

Component Reference

A reference guide to the components of the RichFaces 4 framework

by Sean Rogers (Red Hat)

1. Introduction	1
1.1. Libraries	1
2. Common Ajax attributes	3
2.1. Data processing	3
2.1.1. execute	3
2.1.2. bypassUpdates	4
2.2. Rendering	4
2.2.1. render	4
2.2.2. ajaxRendered	5
2.2.3. limitRender	5
2.3. Queuing and traffic control	6
2.3.1. requestDelay	6
2.3.2. ignoreDupResponses	6
2.4. Events and JavaScript interactions	6
2.4.1. onsubmit	6
2.4.2. onbegin	6
2.4.3. onbeforedomupdate	7
2.4.4. oncomplete	7
2.4.5. onerror	7
I. Ajax control components	9
3. Actions	11
3.1. <a4j:ajax>	11
3.1.1. Basic usage	11
3.1.2. Reference data	11
3.2. <a4j:param>	11
3.2.1. Basic usage	12
3.2.2. Interoperability	12
3.2.3. Passing client-side parameters	13
3.2.4. Reference data	13
3.3. <a4j:actionListener>	14
3.4. <a4j:commandButton>	14
3.4.1. Basic usage	14
3.4.2. Reference data	14
3.5. <a4j:commandLink>	15
3.5.1. Basic usage	15
3.5.2. Reference data	15
3.6. <a4j:jsFunction>	15
3.6.1. Basic usage	15
3.6.2. Parameters and JavaScript	16
3.6.3. Reference data	17
3.7. <a4j:poll>	17
3.7.1. Timing options	17
3.7.2. Reference data	17
3.8. <a4j:push>	17

3.8.1. Basic usage	17
3.8.2. Handling a push notification	19
3.8.3. Reference data	20
4. Resources	21
4.1. <a4j:mediaOutput>	21
4.1.1. Basic usage	21
4.1.2. Handling content	21
4.1.3. Reference data	23
5. Containers	25
5.1. <a4j:outputPanel>	25
5.1.1. Aiding complex Ajax rendering	25
5.1.2. Panel appearance	25
5.1.3. Reference data	25
5.2. <a4j:region>	25
5.2.1. Reference data	26
6. Validation	27
6.1. <rich:validator> client-side validation	28
6.1.1. Basic usage	28
6.1.2. Messages from client-side validators	28
6.1.3. Validation triggers	29
6.1.4. Ajax fall-backs	30
6.1.5. Reference data	30
6.2. <rich:graphValidator> object validation	30
6.2.1. Basic usage	31
6.2.2. Reference data	32
7. Processing management	33
7.1. <a4j:queue>	33
7.1.1. Basic usage	33
7.1.2. Delaying requests	33
7.1.3. Duplicate responses	33
7.1.4. Queue scopes	33
7.1.5. <a4j:queue> client-side events	34
7.1.6. Reference data	34
7.1.7. <a4j:attachQueue>	34
7.2. <a4j:log>	36
7.2.1. Basic usage	36
7.2.2. Log monitoring	36
7.2.3. Reference data	37
7.2.4. Style classes and skin parameters	38
7.3. <a4j:status>	39
7.3.1. Customizing the text	39
7.3.2. Specifying a region	40
7.3.3. JavaScript API	41
7.3.4. Reference data	41

II. User interface components	43
8. Rich inputs	45
8.1. <rich:autocomplete>	45
8.1.1. Basic usage	45
8.1.2. Submission modes	46
8.1.3. Interactivity options	46
8.1.4. Customizing the filter in client and lazyClient modes	47
8.1.5. JavaScript API	47
8.1.6. Reference data	48
8.1.7. Style classes and skin parameters	48
8.2. <rich:calendar>	49
8.2.1. Basic usage	50
8.2.2. Behavior and appearance	50
8.2.3. Time of day	51
8.2.4. Localization and formatting	51
8.2.5. Using a data model	52
8.2.6. Client-side customization	52
8.2.7. JavaScript API	53
8.2.8. Reference data	54
8.2.9. Style classes and skin parameters	54
8.3. <rich:fileUpload>	60
8.3.1. Basic usage	60
8.3.2. Upload settings	60
8.3.3. Interactivity options	60
8.3.4. <rich:fileUpload> client-side events	61
8.3.5. Reference data	61
8.3.6. Style classes and skin parameters	61
8.4. <rich:inplaceInput>	63
8.4.1. Basic usage	64
8.4.2. Interactivity options	64
8.4.3. JavaScript API	64
8.4.4. Reference data	65
8.4.5. Style classes and skin parameters	65
8.5. <rich:inplaceSelect>	67
8.5.1. Basic usage	67
8.5.2. Interactivity options	68
8.5.3. JavaScript API	68
8.5.4. Reference data	69
8.5.5. Style classes and skin parameters	69
8.6. <rich:inputNumberSlider>	71
8.6.1. Basic usage	72
8.6.2. Interactivity options	72
8.6.3. JavaScript API	72
8.6.4. Reference data	73

8.6.5. Style classes and skin parameters	73
8.7. <rich:inputNumberSpinner>	75
8.7.1. Basic usage	75
8.7.2. Interactivity options	75
8.7.3. JavaScript API	75
8.7.4. Reference data	76
8.7.5. Style classes and skin parameters	76
8.8. <rich:select>	77
8.8.1. Basic usage	77
8.8.2. Using manual input	78
8.8.3. Advanced options	78
8.8.4. JavaScript API	78
8.8.5. Reference data	78
8.8.6. Style classes and skin parameters	79
9. Panels	81
9.1. <rich:panel>	81
9.1.1. Basic usage	81
9.1.2. Adding a header	81
9.1.3. Reference data	82
9.1.4. Style classes and skin parameters	82
9.2. <rich:accordion>	82
9.2.1. Basic usage	83
9.2.2. Switching panels	83
9.2.3. <rich:accordion> client-side events	84
9.2.4. <rich:accordion> server-side events	84
9.2.5. JavaScript API	84
9.2.6. Reference data	84
9.2.7. Style classes and skin parameters	85
9.2.8. <rich:accordionItem>	86
9.3. <rich:collapsiblePanel>	87
9.3.1. Basic usage	87
9.3.2. Expanding and collapsing the panel	87
9.3.3. Appearance	88
9.3.4. <rich:collapsiblePanel> server-side events	88
9.3.5. JavaScript API	88
9.3.6. Reference data	88
9.3.7. Style classes and skin parameters	89
9.3.8. <rich:panelToggleListener>	90
9.4. <rich:popupPanel>	90
9.4.1. Basic usage	90
9.4.2. Showing and hiding the pop-up	90
9.4.3. Modal and non-modal panels	91
9.4.4. Size and positioning	91
9.4.5. Header and controls	92

9.4.6. Contents of the pop-up	93
9.4.7. JavaScript API	93
9.4.8. Reference data	94
9.4.9. Style classes and skin parameters	94
9.5. <rich:tabPanel>	95
9.5.1. Switching panels	96
9.5.2. <rich:tabPanel> client-side events	96
9.5.3. <rich:tabPanel> server-side events	97
9.5.4. JavaScript API	97
9.5.5. Reference data	97
9.5.6. Style classes and skin parameters	97
9.5.7. <rich:tab>	99
9.6. <rich:togglePanel>	100
9.6.1. Basic usage	100
9.6.2. Toggling between components	101
9.6.3. JavaScript API	101
9.6.4. Reference data	102
9.6.5. <rich:itemChangeListener>	102
9.6.6. <rich:toggleControl>	102
9.6.7. <rich:togglePanelItem>	105
10. Tables and grids	107
10.1. <a4j:repeat>	107
10.1.1. Basic usage	107
10.1.2. Limited views and partial updates	107
10.1.3. Reference data	108
10.2. <rich:dataTable>	109
10.2.1. Basic usage	109
10.2.2. Customizing the table	109
10.2.3. Partial updates	110
10.2.4. JavaScript API	111
10.2.5. Reference data	111
10.2.6. Style classes and skin parameters	112
10.3. <rich:column>	114
10.3.1. Basic usage	114
10.3.2. Spanning columns	115
10.3.3. Spanning rows	116
10.3.4. Reference data	117
10.4. <rich:columnGroup>	117
10.4.1. Complex headers	117
10.4.2. Reference data	119
10.5. <rich:collapsibleSubTable>	119
10.5.1. Basic usage	119
10.5.2. Expanding and collapsing the sub-table	121
10.5.3. Reference data	122

10.5.4. Style classes	122
10.5.5. <rich:collapsibleSubTableToggler>	124
10.6. <rich:extendedDataTable>	125
10.6.1. Basic usage	126
10.6.2. Table appearance	126
10.6.3. Extended features	126
10.6.4. JavaScript API	132
10.6.5. Reference data	133
10.6.6. Style classes and skin parameters	133
10.7. <rich:dataGrid>	135
10.7.1. Basic usage	136
10.7.2. Customizing the grid	136
10.7.3. Partial updates	137
10.7.4. Reference data	137
10.7.5. Style classes and skin parameters	138
10.8. <rich:list>	139
10.8.1. Basic usage	139
10.8.2. Type of list	140
10.8.3. Bullet and numeration appearance	141
10.8.4. Customizing the list	141
10.8.5. Reference data	142
10.8.6. Style classes and skin parameters	143
10.9. <rich:dataScroller>	143
10.9.1. Basic usage	144
10.9.2. Appearance and interactivity	144
10.9.3. JavaScript API	145
10.9.4. Reference data	145
10.9.5. Style classes and skin parameters	146
10.10. Table filtering	147
10.11. Table sorting	148
11. Trees	151
11.1. <rich:tree>	151
11.1.1. Basic usage	151
11.1.2. Appearance	152
11.1.3. Expanding and collapsing tree nodes	153
11.1.4. Selecting tree nodes	154
11.1.5. Identifying nodes with the rowKeyConverter attribute	154
11.1.6. Event handling	154
11.1.7. Reference data	155
11.1.8. Style classes	155
11.1.9. <rich:treeSelectionChangeListener>	155
11.1.10. <rich:treeNode>	155
11.2. Tree adaptors	158
11.2.1. <rich:treeModelAdaptor>	158

11.2.2. <rich:treeModelRecursiveAdaptor>	159
12. Menus and toolbars	163
12.1. <rich:dropDownMenu>	163
12.1.1. Basic usage	163
12.1.2. Menu content	163
12.1.3. Appearance	163
12.1.4. Expanding and collapsing the menu	164
12.1.5. Reference data	164
12.1.6. Style classes and skin parameters	165
12.2. Menu sub-components	166
12.2.1. <rich:menuItem>	166
12.2.2. <rich:menuGroup>	168
12.2.3. <rich:menuSeparator>	169
12.3. <rich:panelMenu>	169
12.3.1. Basic usage	170
12.3.2. Interactivity options	170
12.3.3. Appearance	170
12.3.4. Submission modes	172
12.3.5. <rich:panelMenu> server-side events	172
12.3.6. JavaScript API	172
12.3.7. Reference data	172
12.3.8. Style classes and skin parameters	173
12.3.9. <rich:panelMenuGroup>	177
12.3.10. <rich:panelMenuItem>	178
12.4. <rich:toolbar>	179
12.4.1. Basic usage	179
12.4.2. Appearance	180
12.4.3. Grouping items	180
12.4.4. Reference data	180
12.4.5. Style classes and skin parameters	181
12.4.6. <rich:toolbarGroup>	181
13. Output and messages	183
13.1. <rich:message>	183
13.1.1. Basic usage	183
13.1.2. Appearance	184
13.1.3. Reference data	184
13.1.4. Style classes and skin parameters	184
13.2. <rich:messages>	185
13.2.1. Basic usage	185
13.2.2. Appearance	186
13.2.3. Reference data	187
13.2.4. Style classes and skin parameters	187
13.3. <rich:progressBar>	187
13.3.1. Basic usage	188

13.3.2. Customizing the appearance	188
13.3.3. Update mode	189
13.3.4. Using set intervals	189
13.3.5. JavaScript API	189
13.3.6. Reference data	190
13.3.7. Style classes and skin parameters	190
13.4. <rich:tooltip>	191
13.4.1. Basic usage	191
13.4.2. Attaching the tool-tip to another component	191
13.4.3. Appearance	192
13.4.4. Update mode	193
13.4.5. <rich:tooltip> client-side events	193
13.4.6. JavaScript API	194
13.4.7. Reference data	194
13.4.8. Style classes and skin parameters	194
14. Drag and drop	197
14.1. <rich:dragSource>	197
14.1.1. Basic usage	197
14.1.2. Dragging an object	197
14.1.3. Reference data	197
14.2. <rich:dropTarget>	197
14.2.1. Basic usage	198
14.2.2. Handling dropped data	198
14.2.3. Reference data	198
14.2.4. Style classes	198
14.3. <rich:dragIndicator>	199
14.3.1. Basic usage	199
14.3.2. Styling the indicator	199
14.3.3. Reference data	199
14.3.4. Style classes	200
15. Layout and appearance	201
15.1. <rich:jQuery>	201
15.1.1. Basic usage	201
15.1.2. Defining a selector	201
15.1.3. Event handlers	202
15.1.4. Timed queries	202
15.1.5. Named queries	203
15.1.6. Dynamic rendering	204
15.1.7. Reference data	204
16. Functions	205
16.1. rich:clientId	205
16.2. rich:component	205
16.3. rich:element	205
16.4. rich:findComponent	205

16.5. rich:isUserInRole	205
17. Functionality extension	207
17.1. <rich:componentControl>	207
17.1.1. Basic usage	207
17.1.2. Passing parameters to API methods	207
17.1.3. Reference data	208
17.1.4. <rich:hashParam>	208
A. Revision History	211

Introduction

This book is a guide to the various components available in the RichFaces 4.0 framework. It includes descriptions of the role of the components, details on how best to use them, coded examples of their use, and basic references of their properties and attributes.

For full references for all component classes and properties, refer to the following supplementary documentation:

- *VDL (View Definition Language) Documentation*
 - Available at http://docs.jboss.org/richfaces/latest_4_0_X/vldoc/
- *API (Application Programming Interface) Documentation*
 - *RichFaces Components API*
 - Available at http://docs.jboss.org/richfaces/latest_4_0_X/javadoc/richfaces-components-api/
 - *RichFaces Components UI*
 - Available at http://docs.jboss.org/richfaces/latest_4_0_X/javadoc/richfaces-components-ui/
 - *RichFaces Core API*
 - Available at http://docs.jboss.org/richfaces/latest_4_0_X/javadoc/richfaces-core-api/
 - *RichFaces Core Implementation*
 - Available at http://docs.jboss.org/richfaces/latest_4_0_X/javadoc/richfaces-core-impl/

For further examples for each component, refer to the *RichFaces Showcase* at <http://richfaces-showcase.appspot.com/>.

1.1. Libraries

The RichFaces framework is made up of two tag libraries: the `a4j` library and the `rich` library.

`a4j` library

The `a4j` tag library provides core Ajax and utility components.

`rich` library

The `rich` tag library provides ready-made, self-contained, rich user-interface components. These components have built-in Ajax support. By default, the components don't require additional configuration in order to send requests or update, but can also be customized by plugging in utility behaviors.

Common Ajax attributes

The Ajax components in the `a4j` library share common attributes to perform similar functionality. Most RichFaces components in the `rich` library that feature built-in Ajax support share these common attributes as well.

Most attributes have default values, so they need not be explicitly set for the component to function in its default state. These attributes can be altered to customize the behavior of the component if necessary.

2.1. Data processing

The RichFaces Ajax script is built on a base of the JSF 2 Ajax script. As such, each time a request is sent, the data from the requesting component's parent JSF form is submitted along with the `XMLHttpRequest` object. The form data contains values from the input element and auxiliary information such as state-saving data.

2.1.1. `execute`

The `execute` attribute allows JSF processing to be limited to defined components. The `execute` attribute can point to an `id` identifier of a specific component to process. Components can also be identified through the use of Expression Language (EL).

Alternatively, the `execute` attribute accepts the following keywords:

`@all`

Every component is processed.

`@none`

No components are processed.

`@this`

The requesting component with the `execute` attribute is processed. This is the default behavior for components.

`@form`

The form that contains the requesting component is processed.

`@region`

The region that contains the requesting component is processed. Use the `<a4j:region>` component as a wrapper element to specify regions.

Some components make use of additional keywords. These are detailed under the relevant component entry in this book.

2.1.2. `bypassUpdates`

If the `bypassUpdates` attribute is set to `true`, the Update Model phase of the request processing lifecycle is bypassed. This is useful if user input needs to be validated but the model does not need to be updated. This is the opposite functionality to the `execute` attribute in RichFaces.

2.2. Rendering

2.2.1. `render`

The `render` attribute provides a reference to one or more components on the page that need updating after an Ajax interaction. It uses the `UIComponent.findComponent()` algorithm to find the components in the component tree using their `id` identifiers as a reference. Components can be referenced by their `id` identifier alone, or by their `clientId` identifier to make locating components more efficient. [Example 2.1, “render example”](#) shows both ways of referencing components. Each command button will correctly render the referenced panel grids, but the second button locates the references more efficiently with explicit `clientId` paths.

Example 2.1. render example

```
<h:form id="form1">
  <a4j:commandButton value="Basic reference" render="infoBlock, infoBlock2" />
  <a4j:commandButton value="Specific
    reference" render=":infoBlock, :sv:infoBlock2" />
</h:form>

<h:panelGrid id="infoBlock">
  ...
</h:panelGrid>

<h:form id="sv">
  <h:panelGrid id="infoBlock2">
    ...
  </h:panelGrid>
</h:form>
```

The value of the `render` attribute can also be an expression written using JavaServer Faces' Expression Language (EL); this can either be a Set, Collection, Array, or String.



Differences between JSF Ajax and RichFaces Ajax

JSF evaluates all parameters during page rendering. As such, during a request from a page, all `execute` and `render` values are passed to the server from the client. In contrast, RichFaces evaluates these options at the server side during the current request.

This means that with JSF, making changes during a request to a render value defined with EL will not influence the request. RichFaces, however, will always use the newer values.

The RichFaces approach additionally increases data integrity. Parameters that are changed from the client side are re-evaluated on the server, where they cannot be changed.



Conditionally-rendered component updates

A common problem with using `render` occurs when the referenced component is conditionally rendered via the `rendered` attribute. If a component is not initially rendered, it does not have any HTML representation in the Document Object Model (DOM). As such, when RichFaces renders the component via Ajax, the page does not update as the place for the update is not known.

To work around this issue, wrap the component to be rendered in an `<a4j:outputPanel>` component. The `<a4j:outputPanel>` component will receive the update and render the component as required.

2.2.2. ajaxRendered

A component with `ajaxRendered="true"` will be re-rendered with every Ajax request, even when not referenced by the requesting component's `render` attribute. This can be useful for updating a status display or error message without explicitly requesting it.

The `ajaxRendered` attribute's functionality is the basis for the `<a4j:outputPanel>` component. The `<a4j:outputPanel>` component is designed to mark parts of the page for automatic updating. Refer to [Section 5.1, "<a4j:outputPanel>"](#) for details.

Automatic rendering of such components can be repressed by adding `limitRender="true"` to the requesting component, as described in [Section 2.2.3, "limitRender"](#).

2.2.3. limitRender

RichFaces Ajax-enabled components and Ajax behaviors with `limitRender="true"` specified will *not* cause components with `ajaxRendered="true"` to re-render, and only those components listed in the `render` attribute will be updated. This essentially overrides the `ajaxRendered` attribute in other components.

[Example 2.3, "Data reference example"](#) describes two command buttons, a panel grid rendered by the buttons, and an output panel showing error messages. When the first button is clicked, the output panel is rendered even though it is not explicitly referenced with the `render` attribute. The second button, however, uses `limitRender="true"` to override the output panel's rendering and only render the panel grid.

Example 2.2. Rendering example

```
<h:form id="form1">
    <a4j:commandButton value="Normal rendering" render="infoBlock" />
                                <a4j:commandButton value="Limited
    rendering" render="infoBlock" limitRender="true" />
</h:form>

<h:panelGrid id="infoBlock">
    ...
</h:panelGrid>

<a4j:outputPanel ajaxRendered="true">
    <h:messages />
</a4j:outputPanel>
```

2.3. Queuing and traffic control

2.3.1. requestDelay

The `requestDelay` attribute specifies an amount of time in milliseconds for the request to wait in the queue before being sent to the server. If a similar request is added to the queue before the delay is over, the original request is replaced with the new one.

2.3.2. ignoreDupResponses

When set to `true`, the `ignoreDupResponses` attribute causes responses from the server for the request to be ignored if there is another similar request in the queue. This avoids unnecessary updates on the client when another update is expected. The request is still processed on the server, but if another similar request has been queued then no updates are made on the client.

2.4. Events and JavaScript interactions

JSF provides global `jsf.ajax.onError` and `jsf.ajax.onEvent` events to define handlers (the `jsf.ajax.onEvent` event is used for all `begin`, `success`, and `complete` events). RichFaces adds event-specific attributes at the component level.

2.4.1. onsubmit

The `onsubmit` event attribute invokes the event listener *before* the Ajax request is sent. The request is canceled if the event listener defined for the `onsubmit` event returns `false`.

2.4.2. onbegin

The `onbegin` event attribute invokes the event listener *after* the Ajax request is sent.

2.4.3. onbeforedomupdate

The onbeforedomupdate event attribute invokes the event listener after the Ajax response has been returned but *before* the DOM tree of the browser has been updated.

2.4.4. oncomplete

The oncomplete event attribute invokes the event listener after the Ajax response has been returned *and* the DOM tree of the browser has been updated.

2.4.4.1. data

The data attribute allows additional data to be handled with the oncomplete event. Use JSF Expression Language (EL) to reference the property of the managed bean, and its value will be serialized in JavaScript Object Notation (JSON) and returned to the client side. The property can then be referenced through the *event.data* variable in the event attribute definitions. Both primitive types and complex types such as arrays and collections can be serialized and used with data.

Example 2.3. Data reference example

```
<a4j:commandButton value="Update" oncomplete="showTheName(event.data.name)" data="#{userBean.name}" />
```

2.4.5. onerror

The onerror event attribute invokes the event listener when an error has occurred during Ajax communications.

Part I. Ajax control components

Actions

This chapter details the basic components that respond to a user action and submit an Ajax request.

3.1. <a4j:ajax>

The <a4j:ajax> behavior allows Ajax capability to be added to a non-Ajax component. The non-Ajax component must implement the `ClientBehaviorHolder` interface for all the event attributes that support behavior rendering.

3.1.1. Basic usage

The <a4j:ajax> behavior is placed as a direct child to the component that requires Ajax support.

Point the event attribute to the standard JSF event that triggers the behavior. If the event attribute is not defined, the behavior is triggered on the event that normally provides interaction behavior for the parent component.

Example 3.1. <a4j:ajax> example

```
<h:panelGrid columns="2">
  <h:inputText id="myinput" value="#{userBean.name}">
    <a4j:ajax event="keyup" render="outtext" />
  </h:inputText>
  <h:outputText id="outtext" value="#{userBean.name}" />
</h:panelGrid>
```

3.1.2. Reference data

- *client-behavior-renderer-type*: `org.ajax4jsf.behavior.Ajax`
- *behavior-id*: `org.ajax4jsf.behavior.Ajax`
- *handler-class*: `org.richfaces.view.facelets.html.AjaxHandler`
- *behavior-class*: `org.ajax4jsf.component.behavior.AjaxBehavior`
- *client-behavior-renderer-class*: `org.ajax4jsf.renderkit.AjaxBehaviorRenderer`

3.2. <a4j:param>

The <a4j:param> behavior combines the functionality of the JavaServer Faces (JSF) components <f:param> and <f:actionListener>.

3.2.1. Basic usage

Basic usage of the `<a4j:param>` requires three main attributes:

- The `value` attribute is the initial value of the parameter.
- The `assignTo` attribute defines the bean property. The property is updated if the parent command component performs an action event during the *Process Request* phase.

Example 3.2, “<a4j:param> example” shows a simple implementation along with the accompanying managed bean.

Example 3.2. `<a4j:param>` example

```
<h:form id="form">
  <a4j:commandButton value="Set name to Alex" reRender="rep">
    <a4j:param name="username" value="Alex" assignTo="#{paramBean.name}"/>
  </a4j:commandButton>
  <h:outputText id="rep" value="Name: #{paramBean.name}"/>
</h:form>
```

```
public class ParamBean {
    private String name = "John";

    public String getName() {
        return name;
    }

    public void setName(String name) {
        this.name = name;
    }
}
```

When the **Set name to Alex** button is pressed, the application sets the name parameter of the bean to Alex, and displays the name in the output field.

3.2.2. Interoperability

The `<a4j:param>` tag can be used with non-Ajax components in addition to Ajax components. This includes components which are working through the GET request, such as the `<h:link>` and `<h:button>` components. In this way, data model values can also be updated without any Java code on the server side.

The `converter` attribute can be used to specify how to convert the value before it is submitted to the data model. The property is assigned the new value during the *Update Model* phase.



Validation failure

If the validation of the form fails, the *Update Model* phase will be skipped and the property will not be updated.

3.2.3. Passing client-side parameters

Variables from JavaScript functions can be used for the `value` attribute. In such an implementation, the `noEscape` attribute should be set to `true`. Using `noEscape="true"`, the `value` attribute can contain any JavaScript expression or JavaScript function invocation, and the result will be sent to the server as the `value` attribute.

Example 3.3. Passing client-side parameters

```
<h:form>
  <a4j:commandButton value="Show Screen Size" render="infoPanel">
    <a4j:param name="w" value="screen.width"
      assignTo="#{paramBean.screenWidth}" noEscape="true" />
    <a4j:param name="h" value="screen.height"
      assignTo="#{paramBean.screenHeight}" noEscape="true" />
  </a4j:commandButton>

  <h:panelGrid columns="2" id="infoPanel">
    <h:outputText value="Width:" />
    <h:outputText value="#{paramBean.screenWidth}" />
    <h:outputText value="Height:" />
    <h:outputText value="#{paramBean.screenHeight}" />
  </h:panelGrid>
</h:form>
```

The command button triggers the `<a4j:param>` behaviors and renders the output text. The `<a4j:param>` behaviors pass client-side parameters for the screen width and height through the backing bean. These parameters are then used to populate the output text values.

3.2.4. Reference data

- *component-type*: `org.richfaces.Parameter`
- *component-class*: `org.richfaces.component.UIParameter`
- *component-family*: `javax.faces.Parameter`
- *handler-class*: `org.richfaces.view.facelets.html.ParameterHandler`

3.3. <a4j:actionListener>

Use the <a4j:actionListener> tag to register an ActionListener class on a parent action component. The class provided as a listener must implement the javax.faces.event.ActionListener interface. Multiple listener methods can be registered on an action component in this way.

The <a4j:actionListener> tag differs from the standard JSF tag by allowing a listener method to be defined instead of just a class. Use the listener attribute to define the listener method.

3.4. <a4j:commandButton>

The <a4j:commandButton> component is similar to the JavaServer Faces (JSF) <h:commandButton> component, but additionally includes Ajax support.




Figure 3.1. <a4j:commandButton>



The <a4j:commandButton> component executes the complete form

Button controls are typically used to perform complete form submissions for data storing. As a consequence, the <a4j:commandButton> component has the execute="@form" setting by default. To limit rendering to a different scope, redefine the execute attribute.

3.4.1. Basic usage

The <a4j:commandButton> requires only the value attribute to function. Use the value attribute to specify the text of the button.

By default, the <a4j:commandButton> uses the click event instead of the submit event.

3.4.2. Reference data

- *component-type*: org.richfaces.CommandButton
- *component-class*: org.richfaces.component.UICommandButton
- *component-family*: javax.faces.Command
- *renderer-type*: org.richfaces.CommandButtonRenderer

3.5. <a4j:commandLink>

The <a4j:commandLink> component is similar to the JavaServer Faces (JSF) <h:commandLink> component, except that it includes plugged-in Ajax behavior.

[Command Link](#)

Figure 3.2. <a4j:commandLink>



The <a4j:commandLink> component executes the complete form

Link controls are typically used to perform complete form submissions for data storing. As a consequence, the <a4j:commandLink> component has the `execute="@form"` setting by default. To limit rendering to a different scope, redefine the `execute` attribute.

3.5.1. Basic usage

The <a4j:commandLink> requires only the `value` attribute to function. Use the `value` attribute to specify the text of the link.

The <a4j:commandLink> uses the `click` event instead of the `submit` event.

3.5.2. Reference data

- *component-type*: `org.richfaces.CommandLink`
- *component-class*: `org.richfaces.component.UICommandLink`
- *component-family*: `javax.faces.Command`
- *renderer-type*: `org.richfaces.CommandLinkRenderer`

3.6. <a4j:jsFunction>

The <a4j:jsFunction> component performs Ajax requests directly from JavaScript code and retrieves server-side data. The server-side data is returned in JavaScript Object Notation (JSON) format prior to the execution of any JavaScript code defined using the `oncomplete` attribute.

3.6.1. Basic usage

The <a4j:jsFunction> component requires the `data` attribute. Use the `data` attribute to define where the retrieved server-side data is stored.

Example 3.4, “<a4j:jsFunction> example” shows how an Ajax request can be initiated from the JavaScript and a partial page update performed. The JavaScript function can be invoked with the data returned by the Ajax response.

Example 3.4. <a4j:jsFunction> example

```
<table width="400">
  <tbody>
    <tr>
      <td>
        <span onmouseover="updateName( ' Kate' )"
              onmouseout="updateName( ' ' )">Kate</span>
      </td>
      <td>
        <span onmouseover="updateName( ' John' )"
              onmouseout="updateName( ' ' )">John</span>
      </td>
      <td>
        <span onmouseover="updateName( ' Alex' )"
              onmouseout="updateName( ' ' )">Alex</span>
      </td>
    </tr>
    <tr>
      <td colspan="3">
        Name: <b><h:outputText id="showname" value="#{functionBean.text}" /
      </td>
    </tr>
  </tbody>
</table>
<h:form>
  <a4j:jsFunction name="updateName" render="showname">
    <a4j:param name="name" assignTo="#{functionBean.text}"/>
  </a4j:jsFunction>
</h:form>
```

The output text for the name is changed depending on which table cell the user hovers over with the mouse. The <a4j:jsFunction> component manages the updating and display of the name.

3.6.2. Parameters and JavaScript

The <a4j:jsFunction> component allows the use of the <a4j:param> component or the JavaServer Faces <f:param> component to pass any number of parameters for the JavaScript function.

3.6.3. Reference data

- *component-type*: `org.richfaces.Function`
- *component-class*: `org.richfaces.component.UIFunction`
- *component-family*: `javax.faces.Command`
- *renderer-type*: `org.richfaces.FunctionRenderer`

3.7. <a4j:poll>

The `<a4j:poll>` component allows periodical sending of Ajax requests to the server. It is used for repeatedly updating a page at specific time intervals.

3.7.1. Timing options

The `interval` attribute specifies the time in milliseconds between requests. The default for this value is 1000 ms (1 second).

The `<a4j:poll>` component can be enabled and disabled using the `enabled` attribute. Using Expression Language (EL), the `enabled` attribute can point to a bean property to apply a particular attribute value.

3.7.2. Reference data

- *component-type*: `org.richfaces.Poll`
- *component-class*: `org.richfaces.component.UIPoll`
- *component-family*: `org.richfaces.Poll`
- *renderer-type*: `org.richfaces.PollRenderer`
- *handler-class*: `org.richfaces.view.facelets.html.AjaxPollHandler`

3.8. <a4j:push>

The `<a4j:push>` component performs real-time updates on the client side from events raised at the server side. The events are pushed out to the client through the Java Message Service (JMS). When the `<a4j:push>` component is triggered by a server event, it can in turn cause Ajax updates and changes.

The `<a4j:push>` component uses the Comet model for pushing data to the client.

3.8.1. Basic usage

RichFaces requires the use of the `jquery-atmosphere.js` client plug-in for push functionality. Add the server-side Atmosphere framework as a build dependency to your project.

The JMS instance on the back-end must be configured to work with your `<a4j : push>` components. Refer to the *JBoss Application Server Administration Console Guide* for details on managing JBoss Application Server through the Administration Console.

Example 3.5. JMS server configuration

This example describes the JMS server configuration required for a simple chat room. The chat room requires topics on the JMS server for the push functionality to check for new messages. Create a new JMS topic using the following settings:

- **Name:** chat
- **JNDI name:** /topic/chat
- Use the default settings for other options.

Add a single role for the topic in the same form using the following settings:

- **Name:** guest
- **Send:** true
- **Consume:** true
- **Create subscriber:** true
- **Delete subscriber:** true
- **Create durable subscriber:** true
- **Delete durable subscriber:** true

Ensure the **Create durable subscriber** and **Delete durable subscriber** options are set to **true** for push functionality. Durable subscriptions receive all events, including those events which were sent while the push component was not connected.

Refer to *JMS Documentation* for details on configuring the JMS Server.

With the JMS server configured, use the `<a4j : push>` component's address attribute to reference the topic on the JMS server that contains the pushed messages.

Example 3.6. Basic usage

```
<rich:list value="#{chatBean.users}" var="user" id="users" type="unordered">
    #{user.nick}
</rich:list>
...
<a4j:push address="#{chatBean.listSubtopic}@chat"
    onerror="alert(event.rf.data)">
    <a4j:ajax event="dataavailable" render="users" execute="@none" />
</a4j:push>
```

```
</a4j:push>
```

```
public String getListSubtopic() {
    return this.getUserName() + SUBTOPIC_SEPARATOR + channelName + "List";
}

@Override
protected void onUserList(String channel, User[] users) {
    try {
        getTopicsContext().publish(new TopicKey("chat", getListSubtopic()), null);
    } catch (MessageException e) {
        LOGGER.error(e.getMessage(), e);
    }
}

@Override
protected void onJoin(String channel, String sender, String login, String hostname) {
    try {
        getTopicsContext().publish(new TopicKey("chat", getListSubtopic()), null);
        Message messageObject = new Message("joined channel", sender,
            DateFormat.getInstance().format(new Date()));
        getTopicsContext().publish(new TopicKey("chat", getMessagesSubtopic()), messageObject);
    } catch (MessageException e) {
        LOGGER.error(e.getMessage(), e);
    }
}
```

The example demonstrates a simple use of the `<a4j:push>` component to manage a list of users in a chat room. The `<a4j:push>` component refers to the `#{chatBean.listSubtopic}@chat` address, which has been created on the JMS server. It then uses the sub-topics to separate messages across different topics.

When a new message arrives, the `<a4j:ajax>` behavior causes the user list to update. If an error occurs, the user is alerted.

3.8.2. Handling a push notification

A push notification sent to the `<a4j:push>` behavior will cause it to trigger any event handlers defined using the `ondataavailable` event attribute.

The `<a4j:push>` component should also include the `onerror` event attribute to inform the user when an error has occurred with the push notifications.

Example 3.7. Handling a push notification

```
<a4j:push address="#{chatBean.messagesSubtopic}@chat"
```

```
onerror="alert(event.rf.data)"
ondataavailable="jQuery('<div/>').
    prependTo('#{chatBean.channelName}Output').text(
        getMessageString(event.rf.data))" />
```

The example uses the `dataavailable` event attribute with JavaScript to update messages in a chat room. The `event.rf.data` parameter contains JMS message data serialized to JavaScript.

3.8.3. Reference data

- *component-type*: `org.richfaces.Push`
- *component-class*: `org.richfaces.component.UIPush`
- *component-family*: `org.richfaces.Push`
- *renderer-type*: `org.richfaces.PushRenderer`

Resources

This chapter covers those components used to handle and manage resources and beans.

4.1. <a4j:mediaOutput>

The <a4j:mediaOutput> component is used for generating images, video, sounds, and other resources defined on the fly.

4.1.1. Basic usage

The `createContent` attribute points to the method used for generating the displayed content.

If necessary, the `value` attribute can be used to pass input data to the content generation method specified with `createContent`. The `cacheable` attribute specifies whether the resulting content will be cached or not.

4.1.2. Handling content

The `mimeType` attribute describes the type of output content, and corresponds to the type in the header of the HTTP request. The `element` attribute defines XHTML element used to display the content:

- `img`
- `object`
- `applet`
- `script`
- `link`
- `a`

Example 4.1. <a4j:mediaOutput> example

This example uses the <a4j:mediaOutput> component to generate a JPEG image of verification digits. The code on the application page is a single element:

```
<a4j:mediaOutput element="img" cacheable="false" session="false"
    createContent="#{mediaBean.paint}" value="#{mediaData}"
    mimeType="image/jpeg" />
```

The <a4j:mediaOutput> component uses the `MediaBean.paint` method to create the image. The method generates a random number, which is then converted into an output stream and rendered to a JPEG image. The `MediaBean` class is as follows:

```
package demo;

import java.awt.Graphics2D;
import java.awt.image.BufferedImage;
import java.io.IOException;
import java.io.OutputStream;
import java.util.Random;
import javax.imageio.ImageIO;

public class MediaBean {

    public void paint(OutputStream out, Object data) throws IOException {

        Integer high = 9999;
        Integer low = 1000;
        Random generator = new Random();
        Integer digits = generator.nextInt(high - low + 1) + low;

        if (data instanceof MediaData) {
            MediaData paintData = (MediaData) data;
            BufferedImage img = new BufferedImage(paintData.getWidth(), paintData.getHeight(), BufferedImage.TYPE_INT_RGB);
            Graphics2D graphics2D = img.createGraphics();
            graphics2D.setBackground(paintData.getBackground());
            graphics2D.setColor(paintData.getDrawColor());
            graphics2D.clearRect(0, 0, paintData.getWidth(), paintData.getHeight());
            graphics2D.setFont(paintData.getFont());
            graphics2D.drawString(digits.toString(), 20, 35);
            ImageIO.write(img, "png", out);
        }
    }
}
```

Another class, MediaData is required by the value attribute for keeping data to be used as input for the content creation method. The MediaData class is as follows:

```
package demo;

import java.awt.Color;
import java.awt.Font;
import java.io.Serializable;

public class MediaData implements Serializable {

    private static final long serialVersionUID = 1L;

    Integer Width=110;
```

```
Integer Height=50;


Color Background=new Color(190, 214, 248);
Color DrawColor=new Color(0,0,0);

Font font = new Font("Serif", Font.TRUETYPE_FONT, 30);

/* Corresponding getters and setters */
...

}
```

The `<a4j:mediaOutput>` component uses the `MediaBean` and `MediaData` classes to generate a new image on each page refresh.



Serializable interface

A bean class passed using the value attribute of `<a4j:mediaOutput>` should implement the `Serializable` interface so that it will be encoded to the URL of the resource.

4.1.3. Reference data

- *component-type*: `org.richfaces.MediaOutput`
- *component-class*: `org.richfaces.component.UIMediaOutput`
- *component-family*: `org.richfaces.MediaOutput`
- *renderer-type*: `org.richfaces.MediaOutputRenderer`

Containers

This chapter details those components in the `a4j` tag library which define an area used as a container or wrapper for other components.

5.1. `<a4j:outputPanel>`

The `<a4j:outputPanel>` component is used to group together components in to update them as a whole, rather than having to specify the components individually.

5.1.1. Aiding complex Ajax rendering

Use the `<a4j:outputPanel>` component to wrap behaviors when using complex Ajax rendering. Parent components may not render correctly when attached behaviors trigger updates. Point the behaviors to the wrapping `<a4j:outputPanel>` component instead of the parent components. The `<a4j:outputPanel>` component is properly encoded to ensure the wrapped components are correctly rendered.

5.1.2. Panel appearance

The `layout` attribute can be used to determine how the component is rendered in HTML:

- `layout="inline"` is the default behavior, which will render the component as a pair of `<span>` tags containing the child components.
- `layout="block"` will render the component as a pair of `<div>` tags containing the child components, which will use any defined `<div>` element styles.

Setting `ajaxRendered="true"` will cause the `<a4j:outputPanel>` to be updated with each Ajax response for the page, even when not listed explicitly by the requesting component. This can in turn be overridden by specific attributes on any requesting components.

5.1.3. Reference data

- *component-type*: `org.richfaces.OutputPanel`
- *component-class*: `org.richfaces.component.UIOutputPanel`
- *component-family*: `javax.faces.Panel`
- *renderer-type*: `org.richfaces.OutputPanelRenderer`

5.2. `<a4j:region>`

The `<a4j:region>` component specifies a part of the JSF component tree to be processed on the server. The region causes all the `a4j` and `rich` Ajax controls to execute: decoding, validating,

and updating the model. The region causes these components to execute even if not explicitly declared. As such, processing areas can more easily be marked using a declarative approach.

Regions can be nested, in which case only the parent region of the component initiating the request will be processed.

5.2.1. Reference data

- *component-type*: `org.richfaces.Region`
- *component-class*: `org.richfaces.component.UIRegion`
- *component-family*: `org.richfaces.AjaxContainer`

Validation

JavaServer Faces 2 provides built-in support for bean validation as per the Java Specification Request JSR-303 standard. As such, containers must validate model objects. Validation is performed at different application tiers according to annotation-based constraints. Refer to <http://jcp.org/en/jsr/detail?id=303> for further details on the JSR-303 specification.

Example 6.1, “JSR-303 validation annotations” shows an example JSF managed bean. The bean includes JSR-303 annotations for validation. Validation annotations defined in this way are registered on components bound to the bean properties, and validation is triggered in the *Process Validation* phase.

Example 6.1. JSR-303 validation annotations

```
import javax.validation.constraints.Max;
import javax.validation.constraints.Min;
import javax.validation.constraints.Pattern;
import javax.validation.constraints.Size;

@ManagedBean
@RequestScoped
public class UserBean {

    @Size(min=3, max=12)
    private String name = null;

    @Pattern(regexp = "^[\\w\\-]([\\w\\.\\w])+[\\w]+@[\\w\\-]+\\.([a-zA-Z]{2,4})$", message="Bad email")
    private String email = null;

    @Min(value = 18)
    @Max(value = 99)
    private Integer age;

    //...
    //Getters and Setters
}
```



Requirements

Bean validation in both JavaServer Faces and RichFaces requires the *JSR-303* implementation. The implementation is bundled with JEE 6 Application Server.

If using Tomcat or another simple servlet container, add the `validation-api` Java Archive and a validation provider (such as Hibernate Validator) to your application libraries.

6.1. `<rich:validator>` client-side validation

The validation built in to JavaServer Faces 2 occurs on the server side. The `<rich:validator>` behavior adds client-side validation to a control based on registered server-side validators. It provides this validation without the need to reproduce the server-side annotations. The `<rich:validator>` behavior triggers all client validator annotations listed in the relevant managed bean.

6.1.1. Basic usage

The `<rich:validator>` behavior is added as a child element to any input control. The value of the input control must reference a managed bean. The content of the input control validates on the client-side based on registered server-side validators included in the managed bean.

Example 6.2. Basic usage

```
<h:inputText value="#{userBean.name}">
  <rich:validator/>
</h:inputText>
```



JSF validation tags

JSF validation tags, such as `<f:validateLength>` and `<f:validateDoubleRange>` tags, can be declared alongside `<rich:validator>` behaviors. However, because this duplicates the validation processes at both the view and model level, it is not recommended.

6.1.2. Messages from client-side validators

Use the `<rich:message>` and `<rich:messages>` components to display validation messages. The `for` attribute of the `<rich:message>` component references the `id` identifier of the input control being validated.

Example 6.3. Messages

```
<rich:panel header="User information">
  <h:panelGrid columns="3">
```



```

<h:outputText value="Name:" />
<h:inputText value="#{validationBean.name}" id="name">
  <rich:validator />
</h:inputText>
<rich:message for="name" />

<h:outputText value="Email" />
<h:inputText value="#{validationBean.email}" id="email">
  <rich:validator />
</h:inputText>
<rich:message for="email" />

<h:outputText value="Age" />
<h:inputText value="#{validationBean.age}" id="age">
  <rich:validator />
</h:inputText>
<rich:message for="age" />

<h:outputText value="I agree the terms" />
<h:selectBooleanCheckbox value="#{validationBean.agree}" id="agree">
  <rich:validator/>
</h:selectBooleanCheckbox>
<rich:message for="agree" />

</h:panelGrid>
</rich:panel>

```

Failed validation checks are reported using `<rich:message>` components. The validation annotations in the managed bean are outlined in [Example 6.1, “JSR-303 validation annotations”](#).

The screenshot shows a web form titled "User information" with four input fields and their corresponding validation error messages:

- Name:** The input field contains the letter 'i'. To its right is a red error message: "size must be between 3 and 12".
- Email:** The input field contains the letter 'i'. To its right is a red error message: "Bad email".
- Age:** The input field contains the letter 'i'. To its right is a red error message: "j_idt134:age: 'i' must be a number".
- I agree the terms:** The checkbox is unchecked. To its right is a red error message: "must be true".

6.1.3. Validation triggers

Use the `event` attribute to specify which event on the input control triggers the validation process. By default, the `<rich:validator>` behavior triggers validation when the input control is changed (`event="change"`).

Example 6.4. Validation triggers

```

<h:inputText value="#{userBean.name}">

```

```
<rich:validator event="keyup"/>
</h:inputText>
```

The event attribute is changed to the keyup event, such that validation takes place after each key press.

6.1.4. Ajax fall-backs

If no client-side validation method exists for a registered server-side validator, Ajax fall-back is used. The `<rich:validator>` behavior invokes all available client-side validators. If all the client-side validators return valid, RichFaces performs an Ajax request to invoke the remaining validators on the server side.

6.1.5. Reference data

- *client-behavior-renderer-type*: `org.richfaces.ClientValidatorRenderer`
- *behavior-id*: `org.richfaces.behavior.ClientValidator`
- *handler-class*: `org.richfaces.view.facelets.html.ClientValidatorHandler`
- *behavior-class*: `org.ajax4jsf.component.behavior.ClientValidatorImpl`
- *client-behavior-renderer-class*:
`org.richfaces.renderkit.html.ClientValidatorRenderer`

6.2. `<rich:graphValidator>` object validation

The `<rich:graphValidator>` component is used to wrap a set of input components related to one object. The object defined by the `<rich:graphValidator>` component can then be completely validated. The validation includes all object properties, even those which are not bound to the individual form components. Validation performed in this way allows for cross-field validation in complex forms.



Validation without model updates

The `<rich:graphValidator>` component performs a `clone()` method on the referenced bean instance during the validation phase. The cloned object is validated and triggers any required validation messages. As such, the model object remains clean, and the lifecycle is interrupted properly after the *Process Validations* phase.

Ensure the referenced object implements the `Cloneable` interface, and allows a deep clone if required.

6.2.1. Basic usage

The `<rich:graphValidator>` element must wrap all the input controls that are required to validate the object. The `value` attribute names the bean for the validating object.

Example 6.5. Basic usage

The example demonstrates a simple form for changing a password. The two entered passwords must match, so a `<rich:graphValidator>` component is used for cross-field validation.

```
<h:form>
  <rich:graphValidator value="#{userBean}">
    <rich:panel header="Change password">
      <rich:messages/>
      <h:panelGrid columns="3">
        <h:outputText value="Enter new password:" />
        <h:inputSecret value="#{userBean.password}" id="pass"/>
        <rich:message for="pass"/>
        <h:outputText value="Confirm the new password:" />
        <h:inputSecret value="#{userBean.confirm}" id="conf"/>
        <rich:message for="conf"/>
      </h:panelGrid>
      <a4j:commandButton value="Store changes"
        action="#{userBean.storeNewPassword}" />
    </rich:panel>
  </rich:graphValidator>
</h:form>
```

The input controls validate against the following bean:

```
@ManagedBean
@RequestScoped
public class UserBean implements Cloneable {

    @Size(min = 5, max = 15, message="Wrong size for password")
    private String password;
    @Size(min = 5, max = 15, message="Wrong size for confirmation")
    private String confirm;
    private String status = "";


    @AssertTrue(message = "Different passwords entered!")
    public boolean isPasswordsEquals() {
        return password.equals(confirm);
    }

    public void storeNewPassword() {
```

```
FacesContext.getCurrentInstance().addMessage("Successfully  
changed!", "Successfully changed!");  
}  
  
...  
}
```

When validation occurs, the whole object is validated against the annotation constraints. The `@AssertTrue` annotation relies on the `isPasswordsEqual()` function to check whether the two entered passwords are equal.

If the entered passwords do not match, an error message is displayed:

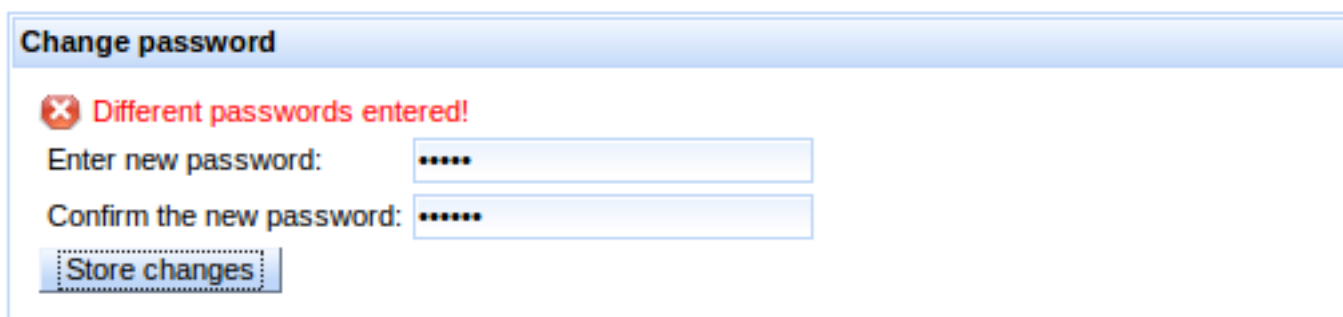

The screenshot shows a web form titled "Change password". At the top, there is a red error message: "Different passwords entered!". Below this, there are two input fields: "Enter new password:" and "Confirm the new password:". Both fields contain masked text (dots). At the bottom of the form, there is a button labeled "Store changes".

6.2.2. Reference data

- *component-type*: `org.richfaces.GraphValidator`
- *component-class*: `org.richfaces.component.UIGraphValidator`
- *component-family*: `org.richfaces.GraphValidator`
- *handler-class*: `org.richfaces.view.facelets.html.GraphValidatorHandler`

Processing management

This chapter covers those components that manage the processing of information, requests, and updates.

7.1. <a4j:queue>

The <a4j:queue> component manages the JSF queue of Ajax requests. It provides additional options for a finer control of request processing.

7.1.1. Basic usage

The <a4j:queue> component works in the same basic way as the standard JSF queue. It can be enabled and disabled through the `enabled` attribute.



Requests from other libraries

The <a4j:queue> component does not handle standard JSF requests or requests from component libraries other than RichFaces.

7.1.2. Delaying requests

Use the `requestDelay` attribute to add a delay between each request in the queue. Set the `requestDelay` attribute to the number of milliseconds to wait in between each request. Delaying requests avoids unnecessary processing for actions that would otherwise cause multiple requests, such as typing. Similar requests in the queue are combined while waiting for the request delay.

Example 7.1. Delaying requests

```
<a4j:queue requestDelay="1500"/>
```

The queue delays each request by 1500 milliseconds.

7.1.3. Duplicate responses

The client side can update unnecessarily if duplicate responses require similar updates. Set `ignoreDupResponses="true"` to ignore duplicate responses. With this setting, the client will not update from a request if a similar request is in the queue.

7.1.4. Queue scopes

Define the queue scope to make it the default queue for all requests in that scope. The scope depends on the placement of the queue and any naming identifiers.

- An unnamed `<a4j:queue>` component placed outside any forms becomes the default queue for all requests on the page.
- An unnamed `<a4j:queue>` component placed inside a form becomes the default queue for all requests within that form.
- Use the `name` identifier attribute to name an `<a4j:queue>` component. Named queues can be accessed with the `<a4j:attachQueue>` behavior to act as a queue for specific components and behaviors. Refer to [Section 7.1.7](#), “`<a4j:attachQueue>`” for details.

Example 7.2. Queue scopes

```
<a4j:queue name="viewQueue" requestDelay="2000"/>
<h:form>
    <a4j:queue name="formQueue" requestDelay="1500"/>
    ...
</h:form>
```

The queue outside the form is scoped to the view. The queue inside the form is scoped only to that form.

7.1.5. `<a4j:queue>` client-side events

The `<a4j:queue>` component features several events relating to queuing actions in addition to the common JSF events:

- The `complete` event is fired after a request is completed. The request object is passed as a parameter to the event handler, so the queue is accessible using `request.queue` and the element which was the source of the request is accessible using `this`.
- The `requestqueue` event is fired after a new request has been added to the queue.
- The `requestdequeue` event is fired after a request has been removed from the queue.

7.1.6. Reference data

- *component-type*: `org.richfaces.Queue`
- *component-class*: `org.richfaces.component.UIQueue`
- *component-family*: `org.richfaces.Queue`
- *renderer-type*: `org.richfaces.QueueRenderer`

7.1.7. `<a4j:attachQueue>`

The `<a4j:attachQueue>` behavior is used together with a `<a4j:queue>` component to further customize queuing for particular components and behaviors. The `<a4j:attachQueue>` behavior

can override the scope-wide queue settings for an individual component, or attach specific requests to a queue.

7.1.7.1. Overriding scope settings

Queues can be scoped to various levels as described in [Section 7.1.4, “Queue scopes”](#). Use an <a4j:attachQueue> behavior in the same scope as a queue to override the queue settings for a particular control.

Example 7.3. Overriding scope settings

```
<a4j:queue requestDelay="2000"/>
<h:form>
  <rich:panel>
    <h:inputText>
      <a4j:ajax event="keyup" />
    </h:inputText>
    <a4j:commandButton value="submit">
      <a4j:attachQueue requestDelay="0" />
    </a4j:commandButton>
  </rich:panel>
</h:form>
```

The request delay is overridden by the <a4j:attachQueue> behavior on the submit button.

7.1.7.2. Using a named queue

Name an <a4j:queue> component using the name attribute. It can then be used by specific components through the <a4j:attachQueue> behavior. Use the name attribute of the <a4j:attachQueue> behavior to identify the name of the destination queue.

Example 7.4. Using a named queue

```
<a4j:queue name="viewQueue"/>
<h:form>
  <a4j:queue name="formQueue"/>
  <rich:panel>
    <a4j:commandButton value="submit">
      <a4j:attachQueue name="viewQueue" />
    </a4j:commandButton>
  </rich:panel>
</h:form>
```

The requests from the button are attached to the viewQueue queue, rather than the formQueue queue.

7.1.7.3. Grouping requests

Use grouping to process multiple requests together. Specify a grouping identifier with the `requestGroupId` attribute. Requests from multiple `<a4j:attachQueue>` behaviors can use the same identifier to group requests together.

Example 7.5. Grouping requests

```
<h:form>
  <a4j:queue requestDelay="2000"/>
  <h:inputText id="input1" value="#{queueBean.text1}">
    <a4j:attachQueue requestGroupId="registrationForm"/>
  </h:inputText>
  <h:inputText id="input2" value="#{queueBean.text2}">
    <a4j:attachQueue requestGroupId="registrationForm"/>
  </h:inputText>
</h:form>
```

Requests from both the text input boxes are grouped together with the `registrationForm` identifier.

7.1.7.4. Reference data

- *component-type*: `org.richfaces.AttachQueue`
- *component-class*: `org.richfaces.component.UIAttachQueue`
- *component-family*: `org.richfaces.AttachQueue`
- *renderer-type*: `org.richfaces.AttachQueueRenderer`
- *handler-class*: `org.richfaces.view.facelets.html.AttachQueueHandler`

7.2. `<a4j:log>`

The `<a4j:log>` component generates JavaScript that opens a debug window, logging application information such as requests, responses, and DOM changes.

7.2.1. Basic usage

The `<a4j:log>` component doesn't require any additional attributes for basic functionality.

7.2.2. Log monitoring

The `mode` attribute determines how the log appears on the page.

- Set `mode="inline"` to place the logging data in-line on the current page. This is the default setting.
- Set `mode="popup"` to present the logging data in a new pop-up window. The window is set to be opened by pressing the key combination **Ctrl+Shift+L**; this can be partially reconfigured with the `hotkey` attribute, which specifies the letter key to use in combination with **Ctrl+Shift** instead of **L**.

The amount of data logged can be determined with the `level` attribute:

- Set `level="ERROR"` to log all errors.
- Set `level="FATAL"` to log only fatal messages.
- Set `level="INFO"` to log only informational messages.
- Set `level="WARN"` to log only warning messages.
- Set `level="ALL"` to log all data. This is the default setting.

Example 7.6. <a4j:log> example

```
<a4j:log level="ALL" mode="inline" />
```

```
debug[09:57:20.732]: New request added to queue. Queue requestGroupId changed to
j_idt718:j_idt720
debug[09:57:20.732]: Queue will wait 0ms before submit
debug[09:57:20.733]: richfaces.queue: will submit request NOW
info [09:57:20.736]: Received 'begin' event from <input id=j_idt718:j_idt720 ...>
info [09:57:21.383]: Received 'beforeDOMupdate' event from <input id=j_idt718:j_idt720 ...>
debug[09:57:21.384]: Server returned responseText: <?xml version='1.0' encoding='UTF-8'?>
<partial-response><changes><update id="javax.faces.ViewState"><![
CDATA[H4sIAAAAAAAAAANVabWcxRmeO9/FX4lj0zgffjI1OQFUVGeHODi2KnKxndjgJJbPdfmQep27ndzteW93mZl
```



Log renewal

The log is automatically renewed after each Ajax request. It does not need to be explicitly re-rendered. To clear previous requests, implement a **Clear** button or similar functionality.

7.2.3. Reference data

- *component-type*: `org.richfaces.AjaxLog`
- *component-class*: `org.richfaces.component.UIAjaxLog`
- *component-family*: `org.richfaces.AjaxLog`

- `renderer-type: org.richfaces.AjaxLogRenderer`

7.2.4. Style classes and skin parameters

The `<a4j:log>` component is intended primarily for debugging during development. However it is still possible to style the component if desired.

Table 7.1. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-log</code> This class defines styles for the log.	<code>generalTextColor</code>	color
<code>.rf-log-popup</code> This class defines styles for the log when it appears as a pop-up.	No skin parameters.	
<code>.rf-log-popup-cnt</code> This class defines styles for the content of the log pop-up.	No skin parameters.	
<code>.rf-log-inline</code> This class defines styles for the log when it appears in-line.	No skin parameters.	
<code>.rf-log-contents</code> This class defines styles for the log contents.	No skin parameters.	
<code>.rf-log-entry-lbl</code> This class defines styles for a label in the log.	No skin parameters.	
<code>.rf-log-entry-lbl-debug</code> This class defines styles for the debug label in the log.	No skin parameters.	
<code>.rf-log-entry-lbl-info</code> This class defines styles for the information label in the log.	No skin parameters.	
<code>.rf-log-entry-lbl-warn</code> This class defines styles for the warning label in the log.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-log-entry-lbl-error This class defines styles for the error label in the log.	No skin parameters.	
.rf-log-entry-msg This class defines styles for a message in the log.	No skin parameters.	
.rf-log-entry-msg-debug This class defines styles for the debug message in the log.	No skin parameters.	
.rf-log-entry-msg-info This class defines styles for the information message in the log.	No skin parameters.	
.rf-log-entry-msg-warn This class defines styles for the warning message in the log.	No skin parameters.	
.rf-log-entry-msg-error This class defines styles for the error message in the log.	No skin parameters.	
.rf-log-entry-msg-xml This class defines styles for an XML message in the log.	No skin parameters.	

7.3. <a4j:status>

The <a4j:status> component displays the status of current Ajax requests. The status can be either in progress, complete, or an error is shown after a failed request.

7.3.1. Customizing the text

The text display can be customized depending on the current status.

- The `startText` attribute defines the text shown after the request has been started and is currently in progress. Set the styles for the text with the `startStyle` and `startStyleClass` attributes. Alternatively, use the `start` facet to customize the text appearance.

- The `stopText` attribute defines the text shown once the request is complete. Set the styles for the text with the `stopStyle` and `stopStyleClass` attributes. Alternatively, use the `stop` facet to customize the text appearance.

If the `stopText` attribute is not defined, and no facet exists for the stopped state, the complete status is simply not shown. In this way, only the progress of the request is displayed to the user, along with any errors.

- The `errorText` attribute defines the text shown when an error has occurred. Set the styles for the text with the `errorStyle` and `errorStyleClass` attributes. Alternatively, use the `error` facet to customize the text appearance.

Example 7.7. Basic `<a4j:status>` usage

```
<a4j:status startText="In progress..." stopText="Complete" />
```

7.3.2. Specifying a region

The `<a4j:status>` component monitors the status of the region relevant to where it is placed.

- If unnamed and placed outside any forms, it monitors the status at the view level.
- If unnamed and placed inside a form, it monitors the status at the form level.

However, if identified with the `name` attribute, the `<a4j:status>` component can monitor any Ajax component or behavior. Use the `status` attribute on the Ajax component or behavior to reference the name identifier of the `<a4j:status>` component.

Example 7.8. Updating a referenced `<a4j:status>` component

```
<rich:panel>
  <f:facet name="header">
    <h:outputText value="User Details Panel" />
  </f:facet>
  <h:panelGrid columns="3">
    <h:outputText value="User name:" />
    <h:inputText value="#{userBean.name}">
      <a4j:ajax status="nameStatus" event="keyup" />
    </h:inputText>
    <a4j:status name="nameStatus">
      <f:facet name="start">
        <h:graphicImage value="/images/ai.gif" />
      </f:facet>
    </a4j:status>
    <h:outputText value="Address:" />
  </h:panelGrid>
</rich:panel>
```

```
<h:inputText value="#{userBean.address}">
  <a4j:ajax status="addressStatus" event="keyup" />
</h:inputText>
<a4j:status name="addressStatus">
  <f:facet name="start">
    <h:graphicImage value="/images/ai.gif" />
  </f:facet>
</a4j:status>
</h:panelGrid>
</rich:panel>
```

7.3.3. JavaScript API

The `<a4j:status>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`start()`

Switches status to the start state.

`stop()`

Switches status to the stop state.

`error()`

Switches status to the error state.

7.3.4. Reference data

- *component-type*: `org.richfaces.Status`
- *component-class*: `org.richfaces.component.UIStatus`
- *component-family*: `org.richfaces.Status`
- *renderer-type*: `org.richfaces.StatusRenderer`

Part II. User interface components

Rich inputs

This chapter details rich components for user input and interaction.

8.1. <rich:autocomplete>

The <rich:autocomplete> component is an auto-completing input-box with built-in Ajax capabilities. It supports client-side suggestions, browser-like selection, and customization of the look and feel.

The auto-complete box is a standard JSF UIInput control with added validation.



Figure 8.1. <rich:autocomplete>

8.1.1. Basic usage

The value attribute stores the text entered by the user for the auto-complete box. Suggestions shown in the auto-complete list can be specified using one of two different methods:

- The autoCompleteMethod attribute points to a method which returns a list of suggestions according to a supplied prefix.



client and lazyClient modes

The prefix is normally ignored in client and lazyClient modes. In these modes, the component requests the suggestion list once only, and performs filtering on the client.

- The autoCompleteList attribute points to a collection of suggestions.

Example 8.1. Defining suggestion values

Using the autoCompleteMethod attribute

```
<rich:autocomplete value="#{bean.state}" autoCompleteMethod="#{bean.autocomplete}"
/>
```

The `<rich:autocomplete>` component uses the `bean.autocomplete` method to provide suggestions, based on the entered prefix.

Using the `autocompleteList` attribute

```
<rich:autocomplete value="#{bean.state}" autocompleteList="#{bean.suggestions}">
```

The `<rich:autocomplete>` component retrieve the suggestion list from `bean.suggestions`.

8.1.2. Submission modes

Use the `mode` attribute to determine how the suggestion list is requested:

- The `client` setting pre-loads data to the client and uses the input to filter the possible suggestions.
- The `ajax` setting fetches suggestions with every input change using Ajax requests.
- The `lazyClient` setting pre-loads data to the client and uses the input to filter the possible suggestions. The filtering does not start until the input length matches a minimum value. Set the minimum value with the `minChars` attribute.
- The `cachedAjax` setting pre-loads data via Ajax requests when the input length matches a minimum value. Set the minimum value with the `minChars` attribute. All suggestions are handled on the client until the input prefix is changed, at which point a new request is made based on the new input prefix.

8.1.3. Interactivity options

Users can type into the text field to enter a value, which also searches through the suggestion items in the drop-down box. By default, the first suggestion item is selected as the user types. This behavior can be deactivated by setting `selectFirst="false"`.

Setting `autoFill="true"` causes the combo-box to fill the text field box with a matching suggestion as the user types.

To allow users to enter multiple values separated by specific characters, use the `tokens` attribute. As the user types, a suggestion will present as normal. When they enter a character specified as a token, this begins a new suggestion process, and the component only uses text entered after the token character for suggestions. For example, if `tokens=", "` is set, the `<rich:autocomplete>` component uses both the comma and space characters as tokens to separate entries. When the user enters a comma or a space, a new suggestion process begins.



Using tokens

When declaring tokens, avoid using any characters that are present in the list of suggestions. This may cause unexpected behavior as the user expects the character to match suggestions instead of separating suggested entries.

8.1.4. Customizing the filter in `client` and `lazyClient` modes

The `<rich:autocomplete>` component uses the JavaScript `startsWith()` method to create the list of suggestions. The filtering is performed on the client side. Alternatively, use the `clientFilter` attribute to specify a custom filtering function. The custom function must accept two parameters: the `subString` parameter is the filtering value as typed into the text box by the user, and the `value` parameter is an item in the list of suggestions against which the `subString` must be checked. Each item is iterated through and passed to the function as the `value` parameter. The custom function must return a boolean value indicating whether the passed item meets the conditions of the filter, and the suggestion list is constructed from successful items.

Example 8.2. Customizing the filter

This example demonstrates how to use a custom filter with the `clientFilter` attribute. The custom filter determines if the sub-string is contained anywhere in the suggestion item, instead of just at the start.

```
<script>
    function customFilter(subString, value){
        if(subString.length>=1) {
            if(value.indexOf(subString)!=-1)
                return true;
        }else return false;
    };
</script>
<h:form>
    <rich:autocomplete mode="client" minChars="0" autofill="false"
        clientFilter="customFilter"
        autocompleteMethod="#{autocompleteBean.autocomplete}" />
</h:form>
```

8.1.5. JavaScript API

The `<rich:autocomplete>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`getValue()`

Get the current value of the text field.

`setValue(newValue)`

Set the value of the text field to the *newValue* string passed as a parameter.

`showPopup()`

Show the pop-up list of completion values.

`hidePopup()`

Hide the pop-up list.

8.1.6. Reference data

- *component-type*: `org.richfaces.Autocomplete`
- *component-class*: `org.richfaces.component.UIAutocomplete`
- *component-family*: `javax.faces.Input`
- *renderer-type*: `org.richfaces.AutocompleteRenderer`
- *handler-class*: `org.richfaces.view.facelets.AutocompleteHandler`

8.1.7. Style classes and skin parameters

Table 8.1. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-au-fnt</code> This class defines styles for the auto-complete box font.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
<code>.rf-au-inp</code> This class defines styles for the auto-complete input box.	<i>controlBackgroundColor</i>	background-color
<code>.rf-au-fld</code> This class defines styles for the auto-complete field.	<i>panelBorderColor</i>	border-color
	<i>controlBackgroundColor</i>	background-color
<code>.rf-au-fld-btn</code> This class defines styles for a button in the auto-complete field.	No skin parameters.	
<code>.rf-au-btn</code> This class defines styles for the auto-complete box button.	<i>headerBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-left-color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-au-btn-arrow This class defines styles for the button arrow.	No skin parameters.	
.rf-au-btn-arrow-dis This class defines styles for the button arrow when it is disabled.	No skin parameters.	
.rf-au-lst-scr1 This class defines styles for the scrollbar in the auto-complete list.	No skin parameters.	
.rf-au-itm This class defines styles for an item in the auto-complete list.	No skin parameters.	
.rf-au-itm-sel This class defines styles for a selected item in the auto-complete list.	headerBackgroundColor	background-color
	generalTextColor	border-color
.rf-au-shdw This class defines styles for the auto-complete box shadow.	No skin parameters.	
.rf-au-shdw-t, .rf-au-shdw-l, .rf-au-shdw-r, .rf-au-shdw-b These classes define styles for the top, left, right, and bottom part of the auto-complete box shadow.	No skin parameters.	
.rf-au-tbl This class defines styles for a table in the auto-complete box.	No skin parameters.	

8.2. <rich:calendar>

The <rich:calendar> component allows the user to enter a date and time through an in-line or pop-up calendar. The pop-up calendar can navigate through months and years, and its look and feel can be highly customized.



Figure 8.2. `<rich:calendar>`

8.2.1. Basic usage

Basic usage of the `<rich:calendar>` component requires only the `value` attribute, which holds the currently selected date. [Example 8.3, “Basic usage”](#) shows a basic declaration, with the `value` pointing to a bean property. The bean property holds the selected date.

Example 8.3. Basic usage

```
<rich:calendar value="#{bean.dateTest}" />
```

8.2.2. Behavior and appearance

The `<rich:calendar>` component is presented as a pop-up by default, appearing as a text field with a button to expand the full pop-up calendar. To render the calendar in-line on the page instead, set `popup="false"`. This displays the full calendar without the text field and display button.

To add keyboard support for manual input, set `enableManualInput="true"`. To disable the calendar from any user input, set `disabled="true"`.

To change the appearance of the display button from the standard calendar icon, use the `buttonIcon` and `buttonDisabledIcon` attributes to replace the icon with a specified file. Alternatively, use the `buttonLabel` attribute to display text on the button without an icon. If `buttonLabel` is specified then both the `buttonIcon` and `buttonDisabledIcon` attributes are ignored. To hide the text field box, set `showInput="false"`.

The calendar features a **Today** button for locating today's date on the calendar. This can be set to three different values using the `todayControlMode` attribute:

- `hidden`, which does not display the button;

- `select`, the default setting, which scrolls the calendar to the current month and selects the date; and
- `scroll`, which scrolls the calendar to the month but does not select the date.
- `inactive`, which displays the date but performs no action when clicked.

To make the entire calendar read-only, set `readonly="true"`. This allows months and years to be browsed through with the arrow controls, but dates and times cannot be selected.

8.2.3. Time of day

The `<rich:calendar>` component can additionally allow a time of day to be specified with the date. After selecting a date the option to set a time becomes available. The default time can be set with the `defaultTime` attribute. If the time is altered and a new date is selected, it will not reset unless `resetTimeOnDateSelect="true"` is specified.

The date selection feature is activated if the time is present in the `datePattern` attribute for the calendar.



Support for seconds

In RichFaces 4, the `<rich:calendar>` component supports times that include seconds. Previous versions of RichFaces only supported hours and minutes.

8.2.4. Localization and formatting

Date and time strings can be formatted in a set pattern. Use standard locale formatting strings specified by *ISO 8601* (for example, `d/M/yy HH:mm a`) with the `datePattern` attribute to format date and time strings.

To set the locale of the calendar, use the `locale` attribute. The calendar will render month and day names in the relevant language. For example, to set the calendar to the US locale, specify `locale="en/US"`.

Use an application resource bundle to localize the calendar control labels. Define the following strings in the resource bundle:

- The `RICH_CALENDAR_APPLY_LABEL` string is the label for the **Apply** button.
- The `RICH_CALENDAR_TODAY_LABEL` string is the label for the **Today** button.
- The `RICH_CALENDAR_CLOSE_LABEL` string is the label for the **Close** button.
- The `RICH_CALENDAR_OK_LABEL` string is the label for the **OK** button.
- The `RICH_CALENDAR_CLEAN_LABEL` string is the label for the **Clean** button.
- The `RICH_CALENDAR_CANCEL_LABEL` string is the label for the **Cancel** button.

Alternatively, use the `org.richfaces.calendar` resource bundle with Java Archive files (JARs) defining the same properties.

8.2.5. Using a data model

The look and feel of the `<rich:calendar>` component can be customized through the use of a data model on the server side. The component supports two different ways of loading data from the server side through defining the `mode` attribute.

When the `mode` attribute is not specified, the component uses the `client` mode. The `client` mode loads an initial portion of data within a set date range. The range can be defined by using the `preloadDateRangeBegin` and `preloadDateRangeEnd` attributes. Additional data requests for months outside the range are not sent.

Alternatively, with `mode="ajax"` the `<rich:calendar>` requests portions of data from the data model every time the month is switched. The data model can be defined through the `dataModel` attribute, which points to an object that implements the `CalendarDataModel` interface. If the `dataModel` attribute is not defined or has a value of `null`, the `ajax` mode functions the same as the `client` mode.

8.2.6. Client-side customization

Instead of using a data model, the `<rich:calendar>` component can be customized on the client-side using JavaScript. Use the `dayClassFunction` attribute to reference the function that determines the CSS style class for each day cell. Use the `dayDisableFunction` to reference the function that enables or disables a day cell. [Example 8.4, “Client-side customization”](#) demonstrates how client-side customization can be used to style different days in a calendar.

Example 8.4. Client-side customization

```
<style>
    .everyThirdDay {
        background-color: gray;
    }
    .weekendBold {
        font-weight: bold;
        font-style: italic;
    }
</style>
<script type="text/javascript">
    var curDt = new Date();
    function disablementFunction(day){
        if (day.isWeekend) return false;
        if (curDt==undefined){
            curDt = day.date.getDate();
        }
        if (curDt.getTime() - day.date.getTime() < 0) return true;
        else return false;
    }
</script>
```



```

    }
    function disabledClassesProv(day){
        if (curDt.getTime() - day.date.getTime() >= 0) return 'rf-ca-boundary-
dates';
        var res = '';
        if (day.isWeekend) res+='weekendBold ';
        if (day.day%3==0) res+='everyThirdDay';
        return res;
    }
</script>
<rich:calendar dayDisableFunction="disablementFunction"
                dayClassFunction="disabledClassesProv"
                boundaryDatesMode="scroll" />

```

8.2.7. JavaScript API

The <rich:calendar> component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`showPopup()`

Expand the pop-up calendar element.

`hidePopup()`

Collapse the pop-up calendar element.

`switchPopup()`

Invert the state of the pop-up calendar element.

`getValue()`

Return the selected date value of the calendar.

`getValueAsString()`

Return the selected date value of the calendar as a formatted string.

`setValue(newValue)`

Set the selected date value to the *newValue* date passed as a parameter. If the new date is not in the currently displayed month, a request is performed to display the correct month.

`resetValue()`

Clear the selected date value.

`today()`

Select today's date.

`getCurrentMonth()`

Return the number of the month currently being displayed.

`getCurrentYear()`

Return the number of the year currently being displayed.

`showSelectedDate()`

Show the calendar month that contains the currently selected date.

`showDateEditor()`

Show the date editor pop-up.

`hideDateEditor()`

Hide the date editor pop-up.

`showTimeEditor()`

Show the time editor pop-up.

`hideTimeEditor()`

Hide the time editor pop-up.

8.2.8. Reference data

- *component-type*: `org.richfaces.Calendar`
- *component-class*: `org.richfaces.component.UICalendar`
- *component-family*: `org.richfaces.Calendar`
- *renderer-type*: `org.richfaces.CalendarRenderer`
- *handler-class*: `org.richfaces.view.facelets.CalendarHandler`

8.2.9. Style classes and skin parameters

Table 8.2. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-cal-extr</code> This class defines the styles for a pop-up calendar exterior.	<code>panelBorderColor</code>	<code>border-color</code>
<code>.rf-cal-btn</code> This class defines styles for a calendar button.	No skin parameters.	
<code>.rf-cal-hdr</code> This class defines the styles for a calendar header.	<code>panelBorderColor</code>	<code>border-bottom-color</code>
	<code>additionalBackgroundColor</code>	<code>background-color</code>
	<code>generalSizeFont</code>	<code>font-size</code>
	<code>generalFamilyFont</code>	<code>font-family</code>
<code>.rf-cal-hdr-optnl</code> This class defines the styles for an optional header.	<code>panelBorderColor</code>	<code>border-bottom-color</code>
	<code>additionalBackgroundColor</code>	<code>background-color</code>
	<code>generalSizeFont</code>	<code>font-size</code>

Class (selector)	Skin Parameters	Mapped CSS properties
	<i>generalFamilyFont</i>	font-family
.rf-cal-hdr-month This class defines the styles for the month header.	<i>headerBackgroundColor</i>	background-color
	<i>headerSizeFont</i>	font-size
	<i>headerFamilyFont</i>	font-family
	<i>headerWeightFont</i>	font-weight
	<i>headerTextColor</i>	color
.rf-cal-ftr This class defines the styles for a calendar footer.	<i>panelBorderColor</i>	border-right-color, border-bottom-color
	<i>additionalBackgroundColor</i>	background
	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-cal-ftr-optnl This class defines the styles for an optional footer.	<i>panelBorderColor</i>	border-right-color, border-bottom-color
	<i>additionalBackgroundColor</i>	background
	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-cal-tl This class defines the styles for calendar toolbars.	<i>headerBackgroundColor</i>	background-color
	<i>headerSizeFont</i>	font-size
	<i>headerFamilyFont</i>	font-family
	<i>headerWeightFont</i>	font-weight
	<i>headerTextColor</i>	color
.rf-cal-tl-ftr This class defines the styles for a toolbar item in the calendar footer.	<i>additionalBackgroundColor</i>	background
	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-cal-tl-btn This class defines styles for a toolbar button.	No skin parameters.	
.rf-cal-tl-btn-dis This class defines styles for a disabled toolbar button.	No skin parameters.	
.rf-cal-tl-btn-hov This class defines the styles for toolbar items when it is hovered over with the mouse cursor.	<i>calendarWeekBackgroundColor</i>	background-color
	<i>generalTextColor</i>	color
	<i>tableBackgroundColor</i>	border-color

Class (selector)	Skin Parameters	Mapped CSS properties
	<i>panelBorderColor</i>	border-right-color, border-bottom-color
.rf-cal-tl-btn-press This class defines the styles for toolbar items when it is pressed.	<i>panelBorderColor</i>	border-color
	<i>panelBorderColor</i>	border-right-color, border-bottom-color
.rf-cal-tl-close This class defines styles for a Close button in a toolbar.	No skin parameters.	
.rf-cal-c This class defines the styles for regular calendar cells.	<i>panelBorderColor</i>	border-bottom-color, border-right-color
	<i>tableBackgroundColor</i>	background-color
	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-cal-c-cnt This class defines styles for the content of a cell.	No skin parameters.	
.rf-cal-today This class defines the styles for the cell representing today's date.	<i>calendarCurrentBackgroundColor</i>	background-color
	<i>calendarCurrentTextColor</i>	color
.rf-cal-sel This class defines the styles for the selected day.	<i>headerBackgroundColor</i>	background-color
	<i>headerTextColor</i>	color
.rf-cal-hov This class defines the styles for a cell when it is hovered over with the mouse cursor.	<i>calendarSpecBackgroundColor</i>	background-color
	<i>calendarSpecTextColor</i>	color
.rf-cal-week This class defines the styles for week numbers.	<i>panelBorderColor</i>	border-bottom-color, border-right-color
	<i>calendarWeekBackgroundColor</i>	background-color
	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-cal-holiday This class defines the styles for weekends and holidays.	<i>calendarHolidaysBackgroundColor</i>	background-color
	<i>calendarHolidaysTextColor</i>	color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-cal-boundary-day This class defines styles for an active boundary button.	No skin parameters.	
.rf-cal-sp-inp This class defines the styles for a spinner input field in the pop-up element for time selection.	<i>buttonSizeFont</i>	font-size
	<i>buttonFamilyFont</i>	font-family
.rf-cal-sp-inp-cntr This class defines the styles for a wrapper <td> element for a spinner input field in the pop-up element for time selection.	<i>controlBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-color
	<i>subBorderColor</i>	border-right-color, border-bottom-color
.rf-cal-sp-btn This class defines the styles for a wrapper <td> element for spinner buttons in the pop-up element for time selection.	<i>headerBackgroundColor</i>	background-color, border-color
.rf-cal-sp-up This class defines styles for the Up spinner button.	No skin parameters.	
.rf-cal-sp-down This class defines styles for the Down spinner button.	No skin parameters.	
.rf-cal-sp-press This class defines styles for a spinner button when it is pressed.	No skin parameters.	
.rf-cal-edtr-shdw This class defines the styles for the calendar editor shadow.	<i>tableBackgroundColor</i>	background
.rf-cal-edtr-layout-shdw This class defines the styles for the layout shadow of a calendar editor.	<i>shadowBackgroundColor</i>	background-color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-cal-edtr-btn This class defines styles for a button in the calendar editor.	No skin parameters.	
.rf-cal-edtr-btn-over This class defines the styles for the calendar editor button when it is hovered over with the mouse cursor.	<i>panelBorderColor</i>	border-color
	<i>calendarSpecBackgroundColor</i>	background
.rf-cal-edtr-btn-sel This class defines the styles for the calendar editor button when it is selected.	<i>calendarCurrentBackgroundColor</i>	background-color
	<i>calendarCurrentTextColor</i>	color
.rf-cal-edtr-tl-over This class defines the styles for a toolbar item in the calendar editor when it is hovered over with the mouse cursor.	<i>additionalBackgroundColor</i>	background
	<i>tableBackgroundColor</i>	border-color
	<i>panelBorderColor</i>	border-right-color, border-bottom-color
.rf-cal-edtr-tl-press This class defines the styles for a toolbar item in the calendar editor when it is pressed.	<i>additionalBackgroundColor</i>	background
	<i>panelBorderColor</i>	border-color
	<i>tableBackgroundColor</i>	border-right-color, border-bottom-color
.rf-cal-time-inp This class defines styles for the time input field.	No skin parameters.	
.rf-cal-time-btn This class defines the styles for a button in the pop-up element for the calendar's time section.	<i>tableBackgroundColor</i>	border-color
	<i>panelBorderColor</i>	border-right-color, border-bottom-color
.rf-cal-time-btn-press This class defines the styles for a pressed button in the pop-up element for the calendar's time section.	<i>tableBackgroundColor</i>	border-right-color, border-bottom-color
	<i>panelBorderColor</i>	border-color
	<i>calendarWeekBackgroundColor</i>	background-color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-cal-timepicker-cnt This class defines the styles for the content of the pop-up element during time selection.	<i>panelBorderColor</i>	border-color
	<i>additionalBackgroundColor</i>	background
	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-cal-timepicker-inp This class defines the styles for an input field in the time picker.	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-cal-timepicker-ok This class defines styles for the OK button in the time picker.	No skin parameters.	
.rf-cal-timepicker-cancel This class defines styles for the Cancel button in the time picker.	No skin parameters.	
.rf-cal-monthpicker-cnt This class defines the styles for the content of the pop-up element during month or year selection.	<i>panelBorderColor</i>	border-color
	<i>tableBackgroundColor</i>	background
	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-cal-monthpicker-ok This class defines the styles for the OK button for the month picker.	<i>additionalBackgroundColor</i>	background
	<i>panelBorderColor</i>	border-top-color
.rf-cal-monthpicker-cancel This class defines the styles for the Cancel button for the month picker.	<i>additionalBackgroundColor</i>	background
	<i>panelBorderColor</i>	border-top-color
.rf-cal-monthpicker-split This class defines the styles for the splitter in the month picker.	<i>panelBorderColor</i>	border-right-color

8.3. <rich:fileUpload>

The <rich:fileUpload> component allows the user to upload files to a server. It features multiple uploads, progress bars, restrictions on file types, and restrictions on sizes of the files to be uploaded.

8.3.1. Basic usage

Basic usage requires the `fileUploadListener` attribute. Use the attribute to reference a listener function on the server side after each file is uploaded. The listener should process files as required, such as storing them in the `session/db/filesystem/` directory. The component itself does not store uploaded files, so if the listener is not implemented they are not stored anywhere.

Example 8.5. Basic usage

```
<rich:fileUpload fileUploadListener="#{bean.listener}" />
```

8.3.2. Upload settings

Files are uploaded to either the temporary folder (different for each operating system) or to RAM (random-access memory), depending on the value of the `org.richfaces.fileUpload.createTempFiles` context parameter of the `web.xml` settings file for the project. If the parameter is set to `true`, the files are uploaded to the temporary folder.

To limit the maximum size of the uploaded files, define the byte size with the `org.richfaces.fileUpload.maxRequestSizes` context parameter of the `web.xml` settings file for the project.

8.3.3. Interactivity options

The text labels used in the component can be completely customized. Labels for the various controls of the component can be set using the following parameters:

`addLabel`

The `addLabel` parameter sets the label for the **Add** button.

`clearAllLabel`

The `clearAllLabel` parameter sets the label for the **Clear All** button.

`clearLabel`

The `clearLabel` parameter sets the label for the **Clear** button.

`uploadLabel`

The `uploadLabel` parameter sets the label for the **Upload** button.

The <rich:fileUpload> component provides a built-in progress bar to indicate the progress of each file that is uploaded. This progress bar can be replaced with a <rich:progressBar>

component added to the progress facet. Refer to [Section 13.3, “<rich:progressBar>”](#) for details on the <rich:progressBar> component.

To disable the <rich:fileUpload> component, use the disabled attribute.

8.3.4. <rich:fileUpload> client-side events

There are a number of event handlers specific to the <rich:fileUpload> component:

- filesubmit is triggered before a file is uploaded.
- uploadcomplete is triggered after all files in the list have finished uploading.

8.3.5. Reference data

- *component-type*: org.richfaces.FileUpload
- *component-class*: org.richfaces.component.UIFileUpload
- *component-family*: org.richfaces.FileUpload
- *renderer-type*: org.richfaces.FileUploadRenderer
- *handler-class*: org.richfaces.view.facelets.FileUploadHandler

8.3.6. Style classes and skin parameters

Table 8.3. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-fu This class defines styles for the file upload control.	<i>generalBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-color
.rf-fu-hdr This class defines styles for the header of the file upload control.	<i>headerBackgroundColor</i>	background-color, border-color
.rf-fu-lst This class defines styles for lists in the file upload control.	No skin parameters.	
.rf-fu-cntr-hdn This class defines styles for the file upload container when it is hidden.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-fu-btns-lft, .rf-fu-btns-rgh These classes define styles for buttons on the left and right of the file upload control.	No skin parameters.	
.rf-fu-btn-add This class defines styles for the Add button in the file upload control.	<i>trimColor</i>	background-color
	<i>panelBorderColor</i>	border-color
.rf-fu-btn-cnt-add This class defines styles for the content of the Add button in the file upload control.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-fu-btn-add-dis This class defines styles for the Add button in the file upload control when it is disabled.	<i>tableFooterBackgroundColor</i>	background-color
	<i>tableFooterBackgroundColor</i>	border-color
.rf-fu-btn-cnt-add-dis This class defines styles for the content of the Add button in the file upload control when it is disabled.	<i>tabDisabledTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-fu-btn-upl This class defines styles for the Upload button in the file upload control.	<i>trimColor</i>	background-color
	<i>panelBorderColor</i>	border-color
.rf-fu-btn-cnt-upl This class defines styles for the content of the Upload button in the file upload control.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-fu-btn-clr This class defines styles for the Clear button in the file upload control.	<i>trimColor</i>	background-color
	<i>panelBorderColor</i>	border-color
.rf-fu-btn-cnt-clr This class defines styles for the content of the Clear	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family

Class (selector)	Skin Parameters	Mapped CSS properties
button in the file upload control.	<i>generalSizeFont</i>	font-size
.rf-fu-itm This class defines styles for an item in the file upload control.	<i>panelBorderColor</i>	border-bottom-color
.rf-fu-itm-lft, .rf-fu-itm-rgh These classes define styles for items on the left and right of the file upload control.	No skin parameters.	
.rf-fu-itm-lbl This class defines styles for the label of an item in the file upload control.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-fu-itm-st This class defines styles for the status of an item in the file upload control.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-fu-itm-lnk This class defines styles for a link item in the file upload control.	<i>generalLinkColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-fu-inp This class defines styles for the input field in the file upload control.	No skin parameters.	
.rf-fu-inp-cntr This class defines styles for the input field container in the file upload control.	No skin parameters.	

8.4. <rich:inplaceInput>

The <rich:inplaceInput> component allows information to be entered in-line in blocks of text, improving readability of the text. Multiple input regions can be navigated with keyboard navigation. The component has three functional states: the *view* state, where the component displays its initial setting, such as "click to edit"; the *edit* state, where the user can input text; and the "changed" state, where the new value for the component has been confirmed but can be edited again if required.

8.4.1. Basic usage

Basic usage requires the `value` attribute to point to the expression for the current value of the component. Validation and conversion rules for the JSF `UIInput` control apply as usual.

8.4.2. Interactivity options

When in the initial *view* state, the starting label can be set using the `defaultLabel` attribute. Alternatively, if the initial value is already set through the `value` attribute, this is displayed instead.

Once the user has entered text, the label is stored in the model specified by the `value` attribute. The use of the default label and value is shown in [Example 8.6, “Default label and value”](#).

Example 8.6. Default label and value

```
<rich:inplaceInput value="#{bean.value}" defaultLabel="click to edit"/>
```

By default, the event to switch the component to the *edit* state is a single mouse click. This can be changed using the `editEvent` attribute to specify a different event.

The user can confirm and save their input in multiple ways:

- By default, pressing the **Enter** key will confirm and save the input.
- If `showControls="true"` is set, buttons for confirming or canceling are added to the component.
- If `saveOnBlur="true"` is set, the input is saved on the component's blur event.

Pressing the **Esc** key cancels editing in all cases.

8.4.3. JavaScript API

The `<rich:inplaceInput>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`getValue()`

Get the current value of the input control.

`setValue(newValue)`

Set the value of the input control to the *newValue* string passed as a parameter.

`isEditState()`

Returns `true` if the control is currently in the *edit* state, or `false` if the control is currently in the *view* state.

`isValueChanged()`

Returns `true` if the control's value has been changed from the default.

`save()`

Saves the current item as the control's value.

`cancel()`

Cancel editing the value.

`getInput()`

Return the DOM element for the input.

8.4.4. Reference data

- *component-type*: `org.richfaces.InplaceInput`
- *component-class*: `org.richfaces.component.UIInplaceInput`
- *component-family*: `org.richfaces.InplaceInput`
- *renderer-type*: `org.richfaces.InplaceInputRenderer`

8.4.5. Style classes and skin parameters

Table 8.4. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-ii-d-s</code> This class defines styles for the in-place input when it is in the default state.	<i>editorBackgroundColor</i>	background-color
	<i>generalTextColor</i>	border-bottom-color
<code>.rf-ii-e-s</code> This class defines styles for the in-place input when it is in the editing state.	No skin parameters.	
<code>.rf-ii-c-s</code> This class defines styles for the in-place input when it is in the changed state.	No skin parameters.	
<code>.rf-ii-dis-s</code> This class defines styles for the in-place input when it is in the disabled state.	No skin parameters.	
<code>.rf-ii-fld</code> This class defines styles for the in-place input field.	<i>editBackgroundColor</i>	background-color, border-bottom-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-ii-dflt-lbl</code> This class defines styles for the default label of the in-place input.	No skin parameters.	
<code>.rf-ii-edit</code> This class defines styles for the in-place input when it is being edited.	No skin parameters.	
<code>.rf-ii-btn</code> This class defines styles for the buttons for the in-place input.	<code>tabBackgroundColor</code>	background-color
	<code>panelBorderColor</code>	border-color
<code>.rf-ii-btn-p</code> This class defines styles for the buttons for the in-place input when they are pressed.	<code>tabBackgroundColor</code>	background-color
	<code>panelBorderColor</code>	border-color
<code>.rf-ii-btn-set</code> , <code>.rf-ii-btn-prepos</code> , <code>.rf-ii-btn-pos</code> These classes define the positioning of the buttons.	No skin parameters.	
<code>.rf-ii-btn-shdw</code> This class defines styles for the button shadows for the in-place input.	No skin parameters.	
<code>.rf-ii-btn-shdw-t</code> , <code>.rf-ii-btn-shdw-b</code> , <code>.rf-ii-btn-shdw-l</code> , <code>.rf-ii-btn-shdw-r</code> These classes define the top, bottom, left, and right edge of the button shadows.	No skin parameters.	
<code>.rf-ii-none</code> This class defines styles for the in-place input when it cannot be edited.	No skin parameters.	

8.5. <rich:inplaceSelect>

The <rich:inplaceSelect> component is similar to the <rich:inplaceInput> component, except that the <rich:inplaceSelect> component uses a drop-down selection box to enter text instead of a regular text field. Changes can be rendered either in-line or for the whole block, and inputs can be focused with keyboard navigation. The component is based on the JSF UISelectOne component, so all the standard rules for value definition, processing, conversion, and validation apply.

The component has three functional states:

- When in the *view* state, the component displays its initial setting, such as "click to edit".
- When in the *edit* state, the user can select a value from a drop-down list.
- When in the *changed* state, the new value for the component has been confirmed, but it can be edited again if required.

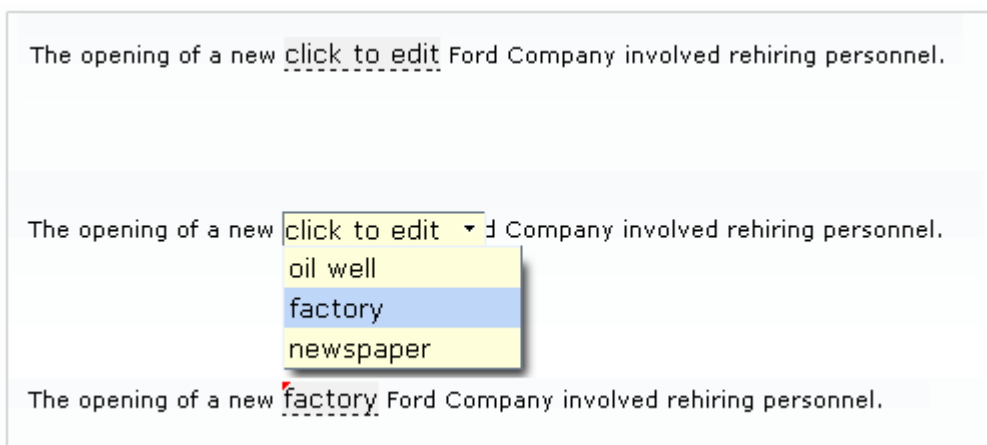


Figure 8.3. <rich:inplaceSelect>

8.5.1. Basic usage

Basic usage requires the value attribute to point to the expression for the current value of the component and a list of items. The list of items can be defined using the JSF components <f:selectItem/> and <f:selectItems/>.

Example 8.7. Defining list items for <rich:inplaceSelect>

```
<rich:inplaceSelect value="#{bean.inputValue}" defaultLabel="click to edit" >
  <f:selectItems value="#{bean.selectItems}" />
  <f:selectItem itemValue="1" itemLabel="Item 1" />
  <f:selectItem itemValue="2" itemLabel="Item 2" />
  <f:selectItem itemValue="3" itemLabel="Item 3" />
</rich:inplaceSelect>
```

```
<f.selectItem itemValue="4" itemLabel="Item 4" />
</rich:comboBox>
```

8.5.2. Interactivity options

When in the initial *view* state, the starting label can be set using the `defaultLabel` attribute, such as `defaultLabel="click to edit"`. Alternatively, if the initial value is already set through the `value` attribute, this is displayed instead.

By default, the event to switch the component to the *edit* state is a single mouse click. This can be changed using the `editEvent` attribute to specify a different event. When switching to *edit* mode, the drop-down list of possible values will automatically be displayed; this can be deactivated by setting `openOnEdit="false"`.

Once a new value for the control is saved, the state switches to the "changed" state. Saving a new value for the control can be performed in a number of ways:

- Once the user selects an item from the drop-down list, the item is saved as the new control value. This is the default setting. If `saveOnSelect="false"` is set, the component applies the selected item but remains in the *edit* state so a different selection could be chosen. The value is then applied when the **Enter** key is pressed.
- If `saveOnBlur="true"` is set, the selected item is saved as the new control value when the control loses focus.
- If `showControls="true"` is set, buttons are added to the control to confirm or cancel the selection. The new control value is only saved once the user confirms the selection using the button.

Pressing the **Esc** key cancels editing in all cases.

8.5.3. JavaScript API

The `<rich:inplaceSelect>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`getValue()`

Get the current value of the select control.

`setValue(newValue)`

Set the value of the select control to the *newValue* string passed as a parameter.

`isEditState()`

Returns `true` if the control is currently in the *edit* state, or `false` if the control is currently in the *view* state.

`isValueChanged()`

Returns `true` if the control's value has been changed from the default.

`save()`
Saves the current item as the control's value.

`cancel()`
Cancel editing the value.

`getInput()`
Return the input entered into the control by the user.

`getLabel()`
Return the default label of the control.

`setLabel(newLabel)`
Set the default label of the control to the *newLabel* string passed as a parameter.

`showPopup()`
Show the pop-up list of possible values.

`hidePopup()`
Hide the pop-up list.

8.5.4. Reference data

- *component-type*: `org.richfaces.InplaceSelect`
- *component-class*: `org.richfaces.component.UIInplaceSelect`
- *component-family*: `org.richfaces.Select`
- *renderer-type*: `org.richfaces.InplaceSelectRenderer`

8.5.5. Style classes and skin parameters

Table 8.5. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-is-d-s</code> This class defines styles for the in-place select when it is in the default state.	<i>editorBackgroundColor</i>	background-color
	<i>generalTextColor</i>	border-bottom-color
<code>.rf-is-e-s</code> This class defines styles for the in-place select when it is in the editing state.	No skin parameters.	
<code>.rf-is-c-s</code> This class defines styles for the in-place select	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
when it is in the changed state.		
.rf-is-dis-s This class defines styles for the in-place select when it is in the disabled state.	No skin parameters.	
.rf-is-flt This class defines styles for the in-place select field.	<i>editBackgroundColor</i>	background
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-is-opt This class defines styles for an option for the in-place select.	<i>generalTextColor</i>	border-color
.rf-is-sel This class defines styles for the selected option of the in-place select.	<i>generalTextColor</i>	border-color
.rf-is-lbl This class defines styles for the label of the in-place select.	No skin parameters.	
.rf-is-dflt-lbl This class defines styles for the default label of the in-place select.	No skin parameters.	
.rf-is-edit This class defines styles for the in-place select when it is being edited.	No skin parameters.	
.rf-is-btn This class defines styles for the buttons for the in-place select.	<i>tabBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-color
.rf-is-btn-p This class defines styles for the buttons for the in-place select when they are pressed.	<i>tabBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-is-btn-set, .rf-is-btn-prepos, .rf-is-btn-pos These classes define the positioning of the buttons.	No skin parameters.	
.rf-is-lst-pos This class defines the positioning of the list.	No skin parameters.	
.rf-is-lst-dec This class defines styles for a decreasing list for the in-place select.	<i>editBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-color
.rf-is-lst-scr1 This class defines styles for the list scrollbar.	No skin parameters.	
.rf-is-shdw This class defines styles for the in-place select shadow.	No skin parameters.	
.rf-is-shdw-t, .rf-is-shdw-b, .rf-is-shdw-l, .rf-is-shdw-r These classes define the top, bottom, left, and right edge of the in-place select shadows.	No skin parameters.	
.rf-is-btn-shdw This class defines styles for the button shadows for the in-place select.	No skin parameters.	
.rf-is-none This class defines styles for the in-place select when it cannot be edited.	No skin parameters.	

8.6. <rich:inputNumberSlider>

The <rich:inputNumberSlider> component provides a slider for changing numerical values. Optional features include control arrows to step through the values, a tool-tip to display the value while sliding, and a text field for typing the numerical value which can then be validated against the slider's range.

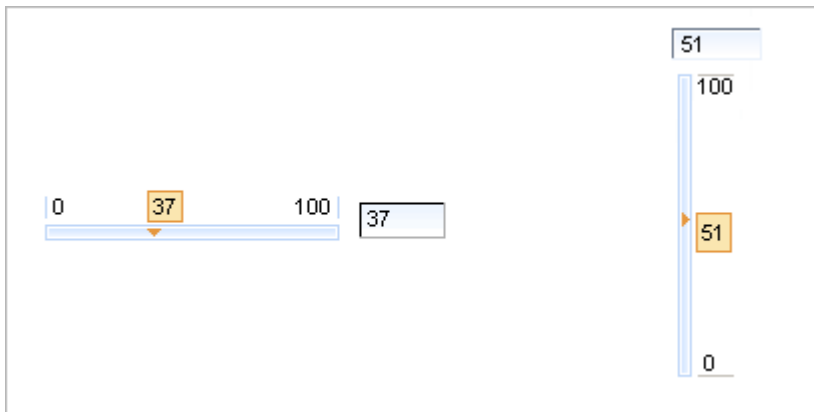


Figure 8.4. `<rich:inputNumberSlider>`

8.6.1. Basic usage

Basic use of the component with no attributes specified will render a slider with a minimum value of 0, a maximum of 100, and a gradient step of 1, together with a text field for typing the desired numerical value. The slider is labeled with the minimum and maximum boundary values, and a tool-tip showing the current value is shown while sliding the slider. The `value` attribute is used for storing the currently selected value of the slider. Standard conversion and validation for the JSF `UIInput` component is applied.

8.6.2. Interactivity options

The text field can be removed by setting `showInput="false"`.

The properties of the slider can be set with the attributes `minValue`, `maxValue`, and `step`.

The minimum and maximum labels on the slider can be hidden by setting `showBoundaryValues="false"`. The tool-tip showing the current value can be hidden by setting `showToolTip="false"`.

Arrow controls can be added to either side of the slider to adjust the value incrementally by setting `showArrows="true"`. Clicking the arrows move the slider indicator in that direction by the gradient step, and clicking and holding the arrows moves the indicator continuously. The time delay for each step when updating continuously can be defined using the `delay` attribute.

8.6.3. JavaScript API

The `<rich:inputNumberSlider>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`getValue()`

Get the current value of the slider control.

`setValue(newValue)`

Set the value of the slider control to the *newValue* integer passed as a parameter.

increase()

Increase the value of the slider control by the gradient step amount.

decrease()

Decrease the value of the slider control by the gradient step amount.

8.6.4. Reference data

- *component-type*: org.richfaces.InputNumberSlider
- *component-class*: org.richfaces.component.UIInputNumberSlider
- *component-family*: org.richfaces.Input
- *renderer-type*: org.richfaces.inputNumberSliderRenderer

8.6.5. Style classes and skin parameters

Table 8.6. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-insl This class defines styles for the number slider itself.	No skin parameters.	
.rf-insl-trc This class defines styles for the number slider track.	<i>controlBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-bottom-color
.rf-insl-trc-cntr This class defines styles for the container of the number slider track.	No skin parameters.	
.rf-insl-mn This class defines styles for the minimum label on the number slider.	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
	<i>generalTextColor</i>	color
	<i>panelBorderColor</i>	border-left-color
.rf-insl-mx This class defines styles for the maximum label on the number slider.	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
	<i>generalTextColor</i>	color
	<i>panelBorderColor</i>	border-right-color
.rf-insl-inp This class defines styles for the input field on the number slider.	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
	<i>generalTextColor</i>	color

Class (selector)	Skin Parameters		Mapped CSS properties
<code>.rf-insl-inp-cntr</code> This class defines styles for the container of the input field.	No skin parameters.		
<code>.rf-insl-hnd</code> This class defines styles for the handle on the number slider.	No skin parameters.		
<code>.rf-insl-hnd-cntr</code> This class defines styles for the container of the handle.	No skin parameters.		
<code>.rf-insl-hnd-sel</code> This class defines styles for the handle when it is selected.	No skin parameters.		
<code>.rf-insl-hnd-dis</code> This class defines styles for the handle when it is selected.	No skin parameters.		
<code>.rf-insl-dec, .rf-insl-inc</code> These classes define styles for the step controls to decrease and increase the number.	No skin parameters.		
<code>.rf-insl-dec-sel, .rf-insl-inc-sel</code> These classes define styles for the step controls when they are selected.	No skin parameters.		
<code>.rf-insl-dec-dis, .rf-insl-inc-dis</code> These classes define styles for the step controls when they are disabled.	No skin parameters.		
<code>.rf-insl-tt</code> This class defines styles for the tool-tip on the number slider.	<code>generalSizeFont</code>		font-size
	<code>generalFamilyFont</code>		font-family
	<code>generalTextColor</code>		color
	<code>tipBorderColor</code>		border

Class (selector)	Skin Parameters	Mapped CSS properties
	<i>tipBackgroundColor</i>	background-color

8.7. <rich:inputNumberSpinner>

The <rich:inputNumberSpinner> component is a single-line input field with buttons to increase and decrease a numerical value. The value can be changed using the corresponding directional keys on a keyboard, or by typing into the field.



Figure 8.5. <rich:inputNumberSpinner>

8.7.1. Basic usage

Basic use of the component with no attributes specified will render a number spinner with a minimum value of 1, a maximum value of 100, and a gradient step of 1.

These default properties can be re-defined with the attributes `minValue`, `maxValue`, and `step` respectively. The starting value of the spinner is the minimum value unless otherwise specified with the `value` attribute.

8.7.2. Interactivity options

When changing the value using the buttons, raising the value above the maximum or cause the spinner to restart at the minimum value. Likewise, when lowering below the minimum value the spinner will reset to the maximum value. This behavior can be deactivated by setting `cycled="false"`, which will cause the buttons to stop responding when the reach the maximum or minimum value.

The ability to change the value by typing into the text field can be disabled by setting `enableManualInput="false"`.

8.7.3. JavaScript API

The <rich:inputNumberSpinner> component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`getValue()`

Get the current value of the spinner control.

`setValue(newValue)`

Set the value of the spinner control to the *newValue* integer passed as a parameter.

`increase()`

Increase the value of the spinner control by the gradient step amount.

`decrease()`

Decrease the value of the spinner control by the gradient step amount.

8.7.4. Reference data

- *component-type*: `org.richfaces.InputNumberSpinner`
- *component-class*: `org.richfaces.component.UIInputNumber`
- *component-family*: `org.richfaces.Input`
- *renderer-type*: `org.richfaces.InputNumberSpinnerRenderer`

8.7.5. Style classes and skin parameters

Table 8.7. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-insp</code> This class defines styles for the number spinner itself.	<i>panelBorderColor</i>	border-color
<code>.rf-insp-inp</code> This class defines styles for the input field on the number spinner.	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
	<i>generalTextColor</i>	color
	<i>controlBackgroundColor</i>	background-color
<code>.rf-insp-btns</code> This class defines styles for the buttons on the number spinner.	<i>headerBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-left-color
<code>.rf-insp-dec</code> , <code>.rf-insp-inc</code> These classes define styles for the step controls to decrease and increase the number.	No skin parameters.	
<code>.rf-insp-dec-dis</code> , <code>.rf-insp-inc-dis</code> These classes define styles for the step controls when they are disabled.	No skin parameters.	

8.8. <rich:select>

The <rich:select> component provides a drop-down list box for selecting a single value from multiple options. The <rich:select> component can be configured as a combo-box, where it will accept typed input. The component also supports keyboard navigation. The <rich:select> component functions similarly to the JSF UISelectOne component.




Figure 8.6. <rich:select>

8.8.1. Basic usage

Simple usage of the <rich:select> component requires the value attribute to store the selected value. Additionally, child tags to manage the list of selections are required. The child tags can either be a number of <f:selectItem> tags or a <f:selectItems> tag which points to a data model containing a list of selection items. The value attribute is used to store the current selection.

Example 8.8. Selection items

Using multiple <f:selectItem> tags

```
<rich:select>
  <f:selectItem itemValue="0" itemLabel="Option 1" />
  <f:selectItem itemValue="1" itemLabel="Option 2" />
  <f:selectItem itemValue="2" itemLabel="Option 3" />
  <f:selectItem itemValue="3" itemLabel="Option 4" />
  <f:selectItem itemValue="4" itemLabel="Option 5" />
</rich:select>
```

Using a single <f:selectItems> tag

```
<rich:select>
  <f:selectItems value="#{bean.options}" />
</rich:select>
```

The arrow keys on a keyboard can be used to highlight different items in the list. If the control loses focus or the **Enter** key is pressed, the highlighted option is chosen as the value and the list is closed. Pressing the **Esc** key will close the list but not change the value.

8.8.2. Using manual input

The `<rich:select>` component allows the user to type into a text field to scroll through or filter the list. By default, the `<rich:select>` component functions as a drop-down list with no manual input. To add keyboard support for manual input, set `enableManualInput="true"`.

Once the user begins typing, the first available matching option is highlighted. If the typed text does not match any values in the list, no value is chosen and the drop-down list displays as empty. Other keyboard interaction remains the same as the basic drop-down list.

The standard JSF `<h:selectOne>` component does not offer this extended keyboard support. However, since the `<rich:select>` component is still based on the JSF `UISelectOne` component, it will not accept a value that does not match any items in the drop-down list. If an invalid value is entered, it is highlighted as erroneous and validation messages appear with the submission.

8.8.3. Advanced options

Use the `defaultLabel` attribute to set a place-holder label, such as `defaultLabel="select an option"`.

Server-side processing occurs in the same manner as for an `<h:selectOneMenu>` component. As such, custom objects used for selection items should use the same converters as for an `<h:selectOneMenu>` component.

8.8.4. JavaScript API

The `<rich:select>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`getValue()`

Get the current value of the text field.

`setValue(newValue)`

Set the value of the text field to the *newValue* string passed as a parameter.

`getLabel()`

Return the default label of the control.

`showPopup()`

Show the pop-up list of completion values.

`hidePopup()`

Hide the pop-up list.

8.8.5. Reference data

- *component-type*: `org.richfaces.Select`
- *component-class*: `org.richfaces.component.UISelect`

- *component-family*: `org.richfaces.Select`
- *renderer-type*: `org.richfaces.SelectRenderer`

8.8.6. Style classes and skin parameters

Table 8.8. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-sel</code> This class defines styles for the select control itself.	No skin parameters.	
<code>.rf-sel-cntr</code> This class defines styles for the container of the select control.	<i>panelBorderColor</i>	border-color
<code>.rf-sel-inp</code> This class defines styles for the select control input field.	<i>controlBackgroundColor</i>	background-color
<code>.rf-sel-fld-err</code> This class defines styles for the input field when an error occurs.	No skin parameters.	
<code>.rf-sel-opt</code> This class defines styles for an option in the select control.	<i>generalTextColor</i>	color
	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
<code>.rf-sel-sel</code> This class defines styles for the selected option of the select control.	<i>generalTextColor</i>	border-color
<code>.rf-sel-dflt-lbl</code> This class defines styles for the default label of the select control.	No skin parameters.	
<code>.rf-sel-btn</code> This class defines styles for the button of the select control.	<i>headerBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-left-color
<code>.rf-sel-btn-arrow</code> This class defines styles for the arrow on the button.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-sel-btn-dis</code> This class defines styles for the button of the select control when it is disabled.	No skin parameters.	
<code>.rf-sel-lst-scr1</code> This class defines styles for the list scrollbar.	No skin parameters.	
<code>.rf-sel-shdw</code> This class defines styles for the select control shadow.	No skin parameters.	
<code>.rf-sel-shdw-t</code> , <code>.rf-sel-shdw-b</code> , <code>.rf-sel-shdw-l</code> , <code>.rf-sel-shdw-r</code> These classes define the top, bottom, left, and right edge of the select control shadows.	No skin parameters.	

Panels

This chapter details those components which act as panels and containers to hold groups of other components.

9.1. <rich:panel>

The <rich:panel> component is a bordered panel with an optional header.

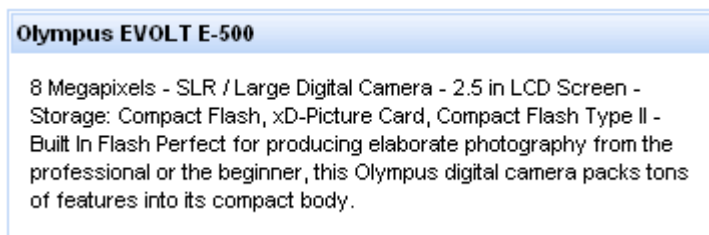


Figure 9.1. <rich:panel>

9.1.1. Basic usage

No attributes need to be listed for basic usage. a <rich:panel> without any attributes defined renders a bordered region with no header.

9.1.2. Adding a header

To add a header to the panel, use the header attribute to specify the text to appear in the header. Alternatively the header can be constructed using a header facet. [Example 9.1, “Adding a header”](#) demonstrates the two different approaches.

Example 9.1. Adding a header

```
<rich:panel header="This is the panel header">
  <h:outputText value="This is the panel content" />
</rich:panel>
```

```
<rich:panel>
  <f:facet name="header">
    <h:outputText value="This is the panel header">
  </f:facet>
  <h:outputText value="This is the panel content" />
</rich:panel>
```

Both the examples render an identical panel.

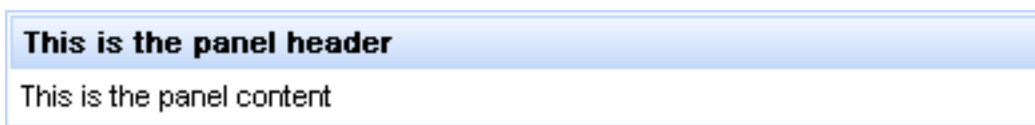


Figure 9.2. Adding a header

9.1.3. Reference data

- *component-type*: `org.richfaces.Panel`
- *component-class*: `org.richfaces.component.UIPanel`
- *component-family*: `org.richfaces.Panel`
- *renderer-type*: `org.richfaces.PanelRenderer`

9.1.4. Style classes and skin parameters

Table 9.1. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-p</code> This class defines styles for the panel itself.	<i>generalBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	color
<code>.rf-p-hdr</code> This class defines styles for the header of a panel.	<i>headerBackgroundColor</i>	background-color, border-color
	<i>headerTextColor</i>	color
	<i>headerSizeFont</i>	font-size
	<i>headerWeightFont</i>	font-weight
	<i>headerFamilyFont</i>	font-family
<code>.rf-p-b</code> This class defines styles for the body of a panel.	<i>generalTextColor</i>	color
	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family

9.2. `<rich:accordion>`

The `<rich:accordion>` is a series of panels stacked on top of each other, each collapsed such that only the header of the panel is showing. When the header of a panel is clicked, it is expanded to show the content of the panel. Clicking on a different header will collapse the previous panel and expand the selected one. Each panel contained in a `<rich:accordion>` component is a `<rich:accordionItem>` component.



Figure 9.3. A `<rich:accordion>` component containing three `<rich:accordionItem>` components

9.2.1. Basic usage

The `<rich:accordion>` component requires no attributes for basic usage. The component can contain any number of `<rich:accordionItem>` components as children. The headers of the `<rich:accordionItem>` components control the expanding and collapsing when clicked. Only a single `<rich:accordionItem>` can be displayed at a time. Refer to [Section 9.2.8, “`<rich:accordionItem>`”](#) for details on the `<rich:accordionItem>` component.



Form elements required

All `<rich:tabPanel>` components should be wrapped in a form element when using either ajax or server mode, as usual for submitting components.

9.2.2. Switching panels

The `activeItem` attribute holds the active panel name. This name is a reference to the name identifier of the active child `<rich:accordionItem>` component.

The switching mode for performing submissions is determined by the `switchType` attribute, which can have one of the following three values:

server

The default setting. Activation of a `<rich:accordionItem>` component causes the parent `<rich:accordion>` component to perform a common submission, completely refreshing the page. Only one panel at a time is rendered to the client side.

ajax

Activation of a `<rich:accordionItem>` component causes the parent `<rich:accordion>` component to perform an Ajax form submission, and the content of the panel is rendered. Only one panel at a time is rendered to the client side.

client

Activation of a `<rich:accordionItem>` component causes the parent `<rich:accordion>` component to perform updates on the client side. All the panels are rendered on the client side during the initial page render. JavaScript changes the styles such that one panel component becomes hidden while the other is shown.

9.2.3. `<rich:accordion>` client-side events

In addition to the standard Ajax events and HTML events, the `<rich:accordion>` component uses the client-side events common to all switchable panels:

- The `itemchange` event points to the function to perform when the switchable item is changed.
- The `beforeitemchange` event points to the function to perform when before the switchable item is changed.

9.2.4. `<rich:accordion>` server-side events

The `<rich:accordion>` component uses the server-side events common to all switchable panels:

- The `ItemChangeEvent` event occurs on the server side when an item is changed through Ajax using the server mode. It can be processed using the `ItemChangeListener` attribute. Refer to [Section 9.6.5, “`<rich:itemChangeListener>`”](#) for details on the `<rich:itemChangeListener>` tag.

9.2.5. JavaScript API

The `<rich:accordion>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions, which are common to all switchable panels:

`getItems()`

Return an array of the items contained in the accordion control.

`getItemsNames()`

Return an array of the names of the items contained in the accordion control.

`switchToItem(itemName)`

Switch to and display the item identified by the `itemName` string passed as a parameter.

`firstItem()`, `prevItem()`, `nextItem()`, `lastItem()`

Switch to and display the first item, the previous item, the next item, or the last item.

9.2.6. Reference data

- *component-type*: `org.richfaces.Accordion`
- *component-class*: `org.richfaces.component.UIAccordion`

- *component-family*: `org.richfaces.Accordion`
- *renderer-type*: `org.richfaces.AccordionRenderer`
- *handler-class*: `org.richfaces.view.facelets.html.TogglePanelTagHandler`

9.2.7. Style classes and skin parameters

Table 9.2. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-ac This class defines styles for the accordion control itself.	<i>panelBorderColor</i>	border-color
	<i>generalBackgroundColor</i>	background
.rf-ac-itm-hdr This class defines styles for the header of an accordion item.	<i>panelBorderColor</i>	border-bottom-color
	<i>headerBackgroundColor</i>	background-color
	<i>headerTextColor</i>	color
	<i>headerWeightFont</i>	font-weight
	<i>headerFamilyFont</i>	font-family
	<i>headerSizeFont</i>	font-size
.rf-ac-itm-hdr-act, .rf-ac-itm-hdr-inact These classes define styles for the header when the item is either active (expanded) or inactive (collapsed).	No skin parameters.	
.rf-ac-itm-hdr-dis This class defines styles for the header when it is disabled.	<i>tabDisabledTextColor</i>	color
.rf-ac-itm-gr This class defines styles for an item group.	No skin parameters.	
.rf-ac-itm-cnt This class defines styles for the content of an accordion item.	<i>panelBorderColor</i>	border-bottom-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-ac-itm-ico This class defines styles for the item icon.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-ac-itm-exp-ico</code> This class defines styles for the expanded icon for an item.	No skin parameters.	
<code>.rf-ac-itm-ico-act, .rf-ac-itm-ico-inact</code> These classes define styles for the icon when the item is either active (expanded) or inactive (collapsed).	No skin parameters.	
<code>.rf-ac-itm-lbl</code> This class defines styles for the item label.	No skin parameters.	
<code>.rf-ac-itm-lbl-act, .rf-ac-itm-lbl-inact</code> These classes define styles for the label when the item is either active (expanded) or inactive (collapsed).	No skin parameters.	

9.2.8. `<rich:accordionItem>`

The `<rich:accordionItem>` component is a panel for use with the `<rich:accordion>` component. `<rich:accordionItem>` components can be added dynamically using iteration models with the `<c:forEach>` tag.

9.2.8.1. Basic usage

Basic usage of the `<rich:accordionItem>` component requires the `header` attribute, which provides the text on the panel header. The panel header is all that is visible when the accordion item is collapsed.

Alternatively the `header` facet could be used in place of the `header` attribute. This would allow for additional styles and custom content to be applied to the tab.

9.2.8.2. `<rich:accordionItem>` client-side events

In addition to the standard HTML events, the `<rich:accordionItem>` component uses the client-side events common to all switchable panel items:

- The `enter` event points to the function to perform when the mouse enters the panel.

- The `leave` event points to the function to perform when the mouse leaves the panel.

9.2.8.3. Reference data

- `component-type`: `org.richfaces.AccordionItem`
- `component-class`: `org.richfaces.component.UIAccordionItem`
- `component-family`: `org.richfaces.AccordionItem`
- `renderer-type`: `org.richfaces.AccordionItemRenderer`

9.3. <rich:collapsiblePanel>

The `<rich:collapsiblePanel>` component is a collapsible panel that shows or hides content when the header bar is activated. It is a simplified version of `<rich:togglePanel>` component.

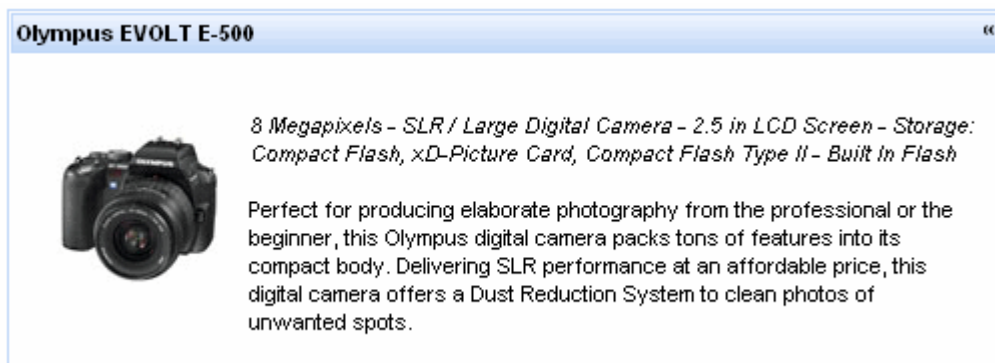


Figure 9.4. `<rich:collapsiblePanel>`

9.3.1. Basic usage

Basic usage requires the `header` attribute to be specified, which provides the title for the header element. Additionally the panel requires content to display when it is expanded. Content is added as child elements like a standard panel.

9.3.2. Expanding and collapsing the panel

The switching mode for performing submissions is determined by the `switchType` attribute, which can have one of the following three values:

`server`

This is the default setting. The `<rich:collapsiblePanel>` component performs a common submission, completely refreshing the page. Only one panel at a time is rendered to the client side.

ajax

The `<rich:collapsiblePanel>` component performs an Ajax form submission, and only the content of the panel is refreshed. Only one panel at a time is rendered to the client side.

client

The `<rich:collapsiblePanel>` component changes the state on the client side without any additional requests being sent.

9.3.3. Appearance

The appearance of the `<rich:collapsiblePanel>` component can be customized using facets. The `headerExpandedClass` and `headerCollapsedClass` facets are used to style the appearance of the panel when it is expanded and collapsed respectively. The `expandControl` facet defines the content in the panel header used for expanding, and the `collapseControl` facet defines the content in the panel header used for collapsing.

9.3.4. `<rich:collapsiblePanel>` server-side events

The `<rich:collapsiblePanel>` component uses the following unique server-side events:

- The `PanelToggleEvent` event occurs on the server side when the `<rich:collapsiblePanel>` component is expanded or collapsed in either the ajax or server modes. It can be processed using the `panelToggleListener` attribute.

9.3.5. JavaScript API

The `<rich:collapsiblePanel>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

switchPanel()

Switch the state of the collapsible panel (expanded or collapsed).

9.3.6. Reference data

- *component-type*: `org.richfaces.CollapsiblePanel`
- *component-class*: `org.richfaces.component.UICollapsiblePanel`
- *component-family*: `org.richfaces.CollapsiblePanel`
- *renderer-type*: `org.richfaces.CollapsiblePanelRenderer`
- *handler-class*: `org.richfaces.view.facelets.html.CollapsiblePanelTagHandler`

9.3.7. Style classes and skin parameters

Table 9.3. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-cp This class defines styles for the collapsible panel itself.	<i>panelBorderColor</i>	color
	<i>generalBackgroundColor</i>	background
.rf-cp-hdr This class defines styles for the header of a collapsible panel.	<i>headerBackgroundColor</i>	background-color, border-color
	<i>headerTextColor</i>	color
	<i>headerWeightFont</i>	font-weight
	<i>headerFamilyFont</i>	font-family
	<i>headerSizeFont</i>	font-size
.rf-cp-hdr-exp, .rf-cp-hdr-colps These classes define styles for the header when the item is either expanded or collapsed.	No skin parameters.	
.rf-cp-gr This class defines styles for a collapsible panel group.	No skin parameters.	
.rf-cp-b This class defines styles for the body of a collapsible panel.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-cp-ico This class defines styles for the panel icon.	No skin parameters.	
.rf-cp-exp-ico This class defines styles for the expanded icon for a panel.	No skin parameters.	
.rf-cp-ico-exp, .rf-cp-ico-colps These classes define styles for the icon when	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
the panel is either expanded or collapsed.		
.rf-cp-lbl This class defines styles for the panel label.	No skin parameters.	
.rf-cp-lbl-exp, .rf-cp-lbl-collapsed These classes define styles for the label when the panel is either expanded or collapsed.	No skin parameters.	

9.3.8. <rich:panelToggleListener>

Use the <rich:panelToggleListener> tag to register a PanelToggleListener class on a parent <rich:collapsiblePanel> component. The class provided as a listener must implement the org.richfaces.event.PanelToggleListener interface. The processPanelToggle method accepts an org.richfaces.event.PanelToggleEvent event as a parameter.

9.4. <rich:popupPanel>

The <rich:popupPanel> component provides a pop-up panel or window that appears in front of the rest of the application. The <rich:popupPanel> component functions either as a modal window which blocks interaction with the rest of the application while active, or as a non-modal window. It can be positioned on the screen, dragged to a new position by the user, and re-sized.

9.4.1. Basic usage

The <rich:popupPanel> does not require any compulsory attributes, though certain use cases require different attributes.

9.4.2. Showing and hiding the pop-up

If show="true" then the pop-up panel will display when the page is first loaded.

The <rich:popupPanel> component can be shown and hidden manually using the show() and hide() methods from the JavaScript API. These can be implemented using two different approaches:

- Using the <rich:componentControl> component. For details on the component, refer to [Section 17.1, “<rich:componentControl>”](#).
- Using the rich:component function. For details on the function, refer to [Section 16.2, “rich:component”](#).

For explicit referencing when using the functions, the component can be given an `id` identifier.

Example 9.2, “<rich:popupPanel> example” demonstrates basic use of both the `<rich:componentControl>` component and the `rich:component` function to show and hide the `<rich:popupPanel>` component.

Example 9.2. <rich:popupPanel> example

```
<h:commandButton value="Show the panel">
    <rich:componentControl target="popup" operation="show" />
</h:commandButton>
...
<a4j:form>
    <rich:popupPanel id="popup">

        <p><a href="#" onclick="#{rich:component('popup')}.hide()">Hide the panel</a></p>
    </rich:popupPanel>
</a4j:form>
```



Placement

The `<rich:popupPanel>` component is usually rendered in front of any other objects on the page. This is achieved by attaching the component to the `<body>` element of the page, and setting a very high “*z-index*” (the stack order of the object). This approach is taken because relatively-positioned elements could still overlap the pop-up panel if they exist at higher levels of the DOM hierarchy, even if their *z-index* is less than the `<rich:popupPanel>` component.

To avoid form limitation of the pop-up panel on pages where no such elements exist, the `<rich:popupPanel>` component can be reattached to its original DOM element by setting `domElementAttachment` to either `parent` or `form`.

9.4.3. Modal and non-modal panels

By default, the `<rich:popupPanel>` appears as a modal window that blocks interaction with the other objects on the page. To implement a non-modal window instead, set `modal="false"`. This will allow interaction with other objects outside the pop-up panel.

9.4.4. Size and positioning

The pop-up panel can be both re-sized and re-positioned by the user. The minimum possible size for the panel can be set with the `minWidth` and `minHeight` attributes. These abilities can be deactivated by setting `resizable` or `movable` to `false` as necessary.

The pop-up panel can be automatically sized when it is shown if the `autosized` attribute is set to `true`.



Embedded objects in the panel

Embedded objects inserted into the HTML with the `<embed>` tag could be rendered in front of a `<rich:popupPanel>` component in some browsers. The `<rich:popupPanel>` component can be forcibly rendered in front of these objects by setting `overlapEmbeddedObjects="true"`.

However, due to the additional script processing required when using the `overlapEmbeddedObjects` attribute, applications can suffer from decreased performance. As such, `overlapEmbeddedObjects` should only be set to `true` when `<embed>` or `<object>` tags are being used in the parent view. Do not set it to `true` for applications that do not require it.

9.4.5. Header and controls

A panel header and associated controls can be added to the `<rich:popupPanel>` component through the use of facets. The header facet displays a title for the panel, and the controls facet can be customized to allow window controls such as a button for closing the pop-up. [Example 9.3](#), “*Header and controls*” demonstrates the use of the facets.

Example 9.3. Header and controls

```
<h:commandLink value="Show pop-up">
    <rich:componentControl target="popup" operation="show" />
</h:commandLink>
...
<a4j:form>

    <rich:popupPanel id="popup" modal="false" autosized="true" resizeable="false">
        <f:facet name="header">
            <h:outputText value="The title of the panel" />
        </f:facet>
        <f:facet name="controls">
            <h:graphicImage value="/pages/
close.png" style="cursor:pointer" onclick="#{rich:component('popup')}.hide()" /
>
        </f:facet>
        <p>
            This is the content of the panel.
        </p>
    </rich:popupPanel>
</a4j:form>
```




Figure 9.5. Header and controls

9.4.6. Contents of the pop-up

The `<rich:popupPanel>` component can contain any other rich component just like a normal panel.

Contents of the `<rich:popupPanel>` component which are positioned relatively may be trimmed if they extend beyond the borders of the pop-up panel. For certain in-line controls this behavior may be preferable, but for other dynamic controls it could be undesirable. If the `trimOverlaidElements` attribute is set to `false` then child components will not be trimmed if they extend beyond the borders of the pop-up panel. For example, if using a calendar, select, or other pop-up component, set `trimOverlaidElements="false"`.

9.4.7. JavaScript API

The `<rich:popupPanel>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`getTop()`

Return the top co-ordinate for the position of the pop-up panel.

`getLeft()`

Return the left co-ordinate for the position of the pop-up panel.

`moveTo(top, left)`

Move the pop-up panel to the co-ordinates specified with the *top* and *left* parameters.

`resize(width, height)`

Resize the pop-up panel to the size specified with the *width* and *height* parameters.

`show()`

Show the pop-up panel.

`hide()`

Hide the pop-up panel.

9.4.8. Reference data

- *component-type*: `org.richfaces.PopupPanel`
- *component-class*: `org.richfaces.component.UIPopupPanel`
- *component-family*: `org.richfaces.PopupPanel`
- *renderer-type*: `org.richfaces.PopupPanelRenderer`

9.4.9. Style classes and skin parameters

Table 9.4. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters		Mapped CSS properties
<code>.rf-pp-btn</code> This class defines styles for the pop-up panel button.	No skin parameters.		
<code>.rf-pp-shade</code> This class defines styles for the shading that covers the page when presenting a modal pop-up panel.	No skin parameters.		
<code>.rf-pp-cntr</code> This class defines styles for the container for the pop-up panel.	<code>panelBorderColor</code>		border
	<code>generalBackgroundColor</code>		background
<code>.rf-pp-hdr</code> This class defines styles for the header of the pop-up panel.	<code>headerBackgroundColor</code>		background

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-pp-hdr-cnt This class defines styles for the content of the header.	<i>headerTextColor</i>	color
	<i>headerWeightFont</i>	font-weight
	<i>headerFamilyFont</i>	font-family
	<i>headerSizeFont</i>	font-size
.rf-pp-cnt This class defines styles for the content of the pop-up panel.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-pp-cnt-scrLr This class defines styles for the scroll bars of the pop-up panel.	<i>generalBackgroundColor</i>	background
.rf-pp-hndlr This class defines styles for borders of the pop-up panel. The border handler is used to re-size the panel.	No skin parameters.	
.rf-pp-hndlr-t, .rf-pp-hndlr-b, .rf-pp-hndlr-l, .rf-pp-hndlr-r, .rf-pp-hndlr-tl, .rf-pp-hndlr-tr, .rf-pp-hndlr-bl, .rf-pp-hndlr-br These classes define styles for the top, bottom, left, right, top-left, top-right, bottom-left, and bottom-right edges of the border handler.	No skin parameters.	

9.5. <rich:tabPanel>

The <rich:tabPanel> component provides a set of tabbed panels for displaying one panel of content at a time. The tabs can be highly customized and themed. Each tab within a <rich:tabPanel> container is a <rich:tab> component. Refer to [Section 9.5.7, "<rich:tab>"](#) for further details on the <rich:tab> component.

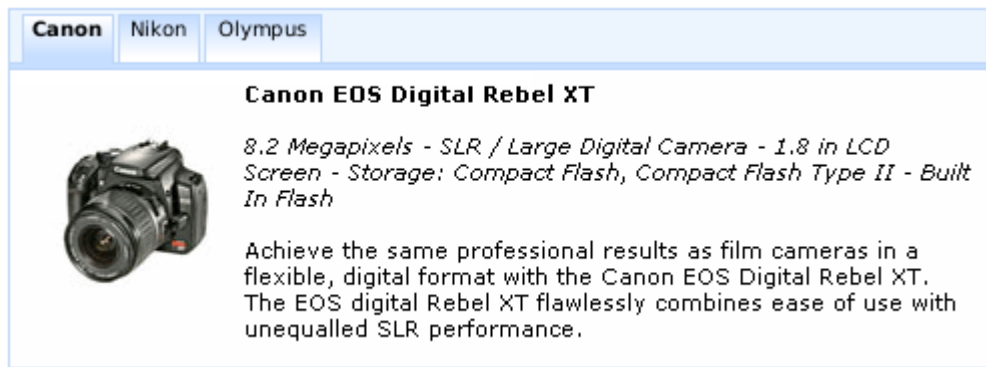


Figure 9.6. A `<rich:tabPanel>` component containing three `<rich:tab>` components



Form elements required

All `<rich:tabPanel>` components should be wrapped in a form element when using either ajax or server mode, as usual for submitting components.

9.5.1. Switching panels

The `activeItem` attribute holds the active tab name. This name is a reference to the name identifier of the active child `<rich:tab>` component.

The switching mode for performing submissions is determined by the `switchType` attribute, which can have one of the following three values:

server

The default setting. Activation of a `<rich:tab>` component causes the parent `<rich:tabPanel>` component to perform a common submission, completely refreshing the page. Only one tab at a time is rendered to the client side.

ajax

Activation of a `<rich:tab>` component causes the parent `<rich:tabPanel>` component to perform an Ajax form submission, and the content of the tab panel is refreshed. Only one tab at a time is rendered to the client side.

client

Activation of a `<rich:tab>` component causes the parent `<rich:tabPanel>` component to update on the client side. All the tabs are rendered to the client during the initial page render. JavaScript changes the styles such that one tab becomes hidden while the other is shown.

9.5.2. `<rich:tabPanel>` client-side events

In addition to the standard Ajax events and HTML events, the `<rich:tabPanel>` component uses the client-side events common to all switchable panels:

- The `itemchange` event points to the function to perform when the switchable item is changed.
- The `beforeitemchange` event points to the function to perform when before the switchable item is changed.

9.5.3. <rich:tabPanel> server-side events

The <rich:tabPanel> component uses the server-side events common to all switchable panels:

- The `ItemChangeEvent` event occurs on the server side when an item is changed through Ajax using the server mode. It can be processed using the `ItemChangeListener` attribute. Refer to [Section 9.6.5, “<rich:itemChangeListener>”](#) for details on the <rich:itemChangeListener> tag.

9.5.4. JavaScript API

The <rich:tabPanel> component can be controlled through the JavaScript API. The JavaScript API provides the following functions, which are common to all switchable panels:

`getItems()`

Return an array of the tabs contained in the tab panel.

`getItemsNames()`

Return an array of the names of the tabs contained in the tab panel.

`switchToItem(itemName)`

Switch to and display the item identified by the *itemName* string passed as a parameter.

`firstItem()`, `prevItem()`, `nextItem()`, `lastItem()`

Switch to and display the first item, the previous item, the next item, or the last item.

9.5.5. Reference data

- *component-type*: `org.richfaces.TabPanel`
- *component-class*: `org.richfaces.component.UITabPanel`
- *component-family*: `org.richfaces.TabPanel`
- *renderer-type*: `org.richfaces.TabPanelRenderer`
- *handler-class*: `org.richfaces.view.facelets.html.TogglePanelTagHandler`

9.5.6. Style classes and skin parameters

Table 9.5. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-tab-hdr</code> This class defines styles for a tab header.	<code>panelBorderColor</code>	border
	<code>tabBackgroundColor</code>	background-color

Class (selector)	Skin Parameters	Mapped CSS properties
	<i>generalTextColor</i>	color
.rf-tab-hdr-act This class defines styles for a tab header when it is active.	<i>additionalBackgroundColor</i>	background-color
.rf-tab-hdr-inact This class defines styles for a tab header when it is inactive.	No skin parameters.	
.rf-tab-hdr-dis This class defines styles for a tab header when it is disabled.	<i>tabDisabledTextColor</i>	color
.rf-tab-hdr-tabline-vis This class defines styles for the header tab line when it is visible.	<i>additionalBackgroundColor</i>	background-color
	<i>panelBorderColor</i>	border-color
.rf-tab-hdr-tabs This class defines styles for the tabs in the header.	No skin parameters.	
.rf-tab-hdr-spcr This class defines styles for the tab header spacer.	<i>panelBorderColor</i>	border-bottom
.rf-tab-lbl This class defines styles for the tab label.	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-tab-hdn This class defines styles for the tab when it is hidden.	No skin parameters.	
.rf-tab-hdr-scr1-lft, .rf-tab-hdr-scr1-rgh These classes define styles for the left and right controls for the tab header scroller.	<i>additionalBackgroundColor</i>	background
	<i>panelBorderColor</i>	border
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-tab-hdr-tablst This class define styles for the tab header list.	<i>additionalBackgroundColor</i>	background
	<i>panelBorderColor</i>	border
	<i>generalFamilyFont</i>	font-family

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-tab-hdr-brd This class define styles for the tab header border.	<i>tabBackgroundColor</i>	background
	<i>panelBorderColor</i>	border
.rf-tab-cnt This class define styles for the content of the tab panel.	<i>generalBackgroundColor</i>	background
	<i>panelBorderColor</i>	border
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size

9.5.7. <rich:tab>

The <rich:tab> component represents an individual tab inside a <rich:tabPanel> component, including the tab's content. Clicking on the tab header will bring its corresponding content to the front of other tabs.

9.5.7.1. Basic usage

Basic usage of the <rich:tab> component requires only the tab header and tab content. No additional attributes are required.

The header attribute provides the text on the tab header. The content of the tab is then detailed inside the <rich:tab> tags.

Alternatively, the header facet could be used in place of the header attribute. This would allow custom components to be applied to the tab header. The component also supports three facets to customize the appearance depending on the current state of the tab:

headerActive facet

This facet is used when the tab is the currently active tab.

headerInactive facet

This facet is used when the tab is not currently active.

headerDisabled facet

This facet is used when the tab is disabled.

The header facet is used in place of any state-based facet that has not been defined.

9.5.7.2. Switching tabs

The switching mode for performing submissions can be inherited from the switchType attribute of the parent <rich:tabPanel> component, or set individually for each <rich:tab> component. Refer to [Section 9.5, “<rich:tabPanel>”](#) for details on the switchType attribute.

An individual tab can be disabled by setting disabled="true". Disabled tabs cannot be activated or switched to.

9.5.7.3. `<rich:tab>` client-side events

In addition to the standard HTML events, the `<rich:tab>` component uses the client-side events common to all switchable panel items:

- The `enter` event points to the function to perform when the mouse enters the tab.
- The `leave` attribute points to the function to perform when the mouse leaves the tab.

9.5.7.4. Reference data

- *component-type*: `org.richfaces.Tab`
- *component-class*: `org.richfaces.component.UITab`
- *component-family*: `org.richfaces.Tab`
- *renderer-type*: `org.richfaces.TabRenderer`

9.5.7.5. Style classes and skin parameters

The `<rich:tab>` component uses the same styles as those applied to the parent `<rich:tabPanel>` component. Refer to [Section 9.5.6, “Style classes and skin parameters”](#) for details.

9.6. `<rich:togglePanel>`

The `<rich:togglePanel>` component is used as a base for the other switchable components, the `<rich:accordion>` component and the `<rich:tabPanel>` component. It provides an abstract switchable component without any associated markup. As such, the `<rich:togglePanel>` component could be customized to provide a switchable component when neither an accordion component or a tab panel component is appropriate.

The `<rich:togglePanel>` component acts as a wrapper for multiple `<rich:togglePanelItem>` components. Each child component is displayed after being activated with the `<rich:toggleControl>` behavior.

Refer to [Section 9.6.6, “`<rich:toggleControl>`”](#) and [Section 9.6, “`<rich:togglePanel>`”](#) for details on how to use the components together.

9.6.1. Basic usage

The initial state of the component can be configured using the `activeItem` attribute, which points to a child component to display. Alternatively, if no `activeItem` attribute is defined, the initial state will be blank until the user activates a panel component with a connected `<rich:toggleControl>` behavior.

The child components are shown in the order in which they are defined in the view, as shown in [Example 9.4, “Basic usage”](#).



Form elements required

All `<rich:tabPanel>` components should be wrapped in a form element when using either ajax or server mode, as usual for submitting components.

Example 9.4. Basic usage

```
<rich:togglePanel#id="layout"#activeItem="item1">
  <rich:togglePanelItem#id="item1">
    <!--content-->
  </rich:togglePanelItem>
  <rich:togglePanelItem#id="item2">
    <!--content-->
  <rich:togglePanelItem>
</rich:togglePanel>
<h:commandButton>
  <rich:toggleControl#activePanel="layout"/>#<!--cycles#through#the#states-->
</h:commandButton>
```

9.6.2. Toggling between components

The switching mode for performing submissions is determined by the `switchType` attribute, which can have one of the following three values:

server

The default setting. Activation of a child component causes the parent `<rich:togglePanel>` component to perform a common submission, completely refreshing the page. Only one child at a time is rendered to the client side.

ajax

Activation of a child component causes the parent `<rich:togglePanel>` component to perform an Ajax form submission, and the content of the panel is refreshed. Only one child at a time is rendered to the client side.

client

Activation of a child component causes the parent `<rich:togglePanel>` component to update on the client side. All the items are rendered to the client side during the initial page render. JavaScript changes the styles such that one child component becomes hidden while the other is shown.

9.6.3. JavaScript API

The `<rich:togglePanel>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions, which are common to all switchable panels:

`getItems()`

Return an array of the items contained in the toggle panel.

`getItemsNames()`

Return an array of the names of the items contained in the toggle panel.

`switchToItem(itemName)`

Switch to and display the item identified by the *itemName* string passed as a parameter.

`firstItem(), prevItem(), nextItem(), lastItem()`

Switch to and display the first item, the previous item, the next item, or the last item.

9.6.4. Reference data

- *component-type*: `org.richfaces.TogglePanel`
- *component-class*: `org.richfaces.component.UITogglePanel`
- *component-family*: `org.richfaces.TogglePanel`
- *renderer-type*: `org.richfaces.TogglePanelRenderer`
- *handler-class*: `org.richfaces.view.facelets.html.TogglePanelTagHandler`

9.6.5. `<rich:itemChangeListener>`

Use the `<rich:itemChangeListener>` tag to register an `ItemChangeListener` class on a parent panel component. The class provided as a listener must implement the `org.richfaces.event.ItemChangeListener` interface. The `processItemChange` method accepts an `org.richface.event.ItemChangeEvent` event as a parameter.

The `<rich:itemChangeListener>` tag can be used with any of the switchable panel components:

- `<rich:togglePanel>` (refer to [Section 9.6](#), “`<rich:togglePanel>`”)
- `<rich:accordion>` (refer to [Section 9.2](#), “`<rich:accordion>`”)
- `<rich:tabPanel>` (refer to [Section 9.5](#), “`<rich:tabPanel>`”)
- `<rich:panelMenu>` (refer to [Section 12.3](#), “`<rich:panelMenu>`”)

9.6.6. `<rich:toggleControl>`

The `<rich:toggleControl>` behavior can be attached to any interface component, whether inside or outside the controlled panel itself. It works with a `<rich:togglePanel>` component to switch between different `<rich:togglePanelItem>` components. Refer to [Section 9.6](#), “`<rich:togglePanel>`” and [Section 9.6.7](#), “`<rich:togglePanelItem>`” for details on how to use the components together.

The <rich:toggleControl> implements the JSF BehaviorHolder component, which provides events to attached components and behaviors.

9.6.6.1. Basic usage

If the <rich:toggleControl> component is positioned inside a <rich:togglePanel> component, no panel attachment attributes need to be defined, as the control is assumed to switch through the <rich:togglePanelItem> components of its parent <rich:togglePanel> component.

A <rich:toggleControl> component can be located outside the <rich:togglePanel> component it needs to switch. Where this is the case, the <rich:togglePanel> is identified using the activePanel attribute.

9.6.6.2. Specifying the next state

The <rich:toggleControl> component can switch the attached <rich:togglePanel> component in multiple ways:

- By default, the <rich:toggleControl> component will cycle through <rich:togglePanelItem> components in the order they are defined within the view.

Example 9.5. Default switching

```
<rich:togglePanel id="layout">
  <rich:togglePanelItem>
    <!--content-->
  </rich:togglePanelItem>
  <rich:togglePanelItem>
    <!--content-->
  </rich:togglePanelItem>
</rich:togglePanel>
<h:commandButton>
  <rich:toggleControl activePanel="layout"/> <!--cycles through the states-->
</h:commandButton>
```

- The next item to switch to can be explicitly defined by including a <rich:toggleControl> component within a <rich:togglePanelItem> component. Point the targetItem to the <rich:togglePanelItem> to switch to when the state is next changed.

Example 9.6. Explicit switching

```
<rich:togglePanel activeItem="item1">
  <rich:togglePanelItem id="item1">
    <!--content-->
```

```
<h:commandButton>
  <rich:toggleControl targetItem="item2"> <!--switches to item2 -->
</h:commandButton>
</rich:togglePanelItem>
<rich:togglePanelItem id="item2">
  <!--content-->
  <h:commandButton>
    <rich:toggleControl targetItem="item1"> <!--switches to item1 -->
  </h:commandButton>
</rich:togglePanelItem>
</rich:togglePanel>
```

- Alternatively, use the `targetItem` attribute with keywords to switch items. The `@first`, `@previous`, `@next`, and `@last` keywords switch to the first item, the previous item, the next item, and the last item respectively.

Example 9.7. Keyword-based switching

```
<rich:togglePanel activeItem="item1">
  <rich:togglePanelItem id="item1">
    <!--content-->
    <h:commandButton>
      <rich:toggleControl targetItem="@next"> <!--switches to next item
(item2)-->
    </h:commandButton>
  </rich:togglePanelItem>
  <rich:togglePanelItem id="item2">
    <!--content-->
    <h:commandButton>
      <rich:toggleControl targetItem="@previous"> <!--switches to previous
item (item1)-->
    </h:commandButton>
  </rich:togglePanelItem>
</rich:togglePanel>
```

9.6.6.3. Reference data

- *client-behavior-renderer-type*: `org.richfaces.component.behavior.ToggleControl`
- *behavior-id*: `org.richfaces.component.behavior.ToggleControl`
- *handler-class*: `org.richfaces.view.facelets.html.CustomBehaviorHandler`
- *behavior-class*: `org.richfaces.component.behavior.ToggleControl`
- *client-behavior-renderer-class*:
`org.richfaces.renderkit.html.ToggleControlRenderer`

9.6.7. `<rich:togglePanelItem>`

The `<rich:togglePanelItem>` component is a switchable panel for use with the `<rich:togglePanel>` component. Use the `<rich:togglePanelItem>` component to define the content for a panel using nested components. Switching between `<rich:togglePanelItem>` components is handled by the `<rich:toggleControl>` behavior.

9.6.7.1. Reference data

- *component-type*: `org.richfaces.TogglePanelItem`
- *component-class*: `org.richfaces.component.UITogglePanelItem`
- *component-family*: `org.richfaces.TogglePanelItem`
- *renderer-type*: `org.richfaces.TogglePanelItemRenderer`

Tables and grids

This chapter covers all components related to the display of tables and grids.

10.1. <a4j:repeat>

The non-visual <a4j:repeat> component is used to iterate through a data model. The component renders child content for every iteration according to the current object data.

The <a4j:repeat> component extends the standard UIRepeat component to allow partial updates within iterations while sending Ajax requests. The component acts as a base for all the data iteration components detailed in this chapter.

10.1.1. Basic usage

The contents of the collection are determined using Expression Language (EL). The data model for the contents is specified with the `value` attribute. The `var` attribute names the object to use when iterating through the collection. This object is then referenced in the relevant child components. *Example 10.1, “<a4j:repeat> example”* shows how to use <a4j:repeat> to maintain a simple table.

Example 10.1. <a4j:repeat> example

```
<table>
  <tbody>
    <a4j:repeat value="#{repeatBean.items}" var="item">
      <tr>
        <td><h:outputText value="#{item.code}" id="item1" /></td>
        <td><h:outputText value="#{item.price}" id="item2" /></td>
      </tr>
    </a4j:repeat>
  </tbody>
</table>
```

Each row of a table contains two cells: one showing the item code, and the other showing the item price. The table is generated by iterating through items in the `repeatBeans.items` data model.

10.1.2. Limited views and partial updates

The <a4j:repeat> component uses other attributes common to iteration components, such as the `first` attribute for specifying the first item for iteration, and the `rows` attribute for specifying the number of rows of items to display.

Specific cells, rows, and columns can be updated without sending Ajax requests for the entire collection. Components that cause the change can specify which part of the table to update

through the `render` attribute. The `render` attribute specifies which part of a table to update. The updated parts relate to where the action component is placed relative to the table:

Action components inside the table

Use `render=componentID` where the component identified by `componentID` is in the same row as the action component. The action component updates the single specified component, as demonstrated in [Example 10.2, “Update a single component”](#).

Example 10.2. Update a single component

```
<rich:column>
    <a4j:commandButton render="col"></a4j:commandButton>
</rich:column>
<rich:column>
    <h:outputText value="#{car.model}" id="col"/>
</rich:column>
```

Action components outside the table

Use `render=tableId:rowId:cellId` to specify the cell to update. The action component updates the cell with an identifier of `cellId`, which is within the row with an identifier of `rowId`, which is within the table with an identifier of `tableId`.

Instead of a specific identifier, any of the references could be variables, as demonstrated in [Example 10.3, “Use variables to specify references”](#).

Example 10.3. Use variables to specify references

```
render=tableId:#{@rows(bean.rowToUpdate)}:cellId
```

The `@rows` function accepts a collection of row keys to be updated.

10.1.3. Reference data

- *component-type*: `org.richfaces.Repeat`
- *component-class*: `org.richfaces.component.UIRepeat`
- *component-family*: `javax.faces.Data`
- *renderer-type*: `org.richfaces.RepeatRenderer`
- *handler-class*: `org.richfaces.taglib.html.RepeatHandler`

10.2. <rich:dataTable>

The <rich:dataTable> component is used to render a table, including the table's caption. It works in conjunction with the <rich:column> and <rich:columnGroup> components to list the contents of a data model.



<rich:extendedDataTable>

The <rich:dataTable> component does not include extended table features, such as data scrolling (including lazy Ajax loading), row selection, and column reordering. These features are available as part of the <rich:extendedDataTable> component; refer to [Section 10.6](#), “<rich:extendedDataTable>” for further details.

10.2.1. Basic usage

The value attribute points to the data model, and the var attribute specifies a variable to use when iterating through the data model.

In addition, the table requires a set of <rich:column> components to define the content of the table.

10.2.2. Customizing the table

The first attribute specifies which item in the data model to start from, and the rows attribute specifies the number of items to list. The header, footer, and caption facets can be used to display text, and to customize the appearance of the table through skinning. demonstrates a simple table implementation.

Example 10.4. <rich:dataTable> example

```
<rich:dataTable value="#{capitalsBean.capitals}" var="cap" rows="5">
  <f:facet name="caption">
    <h:outputText value="United States Capitals" />
  </f:facet>
  <f:facet name="header">
    <h:outputText value="Capitals and States Table" />
  </f:facet>
  <rich:column>
    <f:facet name="header">State Flag</f:facet>
    <h:graphicImage value="#{cap.stateFlag}" />
    <f:facet name="footer">State Flag</f:facet>
  </rich:column>
  <rich:column>
```

```

    <f:facet name="header">State Name</f:facet>
      <h:outputText value="#{cap.state}"/>
    <f:facet name="footer">State Name</f:facet>
  </rich:column>
  <rich:column >
    <f:facet name="header">State Capital</f:facet>
      <h:outputText value="#{cap.name}"/>
    <f:facet name="footer">State Capital</f:facet>
  </rich:column>
  <rich:column>
    <f:facet name="header">Time Zone</f:facet>
      <h:outputText value="#{cap.timeZone}"/>
    <f:facet name="footer">Time Zone</f:facet>
  </rich:column>
  <f:facet name="footer">
    <h:outputText value="Capitals and States Table" />
  </f:facet>
</rich:dataTable>

```

United States Capitals

Capitals and States Table			
State Flag	Capital Name	State Name	TimeZone
	Montgomery	Alabama	GMT-6
	Juneau	Alaska	GMT-9
	Phoenix	Arizona	GMT-7
	Little Rock	Arkansas	GMT-6
	Sacramento	California	GMT-8
State Flag	Capital Name	State Name	TimeZone

Capitals and States Table

Figure 10.1. <rich:dataTable> example

For details on filtering and sorting data tables, refer to [Section 10.10, “Table filtering”](#) and [Section 10.11, “Table sorting”](#).

10.2.3. Partial updates

As <rich:dataTable> the component is based on the <a4j:repeat> component, it can be partially updated with Ajax. Refer to [Section 10.1.2, “Limited views and partial updates”](#) for details on partially updating the <rich:dataTable> component.

The `<rich:dataTable>` component supports master-detail markup with collapsible sub-table sections. Refer to [Section 10.5, “<rich:collapsibleSubTable>”](#) for full details on using the `<rich:collapsibleSubTable>` component.

Use the `rows` attribute to specify the number of rows to show at a time. The table is then presented in pages of rows. Pages can be navigated by using a control such as the `<rich:dataScroller>` component. Refer to [Section 10.9, “<rich:dataScroller>”](#) for full details on using the `<rich:dataScroller>` component.

10.2.4. JavaScript API

The `<rich:dataTable>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`expandAllSubTables()`

Expand any sub-tables contained in the data table.

`collapseAllSubTables()`

Collapse any sub-tables contained in the data table.

`switchSubTable(subtableId)`

Switch the expanded or collapsed state of any sub-tables contained in the data table.

`filter(columnId, newFilterValue, [isClearPreviousFilters])`

Filter the table based on the column specified with the `columnId` parameter. Use the `newFilterValue` parameter as the filter value. The optional `isClearPreviousFilters` parameter is a boolean value which, if set to `true`, will clear any previous filters applied to the table.

`sort(columnId, [direction], [isClearPreviousSorting])`

Sort the table based on the column specified with the `columnId` parameter. The option `direction` parameter specifies whether to sort in ascending or descending order. The optional `isClearPreviousSorting` parameter is a boolean value which, if set to `true`, will clear any previous sorting applied to the table.

10.2.5. Reference data

- *component-type*: `org.richfaces.DataTable`
- *component-class*: `org.richfaces.component.UIDataTable`
- *component-family*: `org.richfaces.Data`
- *renderer-type*: `org.richfaces.DataTableRenderer`
- *handler-class*: `org.richfaces.taglib.DataTableHandler`

10.2.6. Style classes and skin parameters

Table 10.1. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-dt This class defines styles for the table.	<i>tableBackgroundColor</i>	background-color
	<i>tableBorderWidth</i>	border-left-width, border-top-width
	<i>tableBorderColor</i>	border-left-color, border-top-color
.rf-dt-cap This class defines styles for the table caption.	No skin parameters.	
.rf-dt-r This class defines styles for a table row.	No skin parameters.	
.rf-dt-fst-r This class defines styles for the first row in a table.	No skin parameters.	
.rf-dt-c This class defines styles for a table cell.	<i>tableBackgroundColor</i>	background-color
	<i>tableBorderWidth</i>	border-bottom-width, border-right-width
	<i>tableBorderColor</i>	border-bottom-color, border-right-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-dt-nd This class defines styles for a node.	<i>tableBorderWidth</i>	border-bottom-width, border-right-width
	<i>tableBorderColor</i>	border-bottom-color, border-right-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-dt-hdr This class defines styles for a table header.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-dt-hdr-fst</code> This class defines styles for the first header.	No skin parameters.	
<code>.rf-dt-hdr-c</code> This class defines styles for a header cell.	<code>tableHeaderBackgroundColor</code>	background-color
	<code>tableBorderWidth</code>	border-bottom-width, border-right-width
	<code>tableBorderColor</code>	border-bottom-color, border-right-color
	<code>tableHeaderTextColor</code>	color
	<code>generalFamilyFont</code>	font-family
	<code>generalSizeFont</code>	font-size
<code>.rf-dt-shdr</code> This class defines styles for a table sub-header.	No skin parameters.	
<code>.rf-dt-shdr-fst</code> This class defines styles for the first sub-header.	No skin parameters.	
<code>.rf-dt-shdr-c</code> This class defines styles for a sub-header cell.	<code>tableHeaderBackgroundColor</code>	background-color
	<code>tableBorderWidth</code>	border-bottom-width, border-right-width
	<code>tableBorderColor</code>	border-bottom-color, border-right-color
	<code>tableHeaderTextColor</code>	color
	<code>generalFamilyFont</code>	font-family
	<code>generalSizeFont</code>	font-size
<code>.rf-dt-ftr</code> This class defines styles for a table footer.	No skin parameters.	
<code>.rf-dt-ftr-fst</code> This class defines styles for the first footer.	No skin parameters.	
<code>.rf-dt-ftr-c</code> This class defines styles for a footer cell.	<code>tableFooterBackgroundColor</code>	background-color
	<code>tableBorderWidth</code>	border-bottom-width, border-right-width
	<code>tableBorderColor</code>	border-bottom-color, border-right-color
	<code>generalTextColor</code>	color

Class (selector)	Skin Parameters	Mapped CSS properties
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-dt-sftr This class defines styles for a table sub-footer.	No skin parameters.	
.rf-dt-sftr-fst This class defines styles for the first sub-footer.	No skin parameters.	
.rf-dt-sftr-c This class defines styles for a sub-footer cell.	<i>tableFooterBackgroundColor</i>	background-color
	<i>tableBorderWidth</i>	border-bottom-width, border-right-width
	<i>tableBorderColor</i>	border-bottom-color, border-right-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size

10.3. <rich:column>

The <rich:column> component facilitates columns in a table. It supports merging columns and rows, sorting, filtering, and customized skinning.

10.3.1. Basic usage

In general usage, the <rich:column> component is used in the same way as the JavaServer Faces (JSF) <h:column> component. It requires no extra attributes for basic usage, as shown in [Example 10.5, “Basic column example”](#).

Example 10.5. Basic column example

```
<rich:dataTable value="#{capitalsBean.capitals}" var="cap" rows="5">
  <rich:column>
    <f:facet name="header">State Flag</f:facet>
    <h:graphicImage value="#{cap.stateFlag}"/>
  </rich:column>
  <rich:column>
    <f:facet name="header">State Name</f:facet>
    <h:outputText value="#{cap.state}"/>
  </rich:column>
  <rich:column>
    <f:facet name="header">State Capital</f:facet>
```

```

    <h:outputText value="#{cap.name}"/>
</rich:column>
<rich:column>
    <f:facet name="header">Time Zone</f:facet>
    <h:outputText value="#{cap.timeZone}"/>
</rich:column>
</rich:dataTable>

```

State Flag	State Name	State Capital	Time Zone
	Alabama	Montgomery	GMT-6
	Alaska	Juneau	GMT-9
	Arizona	Phoenix	GMT-7
	Arkansas	Little Rock	GMT-6
	California	Sacramento	GMT-8

Figure 10.2. Basic column example

10.3.2. Spanning columns

Columns can be merged by using the `colspan` attribute to specify how many normal columns to span. The `colspan` attribute is used in conjunction with the `breakBefore` attribute on the next column to determine how the merged columns are laid out. [Example 10.6, “Column spanning example”](#).

Example 10.6. Column spanning example

```

<rich:dataTable value="#{capitalsBean.capitals}" var="cap" rows="5">
    <rich:column colspan="3">
        <h:graphicImage value="#{cap.stateFlag}"/>
    </rich:column>
    <rich:column breakBefore="true">
        <h:outputText value="#{cap.state}"/>
    </rich:column>
    <rich:column>
        <h:outputText value="#{cap.name}"/>
    </rich:column>
    <rich:column>
        <h:outputText value="#{cap.timeZone}"/>
    </rich:column>
</rich:dataTable>

```

		
Alabama	Montgomery	GMT-6
		
Alaska	Juneau	GMT-9
		
Arizona	Phoenix	GMT-7
		
Arkansas	Little Rock	GMT-6
		
California	Sacramento	GMT-8

Figure 10.3. Column spanning example

10.3.3. Spanning rows

Similarly, the `rowspan` attribute can be used to merge and span rows. Again the `breakBefore` attribute needs to be used on related `<rich:column>` components to define the layout. [Example 10.7, “Row spanning example”](#) and the resulting [Figure 10.5, “Complex headers using column groups”](#) show the first column of the table spanning three rows.

Example 10.7. Row spanning example

```
<rich:dataTable value="#{capitalsBean.capitals}" var="cap" rows="5">
  <rich:column rowspan="3">
    <f:facet name="header">State Flag</f:facet>
    <h:graphicImage value="#{cap.stateFlag}" />
  </rich:column>
  <rich:column>
    <f:facet name="header">State Info</f:facet>
    <h:outputText value="#{cap.state}" />
  </rich:column>
  <rich:column breakBefore="true">
    <h:outputText value="#{cap.name}" />
  </rich:column>
  <rich:column breakBefore="true">
    <h:outputText value="#{cap.timeZone}" />
  </rich:column>
</rich:dataTable>
```


State Flag	State Info
	Alabama
	Montgomery
	GMT-6
	Alaska
	Juneau
	GMT-9
	Arizona
	Phoenix
	GMT-7
	Arkansas
	Little Rock
	GMT-6
	California
	Sacramento
	GMT-8

Figure 10.4. Row spanning example

For details on filtering and sorting columns, refer to [Section 10.10, “Table filtering”](#) and [Section 10.11, “Table sorting”](#).

10.3.4. Reference data

- *component-type*: org.richfaces.Column
- *component-class*: org.richfaces.component.UIColumn
- *component-family*: org.richfaces.Column

10.4. <rich:columnGroup>

The <rich:columnGroup> component combines multiple columns in a single row to organize complex parts of a table. The resulting effect is similar to using the breakBefore attribute of the <rich:column> component, but is clearer and easier to follow in the source code.

10.4.1. Complex headers

The <rich:columnGroup> can also be used to create complex headers in a table. [Example 10.8, “Complex headers using column groups”](#) and the resulting [Figure 10.5, “Complex headers using column groups”](#) demonstrate how complex headers can be achieved.

Example 10.8. Complex headers using column groups

```
<rich:dataTable value="#{capitalsBean.capitals}" var="cap" rows="5" id="sublist">
  <f:facet name="header">
    <rich:columnGroup>
      <rich:column rowspan="2">
        <h:outputText value="State Flag"/>
      </rich:column>
      <rich:column colspan="3">
        <h:outputText value="State Info"/>
      </rich:column>
      <rich:column breakBefore="true">
        <h:outputText value="State Name"/>
      </rich:column>
      <rich:column>
        <h:outputText value="State Capital"/>
      </rich:column>
      <rich:column>
        <h:outputText value="Time Zone"/>
      </rich:column>
    </rich:columnGroup>
  </f:facet>
  <rich:column>
    <h:graphicImage value="#{cap.stateFlag}"/>
  </rich:column>
  <rich:column>
    <h:outputText value="#{cap.state}"/>
  </rich:column>
  <rich:column>
    <h:outputText value="#{cap.name}"/>
  </rich:column>
  <rich:column>
    <h:outputText value="#{cap.timeZone}"/>
  </rich:column>
</rich:dataTable>
```

State Flag	State Info		
	State Name	State Capital	Time Zone
	Alabama	Montgomery	GMT-6
	Alaska	Juneau	GMT-9
	Arizona	Phoenix	GMT-7
	Arkansas	Little Rock	GMT-6
	California	Sacramento	GMT-8

Figure 10.5. Complex headers using column groups

10.4.2. Reference data

- *component-type*: org.richfaces.ColumnGroup
- *component-class*: org.richfaces.component.UIColumnGroup
- *component-family*: org.richfaces.ColumnGroup
- *renderer-type*: org.richfaces.ColumnGroupRenderer

10.5. <rich:collapsibleSubTable>

The <rich:collapsibleSubTable> component acts as a child element to a <rich:dataTable> component. The <rich:collapsibleSubTable> component iterates through the child collections in the currently iterated object to create master-detail tables.

Additionally, the detail part of the table can be collapsed or expanded through different modes. The <rich:collapsibleSubTable> component works with the <rich:collapsibleSubTableToggle> component, which expands and collapses the sub-tables.

10.5.1. Basic usage

The <rich:collapsibleSubTable> component requires the same basic attributes as the <rich:dataTable> component. The value attribute points to the collection, and the var attribute specifies a variable to use when iterating through the collection.

In addition, the <rich:collapsibleSubTable> component typically needs a corresponding <rich:collapsibleSubTableToggle> component to allow expanding and collapsing. Declare the id identifier on the <rich:collapsibleSubTable> element so that the

<rich:collapsibleSubTableToggler> component can reference it. Refer to [Section 10.5.5](#), “<rich:collapsibleSubTableToggler>” for details on the <rich:collapsibleSubTableToggler> component.

Example 10.9. Basic usage

```
<rich:dataTable value="#{carsBean.inventoryVendorLists}" var="list">
  <f:facet name="header">
    <rich:columnGroup>
      <rich:column colspan="6">
        <h:outputText value="Cars marketplace" />
      </rich:column>
      <rich:column breakRowBefore="true">
        <h:outputText value="Model" />
      </rich:column>
      <rich:column>
        <h:outputText value="Price" />
      </rich:column>
      <rich:column>
        <h:outputText value="Mileage" />
      </rich:column>
      <rich:column>
        <h:outputText value="VIN Code" />
      </rich:column>
      <rich:column>
        <h:outputText value="Items stock" />
      </rich:column>
      <rich:column>
        <h:outputText value="Days Live" />
      </rich:column>
    </rich:columnGroup>
  </f:facet>
  <rich:column colspan="6">
    <rich:collapsibleSubTableToggler for="sbtbl" />
    <h:outputText value="#{list.vendor}" />
  </rich:column>
  <rich:collapsibleSubTable value="#{list.vendorItems}" var="item" id="sbtbl"
    expandMode="client">
    <rich:column>
      <h:outputText value="#{item.model}" />
    </rich:column>
    <rich:column>
      <h:outputText value="#{item.price}" />
    </rich:column>
    <rich:column>
      <h:outputText value="#{item.mileage}" />
    </rich:column>
  </rich:collapsibleSubTable>
</rich:dataTable>
```

```

        <h:outputText value="#{item.vin}" />
    </rich:column>
    <rich:column>
        <h:outputText value="#{item.stock}" />
    </rich:column>
    <rich:column>
        <h:outputText value="#{item.daysLive}" />
    </rich:column>
    <f:facet name="footer">
        <h:outputText value="Total of #{list.vendor} Cars: #{list.count}" />
    </f:facet>
</rich:collapsibleSubTable>
</rich:dataTable>

```

The resulting tables contains multiple sub-tables, grouping the list of cars by vendor. Each sub-table can be expanded or collapsed using the toggle with the vendor's name. The screenshot shows all sub-tables collapsed except for the sub-table for Ford cars.

Cars marketplace					
Model	Price	Mileage	VIN Code	Items stock	Days Live
⤴ Chevrolet					
⤵ Ford					
Taurus	23810	36710.0	CCEJYNFDFIZKQZWEJ	ORCOZLP	90
Taurus	26685	63661.0	KIPQZFJLGXBOMITWZ	YNKCJZ	87
Taurus	47151	41638.0	MQJGCFPZTTMVMVORT	GNQWTW	82
Taurus	47017	25851.0	KCCJMHUVSDSOVIXOB	ZZEGUSN	66
Taurus	40805	47046.0	DZECUNNGCJYVHSVQZ	FNASXG	34
Explorer	24774	10659.0	REGUTBPGVCMTJWKNG	ZNJBQOJ	23
Explorer	34632	62375.0	ZYFFCGQHAOZXGQDEL	VHOEGYE	19
Explorer	15348	27136.0	ADAYRYSTSQJWJOKED	YZYJWF	65
Explorer	47482	47222.0	ZJORWUJUIBFYBWYPY	AOGBDT	63
Explorer	30610	14070.0	BSZWVUQFJWVCARGIW	QRXBYAI	26
Total of Ford Cars: 23					
⤴ GMC					
⤴ Infiniti					
⤴ Nissan					
⤴ Toyota					

10.5.2. Expanding and collapsing the sub-table

Use the boolean expanded attribute to control the current state of the sub-table.

The switching mode for performing submissions is determined by the `expandMode` attribute, which can have one of the following three values:

server

The default setting. Expansion of the `<rich:collapsibleSubTable>` component performs a common submission, completely re-rendering the page.

ajax

Expansion of the `<rich:collapsibleSubTable>` component performs an Ajax form submission, and the content of the data table is rendered.

client

Expansion of the `<rich:collapsibleSubTable>` component updates the data table on the client side.

10.5.3. Reference data

- *component-type*: `org.richfaces.CollapsibleSubTable`
- *component-class*: `org.richfaces.component.UICollapsibleSubTable`
- *component-family*: `org.richfaces.Data`
- *renderer-type*: `org.richfaces.CollapsibleSubTableRenderer`
- *handler-class*: `org.richfaces.taglib.CollapsibleSubTableHandler`

10.5.4. Style classes

Table 10.2. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters		Mapped CSS properties
<code>.rf-cst</code> This class defines styles for the table.	No skin parameters.		
<code>.rf-cst-r</code> This class defines styles for a table row.	No skin parameters.		
<code>.rf-cst-fst-r</code> This class defines styles for the first row in a table.	No skin parameters.		
<code>.rf-cst-c</code> This class defines styles for a table cell.	<code>tableBackgroundColor</code>		background-color
	<code>tableBorderWidth</code>		border-bottom-width, border-right-width
	<code>tableBorderColor</code>		border-bottom-color, border-right-color
	<code>generalTextColor</code>		color

Class (selector)	Skin Parameters	Mapped CSS properties
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-cst-hdr This class defines styles for a table header.	No skin parameters.	
.rf-cst-hdr-fst This class defines styles for the first header.	No skin parameters.	
.rf-cst-hdr-fst-r This class defines styles for the first row in the header.	No skin parameters.	
.rf-cst-hdr-c This class defines styles for a header cell.	<i>tableSubHeaderBackgroundColor</i>	background-color
	<i>tableBorderWidth</i>	border-bottom-width, border-right-width
	<i>tableBorderColor</i>	border-bottom-color, border-right-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-cst-shdr This class defines styles for a table sub-header.	No skin parameters.	
.rf-cst-shdr-fst This class defines styles for the first sub-header.	No skin parameters.	
.rf-cst-shdr-c This class defines styles for a sub-header cell.	<i>tableSubHeaderBackgroundColor</i>	background-color
	<i>tableBorderWidth</i>	border-bottom-width, border-right-width
	<i>tableBorderColor</i>	border-bottom-color, border-right-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-cst-ftp This class defines styles for a table footer.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-cst-ftr-fst</code> This class defines styles for the first footer.	No skin parameters.	
<code>.rf-cst-ftr-c</code> This class defines styles for a footer cell.	<code>tableSubFooterBackgroundColor</code>	background-color
	<code>tableBorderWidth</code>	border-bottom-width, border-right-width
	<code>tableBorderColor</code>	border-bottom-color, border-right-color
	<code>generalTextColor</code>	color
	<code>generalFamilyFont</code>	font-family
	<code>generalSizeFont</code>	font-size
<code>.rf-cst-sftr</code> This class defines styles for a table sub-footer.	No skin parameters.	
<code>.rf-cst-sftr-fst</code> This class defines styles for the first sub-footer.	No skin parameters.	
<code>.rf-cst-sftr-c</code> This class defines styles for a sub-footer cell.	<code>tableSubFooterBackgroundColor</code>	background-color
	<code>tableBorderWidth</code>	border-bottom-width, border-right-width
	<code>tableBorderColor</code>	border-bottom-color, border-right-color
	<code>generalTextColor</code>	color
	<code>generalFamilyFont</code>	font-family
	<code>generalSizeFont</code>	font-size

10.5.5. <rich:collapsibleSubTableToggle>

The <rich:collapsibleSubTableToggle> component provides a toggle control for the user to expand and collapse sub-tables.

10.5.5.1. Basic usage

The <rich:collapsibleSubTableToggle> component requires the `for` attribute. The `for` attribute references the `id` identifier of the <rich:collapsibleSubTable> component to control.

Refer to [Example 10.9, “Basic usage”](#) for an example using the <rich:collapsibleSubTable> component. In the example, the toggle control is placed in a column that spans the width of the table. Output text next to the toggle control displays the car vendor’s name for that sub-table.

10.5.5.2. Appearance

The icons and labels of the <rich:collapsibleSubTableToggler> component can be customized. Use the collapsedIcon and expandedIcon attributes to specify icons for the toggler when it is collapsed and expanded respectively. Use the collapsedLabel and expandedLabel attributes to specify labels for the toggler when it is collapsed and expanded respectively.

10.5.5.3. Reference data

- *component-type*: org.richfaces.CollapsibleSubTableToggler
- *component-class*: org.richfaces.component.UICollapsibleSubTableToggler
- *component-family*: org.richfaces.CollapsibleSubTableToggler
- *renderer-type*: org.richfaces.CollapsibleSubTableTogglerRenderer

10.5.5.4. Style classes and skin parameters

Style classes (selectors)

.rf-csttg

This class defines styles for a toggle control.

.rf-csttg-exp

This class defines styles for a toggle control which expands the sub-table.

.rf-csttg-colps

This class defines styles for a toggle control which collapses the sub-table.

10.6. <rich:extendedDataTable>

The <rich:extendedDataTable> component builds on the functionality of the <rich:dataTable> component, adding features such as scrolling for the table body (both horizontal and vertical), Ajax loading for vertical scrolling, frozen columns, row selection, and rearranging of columns. It also supports all the basic table features such as sorting, filtering, and paging using the <rich:dataScroller> component.

The <rich:extendedDataTable> component includes the following main attributes not included in the <rich:dataTable> component:

- clientRows
- frozenColumns
- height
- onselectionchange
- selectedClass

- selection
- selectionMode



Complex sub-tables

Due to the complex mark-up involved in the `<rich:extendedDataTable>` component, it does not support the use of the `<rich:collapsibleSubTable>` component. The `<rich:collapsibleSubTable>` component is only available with the `<rich:dataTable>` component.

Similarly, complex row and column spanning using the `breakBefore`, `colSpan`, and `rowSpan` attributes is also not available with the `<rich:extendedDataTable>` component.

10.6.1. Basic usage

Basic use of the `<rich:extendedDataTable>` component requires the `value` and `var` attributes, the same as with the `<rich:dataTable>` component. In addition, a set of columns must be included to define the table content. Refer to [Section 10.2, “<rich:dataTable>”](#) for details.

10.6.2. Table appearance

As with the `<rich:dataTable>` component, the look of the `<rich:extendedDataTable>` component can be customized using the header and footer facets.

10.6.3. Extended features

Example 10.10. `<rich:extendedDataTable>` example

This example `<rich:extendedDataTable>` component demonstrates horizontal and vertical scrolling and frozen columns. Each feature is detailed in this section.

```
<rich:extendedDataTable value="#{carsBean.allInventoryItems}"
                        var="car" id="table" frozenColumns="2"
                        style="height:300px; width:500px;" selectionMode="none">
  <f:facet name="header">
    <h:outputText value="Cars marketplace" />
  </f:facet>
  <rich:column>
    <f:facet name="header">
      <h:outputText value="vendor" />
    </f:facet>
    <h:outputText value="#{car.vendor}" />
  </rich:column>
  <rich:column>
```

```
<f:facet name="header">
    <h:outputText value="Model" />
</f:facet>
<h:outputText value="#{car.model}" />
</rich:column>
<rich:column>
    <f:facet name="header">
        <h:outputText value="Price" />
    </f:facet>
    <h:outputText value="#{car.price}" />
</rich:column>
<rich:column>
    <f:facet name="header">
        <h:outputText value="Mileage" />
    </f:facet>
    <h:outputText value="#{car.mileage}" />
</rich:column>
<rich:column>
    <f:facet name="header">
        <h:outputText value="VIN Code" />
    </f:facet>
    <h:outputText value="#{car.vin}" />
</rich:column>
<rich:column>
    <f:facet name="header">
        <h:outputText value="Items stock" />
    </f:facet>
    <h:outputText value="#{car.stock}" />
</rich:column>
<rich:column>
    <f:facet name="header">
        <h:outputText value="Days Live" />
    </f:facet>
    <h:outputText value="#{car.daysLive}" />
</rich:column>
</rich:extendedDataTable>
```

Cars marketplace				
vendor	Model	Price	Mileage	VIN Code
Chevrolet	Corvette	17226	25965.0	ILLAKAWAZDZ
Chevrolet	Corvette	34229	46429.0	RCPNSRYGXOM
Chevrolet	Corvette	27982	50209.0	NWLGCEVEHGI
Chevrolet	Corvette	51825	72998.0	NGVZSCIZGSM
Chevrolet	Corvette	52845	34364.0	PSDRUYYOIJG
Chevrolet	Malibu	37874	37273.0	VLFPQPWNEFD
Chevrolet	Malibu	15600	71441.0	EXLJGDWOZSA
Chevrolet	Malibu	52447	46700.0	NLMGJZAKBRD
Chevrolet	Malibu	27129	36254.0	OIPFUIENLEHS
Chevrolet	Malibu	28846	77162.0	WRCOOFREZLL
Chevrolet	Malibu	46165	60590.0	HUFTTHQHSFJF
Chevrolet	Malibu	18263	37790.0	JLMHNAFESHVD

10.6.3.1. Scrolling

The example table shown in [Example 10.10, “<rich:extendedDataTable> example”](#) features both horizontal and vertical scrolling. Scrolling occurs automatically when the contents of the table exceed the dimensions specified with the height and width attributes. Headers and footers remain in place and visible when the table is scrolled.

Large tables can use Ajax “lazy” loading to cache data on the client during scrolling. Use the `clientRows` attribute to specify the number of rows to load. The specified number of rows are loaded on the initial rendering and with every vertical scroll. If the `clientRows` attribute is not specified, all the rows are loaded on the client without the use of Ajax.

In addition to Ajax scrolling, the `<rich:extendedDataTable>` component can also be used with the `<rich:dataScroller>` component in the same way as a regular `<rich:dataTable>` component. If both the `clientRows` and `rows` attributes are included, Ajax loading occurs as defined by the `clientRows` attribute, but the loading is limited to the current table page as determined by the `rows` attribute. Refer to [Section 10.9, “<rich:dataScroller>”](#) for full details on using the `<rich:dataScroller>` component.

10.6.3.2. Frozen columns

The example table shown in [Example 10.10, “<rich:extendedDataTable> example”](#) has the first two columns frozen so that they remain visible if the user scrolls horizontally through the table. Note that the horizontal scrollbar does not encompass these frozen columns. To freeze columns, use the `frozenColumns` attribute to specify the number of columns on the left-hand side of the table to freeze.

10.6.3.3. Row selection

Row selection is determined by the `selectionMode` attribute. Setting the attribute to `none` allows for no row selection capability. The example table shown in [Example 10.10](#), “<rich:extendedDataTable> example” does not allow row selection.

Setting the `selectionMode` attribute to `single` allows the user to select a single row at a time using the mouse. With the `selectionMode` attribute set to `multiple`, the user can select multiple rows. Holding down the **Ctrl** key while clicking selects additional rows with each click. Holding down the **Shift** key while clicking selects all the rows in a range.

The `selection` attribute points to a collection of objects. It holds the `rowKey` identifiers to track which rows are selected. [Example 10.11](#), “Selecting multiple rows” shows how to implement multiple row selection in the same table from [Example 10.10](#), “<rich:extendedDataTable> example”.

Example 10.11. Selecting multiple rows

```
<rich:extendedDataTable value="#{extTableSelectionBean.inventoryItems}"
    var="car" selection="#{extTableSelectionBean.selection}"
    id="table" frozenColumns="2"
    style="height:300px; width:500px;" selectionMode="multiple">
    ...
</rich:extendedDataTable>
```

The accompanying `ExtSelectionBean` bean handles which rows are selected. The rows are identified by their `rowKey` identifiers.

```
package org.richfaces.demo.tables;

import java.io.Serializable;
import java.util.ArrayList;
import java.util.Collection;
import java.util.List;

import javax.faces.bean.ManagedBean;
import javax.faces.bean.ManagedProperty;
import javax.faces.bean.SessionScoped;
import javax.faces.event.AjaxBehaviorEvent;

import org.richfaces.component.UIExtendedDataTable;
import org.richfaces.demo.tables.model.cars.InventoryItem;

@ManagedBean
@SessionScoped

public class ExtTableSelectionBean implements Serializable{
```

```
private Collection<Object> selection;
@ManagedProperty(value = "#{carsBean.allInventoryItems}")
private List<InventoryItem> inventoryItems;
private List<InventoryItem> selectionItems = new ArrayList<InventoryItem>();

public void selectionListener(AjaxBehaviorEvent event){
    UIExtendedDataTable dataTable = (UIExtendedDataTable)event.getComponent();
    Object originalKey = dataTable.getRowKey();
    selectionItems.clear();
    for (Object selectionKey: selection) {
        dataTable.setRowKey(selectionKey);
        if (dataTable.isRowAvailable()){
            selectionItems.add((InventoryItem)dataTable.getRowData());
        }
    }
    dataTable.setRowKey(originalKey);
}

public Collection<Object> getSelection() {
    return selection;
}

public void setSelection(Collection<Object> selection) {
    this.selection = selection;
}

public List<InventoryItem> getInventoryItems() {
    return inventoryItems;
}

public void setInventoryItems(List<InventoryItem> inventoryItems) {
    this.inventoryItems = inventoryItems;
}

public List<InventoryItem> getSelectionItems() {
    return selectionItems;
}

public void setSelectionItems(List<InventoryItem> selectionItems) {
    this.selectionItems = selectionItems;
}
}
```

Cars marketplace				
vendor	Model	Price	Mileage	VIN Code
Chevrolet	Corvette	17226	25965.0	ILLAKAWAZDZ
Chevrolet	Corvette	34229	46429.0	RCPNSRYGXOM
Chevrolet	Corvette	27982	50209.0	NWLGCEVEHGI
Chevrolet	Corvette	51825	72998.0	NGVZSCIZGSM
Chevrolet	Corvette	52845	34364.0	PSDRUYYOIJG
Chevrolet	Malibu	37874	37273.0	VLFPQPWNEFD
Chevrolet	Malibu	15600	71441.0	EXLJGDWOZSA
Chevrolet	Malibu	52447	46700.0	NLMGJZAKBRD
Chevrolet	Malibu	27129	36254.0	OIPFUIENLEHSX
Chevrolet	Malibu	28846	77162.0	WRCOOFREZLL
Chevrolet	Malibu	46165	60590.0	HUFTTHQHSFJF
Chevrolet	Malibu	18263	37790.0	JLMHNAFESHVD

10.6.3.4. Rearranging columns

Columns in a `<rich:extendedDataTable>` component can be rearranged by the user by dragging each column to a different position. A graphical representation of the column is displayed during dragging. [Figure 10.6, “Dragging columns”](#) illustrates the **Price** column being dragged to a new location. The small blue arrow indicates where the column will be moved to if it is dropped in the current position. [Figure 10.7, “Rearranged columns”](#) shows the result of dragging the **Price** column.

Cars marketplace				
vendor	Model	Price	Mileage	VIN Code
Chevrolet	Corvette	17226	25965.0	ILLAKAWAZDZ
Chevrolet	Corvette	34229	46429.0	RCPNSRYGXOM
Chevrolet	Corvette	27982	50209.0	NWLGCEVEHGI
Chevrolet	Corvette	51825	72998.0	NGVZSCIZGSM
Chevrolet	Corvette	52845	34364.0	PSDRUYYOIJG
Chevrolet	Malibu	37874	37273.0	VLFPQPWNEFD
Chevrolet	Malibu	15600	71441.0	EXLJGDWOZSA
Chevrolet	Malibu	52447	46700.0	NLMGJZAKBRD
Chevrolet	Malibu	27129	36254.0	OIPFUIENLEHSX
Chevrolet	Malibu	28846	77162.0	WRCOOFREZLL
Chevrolet	Malibu	46165	60590.0	HUFTTHQHSFJF
Chevrolet	Malibu	18263	37790.0	JLMHNAFESHVD

Figure 10.6. Dragging columns

Cars marketplace				
vendor	Model	Mileage	Price	VIN Code
Chevrolet	Corvette	25965.0	17226	ILLAKAWAZDZ
Chevrolet	Corvette	46429.0	34229	RCPNSRYGXOM
Chevrolet	Corvette	50209.0	27982	NWLGCEVEHGI
Chevrolet	Corvette	72998.0	51825	NGVZSCIZGSM
Chevrolet	Corvette	34364.0	52845	PSDRUYYOIJG
Chevrolet	Malibu	37273.0	37874	VLFPQPWNEFD
Chevrolet	Malibu	71441.0	15600	EXLJGDWOZSA
Chevrolet	Malibu	46700.0	52447	NLMGJZAKBRD
Chevrolet	Malibu	36254.0	27129	OIPFUIENLEHSX
Chevrolet	Malibu	77162.0	28846	WRCOOFREZLL
Chevrolet	Malibu	60590.0	46165	HUFTTHQHSFJF
Chevrolet	Malibu	37790.0	18263	JL MHNAFESHVD

Figure 10.7. Rearranged columns

10.6.3.5. Filtering and sorting

The `<rich:extendedDataTable>` component can include filtering and sorting in the same way as a regular `<rich:dataTable>` component. For full details on filtering tables, refer to [Section 10.10, “Table filtering”](#). For full details on sorting tables, refer to [Section 10.11, “Table sorting”](#).

10.6.4. JavaScript API

The `<rich:extendedDataTable>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

- `sort()`
Sort the data table.
- `filter()`
Filter the data table.
- `clearSorting()`
Clear any sorting that is currently applied to the table.
- `clearFiltering()`
Clear any filtering that is currently applied to the table.
- `selectRow(index)`
Select the row specified by the *index* parameter.

`selectRows([startIndex, stopIndex])`

Select all the rows in the table. Optionally, select only those rows between the indexes specified with the *startIndex* and *stopIndex* parameters.

`deselectRow`

Deselect the row that is currently selected.

`setActiveRow(index)`

Set the active row to that specified by the *index* parameter.

10.6.5. Reference data

- *component-type*: `org.richfaces.ExtendedDataTable`
- *component-class*: `org.richfaces.component.UIExtendedDataTable`
- *component-family*: `org.richfaces.Data`
- *renderer-type*: `org.richfaces.ExtendedDataTableRenderer`
- *handler-class*: `org.richfaces.taglib.ExtendedDataTableHandler`

10.6.6. Style classes and skin parameters

Table 10.3. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-edt</code> This class defines styles for the table.	<code>tableBorderWidth</code> , <code>tableBorderColor</code>	border
	<code>tableBackgroundColor</code>	background-color
<code>.rich-edt-cnt</code> This class defines styles for the table content.	No skin parameters.	
<code>.rf-edt-c</code> This class defines styles for a table cell.	<code>tableBorderWidth</code> , <code>tableBorderColor</code>	border-bottom
	<code>tableBorderWidth</code> , <code>tableBorderColor</code>	border-right
<code>.rf-edt-c-cnt</code> This class defines styles for the contents of a cell.	<code>generalFamilyFont</code>	font-family
	<code>generalSizeFont</code>	font-size
<code>.rf-edt-tbl-hdr</code> This class defines styles for the table header.	<code>tableBorderWidth</code> , <code>tableBorderColor</code>	border-bottom
	<code>tableHeaderTextColor</code>	color
	<code>generalFamilyFont</code>	font-family
	<code>generalSizeFont</code>	font-size

Class (selector)	Skin Parameters	Mapped CSS properties
	<i>tableHeaderTextColor</i>	color
.rich-edt-hdr This class defines styles for a header.	No skin parameters.	
.rf-edt-hdr-c This class defines styles for a table header cell.	<i>tableBorderWidth</i> , <i>tableBorderColor</i>	border-bottom
	<i>tableBorderWidth</i> , <i>tableBorderColor</i>	border-right
.rf-edt-hdr-c-cnt This class defines styles for the contents of a header cell.	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
	<i>tableHeaderTextColor</i>	color
.rf-edt-tbl-fty This class defines styles for the table footer.	<i>tableBorderWidth</i> , <i>tableBorderColor</i>	border-top
	<i>tableFooterBackgroundColor</i>	background-color
.rich-edt-fty This class defines styles for a footer.	<i>tableBorderWidth</i> , <i>tableBorderColor</i>	border-top
	<i>tableFooterBackgroundColor</i>	background-color
.rich-edt-fty-cnt This class defines styles for the content of a footer.	No skin parameters.	
.rf-edt-fty-c This class defines styles for a table footer cell.	<i>tableBorderWidth</i> , <i>tableBorderColor</i>	border-bottom
	<i>tableBorderWidth</i> , <i>tableBorderColor</i>	border-right
.rf-edt-fty-c-cnt This class defines styles for the contents of a footer cell.	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
	<i>generalTextColor</i>	color
.rf-edt-fty-emp This class defines styles for an empty footer cell.	<i>tableBorderWidth</i> , <i>tableBorderColor</i>	border-right
.rich-edt-fty-fzn This class defines styles for a frozen footer.	No skin parameters.	
.rich-edt-b This class defines styles for the body of the table.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-edt-r-sel This class defines styles for the selected row.	<i>tableBorderWidth</i> , <i>tableBorderColor</i>	border-right
.rich-edt-r-act This class defines styles for the active row.	No skin parameters.	
.rich-edt-rsz This class defines styles for the table resizer.	No skin parameters.	
.rich-edt-rsz-cntr This class defines styles for the resize container.	No skin parameters.	
.rich-edt-rsz-mkr This class defines styles for the resize marker.	<i>generalTextColor</i>	border-left
.rf-edt-rord This class defines styles for the re-order functionality.	<i>tableBorderWidth</i> , <i>tableBorderColor</i>	border
	<i>tableHeaderBackgroundColor</i> / <i>tableBackgroundColor</i>	background-color
.rich-edt-rord-mkr This class defines styles for the re-order marker.	No skin parameters.	
.rich-edt-spcr This class defines a spacer for Internet Explorer 7 compatibility.	No skin parameters.	

10.7. <rich:dataGrid>

The <rich:dataGrid> component is used to arrange data objects in a grid. Values in the grid can be updated dynamically from the data model, and Ajax updates can be limited to specific rows. The component supports header, footer, and caption facets.

The <rich:dataGrid> component is similar in function to the JavaServer Faces <h:panelGrid> component. However, the <rich:dataGrid> component additionally allows iteration through the data model rather than just aligning child components in a grid layout.

Car Store	
Chevrolet Corvette Price: 46071 Mileage: 40446.0	Chevrolet Corvette Price: 46416 Mileage: 48531.0
Chevrolet Corvette Price: 47822 Mileage: 15438.0	Chevrolet Corvette Price: 16629 Mileage: 69237.0

Navigation: <<< << 1 2 3 4 5 6 7 8 9 10 >> >>>

Figure 10.8. The `<rich:dataGrid>` component

10.7.1. Basic usage

The `<rich:dataGrid>` component requires the `value` attribute, which points to the data model, and the `var` attribute, which holds the current variable for the collection of data.

10.7.2. Customizing the grid

The number of columns for the grid is specified with the `columns` attribute, and the number of elements to layout among the columns is determined with the `elements` attribute. The first attribute references the zero-based element in the data model from which the grid starts.

Example 10.12. `<rich:dataGrid>` example

```
<rich:panel style="width:150px;height:200px;">
  <h:form>

  <rich:dataGrid value="#{dataTableScrollerBean.allCars}" var="car" columns="2" elements="4" f
    <f:facet name="header">
      <h:outputText value="Car Store"></h:outputText>
    </f:facet>
    <rich:panel>
      <f:facet name="header">
        <h:outputText value="#{car.make} #{car.model}"></h:outputText>
      </f:facet>
      <h:panelGrid columns="2">
        <h:outputText value="Price:" styleClass="label"></h:outputText>
        <h:outputText value="#{car.price}"/>
        <h:outputText value="Mileage:" styleClass="label"></h:outputText>
        <h:outputText value="#{car.mileage}"/>
      </h:panelGrid>
    </rich:panel>
  </h:form>
</rich:panel>
```

```

</rich:panel>
<f:facet name="footer">
    <rich:datascroller></rich:datascroller>
</f:facet>
</rich:dataGrid>
</h:form>
</rich:panel>

```

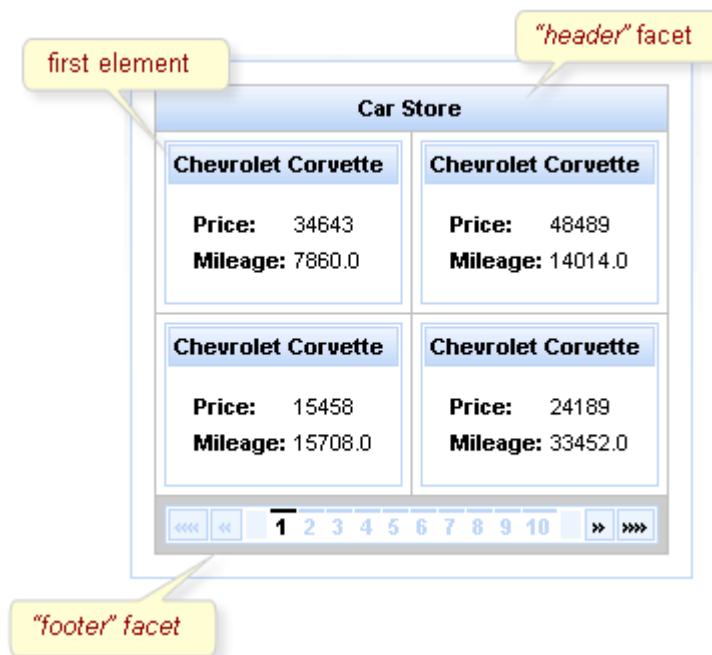


Figure 10.9. <rich:dataGrid> example

10.7.3. Partial updates

As <rich:dataGrid> the component is based on the <a4j:repeat> component, it can be partially updated with Ajax. Refer to [Section 10.1.2, "Limited views and partial updates"](#) for details on partially updating the <rich:dataGrid> component.

10.7.4. Reference data

- *component-type*: org.richfaces.DataGrid
- *component-class*: org.richfaces.component.UIDataGrid
- *component-family*: org.richfaces.Data
- *renderer-type*: org.richfaces.DataGridRenderer
- *handler-class*: org.richfaces.taglib.DataGridHandler

10.7.5. Style classes and skin parameters

Table 10.4. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-dg This class defines styles for the grid.	<i>tableBackgroundColor</i>	background-color
	<i>tableBorderWidth</i>	border-left-width, border-top-width
	<i>tableBorderColor</i>	border-left-color, border-top-color
.rf-dg-cap This class defines styles for the grid caption.	No skin parameters.	
.rf-dg-r This class defines styles for a grid row.	No skin parameters.	
.rf-dg-c This class defines styles for a grid cell.	<i>tableBorderWidth</i>	border-bottom-width, border-right-width
	<i>tableBorderColor</i>	border-bottom-color, border-right-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-dg-nd-c This class defines styles for a node cell.	<i>tableBorderWidth</i>	border-bottom-width, border-right-width
	<i>tableBorderColor</i>	border-bottom-color, border-right-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-dg-th This class defines styles for the grid header section.	<i>tableBorderWidth</i>	border-bottom-width
	<i>tableBorderColor</i>	border-bottom-color
.rf-dg-h This class defines styles for a grid header.	No skin parameters.	
.rf-dg-h-f This class defines styles for the first header.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-dg-h-r This class defines styles for a header row.	No skin parameters.	
.rf-dg-h-c This class defines styles for a header cell.	<i>tableHeaderBackgroundColor</i>	background-color
	<i>tableBorderWidth</i>	border-bottom-width, border-right-width
	<i>tableBorderColor</i>	border-bottom-color, border-right-color
	<i>tableHeaderTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-dg-f This class defines styles for a grid footer.	No skin parameters.	
.rf-dg-f-f This class defines styles for the first footer.	No skin parameters.	
.rf-dg-f-c This class defines styles for a footer cell.	<i>tableFooterBackgroundColor</i>	background-color
	<i>tableBorderWidth</i>	border-bottom-width, border-right-width
	<i>tableBorderColor</i>	border-bottom-color, border-right-color
	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size

10.8. <rich:list>

The <rich:list> component renders a list of items. The list can be an numerically ordered list, an un-ordered bullet-point list, or a data definition list. The component uses a data model for managing the list items, which can be updated dynamically.

10.8.1. Basic usage

The `var` attribute names a variable for iterating through the items in the data model. The items to iterate through are determined with the `value` attribute by using EL (Expression Language).

10.8.2. Type of list

By default, the list is displayed as an un-ordered bullet-point list. The `type` attribute is used to specify different list types:

`unordered`

The default presentation. The list is presented as a series of bullet-points, similar to the `<ul>` HTML element.

- Chevrolet Corvette
Price:41753
Mileage:10419.0
- Chevrolet Corvette
Price:17540
Mileage:45531.0
- Chevrolet Corvette
Price:20191
Mileage:5927.0
- Chevrolet Corvette
Price:46960
Mileage:13937.0
- Chevrolet Corvette
Price:34164
Mileage:72236.0

Figure 10.10. Unordered list

`ordered`

The list is presented as a numbered series of items, similar to the `<ol>` HTML element.

1. Chevrolet Corvette
Price:16080
Mileage:55773.0
2. Chevrolet Corvette
Price:49936
Mileage:72356.0
3. Chevrolet Corvette
Price:52167
Mileage:30749.0
4. Chevrolet Corvette
Price:21148
Mileage:55447.0
5. Chevrolet Corvette
Price:18098
Mileage:16296.0

Figure 10.11. Ordered list

`definitions`

The list is presented as a series of data definitions. Part of the data model, specified as the term, is listed prominently. The other associated data is listed after each term.


```
Chevrolet Corvette
  Price:18098
  Mileage:16296.0
Chevrolet Malibu
  Price:36523
  Mileage:46112.0
Chevrolet Malibu
  Price:33307
  Mileage:57709.0
Chevrolet Malibu
  Price:34248
  Mileage:62821.0
Chevrolet Malibu
  Price:51555
  Mileage:51549.0
```

Figure 10.12. Data definition list

The term is marked using the term facet. The facet is required for all definition lists. Use of the facet is shown in [Example 10.13, “Data definition list”](#).

Example 10.13. Data definition list

```
<h:form>

  <rich:list var="car" value="#{dataTableScrollerBean.allCars}" type="definitions" rows="5"
    <f:facet name="term">
      <h:outputText value="#{car.make} #{car.model}"></h:outputText>
    </f:facet>
    <h:outputText value="Price:" styleClass="label"></h:outputText>
    <h:outputText value="#{car.price}" /><br/>
    <h:outputText value="Mileage:" styleClass="label"></h:outputText>
    <h:outputText value="#{car.mileage}" /><br/>
  </rich:list>
</h:form>
```

10.8.3. Bullet and numeration appearance

The appearance of bullet points for unordered lists or numeration for ordered lists can be customized through CSS, using the list-style-type property.

10.8.4. Customizing the list

The first attribute specifies which item in the data model to start from, and the rows attribute specifies the number of items to list. The title attribute is used for a floating tool-tip. [Example 10.14, “<rich:list> example”](#) shows a simple example using the <rich:list> component.

Example 10.14. <rich:list> example

```
<h:form>
<rich:list var="cars" value="#{dataTableScrollerBean.allCars}" rows="5" type="unordered" title="Car
Store">
  <h:outputText value="#{car.make} #{car.model}"/><br/>
  <h:outputText value="Price:" styleClass="label"/></h:outputText>
  <h:outputText value="#{car.price}"/><br/>
  <h:outputText value="Mileage:" styleClass="label"/></h:outputText>
  <h:outputText value="#{car.mileage}"/><br/>
</rich:list>
</h:form>
```

- Chevrolet Corvette
Price:41753
Mileage:10419.0
- Chevrolet Corvette
Price:17540
Mileage:45531.0
- Chevrolet Corvette
Price:20191
Mileage:5927.0
- Chevrolet Corvette
Price:46960
Mileage:13937.0
- Chevrolet Corvette
Price:34164
Mileage:72236.0

Figure 10.13. <rich:list> example**10.8.5. Reference data**

- *component-type*: org.richfaces.List
- *component-class*: org.richfaces.component.UIList
- *component-family*: org.richfaces.List
- *renderer-type*: org.richfaces.ListRenderer
- *handler-class*: org.richfaces.taglib.ListHandler

10.8.6. Style classes and skin parameters

Table 10.5. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-ulst-itm This class defines styles for an item in an unordered list.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-olst-itm This class defines styles for an item in an unordered list.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-dlst-trm This class defines styles for the term of an item in a definition list.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-dlst-dfn This class defines styles for the definition of an item in a definition list.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size

10.9. <rich:dataScroller>

The <rich:dataScroller> component is used for navigating through multiple pages of tables or grids.



Figure 10.14. The <rich:dataScroller> component

10.9.1. Basic usage

The `<rich:dataScroller>` must be placed in a facet of the table or grid it needs to control. Alternatively, use the `for` attribute to bind the parent table or grid to the scroller.

The bound table or grid should also have the `rows` attribute defined to limit the number of rows per page.

The `<rich:dataScroller>` component must be re-rendered whenever a filter changes on the bound table, so that the scroller matches the current model for the table.

Example 10.15. Basic usage

```
<rich:dataTable id="table" value="#{capitalsBean.capitals}" var="cap" rows="5">
  <!-- table content -->
  ...
</rich:dataTable>
<rich:dataScroller for="table" maxPages="5">
  <f:facet name="first">
    <h:outputText value="First" />
  </f:facet>
  <f:facet name="last">
    <h:outputText value="Last" />
  </f:facet>
</rich:dataScroller>
```

10.9.2. Appearance and interactivity

The `page` attribute is a value-binding attribute used to define and save the current page number.

The `<rich:dataScroller>` component provides a range of controllers for scrolling through tables and grids:

Controls for scrolling by a specific amount

The component includes controls for switching to the first page, the last page, the next page, and the previous page, as well as controls for fast-forwarding or rewinding by a set amount. Use the `fastStep` attribute to set the number of pages to skip when fast-forwarding or rewinding.

The appearance of these controls can be customized using the following facets: `first`, `last`, `next`, `previous`, `fastForward`, and `fastRewind`. Additionally, there are facets for the controls' disabled states: `first_disabled`, `last_disabled`, `next_disabled`, `previous_disabled`, `fastforward_disabled`, and `rewind_disabled`.

Page controls

The component also features a series of numbered controls to jump to a specific page. Use the `maxPages` attribute to limit the number of page controls that appear. The current page control is highlighted.

To add optional separators between controls, define the separators with the `controlsSeparator` facet.

10.9.3. JavaScript API

The `<rich:dataScroller>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`switchToPage(pageIndex)`

Switch to the page specified with the *pageIndex* parameter.

`next()`

Switch to the next page.

`previous()`

Switch to the previous page.

`first()`

Switch to the first page.

`last()`

Switch to the last page.

`fastForward()`

Step forward through the pages by the *fastStep* amount.

`fastRewind()`

Step backward through the pages by the *fastStep* amount.

10.9.4. Reference data

- *component-type*: `org.richfaces.DataScroller`
- *component-class*: `org.richfaces.component.UIDataScroller`
- *component-family*: `org.richfaces.DataScroller`
- *renderer-type*: `org.richfaces.DataScrollerRenderer`
- *handler-class*: `org.richfaces.taglib.DataScrollerHandler`

10.9.5. Style classes and skin parameters

Table 10.6. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-ds This class defines styles for the data scroller.	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
	<i>tableBackgroundColor</i>	background
.rf-ds-btn This class defines styles for buttons in the data scroller.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
	<i>tableBorderColor</i>	border-color
.rf-ds-btn-first This class defines styles for the first button.	<i>headerBackgroundColor</i>	background-color
	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
.rf-ds-btn-fastrwd This class defines styles for the fast rewind button.	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
.rf-ds-btn-prev This class defines styles for the previous button.	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
.rf-ds-btn-next This class defines styles for the next button.	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
.rf-ds-btn-fastfwd This class defines styles for the fast forward button.	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
.rf-ds-btn-last This class defines styles for the last button.	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
	No skin parameters.	
.rf-ds-nmb-btn This class defines styles for page number buttons in the data scroller.	<i>generalTextColor</i>	color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
	<i>tableBorderColor</i>	border-color
	<i>tableBackgroundColor</i>	background-color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-ds-press This class defines styles for a data scroller when a control is pressed.	<i>tableBorderColor</i>	border-color
<i>tableBackgroundColor</i>	background	
.rf-ds-act This class defines styles for an active data scroller.	<i>tableBorderColor</i>	color
.rf-ds-dis This class defines styles for a disabled data scroller.	<i>tableBorderColor</i>	color

10.10. Table filtering

Use the `filterExpression` attribute to define an expression that can be evaluated as a boolean value. The expression checks if each table entry satisfies the filtering condition when the table is rendered. For example, the expression might be a JSTL (JavaServer Pages Standard Tag Library) function such as `contains` or `equals`.

Use the `filter` attribute to define a filter interface. The attribute must use EL (Expression Language) to point to an object which implements the `org.richfaces.model.Filter<T>` interface. The object must provide a single `accept(T t)` method. The method takes each iteration object as a parameter and returns a boolean value, which determines whether the object satisfies the filter. By defining a custom filter, you can implement complex business logic to filter a table.

Use the `filterValue` attribute to point to an object which holds the current filtering value for the column. The attribute can be used to store filtering conditions in a session. Alternatively, use the `filterValue` attribute when using the JavaScript API for filtering. The attribute can store a value to pass as parameter to a JavaScript filter method.

Example 10.16. Filtering example

```
<rich:dataTable value="#{capitalsBean.capitals}" var="cap" id="table">
  <f:facet name="header">
    <rich:column>
      <h:outputText value="State Name">
    </rich:column>
    <rich:column>
      <h:outputText value="State Time Zone">
    </rich:column>
  </f:facet>
  <rich:column filterMethod="#{filteringBean.filterStates}">
    <f:facet name="header">
```

```

        <h:inputText value="#{filteringBean.filterValue}" id="input">
            <a4j:ajax event="keyup" render="table"
                    ignoreDupResponses="true" requestDelay="700"/>
        </h:inputText>
    </f:facet>
    <h:outputText value="#{cap.state}"/>
</rich:column>
<rich:column filterExpression=
    "#{fn:containsIgnoreCase(cap.timeZone, filteringBean.filterZone)}">
    <f:facet name="header">
        <h:selectOneMenu value="#{filteringBean.filterZone}"
            <f:selectItems value="#{filteringBean.filterZones}" />
        <a4j:ajax event="change" render="table" />
    </h:selectOneMenu>
    </f:facet>
    <h:outputText value="#{cap.timeZone}"/>
</rich:column>
</rich:dataTable>

```

The example uses a filter expression on the first column and a filter method on the second column.

State Name	State Time Zone
n	-5
New Hampshire	GMT-5
New Jersey	GMT-5
New York	GMT-5
North Carolina	GMT-5

10.11. Table sorting

Tables entries can be sorted by defining external sorting algorithms. Refer to [Section 10.3](#), “<rich:column>” for details on using the <rich:column> component in tables.



Sorting non-English tables

To sort a table whose contents are not in English, add the `org.richfaces.datatableUsesViewLocale` context parameter to the project's `web.xml` settings file. Set the value of the context parameter to `true`.

Set the `sortBy` attribute to indicate which iteration object property to use when sorting the column. By default, the target will be sorted using the `compare()` method.

If using custom-defined rules for sorting, use the `comparator` attribute instead. Set the `comparator` attribute to point to your comparator method, which will be used when sorting the data model.

Bind the `sortOrder` attribute to bean properties to manage the sorting order. The bean must handle all the sorting algorithms. [Example 10.17, "Sorting"](#) demonstrates table sorting using an external control.

Example 10.17. Sorting

```
<rich:dataTable value="#{dataTableScrollerBean.allCars}"
               var="category" rows="20" id="table" reRender="ds2"
               sortPriority="#{sortingBean.prioritList}">
  <rich:column id="make" sortBy="#{category.make}"
              sortOrder="#{sortingBean.makeDirection}">
    <f:facet name="header">
      <h:outputText styleClass="headerText" value="Make" />
    </f:facet>
    <h:outputText value="#{category.make}" />
  </rich:column>
  <rich:column id="model" sortBy="#{category.model}"
              sortOrder="#{sortingBean.modelDirection}">
    <f:facet name="header">
      <h:outputText styleClass="headerText" value="Model" />
    </f:facet>
    <h:outputText value="#{category.model}" />
  </rich:column>
  <rich:column id="price" sortBy="#{category.price}"
              sortOrder="#{sortingBean.priceDirection}">
    <f:facet name="header">
      <h:outputText styleClass="headerText" value="Price" />
    </f:facet>
    <h:outputText value="#{category.price}" />
  </rich:column>
  <rich:column id="mileage" sortBy="#{category.mileage}"
              sortOrder="#{sortingBean.mileageDirection}">
    <f:facet name="header">
      <h:outputText styleClass="headerText" value="Mileage" />
    </f:facet>
    <h:outputText value="#{category.mileage}" />
  </rich:column>
</rich:dataTable>
```

The example uses an external control to manage the table's sorting.

Make	Model	Price	Mileage
Chevrolet	Corvette	21227	32792.0
Chevrolet	Corvette	26659	14208.0
Chevrolet	Corvette	45779	24349.0
Chevrolet	Malibu	15708	74154.0
Chevrolet	Malibu	54037	71257.0
Chevrolet	Malibu	39646	31674.0
Chevrolet	S-10	21599	39670.0
Chevrolet	S-10	18042	65112.0
Chevrolet	S-10	42683	22633.0

When multiple columns are capable of being sorted at the same time, set the priority by which the columns are sorted with the `sortPriorities` attribute. The attribute must contain a list of column identifiers in the order of the sorting sequence.

Trees

Read this chapter for details on components that use tree structures.

11.1. <rich:tree>

The <rich:tree> component provides a hierarchical tree control. Each <rich:tree> component typically consists of <rich:treeNode> child components. The appearance and behavior of the tree and its nodes can be fully customized.

11.1.1. Basic usage

The <rich:tree> component requires the `value` attribute to point to the data model for populating the tree. The data model must be either an `org.richfaces.model.TreeNode` interface, an `org.richfaces.model.TreeDataModel` interface, or a `javax.swing.tree.TreeNode` interface. The `var` attribute declares the variable used for iterating through the data model, so that child <rich:treeNode> components can reference each iteration.

Ideally, the <rich:tree> component needs one or more <rich:treeNode> components to work with the data model. However if no <rich:treeNode> components are provided the tree creates default nodes instead.

Example 11.1. Basic usage

This example demonstrates basic usage of the <rich:tree> component using an `org.richfaces.model.TreeNode` data model.


The data model is constructed as follows:

```
private TreeNodeImpl<String> stationRoot = new TreeNodeImpl<String>();
private TreeNodeImpl<String> stationNodes = new TreeNodeImpl<String>();
private String[] kickRadioFeed = { "Hall & Oates - Kiss On My List",
                                   "David Bowie - Let's Dance",
                                   "Lyn Collins - Think (About It)",
                                   "Kim Carnes - Bette Davis Eyes",
                                   "KC & the Sunshine Band - Give It Up" };

stationRoot.setData("KickRadio");
stationNodes.addChild(0, stationRoot);
for (int i = 0; i < kickRadioFeed.length; i++){
    TreeNodeImpl<String> child = new TreeNodeImpl<String>();
    child.setData(kickRadioFeed[i]);
    stationRoot.addChild(i, child);
}
```

The tree then accesses the nodes of the model using the station variable:

```
<rich:tree value="#{stations.stationNodes}" var="station">
  <rich:treeNode>
    <h:outputText value="#{station}" />
  </rich:treeNode>
</rich:tree>
```

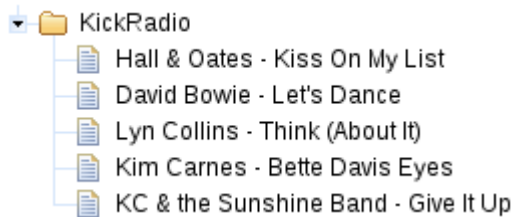

11.1.2. Appearance

Different nodes in the tree can have different appearances, such as node icons, depending on the type of data the node contains. Use the `nodeType` attribute to differentiate the types of nodes; the node is then rendered according to the `<rich:treeNode>` component with the corresponding type attribute. [Example 11.2, “nodeType attribute”](#) shows a `<rich:tree>` component with three different child `<rich:treeNode>` components defined to represent three different node appearances. Refer to [Section 11.1.10.2, “Appearance”](#) for details on customizing the appearance of `<rich:treeNode>` components.

Example 11.2. nodeType attribute

```
<rich:tree style="width:300px" value="#{library.data}" var="item" nodeType="#{item.type}">
  <rich:treeNode type="artist" iconExpanded="/images/tree/singer.png" iconCollapsed="/images/tree/singer.png">
    <h:outputText value="#{item.name}" />
  </rich:treeNode>
  <rich:treeNode type="album" iconExpanded="/images/tree/disc.png" iconCollapsed="/images/tree/disc.png">
    <h:outputText value="#{item.album}" />
  </rich:treeNode>
  <rich:treeNode type="song" iconLeaf="/images/tree/song.png">
    <h:outputText value="#{item.title}" />
  </rich:treeNode>
</rich:tree>
```



If the `nodeType` attribute returns null, the node is rendered as a "*typeless*" (or default) node. The *typeless* node is the first child `<rich:treeNode>` component with a valid rendered attribute, but without a defined type attribute.

If the `nodeType` attribute is not included and there are no child `<rich:treeNode>` components, the tree constructs a default node itself.

Icons for different nodes and node states can be defined for the whole tree using the following attributes:

`iconLeaf`

The `iconLeaf` attribute points to the icon to use for any node that does not contain any child nodes.

`iconExpanded` and `iconCollapsed`

The `iconExpanded` and `iconCollapsed` attributes point to the icons to use for expanded and collapsed nodes respectively. If these attributes are defined, the `icon` attribute is not used.

11.1.3. Expanding and collapsing tree nodes

The mode for performing submissions when nodes are expanded or collapsed is determined by the `toggleType` attribute, which can have one of the following three values:

`ajax`

This is the default setting. The `<rich:tree>` component performs an Ajax form submission, and only the content of the tree is rendered.

`server`

The `<rich:tree>` component performs a common submission, completely refreshing the page.

`client`

The `<rich:tree>` component updates on the client side through JavaScript, without any additional requests or updates. All nodes are rendered to the client during the initial page rendering.

By default, tree nodes are expanded and collapsed through the + and - controls. To expand or collapse a tree node using an action event such as a mouse click, specify the event with the `toggleNodeEvent` attribute.

11.1.4. Selecting tree nodes

The mode for performing submissions when nodes are selected is determined by the `selectionType` attribute, which can have one of the following three values:

ajax

This is the default setting. The `<rich:tree>` component performs an Ajax form submission, and only the content of the tree is rendered.

server

The `<rich:tree>` component performs a common submission, completely refreshing the page.

client

The `<rich:tree>` component updates on the client side using JavaScript, without any additional requests or updates.

11.1.5. Identifying nodes with the `rowKeyConverter` attribute

If the `<rich:tree>` component uses a custom data model, the data model provides unique keys for tree nodes so they can be identified during a client request. The `<rich:tree>` component can use strings as key values. These strings may contain special characters that are not allowed by browsers, such as the left angle bracket (<) and ampersand (&). To allow these characters in the keys, a row key converter must be provided.

To apply a converter to the `<rich:tree>` component, define it with the `rowKeyConverter` attribute.

11.1.6. Event handling

In addition to the standard Ajax events and HTML events, the `<rich:tree>` component uses the following client-side events:

- The `nodetoggle` event is triggered when a node is expanded or collapsed.
- The `beforenodetoggle` event is triggered before a node is expanded or collapsed.
- The `selectionchange` event is triggered when a node is selected.
- The `beforeselectionchange` event is triggered before a node is selected.

The `<rich:tree>` component uses the following server-side listeners:

- The `toggleListener` listener processes expand and collapse events.

- The `selectionChangeListener` listener processes the request when a node is selected.

11.1.7. Reference data

- *component-type*: `org.richfaces.Tree`
- *component-class*: `org.richfaces.component.UITree`
- *component-family*: `org.richfaces.Tree`
- *renderer-type*: `org.richfaces.TreeRenderer`
- *handler-class*: `org.richfaces.view.facelets.TreeHandler`

11.1.8. Style classes

Styling for the `<rich:tree>` component is mostly applied to the tree nodes. Refer to [Section 11.1.10.5, “Style classes and skin parameters”](#) for details on styling tree nodes. In addition, the `<rich:tree>` component can make use of the style classes outlined in [Style classes \(selectors\)](#).

Style classes (selectors)

`.rf-tr-nd`

This class defines styles for the nodes in a tree.

`.rf-tr-nd-last`

This class defines styles for last node in a tree.

`.rf-tr-nd-colps`

This class defines styles for a collapsed tree node.

`.rf-tr-nd-exp`

This class defines styles for an expanded tree node.

11.1.9. `<rich:treeSelectionChangeListener>`

Use the `<rich:treeSelectionChangeListener>` tag to register a `TreeSelectionChangeListener` class on a parent `<rich:tree>` component. The class provided as a listener must implement the `org.richfaces.event.TreeSelectionChangeListener` interface. The `processTreeSelectionChange` method accepts an `org.richface.event.TreeSelectionChangeEvent` event as a parameter.

11.1.10. `<rich:treeNode>`

The `<rich:treeNode>` component is a child component of the `<rich:tree>` component. It represents nodes in the parent tree. The appearance and functionality of each tree node can be customized.

11.1.10.1. Basic usage

The `<rich:treeNode>` component must be a child of a `<rich:tree>` component or a tree adaptor component. It does not need any attributes declared for basic usage, but can provide markup templates for tree nodes of particular types. Default markup is used if the tree node type is not specified. Refer to [Example 11.1, “Basic usage”](#) for an example of basic `<rich:treeNode>` component usage.

Example 11.3. Basic usage

```
<rich:tree nodeType="#{node.type}" var="node"
           value="#{treeBean.rootNodes}">
  <rich:treeNode type="country">
    #{node.name}
  </rich:treeNode>
  <rich:treeNode type="state">
    #{node.name}
  </rich:treeNode>
  <rich:treeNode type="city">
    #{node.name}
  </rich:treeNode>
</rich:tree>
```

The example renders a simple tree of countries. Each country node expands to show state nodes for that country, and each state node expands to show city nodes for that state.

11.1.10.2. Appearance

Refer to [Section 11.1.2, “Appearance”](#) for the `<rich:tree>` component for details and examples on styling nodes and icons. Icon styling for individual `<rich:treeNode>` components uses the same attributes as the parent `<rich:tree>` component: `iconLeaf`, `iconExpanded`, and `iconCollapsed`. Icon-related attributes specified for child `<rich:treeNode>` components overwrite any global icon attributes of the parent `<rich:tree>` component.

Use the `rendered` attribute to determine whether the node should actually be rendered in the tree or not. Using the `rendered` attribute in combination with the `<rich:treeNode>` `type` attribute can allow further style differentiation between node content.

11.1.10.3. Interactivity

Interactivity with individual nodes, such as expanding, collapsing, and other event handling, can be managed by the parent `<rich:tree>` component. Refer to [Section 11.1.3, “Expanding and collapsing tree nodes”](#) and [Section 11.1.6, “Event handling”](#) for further details.

Use the `expanded` attribute to determine whether the node is expanded or collapsed.

11.1.10.4. Reference data

- *component-type*: org.richfaces.TreeNode
- *component-class*: org.richfaces.component.UITreeNode
- *component-family*: org.richfaces.TreeNode
- *renderer-type*: org.richfaces.TreeNodeRenderer
- *handler-class*: org.richfaces.view.facelets.TreeNodeHandler

11.1.10.5. Style classes and skin parameters

Table 11.1. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-trn This class defines styles for a tree node.	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-trn-lbl This class defines styles for a tree node label.	No skin parameters.	
.rf-trn-cnt This class defines styles for tree node content.	No skin parameters.	
.rf-trn-sel This class defines styles for a selected tree node.	<i>additionalBackgroundColor</i>	background
.rf-trn-ldn This class defines styles for a tree node when it is loading.	<i>additionalBackgroundColor</i>	background
.rf-trn-hnd This class defines styles for a tree node handle.	No skin parameters.	
.rf-trn-hnd-lf This class defines styles for the handle of a leaf node.	No skin parameters.	
.rf-trn-hnd-colps This class defines styles for the handle of a collapsed node.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-trn-hnd-exp</code> This class defines styles for the handle of an expanded node.	No skin parameters.	
<code>.rf-trn-hnd-ldn-fct</code> This class defines styles for the loading facet of a tree node handle.	No skin parameters.	
<code>.rf-trn-ico</code> This class defines styles for tree node icon.	No skin parameters.	
<code>.rf-trn-ico-lf</code> This class defines styles for the icon of a leaf node.	No skin parameters.	
<code>.rf-trn-ico-colps</code> This class defines styles for the icon of a collapsed node.	No skin parameters.	
<code>.rf-trn-ico-exp</code> This class defines styles for the icon of an expanded node.	No skin parameters.	
<code>.rf-trn-ico-cst</code> This class defines styles for a custom node icon.	No skin parameters.	

11.1.10.6. <rich:treeToggleListener>

Use the `<rich:treeToggleListener>` tag to register a `TreeToggleListener` class on a parent `<rich:treeNode>` component. The class provided as a listener must implement the `org.richfaces.event.TreeToggleListener` interface. The `processTreeToggle` method accepts an `org.richfaces.event.TreeToggleEvent` event as a parameter.

11.2. Tree adaptors

Use a tree adaptor to populate a tree model declaratively from a non-hierarchical model, such as a list or a map.

11.2.1. <rich:treeModelAdaptor>

The `<rich:treeModelAdaptor>` component takes an object which implements the `Map` or `Iterable` interfaces. It adds all the object entries to the parent node as child nodes.

11.2.1.1. Basic usage

The `<rich:treeModelAdaptor>` component is added as a nested child component to a `<rich:tree>` component, or to another tree adaptor component.

The `<rich:treeModelAdaptor>` component requires the `nodes` attribute for basic usage. The `nodes` attribute defines a collection of elements to iterate through for populating the nodes.

Define the appearance of each node added by the adaptor with a child `<rich:treeNode>` component. Refer to [Section 11.1.10, “`<rich:treeNode>`”](#) for details on the `<rich:treeNode>` component.

11.2.1.2. Identifying nodes

Adaptors that use Map interfaces or models with non-string keys require a row key converter in order to correctly identify nodes. Refer to [Section 11.1.5, “*Identifying nodes with the `rowKeyConverter` attribute*”](#) for details on the use of the `rowKeyConverter` attribute.

Adaptors that use Iterable interfaces have simple integer row keys. A default converter is provided and does not need to be referenced explicitly.

11.2.1.3. Reference data

- *component-type*: `org.richfaces.treeModelAdaptor`
- *component-class*: `org.richfaces.component.UITreeModelAdaptor`
- *component-family*: `org.richfaces.TreeModelAdaptor`
- *handler-class*: `org.richfaces.view.facelets.TreeModelAdaptorHandler`

11.2.2. `<rich:treeModelRecursiveAdaptor>`

The `<rich:treeModelRecursiveAdaptor>` component iterates through recursive collections in order to populate a tree with hierarchical nodes, such as for a file system with multiple levels of directories and files.

11.2.2.1. Basic usage

The `<rich:treeModelRecursiveAdaptor>` component is an extension of the `<rich:treeModelAdaptor>` component. As such, the `<rich:treeModelRecursiveAdaptor>` component uses all of the same attributes. Refer to [Section 11.2.1, “`<rich:treeModelAdaptor>`”](#) for details on the `<rich:treeModelAdaptor>` component.

In addition, the `<rich:treeModelRecursiveAdaptor>` component requires the `roots` attribute. The `roots` attribute defines the collection to use at the top of the recursion. For subsequent levels, the `nodes` attribute is used for the collection.

Example 11.4, "Basic usage" demonstrates how the `<rich:treeModelRecursiveAdaptor>` component can be used in conjunction with the `<rich:treeModelAdaptor>` component to recursively iterate through a file system and create a tree of directories and files.

Example 11.4. Basic usage

```
<rich:tree var="item">

  <rich:treeModelRecursiveAdaptor roots="#{fileSystemBean.sourceRoots}" nodes="#{item.directories}">
    <rich:treeNode>
      #{item.shortPath}
    </rich:treeNode>
    <rich:treeModelAdaptor nodes="#{item.files}">
      <rich:treeNode>#{item}</rich:treeNode>
    </rich:treeModelAdaptor>
  </rich:treeModelRecursiveAdaptor>
</rich:tree>
```

The `<rich:treeModelRecursiveAdaptor>` component references the `FileSystemBean` class as the source for the data.

```
@ManagedBean
@RequestScoped
public class FileSystemBean {
    private static final String SRC_PATH = "/WEB-INF";

    private List<FileSystemNode> srcRoots;

    public synchronized List<FileSystemNode> getSourceRoots() {
        if (srcRoots == null) {
            srcRoots = new FileSystemNode(SRC_PATH).getDirectories();
        }
        return srcRoots;
    }
}
```

The `FileSystemBean` class in turn uses the `FileSystemNode` class to recursively iterate through the collection.

```
public class FileSystemNode {
    ...
    public synchronized List<FileSystemNode> getDirectories() {
        if (directories == null) {
            directories = Lists.newArrayList();
        }
    }
}
```

```

Iterables.addAll(directories,transform(filter(getResourcePaths(),containsPattern("/
    $")), FACTORY));
    }
    return directories;
}

    public synchronized List<String> getFiles() {
        if (files == null) {
            files = new ArrayList<String>();
            Iterables.addAll(files,transform(filter(getResourcePaths(),not(containsPattern("/
                $")), TO_SHORT_PATH));
        }
        return files;
    }


    private Iterable<String> getResourcePaths() {
        FacesContext facesContext = FacesContext.getCurrentInstance();
        ExternalContext externalContext = facesContext.getExternalContext();
        Set<String> resourcePaths = externalContext.getResourcePaths(this.path);

        if (resourcePaths == null) {
            resourcePaths = Collections.emptySet();
        }
        return resourcePaths;
    }
    ...
}

```

The `getDirectories()` function is used recursively until the object has the collection of children. The model adaptor calls the `getFiles()` function at each level in order to add the file nodes.

The resulting tree hierarchically lists the directories and files in the collection.

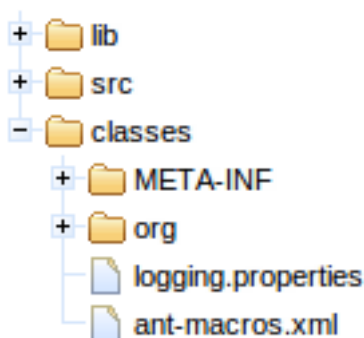

11.2.2.2. Identifying nodes

Adaptors that use Map interfaces or models with non-string keys require a row key converter in order to correctly identify nodes. Refer to [Section 11.1.5, “Identifying nodes with the `rowKeyConverter` attribute](#)” for details on the use of the `rowKeyConverter` attribute.

Adaptors that use `Iterable` interfaces have simple integer row keys. A default converter is provided and does not need to be referenced explicitly.

11.2.2.3. Reference data

- *component-type*: `org.richfaces.TreeModelRecursiveAdaptor`
- *component-class*: `org.richfaces.component.UITreeModelRecursiveAdaptor`
- *component-family*: `org.richfaces.TreeModelRecursiveAdaptor`
- *handler-class*: `org.richfaces.view.facelets.TreeModelRecursiveAdaptorHandler`

Menus and toolbars

Read this chapter for details on menu and toolbar components.

12.1. <rich:dropDownMenu>

The <rich:dropDownMenu> component is used for creating a drop-down, hierarchical menu. It can be used with the <rich:toolbar> component to create menus in an application's toolbar.

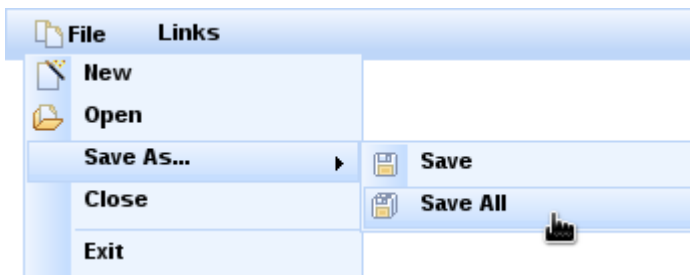


Figure 12.1. <rich:dropDownMenu>

12.1.1. Basic usage

The <rich:dropDownMenu> component only requires the `label` attribute for basic usage. Use the `label` attribute to define the text label that appears as the title of the menu. Clicking on the title drops the menu down.

Alternatively, use the `label` facet to define the menu title. If the `label` facet is used, the `label` attribute is not necessary.

12.1.2. Menu content

To set the content of the drop-down menu and any sub-menus, use the <rich:menuItem>, <rich:menuGroup>, and <rich:menuSeparator> components. These components are detailed in [Section 12.2, “Menu sub-components”](#).

12.1.3. Appearance

Use the `jointPoint` and `direction` attributes to determine the direction and location of the menu when it appears. The `jointPoint` and `direction` attributes both use the following settings:

`topLeft`, `topRight`, `bottomLeft`, `bottomRight`

When used with the `jointPoint` attribute, the menu is attached to the top-left, top-right, bottom-left, or bottom-right of the control as appropriate.

When used with the `direction` attribute, the menu appears to the top-left, top-right, bottom-left, or bottom-right of the joint location as appropriate.

`auto`

The direction or joint location is determined automatically.

`autoLeft`, `autoRight`, `autoTop`, `autoBottom`

When used with the `jointPoint` attribute, the joint location is determined automatically, but defaults to either the left, right, top, or bottom of the control as appropriate.

When used with the `direction` attribute, the menu direction is determined automatically, but defaults to either the left, right, top, or bottom of the joint location as appropriate.

12.1.4. Expanding and collapsing the menu

By default, the menu drops down when the title is clicked. To drop down with a different event, use the `showEvent` attribute to define the event instead.

Menus can be navigated using the keyboard. Additionally, menus can be navigated programmatically using the JavaScript API. The JavaScript API allows the following methods:

`show()`

The `show()` method shows the menu.

`hide()`

The `hide()` method hides the menu.

`activateItem(menuItemId)`

The `activateItem(menuItemId)` activates the menu item with the *menuItemId* identifier.

Use the `mode` attribute to determine how the menu requests are submitted:

- `server`, the default setting, submits the form normally and completely refreshes the page.
- `ajax` performs an Ajax form submission, and re-renders elements specified with the `render` attribute.
- `client` causes the `action` and `actionListener` items to be ignored, and the behavior is fully defined by the nested components or custom JavaScript instead of responses from submissions.

12.1.5. Reference data

- *component-type*: `org.richfaces.DropDownMenu`
- *component-class*: `org.richfaces.component.UIDropDownMenu`
- *component-family*: `org.richfaces.DropDownMenu`
- *renderer-type*: `org.richfaces.DropDownMenuRenderer`

12.1.6. Style classes and skin parameters

Table 12.1. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-ddm-lbl This class defines styles for the label of the drop-down menu.	<i>headerFamilyFont</i>	font-family
.rf-ddm-dis This class defines styles for the drop-down menu when it is disabled.	<i>tabDisabledTextColor</i>	color
.rf-ddm-lbl-dis This class defines styles for the label of the drop-down menu when it is disabled.	<i>headerFamilyFont</i>	font-family
.rf-ddm-pos This class defines the positioning of the drop-down menu.	No skin parameters.	
.rf-ddm-lbl-unsel This class defines styles for the label of the drop-down menu when it is unselected.	No skin parameters.	
.rf-ddm-lst This class defines styles for the drop-down list.	<i>panelBorderColor</i>	border-color
	<i>additionalBackgroundColor</i>	background-color
.rf-ddm-lst-bg This class defines styles for the background of the drop-down list.	<i>additionalBackgroundColor</i>	border-color
.rf-ddm-sublst This class defines the positioning of the menu when used as a sub-menu.	No skin parameters.	
.rf-ddm-itm This class defines styles for a menu item.	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-ddm-itm-sel</code> This class defines styles for a menu item when it is selected.	<code>headerBackgroundColor</code>	<code>border-color</code>
	<code>tabBackgroundColor</code>	<code>background-color</code>
<code>.rf-ddm-itm-unsel</code> This class defines styles for a menu item when it is unselected.	No skin parameters.	
<code>.rf-ddm-itm-dis</code> This class defines styles for a menu item when it is disabled.	<code>tabDisabledTextColor</code>	<code>color</code>
<code>.rf-ddm-itm-lbl</code> This class defines styles for the label in a menu item.	<code>generalTextColor</code>	<code>color</code>
<code>.rf-ddm-itm-ic</code> This class defines styles for the icon in a menu item.	No skin parameters.	
<code>.rf-ddm-emptyIcon</code> This class defines styles for an empty icon in a menu item.	No skin parameters.	
<code>.rf-ddm-sep</code> This class defines styles for a menu separator.	<code>panelBorderColor</code>	<code>border-top-color</code>
<code>.rf-ddm-nd</code> This class defines styles for a menu node.	No skin parameters.	

12.2. Menu sub-components

The `<rich:menuItem>`, `<rich:menuGroup>`, and `<rich:menuSeparator>` components are used to construct menus for the `<rich:dropDownMenu>` component. Refer to [Section 12.1, “<rich:dropDownMenu>”](#) for more details on the `<rich:dropDownMenu>` component.

12.2.1. `<rich:menuItem>`

The `<rich:menuItem>` component represents a single item in a menu control. The `<rich:menuItem>` component can also be used as a separate component without a parent menu component, such as on a toolbar.

12.2.1.1. Basic usage

The <rich:menuItem> component requires the `label` attribute for basic usage. The `label` attribute is the text label for the menu item.

12.2.1.2. Appearance

Icons can be added to menu items through the use of two icon attributes. The `icon` attribute specifies the normal icon, while the `iconDisabled` attribute specifies the icon for a disabled item.

Alternatively, define facets with the names `icon` and `iconDisabled` to set the icons. If facets are defined, the `icon` and `iconDisabled` attributes are ignored. Using facets for icons allows more complex usage; example shows a checkbox being used in place of an icon.

Example 12.1. Icon facets

```
<rich:menuItem value="Show comments">
  <f:facet name="icon">
    <h:selectBooleanCheckbox value="#{bean.property}"/>
  </f:facet>
</rich:menuItem>
```

12.2.1.3. Submission modes

Use the `submitMode` attribute to determine how the menu item requests are submitted:

- `server`, the default setting, submits the form normally and completely refreshes the page.
- `ajax` performs an Ajax form submission, and re-renders elements specified with the `render` attribute.
- `client` causes the `action` and `actionListener` items to be ignored, and the behavior is fully defined by the nested components instead of responses from submissions.

12.2.1.4. JavaScript API

The <rich:menuItem> component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`activate()`

Activate the menu item as though it were selected.

12.2.1.5. Reference data

- *component-type*: `org.richfaces.MenuItem`

- *component-class*: `org.richfaces.component.UIMenuItem`
- *component-family*: `org.richfaces.DropDownMenu`
- *renderer-type*: `org.richfaces.MenuItemRenderer`

12.2.2. <rich:menuGroup>

The <rich:menuGroup> component represents an expandable sub-menu in a menu control. The <rich:menuGroup> component can contain a number of <rich:menuItem> components, or further nested <rich:menuGroup> components.

12.2.2.1. Basic usage

The <rich:menuGroup> component requires the `label` attribute for basic usage. The `label` attribute is the text label for the menu item. Alternatively, use the `label` facet to define content for the label.

Additionally, the <rich:menuGroup> component must contain child <rich:menuItem> components or <rich:menuGroup> components.

12.2.2.2. Appearance

Icons can be added to menu groups through the use of two icon attributes. The `icon` attribute specifies the normal icon, while the `iconDisabled` attribute specifies the icon for a disabled group.

The <rich:menuGroup> component can be positioned using the `jointPoint` and `direction` attributes, the same as the parent menu control. For details on the `jointPoint` and `direction` attributes, refer to [Section 12.1.3, “Appearance”](#).

12.2.2.3. JavaScript API

The <rich:menuGroup> component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`show()`
Show the menu group.

`hide()`
Hide the menu group.

12.2.2.4. Reference data

- *component-type*: `org.richfaces.MenuGroup`
- *component-class*: `org.richfaces.component.UIMenuGroup`
- *component-family*: `org.richfaces.DropDownMenu`
- *renderer-type*: `org.richfaces.MenuGroupRenderer`

12.2.3. <rich:menuSeparator>

The <rich:menuSeparator> component represents a separating divider in a menu control.

12.2.3.1. Basic usage

The <rich:menuSeparator> component does not require any attributes for basic usage. Add it as a child to a menu component to separator menu items and menu groups.

12.2.3.2. Reference data

- *component-type*: org.richfaces.MenuSeparator
- *component-class*: org.richfaces.component.UIMenuSeparator
- *component-family*: org.richfaces.DropDownMenu
- *renderer-type*: org.richfaces.MenuSeparatorRenderer


12.3. <rich:panelMenu>

The <rich:panelMenu> component is used in conjunction with <rich:panelMenuItem> and <rich:panelMenuGroup> to create an expanding, hierarchical menu. The <rich:panelMenu> component's appearance can be highly customized, and the hierarchy can stretch to any number of sub-levels.

Example 12.2. richpanelMenu

```
<rich:panelMenu mode="ajax"
    topGroupExpandedRightIcon="chevronUp"
    topGroupCollapsedRightIcon="chevronDown"
    groupExpandedLeftIcon="disc"
    groupCollapsedLeftIcon="disc">
    <rich:panelMenuGroup label="Group 1">
        <rich:panelMenuItem label="Item 1.1"/>
        <rich:panelMenuItem label="Item 1.2"/>
        <rich:panelMenuItem label="Item 1.3"/>
    </rich:panelMenuGroup>
    <rich:panelMenuGroup label="Group 2">
        <rich:panelMenuItem label="Item 2.1"/>
        <rich:panelMenuItem label="Item 2.2"/>
        <rich:panelMenuItem label="Item 2.3"/>
        <rich:panelMenuGroup label="Group 2.4">
            <rich:panelMenuItem label="Item 2.4.1"/>
            <rich:panelMenuItem label="Item 2.4.2"/>
            <rich:panelMenuItem label="Item 2.4.3"/>
        </rich:panelMenuGroup>
    </rich:panelMenuGroup>
```

```
<rich:panelMenuItem label="Item 2.5"/>
</rich:panelMenuGroup>
<rich:panelMenuItem label="Item 3"/>
</rich:panelMenu>
```

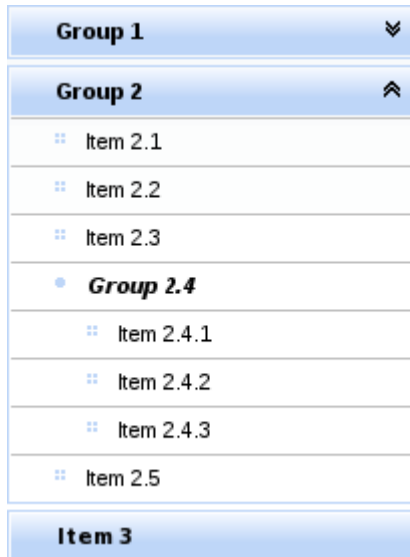

12.3.1. Basic usage

The `<rich:panelMenu>` component does not need any extra attributes declared for basic usage. However, it does require child `<rich:panelMenuGroup>` and `<rich:panelMenuItem>` components. Refer to [Section 12.3.9, “<rich:panelMenuGroup>”](#) and [Section 12.3.10, “<rich:panelMenuItem>”](#) for details on these child components.

12.3.2. Interactivity options

The `activeItem` attribute is used to point to the name of the currently selected menu item.

By default, the event to expand the menu is a mouse click. Set the `expandEvent` attribute to specify a different event to expand menus. Multiple levels of sub-menus can be expanded in one action. Set `expandSingle="true"` to only expand one sub-menu at a time.

Similarly, the default event to collapse the menu is a mouse click. Set the `collapseEvent` attribute to specify a different event to collapse menus.

As with other control components, set `disabled="true"` to disable the `<rich:panelMenu>` component. Child menu components can be disabled in the same way.

12.3.3. Appearance

Icons for the panel menu can be chosen from a set of standard icons. Icons can be set for the top panel menu, child panel menus, and child item. There are three different menu states that the icon represents, as well as icons for both the left and right side of the item title.

`topGroupExpandedLeftIcon`, `topGroupExpandedRightIcon`

These attributes determine the icons for the top level menu when it is expanded.

`topGroupCollapsedLeftIcon`, `topGroupCollapsedRightIcon`

These attributes determine the icons for the top level menu when it is collapsed.

`topGroupDisabledLeftIcon`, `topGroupDisabledRightIcon`

These attributes determine the icons for the top level menu when it is disabled.

`topItemLeftIcon`, `topItemRightIcon`

These attributes determine the icons for a top level menu item.

`topItemDisabledLeftIcon`, `topItemDisabledRightIcon`

These attributes determine the icons for a top level menu item when it is disabled.

`groupExpandedLeftIcon`, `groupExpandedRightIcon`

These attributes determine the icons for sub-menus that are not the top-level menu when they are expanded.

`groupCollapsedLeftIcon`, `groupCollapsedRightIcon`

These attributes determine the icons for sub-menus that are not the top-level menu when they are collapsed.

`groupDisabledLeftIcon`, `groupDisabledRightIcon`

These attributes determine the icons for sub-menus that are not the top-level menu when they are disabled.

`itemLeftIcon`, `itemRightIcon`

These attributes determine the icons for items in the menus.

`itemDisabledLeftIcon`, `itemDisabledRightIcon`

These attributes determine the icons for items in the menus when they are disabled.

[Example 12.2, “richpanelMenu”](#) demonstrates the use of icon declaration at the panel menu level. The standard icons are shown in [Figure 12.2, “<Standard icons>”](#).



Figure 12.2. <Standard icons>

Alternatively, point the icon attributes to the paths of image files. The image files are then used as icons.

Any icons specified by child `<rich:panelMenuGroup>` and `<rich:panelMenuItem>` components overwrite the relevant icons declared with the parent `<rich:panelMenu>` component.

12.3.4. Submission modes

The `itemMode` attribute defines the submission mode for normal menu items that link to content, and the `groupMode` attribute defines the submission mode for menu items that expand and collapse. The settings for these attributes apply to the entire menu unless a menu item defines its own individual `itemMode` or `groupMode`. The possible values for `itemMode` and `groupMode` are as follows:

- `server`, the default setting, which submits the form normally and completely refreshes the page.
- `ajax`, which performs an Ajax form submission, and re-renders elements specified with the `render` attribute.
- `client`, which causes the `action` and `actionListener` items to be ignored, and the behavior is fully defined by the nested components instead of responses from submissions.

12.3.5. `<rich:panelMenu>` server-side events

The `<rich:panelMenu>` component fires the `ItemChangeEvent` event on the server side when the menu is changed. The event only fires in the `server` and `ajax` submission modes. The event provides the `itemChangeListener` attribute to reference the event listener. Refer to [Section 9.6.5, “`<rich:itemChangeListener>`”](#) for details on the `<rich:itemChangeListener>` tag.

12.3.6. JavaScript API

The `<rich:panelMenu>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`expandAll()`

Expand all the panel menu groups in the component.

`collapseAll()`

Collapse all the panel menu groups in the component.

`selectItem(id)`

Select the menu item with the `id` identifier.

12.3.7. Reference data

- *component-type*: `org.richfaces.PanelMenu`
- *component-class*: `org.richfaces.component.UIPanelMenu`
- *component-family*: `org.richfaces.PanelMenu`
- *renderer-type*: `org.richfaces.PanelMenuRenderer`
- *handler-class*: `org.richfaces.view.facelets.html.PanelMenuTagHandler`

12.3.8. Style classes and skin parameters

Table 12.2. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters		Mapped CSS properties
<code>.rf-pm</code> This class defines styles for the panel menu itself.	No skin parameters.		
<code>.rf-pm-gr</code> This class defines styles for a panel menu group.	<code>panelBorderColor</code>		<code>border-top-color</code>
<code>.rf-pm-exp</code> , <code>.rf-pm-colps</code> These classes define styles for the panel menu when it is expanded or collapsed.	No skin parameters.		
<code>.rf-pm-ico</code> This class defines styles for the panel menu icons.	No skin parameters.		
<code>.rf-pm-ico-exp</code> , <code>.rf-pm-ico-colps</code> These classes define styles for the panel menu icons when they are expanded or collapsed.	No skin parameters.		
<code>.rf-pm-hdr-exp</code> , <code>.rf-pm-hdr-colps</code> These classes define styles for the panel menu headers when they are expanded or collapsed.	No skin parameters.		
<code>.rf-pm-itm</code> This class defines styles for a panel menu item.	<code>panelBorderColor</code>		<code>border-top-color</code>
	<code>generalTextColor</code>		<code>color</code>
<code>.rf-pm-itm-gr</code> This class defines styles for a panel menu item as part of a panel menu group.	No skin parameters.		
<code>.rf-pm-itm:hover</code> This class defines styles for a panel menu item	<code>additionalBackgroundColor</code>		<code>background-color</code>

Class (selector)	Skin Parameters	Mapped CSS properties
when the mouse hovers over it.		
.rf-pm-itm-sel This class defines styles for a panel menu item when it is selected.	No skin parameters.	
.rf-pm-itm-dis This class defines styles for a panel menu item when it is disabled.	<i>tabDisabledTextColor</i>	color
.rf-pm-itm-ico This class defines styles for the icon in a panel menu item.	No skin parameters.	
.rf-pm-itm-exp-ico This class defines styles for the icon in a panel menu item when it is expanded.	No skin parameters.	
.rf-pm-itm-lbl This class defines styles for the label in a panel menu item.	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-pm-gr This class defines styles for a panel menu group.	<i>panelBorderColor</i>	border-top-color
.rf-pm-gr-gr This class defines styles for a panel menu group as part of another panel menu group.	No skin parameters.	
.rf-pm-gr-sel This class defines styles for a panel menu group when it is selected.	No skin parameters.	
.rf-pm-gr-hdr This class defines styles for the header of a panel menu group.	<i>generalTextColor</i>	color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-pm-gr-hdr:hover This class defines styles for the header of a panel menu group when the mouse hovers over it.	<i>additionalBackgroundColor</i>	background
.rf-pm-gr-hdr-dis This class defines styles for the header of a panel menu group when it is disabled.	<i>tabDisabledTextColor</i>	color
.rf-pm-gr-ico This class defines styles for the icon in a panel menu group.	No skin parameters.	
.rf-pm-gr-exp-ico This class defines styles for the icon in a panel menu group when it is expanded.	No skin parameters.	
.rf-pm-gr-lbl This class defines styles for the label in a panel menu group.	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-pm-gr-cnt This class defines styles for the content of a panel menu group.	No skin parameters.	
.rf-pm-top-itm This class defines styles for the top panel menu item.	<i>panelBorderColor</i>	border-color
	<i>generalTextColor</i>	color
.rf-pm-top-itm-gr This class defines styles for the top panel menu item as part of a panel menu group.	No skin parameters.	
.rf-pm-top-itm:hover This class defines styles for the top panel menu item when the mouse hovers over it.	<i>headerTextColor</i>	color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-pm-top-itm-sel This class defines styles for the top panel menu item when it is selected.	No skin parameters.	
.rf-pm-top-itm-dis This class defines styles for the top panel menu item when it is disabled.	<i>tabDisabledTextColor</i>	color
.rf-pm-top-itm-ico This class defines styles for the icon in the top panel menu item.	No skin parameters.	
.rf-pm-top-itm-exp-ico This class defines styles for the icon in the top panel menu item when it is expanded.	No skin parameters.	
.rf-pm-top-itm-lbl This class defines styles for the label in the top panel menu item.	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-pm-top-gr This class defines styles for the top panel menu group.	<i>panelBorderColor</i>	border-color
.rf-pm-top-gr-gr This class defines styles for the top panel menu group as part of another panel menu group.	No skin parameters.	
.rf-pm-top-gr-sel This class defines styles for the top panel menu group when it is selected.	No skin parameters.	
.rf-pm-top-gr-hdr This class defines styles for the header of the top panel menu group.	<i>headerTextColor</i>	color
	<i>headerBackgroundColor</i>	background-color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-pm-top-gr-hdr-dis This class defines styles for the header of the top panel menu group when it is disabled.	<i>tabDisabledTextColor</i>	color
	<i>additionalBackgroundColor</i>	background-color
.rf-pm-top-gr-ico This class defines styles for the icon in the top panel menu group.	No skin parameters.	
.rf-pm-top-gr-exp-ico This class defines styles for the icon in the top panel menu group when it is expanded.	No skin parameters.	
.rf-pm-top-gr-lbl This class defines styles for the label in the top panel menu group.	<i>generalSizeFont</i>	font-size
	<i>generalFamilyFont</i>	font-family
.rf-pm-top-gr-cnt This class defines styles for the content of the top panel menu group.	No skin parameters.	

12.3.9. <rich:panelMenuGroup>

The <rich:panelMenuGroup> component defines a group of <rich:panelMenuItem> components inside a <rich:panelMenu>.

12.3.9.1. Basic usage

The <rich:panelMenuGroup> component needs the `label` attribute declared, which specifies the text to show for the menu entry. Alternatively, the `label` facet can be used to specify the menu text.

In addition, the <rich:panelMenuGroup> component at least one <rich:panelMenuGroup> or <rich:panelMenuItem> components as child elements.

12.3.9.2. Appearance

Icons for the menu group are inherited from the parent <rich:panelMenu> component. Refer to [Section 12.3.3, “Appearance”](#) for details on icon attributes and facets. Alternatively, the menu group's icons can be re-defined at the <rich:panelMenuGroup> component level, and these settings will be used instead of the parent component's settings.

12.3.9.3. Submission modes

If the mode attribute is unspecified, the submission behavior for the group is inherited from the parent `<rich:panelMenu>`. Otherwise, the `groupMode` setting of the panel menu is used instead of the parent's behavior. Refer to [Section 12.3.4, “Submission modes”](#) for submission mode settings.

12.3.9.4. `<rich:panelMenuGroup>` server-side events

The `<rich:panelMenuGroup>` component fires the `ActionEvent` event on the server side when the menu group receives a user action. The event only fires in the server and ajax submission modes. The event provides the `action` attribute to specify the user action method, and the `actionListener` attribute to reference the event listener.

12.3.9.5. JavaScript API

The `<rich:panelMenuGroup>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`expand()`

Expand this panel menu group.

`collapse()`

Collapse this panel menu group.

`select(id)`

Select the menu item with the *id* identifier.

12.3.9.6. Reference data

- *component-type*: `org.richfaces.PanelMenuGroup`
- *component-class*: `org.richfaces.component.UIPanelMenuGroup`
- *component-family*: `org.richfaces.PanelMenuGroup`
- *renderer-type*: `org.richfaces.PanelMenuGroupRenderer`

12.3.10. `<rich:panelMenuItem>`

The `<rich:panelMenuItem>` component represents a single item inside a `<rich:panelMenuGroup>` component, which is in turn part of a `<rich:panelMenu>` component.

12.3.10.1. Basic usage

The `<rich:panelMenuItem>` component needs the `label` attribute declared, which specifies the text to show for the menu entry. Alternatively, the `label` facet can be used to specify the menu text.

12.3.10.2. Appearance

Icons for the menu item are inherited from the parent `<rich:panelMenu>` or `<rich:panelMenuGroup>` component. Refer to [Section 12.3.3, “Appearance”](#) for details on

icon attributes and facets. Alternatively, the menu item's icons can be re-defined at the <rich:panelMenuItem> component level, and these settings will be used instead of the parent component's settings.

12.3.10.3. Submission modes

If the mode is unspecified, the submission behavior for the item is inherited from the parent <rich:panelMenu>. Otherwise, the `itemMode` setting from the panel menu is used instead of the parent's behavior.

12.3.10.4. <rich:panelMenuItem> server-side events

The <rich:panelMenuItem> component fires the `ActionEvent` event on the server side when the menu item receives a user action. The event only fires in the server and ajax submission modes. The event provides the `action` attribute to specify the user action performed, and the `actionListener` attribute to reference the event listener.

12.3.10.5. JavaScript API

The <rich:panelMenuItem> component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`select()`

Select this menu item.

12.3.10.6. Reference data

- *component-type*: `org.richfaces.PanelMenuItem`
- *component-class*: `org.richfaces.component.UIPanelMenuItem`
- *component-family*: `org.richfaces.PanelMenuItem`
- *renderer-type*: `org.richfaces.PanelMenuItemRenderer`

12.4. <rich:toolbar>

The <rich:toolbar> component is a horizontal toolbar. Any JavaServer Faces (JSF) component can be added to the toolbar.



Figure 12.3. <rich:toolbar>

12.4.1. Basic usage

The <rich:toolbar> component does not require any attributes to be defined for basic usage. Add child components to the <rich:toolbar> component to have them appear on the toolbar when rendered.

Example 12.3. Basic usage

```
<rich:toolbar>
  <h:commandLink value="News" />
  <h:commandLink value="Reviews" />
  <h:commandLink value="Galleries" />
</rich:toolbar>
```

12.4.2. Appearance

Set the width and height of the toolbar using the common width and height attributes.

Items on the toolbar can be separated by a graphical item separator. Use the `itemSeparator` attribute to specify one of the standard separator styles:

- none, the default appearance, does not show any item separators.
- disc shows a small circular disc to separate items:

- grid shows a grid pattern to separate items:

- line shows a vertical line to separate items:

- square shows a small square to separate items:


Alternatively, use the `itemSeparator` attribute to specify a URL to an image. The image is then used as an item separator. The appearance of the item separator can be additionally customized by using the `itemSeparator` facet.

12.4.3. Grouping items

Group together multiple items on the toolbar by using the `<rich:toolbarGroup>` child component. Refer to [Section 12.4.6, “<rich:toolbarGroup>”](#) for full details on the `<rich:toolbarGroup>` component.

12.4.4. Reference data

- *component-type*: `org.richfaces.Toolbar`

- *component-class*: `org.richfaces.component.UIToolbar`
- *component-family*: `org.richfaces.Toolbar`
- *renderer-type*: `org.richfaces.ToolbarRenderer`

12.4.5. Style classes and skin parameters

Table 12.3. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-tb This class defines styles for the toolbar itself.	<i>panelBorderColor</i>	border-color
	<i>headerTextColor</i>	color
	<i>headerBackgroundColor</i>	background-color
	<i>headerFamilyFont</i>	font-family
	<i>headerSizeFont</i>	font-size
	<i>headerWeightFont</i>	font-weight
.rf-tb-itm This class defines styles for an item in the toolbar.	No skin parameters.	
.rf-tb-sep This class defines styles for a separator in the toolbar.	No skin parameters.	
.rf-tb-sep-grid, .rf-tb-sep-line, .rf-tb-sep-disc, .rf-tb-sep-square These classes define styles for grid, line, disc, and square separators.	No skin parameters.	
.rf-tb-cntr This class defines styles for the container of the toolbar.	No skin parameters.	

12.4.6. <rich:toolbarGroup>

The <rich:toolbarGroup> component is a child component of the <rich:toolbar> component. The <rich:toolbarGroup> component is used to group a number of items together on a toolbar.

12.4.6.1. Basic usage

Like the <rich:toolbar> parent component, the <rich:toolbarGroup> component does not require any extra attributes for basic functionality. Add child components to the

`<rich:toolbarGroup>` component to have them appear grouped on the parent toolbar when rendered.

12.4.6.2. Appearance

Similar to the `<rich:toolbar>` component, items within a `<rich:toolbarGroup>` can be separated by specifying the `itemSeparator` attribute. Refer to [Section 12.4.2, “Appearance”](#) for details on using the `itemSeparator` attribute.

Groups of toolbar items can be located on either the left-hand side or the right-hand side of the parent toolbar. By default, they appear to the left. To locate the toolbar group to the right of the parent toolbar, set `location="right"`.

Example 12.4. `<rich:toolbarGroup>`

```
<rich:toolBar height="26" itemSeparator="grid">
  <rich:toolBarGroup>
    <h:graphicImage value="/images/icons/create_doc.gif"/>
    <h:graphicImage value="/images/icons/create_folder.gif"/>
    <h:graphicImage value="/images/icons/copy.gif"/>
  </rich:toolBarGroup>
  <rich:toolBarGroup>
    <h:graphicImage value="/images/icons/save.gif"/>
    <h:graphicImage value="/images/icons/save_as.gif"/>
    <h:graphicImage value="/images/icons/save_all.gif"/>
  </rich:toolBarGroup>
  <rich:toolBarGroup location="right">
    <h:graphicImage value="/images/icons/find.gif"/>
    <h:graphicImage value="/images/icons/filter.gif"/>
  </rich:toolBarGroup>
</rich:toolBar>
```

The example shows how to locate a toolbar group to the right-hand side of the parent toolbar. It also demonstrates how item separators on the parent toolbar work with toolbar groups.



12.4.6.3. Reference data

- *component-type*: `org.richfaces.ToolbarGroup`
- *component-class*: `org.richfaces.component.UIToolbarGroup`
- *component-family*: `org.richfaces.Toolbar`
- *renderer-type*: `org.richfaces.ToolbarGroupRenderer`

Output and messages

Read this chapter for details on components that display messages and other feedback to the user.

13.1. <rich:message>

The <rich:message> component renders a single FacesMessage message instance added for the component. The appearance of the message can be customized, and tool-tips can be used for further information about the message.

The <rich:message> component is rendered in the same way as the standard <h:message> component, but allows separate styling of the message summary and detail. It allows unified icons to be set using background images in predefined classes.




Figure 13.1. rich:message component

13.1.1. Basic usage

The <rich:message> component needs the for attribute to point to the id identifier of the related component. The message is displayed after the FacesMessage message instance is created and added for the client identifier of the related component.

The <rich:message> component is automatically rendered after an Ajax request. This occurs without the use of an <ajax:outputPanel> component or a specific reference through the render attribute of the Ajax request source.

Example 13.1. rich:message example

```
<h:outputText value="Zip:" />
<h:inputText label="Zip" id="zip" required="true"
    value="#{userBean.zip}">
    <f:validateLength minimum="4" maximum="9" />
</h:inputText>
<rich:message for="zip" ajaxRendered="true"/>
```

The example contains a text input for zip codes. The simple validation requires the entered zip code to be between 4 and 9 characters long. The <rich:message> component references the input box, and reports any messages relating to the input validation.

13.1.2. Appearance

The `showSummary` attribute specifies whether to display only a summary of the full message. The full message can be displayed in a tool-tip when hovering the mouse over the summary.

Use CSS (Cascading Style Sheets) to customize the appearance and icon for the `<rich:message>` component. To use a custom icon, set the `background-image` property to the icon graphic, as shown in [Example 13.2, “Message icons”](#). Refer to [Section 13.1.4, “Style classes and skin parameters”](#) for a complete list of style classes for the `<rich:message>` component.

Example 13.2. Message icons

```
.rf-msg-err{
    background-image: url('#{facesContext.getExternalContext().requestContextPath}/
images/icons/error.gif');
}
```

The example demonstrates how an icon for an error message could be added using CSS.

13.1.3. Reference data

- *component-type*: `org.richfaces.RichMessage`
- *component-class*: `org.richfaces.component.UIRichMessage`
- *component-family*: `javax.faces.Message`
- *renderer-type*: `org.richfaces.MessageRenderer`

13.1.4. Style classes and skin parameters

Table 13.1. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-msg</code> This class defines styles for the message itself.	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
<code>.rf-msg-err</code> This class defines styles for an error message.	<i>errorColor</i>	color
<code>.rf-msg-ftl</code> This class defines styles for a fatal message.	<i>errorColor</i>	color

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-msg-inf This class defines styles for an information message.	<i>generalTextColor</i>	color
.rf-msg-wrn This class defines styles for a warning message.	<i>warningTextColor</i>	color
.rf-msg-ok This class defines styles for a basic OK message.	<i>generalTextColor</i>	color
.rf-msg-sum, .rf-msg-det These classes define styles for the summary or details of a message.	No skin parameters.	

13.2. <rich:messages>

The <rich:messages> component works similarly to the <rich:message> component, but can display all the validation messages added for the current view instead of just a single message. Refer to [Section 13.1, “<rich:message>”](#) for details on the <rich:message> component.




Figure 13.2. rich:messages component

13.2.1. Basic usage

The <rich:messages> component doesn't require any extra attributes for basic usage. It displays all messages relating to requests from components.

To limit the messages to a specific component, use the `for` attribute to reference the component's identifier.

To show only those messages that are not attached to specific components, set `globalOnly="true"`.

The <rich:messages> component is automatically rendered after an Ajax request. This occurs without the use of an <ajax:outputPanel> component or a specific reference through the `render` attribute of the Ajax request source.

13.2.2. Appearance

The `<rich:messages>` component displays error messages for each validating component in the same container.

The `<rich:messages>` component can be further styled through CSS, the same as for the `<rich:message>` component. Refer to [Section 13.1.2, “Appearance”](#) for an example of message styling, and refer to [Section 13.2.4, “Style classes and skin parameters”](#) for a complete list of style classes for the `<rich:message>` component.

The layout of the messages can also be customized through CSS. By default, the messages are arranged in a block as shown in [Figure 13.3, “Messages in a block”](#).

Figure 13.3. Messages in a block

Override the display property for all CSS message classes to customize the layout as follows:

Display messages in a list with no icons

To display the messages in a list format without the default icons, override the message styles as follows:

```
.rf-msg-err, .rf-msgs-err, .rf-msg-ftl, .rf-msgs-ftl, .rf-msg-inf,
.rf-msgs-inf, .rf-msg-wrn, .rf-msgs-wrn, .rf-msg-ok, .rf-msgs-ok {
    display: list-item;
    margin-left: 20px;
    padding-left: 0px; }

.rf-msg-err, .rf-msgs-err{ background-image:none; }
```

Figure 13.4. Messages in a list

Display in-line messages

To display the messages in line with text, override the message styles as follows:

```
.rf-msg-err, .rf-msgs-err, .rf-msg-ftl, .rf-msgs-ftl, .rf-msg-inf,
.rf-msgs-inf, .rf-msg-wrn, .rf-msgs-wrn, .rf-msg-ok, .rf-msgs-ok
{ display:inline; }
```

Figure 13.5. In-line messages

13.2.3. Reference data

- *component-type*: org.richfaces.RichMessages
- *component-class*: org.richfaces.component.UIRichMessages
- *component-family*: javax.faces.Messages
- *renderer-type*: org.richfaces.MessagesRenderer

13.2.4. Style classes and skin parameters

Table 13.2. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
.rf-msgs This class defines styles for the message itself.	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size
.rf-msgs-err This class defines styles for an error message.	<i>errorColor</i>	color
.rf-msgs-ftl This class defines styles for a fatal message.	<i>errorColor</i>	color
.rf-msgs-inf This class defines styles for an information message.	<i>generalTextColor</i>	color
.rf-msgs-wrn This class defines styles for a warning message.	<i>warningTextColor</i>	color
.rf-msgs-ok This class defines styles for a basic OK message.	<i>generalTextColor</i>	color
.rf-msgs-sum, .rf-msgs-det These classes define styles for the summary or details of a message.	No skin parameters.	

13.3. <rich:progressBar>

The <rich:progressBar> component displays a progress bar to indicate the status of a process to the user. It can update either through Ajax or on the client side, and the look and feel can be fully customized.



Figure 13.6. `<rich:progressBar>`

13.3.1. Basic usage

Basic usage of the `<rich:progressBar>` component requires the `value` attribute, which points to the property that holds the current progress value. When the value is greater than or equal to the minimum value (0 by default), the progress bar becomes active, and starts sending Ajax requests if in ajax mode.

Example 13.3. Basic usage

```
<rich:progressBar value="#{bean.incValue}" />
```

13.3.2. Customizing the appearance

By default, the minimum value of the progress bar is 0 and the maximum value of the progress bar is 100. These values can be customized using the `minValue` and `maxValue` attributes respectively.

The progress bar can be labeled in one of two ways:

Using the `label` attribute

The content of the `label` attribute is displayed over the progress bar.

Example 13.4. Using the `label` attribute

```
<rich:progressBar value="#{bean.incValue}" id="progrs" label="#{bean.incValue}
% complete"/>
```

Using nested child components

Child components, such as the JSF `<h:outputText>` component, can be nested in the `<rich:progressBar>` component to display over the progress bar.

Example 13.5. Using nested child components

```
<rich:progressBar value="#{bean.incValue}">
    <h:outputText value="#{bean.incValue} % complete"/>
</rich:progressBar>
```

Define the initial and finish facets to customize the progress bar's appearance before progress has started and after progress has finished. When the current progress bar value is less

than the minimum value, the `initial` facet is displayed. When the current progress bar is greater than the maximum value, the `finish` facet is displayed.

Example 13.6. Initial and finished states

```
<rich:progressBar value="#{bean.incValue1}">
  <f:facet name="initial">
    <h:outputText value="Process has not started"/>
  </f:facet>
  <f:facet name="finish">
    <h:outputText value="Process has completed"/>
  </f:facet>
</rich:progressBar>
```

13.3.3. Update mode

The mode for updating the progress bar is determined by the `mode` attribute, which can have one of the following values:

ajax

The progress bar updates in the same way as the `<a4j:poll>` component. The `<rich:progressBar>` component repeatedly polls the server for the current progress value.

client

The progress bar must be explicitly updated on the client side through the JavaScript API.

13.3.4. Using set intervals

The `<rich:progressBar>` component can be set to constantly poll for updates at a constant interval. Use the `interval` component to set the interval in milliseconds. The progress bar is updated whenever the polled value changes. Polling is only active when the `enabled` attribute is set to `true`.

Example 13.7. Using set intervals

```
<rich:progressBar value="#{bean.incValue1}" progressInterval="500" enabled="#{bean.enabled1}"/>
```

13.3.5. JavaScript API

The `<rich:progressBar>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

`getValue()`

Return the current value displayed on the progress bar.

`setValue()`

Set the current value to display on the progress bar.

`getMinValue()`

Return the minimum value for the progress bar.

`getMaxValue()`

Return the maximum value for the progress bar.

`disable()`

Disables the progress bar.

`enable()`

Enables the progress bar.

`isEnabled()`

Returns a boolean value indicating whether the progress bar is enabled.

13.3.6. Reference data

- *component-type*: `org.richfaces.ProgressBar`
- *component-class*: `org.richfaces.component.UIProgressBar`
- *component-family*: `org.richfaces.ProgressBar`
- *renderer-type*: `org.richfaces.ProgressBarRenderer`

13.3.7. Style classes and skin parameters

Table 13.3. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters		Mapped CSS properties
<code>.rf-pb-lbl</code> This class defines styles for labels on the progress bar.	No skin parameters.		
<code>.rf-pb-prgs</code> This class defines styles for the progressed portion of the progress bar.	<code>panelBorderColor</code>		<code>border-color</code>
	<code>selectControlColor</code>		<code>background-color</code>
<code>.rf-pb-init</code> , <code>.rf-pb-fin</code> These classes define styles for the initial state and finished state.	<code>generalTextColor</code>		<code>color</code>
	<code>generalFamilyFont</code>		<code>font-family</code>
	<code>generalSizeFont</code>		<code>font-size</code>

13.4. <rich:tooltip>

The <rich:tooltip> component provides an informational tool-tip. The tool-tip can be attached to any control and is displayed when hovering the mouse cursor over the control.



Figure 13.7. <rich:tooltip>

13.4.1. Basic usage

For basic usage, define the tool-tip text using the `value` attribute. The <rich:tooltip> component is then automatically attached to the parent element, and is usually shown when the mouse cursor hovers.

Alternatively, the content of the tool-tip can be defined inside the <rich:tooltip> tags, and the `value` attribute is not used. This allows HTML tags to be used to define the content, and provides for rich content such as images, links, buttons, and other RichFaces components.

Example 13.8. Defining tool-tip content

Basic content

```
<rich:panel>
  <rich:toolTip value="This is a tool-tip."/>
</rich:panel>
```

Rich content

```
<rich:panel>
  <rich:toolTip>
    This is a <b>tool-tip</b>.
  </rich:toolTip>
</rich:panel>
```

13.4.2. Attaching the tool-tip to another component

If not otherwise specified, the tool-tip is attached to the parent element in which it is defined. The `target` attribute is used to attach the tool-tip to another component, pointing to the target

component's id identifier. This allows the `<rich:tooltip>` component to be specified outside the target element. This approach is demonstrated in [Example 13.9, “Attaching the tool-tip”](#).

Example 13.9. Attaching the tool-tip

```
<rich:panel id="panelId">
...
</rich:panel>

<rich:tooltip value="This is a tool-tip." target="panelId"/>
```

The `<rich:tooltip>` component can alternatively be left unattached, and is instead invoked through an event handler on the target component. To leave the `<rich:tooltip>` component unattached, set `attached="false"`, and define the event handler to trigger the tool-tip on the target component. This approach is demonstrated in [Example 13.10, “Unattached tool-tips”](#). When leaving the `<rich:tooltip>` component unattached, ensure it has an id identifier defined. If it is defined outside the target element, it must be nested in an `<a4j:form>` component.

Example 13.10. Unattached tool-tips

```
<rich:panel id="panelId" onclick="#{rich:component("tooltipId").show(event)}" />
</rich:panel>

<a4j:form>
  <rich:tooltip id="tooltipId" attached="false" value="This is a tool-tip."/>
</a4j:form>
```

13.4.3. Appearance

By default, the `<rich:tooltip>` component is positioned intelligently based on the position of the mouse cursor. Use the `jointPoint` attribute to specify a corner of the target component at which to display the tool-tip instead, and use the `direction` attribute to specify the direction the tool-tip will appear relative to that corner. Possible values for both attributes are `top-left`, `top-right`, `bottom-left`, and `bottom-right`. Use the `horizontalOffset` and `verticalOffset` attributes to specify the horizontal offset and vertical offset at which to display the tool-tip.

Use the `showEvent` attribute to specify when the tool-tip is shown. By default it appears when the attached component is hovered-over with the mouse. Use the `hideEvent` attribute to specify when the tool-tip is hidden. The default value is `none`, so the tool-tip remains shown. However, it can be linked to an event on the target component, such as the `mouseout` event.

Set `followMouse="true"` to cause the tool-tip to follow the user's mouse movements.

Advanced appearance features are demonstrated in [Example 13.11, “Advanced tool-tip usage”](#).

13.4.4. Update mode

The mode for updating the tool-tip is determined by the mode attribute, which can have one of the following values:

ajax

The tool-tip content is requested from the server with every activation.

client

The tool-tip content is rendered once on the server. An external submit causes the content to re-render.

When using mode="ajax", define the defaultContent facet. The tool-tip displays the content of the defaultContent facet while loading the actual content from the server.

Example 13.11. Advanced tool-tip usage

```
<h:commandLink value="Simple Link" id="link">
    <rich:toolTip followMouse="true" direction="top-
right" mode="ajax" value="#{bean.toolTipContent}"
    horizontalOffset="5" verticalOffset="5" layout="block">
        <f:facet name="defaultContent">
            <f:verbatim>Loading...</f:verbatim>
        </f:facet>
    </rich:toolTip>
</h:commandLink>
```

13.4.5. <rich:tooltip> client-side events

The <rich:tooltip> component supports the following client-side events:

click

This event is activated when the tool-tip is clicked with the mouse.

dblclick

This event is activated when the tool-tip is double-clicked with the mouse.

mouseout

This event is activated when the mouse cursor leaves the tool-tip.

mousemove

This event is activated when the mouse cursor moves over the tool-tip.

mouseover

This event is activated when the mouse cursor hovers over the tool-tip.

show

This event is activated when the tool-tip is shown.

complete

This event is activated when the tool-tip is completed.

hide

This event is activated when the tool-tip is hidden.

13.4.6. JavaScript API

The `<rich:tooltip>` component can be controlled through the JavaScript API. The JavaScript API provides the following functions:

show(event)

Show the tool-tip.

hide()

Hide the tool-tip.

13.4.7. Reference data

- *component-type*: `org.richfaces.Tooltip`
- *component-class*: `org.richfaces.component.UITooltip`
- *component-family*: `org.richfaces.Tooltip`
- *renderer-type*: `org.richfaces.TooltipRenderer`

13.4.8. Style classes and skin parameters

Table 13.4. Style classes (selectors) and corresponding skin parameters

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-tt</code> This class defines styles for the tool-tip itself.	No skin parameters.	
<code>.rf-tt-loading</code> This class defines styles for the tool-tip when it is loading.	No skin parameters.	
<code>.rf-tt-cnt</code> This class defines styles for the tool-tip content.	No skin parameters.	

Class (selector)	Skin Parameters	Mapped CSS properties
<code>.rf-tt-cntr</code> This class defines styles for the progressed portion of the progress bar.	<i>tipBorderColor</i>	border-color
	<i>generalFamilyFont</i>	font-family
	<i>generalSizeFont</i>	font-size

Drag and drop

Read this chapter for details on adding drag and drop support to controls.

14.1. <rich:dragSource>

The <rich:dragSource> component can be added to a component to indicate it is capable of being dragged by the user. The dragged item can then be dropped into a compatible drop area, designated using the <rich:dropTarget> component.

14.1.1. Basic usage

To add drag support to a component, attach the <rich:dragSource> component as a child element.

The type attribute must be specified, and can be any identifying string. Dragged items can only be dropped in drop zones where the type attribute of the <rich:dragSource> component is listed in the acceptedTypes attribute of the <rich:dropTarget> component.

14.1.2. Dragging an object

Use the dragIndicator parameter to customize the appearance of a dragged object while it is being dragged. The dragIndicator parameter must point to the id identifier of a <rich:dragIndicator> component. If the dragIndicator attribute is not defined, the drag indicator appears as a clone of the <rich:dragSource> component's parent control.

To bind data to the dragged object, use the dragValue attribute. The dragValue attribute specifies a server-side object, which is then bound to the parent component when it is dragged. This facilitates handling event data during a drop event.

14.1.3. Reference data

- *component-type*: org.richfaces.DragSource
- *component-class*: org.richfaces.component.UIDragSource
- *component-family*: org.richfaces.DragSource
- *renderer-type*: org.richfaces.DragSourceRenderer

14.2. <rich:dropTarget>

The <rich:dropTarget> component can be added to a component so that the component can accept dragged items. The dragged items must be defined with a compatible drop type for the <rich:dragSource> component.

14.2.1. Basic usage

To allow dragged items to be dropped on a component, attach the `<rich:dropTarget>` component as a child element to the component.

The `acceptedTypes` attribute must be specified. The `acceptedTypes` attribute is a comma-separated list of strings that match the types of dragged items. Dragged items can only be dropped in drop zones where the `type` attribute of the `<rich:dragSource>` component is listed in the `acceptedTypes` attribute of the `<rich:dropTarget>` component.

The `acceptedTypes` attribute can optionally be set to either `@none` or `@all`. If set to `@none`, the component will not accept any type of dropped object. If set to `@all`, the component accepts all dropped objects. If the `acceptedTypes` attribute is not specified, the default value is `null`, which is the same as a `@none` setting.

14.2.2. Handling dropped data

To provide additional parameters for the server-side drop event, use the `dropValue` attribute.

The `<rich:dropTarget>` component raises the `DropEvent` server-side event when an object is dropped. The event uses the following parameters:

- The `dragSource` identifies the component being dragged (the parent of the `<rich:dragSource>` component).
- The `dragValue` parameter is the content of the `<rich:dragSource>` component's `dragValue` attribute.
- The `dropValue` parameter is the content of the `<rich:dropTarget>` component's `dropValue` attribute.

14.2.3. Reference data

- `component-type`: `org.richfaces.DropTarget`
- `component-class`: `org.richfaces.component.UIDropTarget`
- `component-family`: `org.richfaces.DropTarget`
- `renderer-type`: `org.richfaces.DropTargetRenderer`
- `handler-class`: `org.richfaces.view.facelets.DropHandler`

14.2.4. Style classes

Style classes (selectors)

`.rf-drp-hvr`

This class defines styles for the drop target when a dragged item is hovering over it.

`.rf-drp-hlight`

This class defines styles for a highlighted drop target.

14.3. `<rich:dragIndicator>`

The `<rich:dragIndicator>` component defines a graphical element to display under the mouse cursor during a drag-and-drop operation.

14.3.1. Basic usage

To use a drag indicator, define the inner content that appears during a drag event. No additional attributes are required. If a drag indicator is not used, a clone of the drag source is used instead.

14.3.2. Styling the indicator

The drag indicator can be styled depending on the current state of the dragged element. There are three attributes for different states. The attributes reference the CSS class to use for styling the drag indicator when the dragged element is in the relevant state.

`acceptClass`

The `acceptClass` attribute specifies the style when the dragged element is over an acceptable drop target. It indicates that the `type` attribute of the element's `<rich:dragSource>` component matches `acceptedTypes` attribute of the drop target's `<rich:dropTarget>` component.

`rejectClass`

The `rejectClass` attribute specifies the style when the dragged element is over a drop target that is not acceptable. It indicates that the `type` attribute of the element's `<rich:dragSource>` component is not found in the `acceptedTypes` attribute of the drop target's `<rich:dropTarget>` component.

`draggingClass`

The `draggingClass` attribute specifies the style when the dragged element is being dragged. It indicates that the dragged element is not over a drop target.

14.3.3. Reference data

- *component-type*: `org.richfaces.DragIndicator`
- *component-class*: `org.richfaces.component.UIDragIndicator`
- *component-family*: `org.richfaces.DragIndicator`
- *renderer-type*: `org.richfaces.DragIndicatorRenderer`

14.3.4. Style classes

Style classes (selectors)

`.rf-ind`

This class defines styles for the drag indicator.

`.rf-ind-drag.accept`

This class defines styles for the indicator when it is over an acceptable drop target.

`.rf-ind-drag.reject`

This class defines styles for the indicator when it is over an unacceptable drop target.

`.rf-ind-drag.default`

This class defines styles for the indicator when it is being dragged, and is not over any drop targets.

Layout and appearance

Read this chapter to alter the layout and appearance of web applications using special components.

15.1. <rich:jQuery>

The <rich:jQuery> component applies styles and custom behavior to both JSF (JavaServer Faces) objects and regular DOM (Document Object Model) objects. It uses the jQuery JavaScript framework to add functionality to web applications.

15.1.1. Basic usage

The query triggered by the <rich:jQuery> component is specified using the query attribute.

With the query defined, the component is used to trigger the query as either a *timed query* or a *named query*. The query can be bound to an event to act as an *event handler*. These different approaches are covered in the following sections.

15.1.2. Defining a selector

Any objects or lists of objects used in the query are specified using the selector attribute. The selector attribute references objects using the following method:

- The selector attribute can refer to the id identifier of any JSF component or client.
- If the selector attribute does not match the id identifier attribute of any JSF components or clients on the page, it instead uses syntax defined by the World Wide Web Consortium (W3C) for the CSS rule selector. Refer to the syntax specification at <http://api.jquery.com/category/selectors/> for full details.

Because the selector attribute can be either an id identifier attribute or CSS selector syntax, conflicting values could arise. *Example 15.1, “Avoiding syntax confusion”* demonstrates how to use double backslashes to escape colon characters in id identifier values.

Example 15.1. Avoiding syntax confusion

```
<h:form id="form">
  <h:panelGrid id="menu">
    <h:graphicImage value="pic1.jpg" />
    <h:graphicImage value="pic2.jpg" />
  </h:panelGrid>
</h:form>
```

The `id` identifier for the `<h:panelGrid>` element is `form:menu`, which can conflict with CSS selector syntax. Double backslashes can be used to escape the colon character such that the identifier is read correctly instead of being interpreted as CSS selector syntax.

```
<rich:jQuery selector="#form\\:menu img" query="..." />
```

15.1.3. Event handlers

Queries set as event handlers are triggered when the component specified in the `selector` attribute raises an event. The query is bound to the event defined using the `event` attribute.

Use the `attachType` attribute to specify how the event-handling queries are attached to the events:

`bind`

This is the default for attaching queries to events. The event handler is bound to all elements currently defined by the `selector` attribute.

`live`

The event handler is bound to all current and future elements defined by the `selector` attribute.

`one`

The event handler is bound to all elements currently defined by the `selector` attribute. After the first invocation of the event, the event handler is unbound such that it no longer fires when the event is raised.

15.1.4. Timed queries

Timed queries are triggered at specified times. This can be useful for calling simple methods when a page is rendered, or for adding specific functionality to an element. Use the `timing` attribute to specify the point at which the timed query is triggered:

`domready`

This is the default behavior. The query is triggered when the document is loaded and the DOM is ready. The query is called as a `jQuery()` function.

`immediate`

The query is triggered immediately. The query is called as an in-line script.

Example 15.2. `<rich:jQuery>` example

```
<rich:dataTable id="customList" ... >
  ...
</rich:dataTable>
```

```
<rich:jQuery selector="#customList"
  tr:odd" timing="domready" query="addClass(odd)" />
```

In the example, the selector picks out the odd `<tr>` elements that are children of the element with an `id="customList"` attribute. The query `addClass(odd)` is then performed on the selection during page loading (load) such that the `odd` CSS class is added to the selected elements.

Make	Model	Price	Mileage
Chevrolet	Corvette	39858	64699.0
Chevrolet	Corvette	38091	38014.0
Chevrolet	Corvette	18427	64568.0
Chevrolet	Corvette	35277	79994.0
Chevrolet	Corvette	47206	19290.0
Chevrolet	Malibu	52155	5242.0
Chevrolet	Malibu	41576	73266.0
Chevrolet	Malibu	41762	16542.0

15.1.5. Named queries

Named queries are given a name such that they can be triggered by other functions or handlers. Use the `name` attribute to name the query. The query can then be accessed as though it were a JavaScript function using the specified `name` attribute as the function name.

Calls to the function must pass a direct reference (`this`) to the calling object as a parameter. This is treated the same as an item defined through the `selector` attribute.

If the function requires extra parameters itself, these are provided in JavaScript Object Notation (JSON) syntax as a second parameter in the JavaScript call. The `options` namespace is then used in the `<rich:jQuery>` query to access the passed function parameters. [Example 15.3, "Calling a `<rich:jQuery>` component as a function"](#) demonstrates the use of the `name` attribute and how to pass function parameters through the JavaScript calls.

Example 15.3. Calling a `<rich:jQuery>` component as a function

```
<h:graphicImage width="50" value="/images/price.png"
  onmouseover="enlargePic(this,{pwidth:'60px'})" onmouseout="releasePic(this)" />
<h:graphicImage width="50" value="/images/discount.png"
  onmouseover="enlargePic(this,{pwidth:'100px'})" onmouseout="releasePic(this)" />
...
<rich:jQuery name="enlargePic" query="animate({width:options.pwidth})" />
<rich:jQuery name="releasePic" query="animate({width:'50px'})"/>
```

The example enlarges the images when the mouse moves over them. The `enlargePic` and `releasePic` components are called like ordinary JavaScript functions from the image elements.

15.1.6. Dynamic rendering

The `<rich:jQuery>` component applies style and behavioral changes to DOM objects dynamically. As such, changes applied during an Ajax response are overwritten, and will need to be re-applied once the Ajax response is complete.

Any timed queries with the `timing` attribute set to `domready` may not update during an Ajax response, as the DOM document is not completely reloaded. To ensure the query is re-applied after an Ajax response, include the `name` attribute in the `<rich:jQuery>` component and invoke it using JavaScript from the `complete` event attribute of the component that triggered the Ajax interaction.

15.1.7. Reference data

- *component-type*: `org.richfaces.JQuery`
- *component-class*: `org.richfaces.component.UIjQuery`
- *component-family*: `org.richfaces.JQuery`
- *renderer-type*: `org.richfaces.JQueryRenderer`

Functions

Read this chapter for details on special functions for use with particular components. Using JavaServer Faces Expression Language (JSF EL), these functions can be accessed through the data attribute of components. Refer to [Section 2.4.4.1, “data”](#) for details on the data attribute.

16.1. `rich:clientId`

The `rich:clientId('id')` function returns the client identifier related to the passed component identifier ('id'). If the specified component identifier is not found, `null` is returned instead.

16.2. `rich:component`

The `rich:component('id')` function is equivalent to the `RichFaces.$('clientId')` code. It returns the client object instance based on the passed server-side component identifier ('id'). If the specified component identifier is not found, `null` is returned instead. The function can be used to get an object from a component to call a JavaScript API function without using the `<rich:componentControl>` component.

16.3. `rich:element`

The `rich:element('id')` function is a shortcut for the equivalent `document.getElementById("#{rich:clientId('id')})` code. It returns the element from the client, based on the passed server-side component identifier. If the specified component identifier is not found, `null` is returned instead.

16.4. `rich:findComponent`

The `rich:findComponent('id')` function returns the a `UIComponent` instance of the passed component identifier. If the specified component identifier is not found, `null` is returned instead.

Example 16.1. `rich:findComponent` example

```
<h:inputText id="myInput">
  <a4j:support event="keyup" render="outtext"/>
</h:inputText>
<h:outputText id="outtext" value="#{rich:findComponent('myInput').value}" />
```

16.5. `rich:isUserInRole`

The `rich:isUserInRole(Object)` function checks whether the logged-in user belongs to a certain user role, such as being an administrator. User roles are defined in the `web.xml` settings file.

Example 16.2. rich:isUserInRole example

The `rich:isUserInRole(Object)` function can be used in conjunction with the `rendered` attribute of a component to only display certain controls to authorized users.

```
<rich:editor value="#{bean.text}" rendered="#{rich:isUserInRole('admin')}" />
```

Functionality extension

Read this chapter for details on miscellaneous components that provide extended functionality to web applications.

17.1. <rich:componentControl>

The <rich:componentControl> behavior allows JavaScript API functions to be called on target components. The functions are called after defined events are triggered on the component to which the <rich:componentControl> behavior is attached. Initialization variants and activation events can be customized, and parameters can be passed to the target component.

17.1.1. Basic usage

The operation attribute is required to attach JavaScript functions to the parent component, along with either the target or selector attributes. Use the operation attribute to specify the JavaScript API function to perform. Use the target attribute to define the id identifier of the target component, or use the selector attribute to define a number of target components through the use of valid jQuery selectors.

Use the event attribute to specify the event that triggers the JavaScript API function call if it is different from the default triggering event for the parent component.

Example 17.1. <rich:componentControl> basic usage

```
<h:commandButton value="Show Modal Panel">
    <!--componentControl is attached to the commandButton-->

    <rich:componentControl target="ccModalPanelID" event="click" operation="show"/>
</h:commandButton>
```

The example contains a single command button, which when clicked shows the modal panel with the identifier ccModalPanelID.

17.1.2. Passing parameters to API methods

The operation can receive parameters through nested <f:param> elements.

Example 17.2. Using parameters

```
<rich:componentControl event="click" target="modalPanel" operation="show">
    <f:param value="width" name="500"/>
```

```
</rich:componentControl>
```

To group multiple parameters for a function, use the `<rich:hashParam>` component to create a hash map. Refer to [Section 17.1.4, “<rich:hashParam>”](#) for details.

17.1.3. Reference data

- *client-behavior-renderer-type*: `org.richfaces.behavior.ComponentControlBehavior`
- *behavior-id*: `org.richfaces.behavior.ComponentControlBehavior`
- *handler-class*: `org.richfaces.taglib.ComponentControlHandler`
- *behavior-class*: `org.richfaces.component.behavior.ComponentControlBehavior`
- *client-behavior-renderer-class*:
`org.richfaces.renderkit.html.ToggleControlRenderer`

17.1.4. <rich:hashParam>

The `<rich:hashParam>` component allows client-side parameters to be grouped into a hash map. The hash map can then be passed to the client JavaScript API functions of any RichFaces component.

17.1.4.1. Basic usage

Nest parameter tags in the `<rich:hashParam>` component to group them in the hash map. The hash map itself can then be passed as a function parameter.

Example 17.3. <rich:hashParam>

```
<h:commandButton value="Show popup">
  <rich:componentControl target="popupPanel" operation="show">
    <a4j:param noEscape="true" value="event" />
    <rich:hashParam>
      <f:param name="width" value="500" />
      <f:param name="height" value="300" />
      <f:param name="minWidth" value="300" />
      <f:param name="minHeight" value="150" />

      <a4j:param noEscape="true" name="left" value="(jQuery(window).width()/2)-250" />
    >

    <a4j:param noEscape="true" name="top" value="(jQuery(window).height()/2)-150" />
  >
    </rich:hashParam>
  </rich:componentControl>
```

```
</h:commandButton>
```

The example illustrates the use of the `<rich:hashParam>` component to group multiple parameters into a hash map. The parameters are passed through to the show function pop-up panel with the `popupPanel` identifier.

17.1.4.2. Reference data

- *component-type*: `org.richfaces.HashParam`
- *component-class*: `org.richfaces.component.UIHashParam`
- *component-family*: `org.richfaces.HashParam`
- *renderer-type*: `org.richfaces.HashParamRenderer`
- *handler-class*: `org.richfaces.view.facelets.HashParamTag`

Appendix A. Revision History

Revision History

Revision 1.0

Mon Apr 11 2011

SeanRogers

4.0.0.Final Release

