Seam -

Java

2.1.0.GA

King Gavin [FAMILY Given], Muir Pete [FAMILY Given], Richards Norman [FAMILY Given], Bryzak Shane [FAMILY Given], Yuan Michael [FAMILY Given], Youngstrom Mike [FAMILY Given], Bauer Christian [FAMILY Given], Balunas Jay [FAMILY Given], Allen Dan [FAMILY Given], Andersen Max [FAMILY Given], Bernard Emmanuel [FAMILY Given], Karlsson Nicklas [FAMILY Given], Roth Daniel [FAMILY Given], Drees Matt [FAMILY Given], Orshalick Jacob [FAMILY Given], # Novotny Marek [FAMILY Given]

edited by Kittoli Samson [FAMILY Given]

and thanks to Cobb James [FAMILY Given] (##########), Weaver Cheyenne [FAMILY Given] (##########), Newton Mark [FAMILY Given], Ebersole Steve [FAMILY Given], # Courcy Michael [FAMILY Given] (#######)

JBoss Seam ### xvii
1. Seam ####### xx
1. Seam ####### 1
1.1. Seam ######### 1
1.1.1. JBoss AS ########## 1
1.1.2. Tomcat ######### 1
1.1.3. ########## 1
1.2. #### Seam ########: ########## 2
1.2.1. ###### 2
1.2.2. #### 14
1.3. Seam ###########: ####### 14
1.3.1. ###### 15
1.3.2. #### 20
1.4. Seam # jBPM : TO-DO ###### 21
1.4.1. ###### 21
1.4.2. #### 29
1.5. Seam ######: ########### 29
1.5.1. ###### 30
1.5.2. #### 38
1.6. ### Seam ########: ######### 39
1.6.1. #### 39
1.6.2. ######### 41
1.6.3. Seam ##### 41
1.6.4. Seam ####### 49
1.7. ######## : ############ 51
1.7.1. #### 51
1.7.2. ########### 53
1.8. Seam # jBPM ################: DVD ####### 59
1.9. Blog ############## URL 61
1.9.1. "PULL" # MVC ### 62
1.9.2. ################ 64
1.9.3. RESTful ######### "PUSH" # MVC ### 68
2. seam-gen #### Seam ##### 73
2.1. ##### 73
2.2. ### Eclipse ############# 73
2.3. ############## 77
2.4. ################## 78
2.5. ############################ 79
2.6. ### JPA/EJB3 ######################## 79
2.7. EAR ################## 79
2.8. Seam ############## 80
2.9. JBoss 4.0 # Seam ##### 81
2.9.1. JBoss 4.0 ####### 81
2.9.2. JSF 1.2 RI ####### 81

3. JBoss Tools #### Seam ##### 83
3.1. ##### 83
3.2. ### Eclipse ############# 83
3.3. ############# 99
3.4. ################# 101
3.5. ########################## 102
3.6. Seam # JBoss Tools ################# 103
4. ################## 105
4.1. Seam ###### 105
4.1.1. ############ 105
4.1.2. ########## 106
4.1.3. ######### 106
4.1.4. ######## 106
4.1.5. ########### 107
4.1.6. ############## 107
4.1.7. ############## 107
4.1.8. ######## 107
4.1.9. ############ 107
4.1.10. ######### 108
4.2. Seam ####### 108
4.2.1. ########### Bean 109
4.2.2. ########### Bean 109
4.2.3. ###### Bean 110
4.2.4. JavaBeans 110
4.2.5. ######## Bean 110
4.2.6. ######## 111
4.2.7. ######## 111
4.2.8. ############### 113
4.2.9. ################ 113
4.2.10. ########### 114
4.3. ######## 114
4.4. ########### 117
4.5. ########## 118
4.6. #### 119
4.7. `Mutable` ######## `@ReadOnly` 120
4.8. ################ 122
5. Seam########## 125
5.1. ##################### 125
5.2. `components.xml`############# 125
5.3. ########### 129
5.4. ############ 130
5.5. XML####### 133
6. ################ 137
6.1. Seam#### 137

6.2. ######## 137
6.3. ######## 138
6.3.1. ################### 139
6.4. ########## 139
6.5. ###########URL#### 140
6.6. ######## 141
6.7. ####### 142
6.8. ################################### 146
6.9. ############## 146
6.10. ############ 148
6.11. Seam###### 150
6.12. ####### 152
6.12.1. ############## 152
6.12.2. Seam ########## 152
6.12.3. ################### 153
6.12.4. ##### XML ##### 153
6.12.5. ##### 155
7. ############ 159
7.1. Seam ###### 159
7.2. ######## 161
7.3. GET ############## 162
7.4. <s:link> # <s:button> ##### 164
7.5. ######## 165
7.6. ######## ID 166
7.7. ############ 166
7.8. ################ 167
7.9. ########## 168
7.9.1. ########## JSF ####### 168
7.9.2. ########## jPDL ###### 169
7.9.3. ###### 170
7.9.4. #### 170
7.9.5. ####### (Breadcrumbs) 171
7.10. ########### JSF ################ 172
7.11. ################## 173
7.11.1. ### AJAX ############## 174
7.11.2. ######## 174
7.11.3. RichFaces Ajax 175
8. ################ 177
8.1. Seam####### 177
8.1.1. ############## 177
8.1.2. Seam # ##### 181
8.2. jPDL ######### 182
8.2.1. ######### 182
8.2.2. ######### 182

8.2.3. ######### 183
8.2.4. ###### 185
8.2.5. ###### 185
8.2.6. ############## 186
8.3. Seam ########### 186
8.4. jPDL ############## 187
8.4.1. ######### 187
8.4.2. ####ID#### 187
8.4.3. ############ 188
8.4.4. ####### 188
8.4.5. ###### 189
8.4.6. ###### 190
9. Seam #################### 191
9.1. #### 191
9.2. Seam ########## 191
9.2.1. Seam ################ 192
9.2.2. Seam################## 193
9.2.3. ############ 194
9.3. Seam ########### 194
9.3.1. JPA # Seam ################ 194
9.3.2. Seam ### Hibernate ########## 195
9.3.3. Seam ################### 196
9.4. JPA ############ 197
9.5. EJB-QL/HQL # EL ####### 198
9.6. Hibernate ######### 198
10. Seam ## JSF ###### 201
11. Groovy ######### 209
11.1. #### 209
11.2. Groovy ### Seam ########### 209
11.2.1. Groovy ########## 209
11.2.2. seam-gen 211
11.3. #### 211
11.3.1. Groovy ######## 211
11.3.2. ######### .groovy ######### 211
11.3.3. seam-gen 212
12. ####################Apache Wicket##### 213
12.1. Seam##Wicket############## 213
12.1.1. ######## 213
12.1.2. ########## 214
12.2. ############## 215
12.2.1. ########### 215
13. Seam################ 217
13.1. #### 217
13.2. Home###### 218

13.3. Query###### 224
13.4. Controller###### 227
14. Seam # JBoss Rules 229
14.1. ############ 229
14.2. Seam ################## 230
14.3. jBPM ################## 231
15. ###### 235
15.1. ## 235
15.2. ########## 235
15.3. ## 235
15.3.1. ############ 235
15.3.2. ######### 236
15.3.3. ########### 239
15.3.4. ###### 239
15.3.5. Remember Me ######### 239
15.3.6. ########### 242
15.3.7. ########## 243
15.3.8. HTTP## 244
15.3.9. ####### 245
15.4. ID### 245
15.4.1. ID######## 246
15.4.2. JpaIdentityStore 246
15.4.3. LdapIdentityStore 252
15.4.4. ###ID######## 253
15.4.5. ID####### 254
15.4.6. ID######## 254
15.5. ######## 257
15.6. ## 257
15.6.1. ###### 257
15.6.2. ################ 258
15.6.3. ################## 260
15.6.4. ############ 261
15.6.5. ############# 261
15.6.6. ################### 264
15.6.7. ################## 265
15.6.8. ############ 265
15.6.9. ################### 268
15.6.10. ################ 272
15.7. ########## 279
15.7.1. ############ 279
15.7.2. ############################## 279
15.8. SSL######### 280
15.8.1. ############# 281
15.9. ##### 281

15.9.1. ##### ######### 281
15.9.2. ############### 282
15.9.3. ################## 282
15.10. ###### #### 283
15.11. ############ 283
15.12. ID########Identity component#### 284
16. ############ 285
16.1. ############### 285
16.1.1. ################ 285
16.1.2. ################# 285
16.1.3. ############### 286
16.2. #### 286
16.3. ### 287
16.3.1. ######## 287
16.3.2. ######## 288
16.3.3. Faces ##### 289
16.4. ###### 289
16.5. ### 290
16.6. ###################### 291
17. Seam Text 293
17.1. ######### 293
17.2. ######################## 296
17.3. ### 297
17.4. HTML### 297
18. iText PDF ## 299
18.1. PDF ####### 299
18.1.1. ########### 299
18.1.2. ############### 300
18.1.3. ######### 305
18.1.4. ####### 306
18.1.5. ### 307
18.1.6. # 309
18.1.7. ######### 311
18.2. ### 312
18.3. ##### 319
18.4. Swing/AWT ################ 320
18.5. iText ##### 321
18.6. ########## 322
19. Microsoft® Excel® ############ 323
19.1. Microsoft® Excel® ################## 323
19.2. ########### 324
19.3. workbook## 324
19.4. worksheet## 327
19.5. column## 331

19.6. cell## 332
19.6.1. validation## 333
19.6.2. ##### 336
19.7. formula## 337
19.8. image## 338
19.9. hyperlink## 339
19.10. header###footer## 340
19.11. printArea###printTitle## 341
19.12. ############ 342
19.12.1. ###### 342
19.12.2. ###### 344
19.12.3. #### 344
19.13. ########### 345
19.14. ########## 346
19.14.1. ############ 346
19.14.2. #### 347
19.14.3. #### 347
19.14.4. ## 348
19.14.5. #### 348
19.14.6. ##### 349
19.14.7. ######### 349
19.14.8. ###### 349
19.14.9. ## 349
19.15. ################ 350
20. RSS#### 351
20.1. ###### 351
20.2. ######### 351
20.3. #### 352
20.4. #### 352
20.5. ################# 353
21. ##### 355
21.1. ########## 355
21.1.1. ###### 356
21.1.2. HTML/Text #### 358
21.1.3. ###### 358
21.1.4. ######## 358
21.1.5. ######### 358
21.1.6. ### 359
21.1.7. ######## 360
21.2. ########## 360
21.3. ## 361
21.3.1. `mailSession` 361
21.4. Meldware 362
21.5. ## 363

22. ############ 367
22.1. #### 367
22.1.1. ####### 368
22.1.2. Quartz ################## 371
22.1.3. ####### 373
22.1.4. ################## 374
22.2. Seam ######### 374
22.2.1. ## 375
22.2.2. ####### 375
22.2.3. ######## Bean ############## 376
22.2.4. ################ 376
23. ##### 377
23.1. Seam########### 377
23.2. ########### 379
24. Web#### 381
24.1. ########## 381
24.2. ###Web#### 381
24.2.1. ####### 382
24.3. Web###### 383
24.4. RESTEasy ###RESTful HTTP Web#### 384
24.4.1. RESTEasy ###### 384
24.4.2. Seam ###################### 387
25. ####### 389
25.1. ## 389
25.2. "Seam"###### 390
25.2.1. Hello World #### 390
25.2.2. Seam.Component 392
25.2.3. Seam.Remoting 394
25.3. EL ###### 394
25.4. ############## 395
25.5. ###### 395
25.5.1. ## ID ######## 396
25.5.2. ################## 396
25.6. ##### 396
25.7. ########### 396
25.7.1. ####### / ##### 396
25.7.2. JavaBeans 397
25.7.3. ##### 397
25.7.4. Enum 398
25.7.5. ## 398
25.8. ###### 399
25.9. ########### 399
25.9.1. ########## 399
25.9.2. ############## 399

25.9.3. ################## 399
25.10. ###### 400
25.10.1. ######## 400
25.10.2. Map ########## 401
25.10.3. ################## 401
25.10.4. ########### 401
25.11. JMS ####### 402
25.11.1. ## 402
25.11.2. JMS Topic ######## 402
25.11.3. ################## 402
25.11.4. ############# 403
26. Seam#Google Web Toolkit 405
26.1. ## 405
26.2. ############ 405
26.3. GWT####### Seam ############# 406
26.4. GWT#Ant##### 407
27. Spring Framework ## 409
27.1. Seam ######## Spring Bean ######### 409
27.2. Spring Bean # Seam ################ 411
27.3. Spring Bean # Seam ########## 411
27.4. Seam ##### Spring Bean 412
27.5. Spring # PlatformTransactionManagement ##### 413
27.6. Spring # Seam ################ 413
27.7. Spring # Seam ### Hibernate ########## 415
27.8. Seam ########### Spring Application Context 416
27.9. @Asynchronous # Spring # TaskExecutor ##### 416
28. Hibernate Search 419
28.1. #### 419
28.2. ## 419
28.3. ### 420
29. Seam #### Seam ################ 423
29.1. Seam ##### 423
29.1.1. Seam # JSF# ############## 423
29.1.2. Using facelets 424
29.1.3. Seam ########## 425
29.1.4. Seam########## 425
29.1.5. EJB ##### Seam ### 430
29.1.6. ############## 431
29.2. ### JPA ########## 431
29.3. Java EE 5 # Seam ### 432
29.3.1. ####### 432
29.4. J2EE## Seam ### 434
29.4.1. Seam ## Hibernate######### 434
29.4.2. Seam ## JPA######### 435

29.4.3. ####### 435
29.5. JBoss Embedded ### Java SE # Seam ##### 436
29.6. JBoss Embedded #### Java SE # Seam ##### 436
29.6.1. Embedded JBoss ######### 437
29.6.2. ####### 439
29.7. Seam##jBPM## 440
29.7.1. ####### 441
29.8. JBoss AS## SFSB############### 442
29.9. Portlet # Seam ##### 443
29.10. ################ 443
30. Seam ####### 447
30.1. ################### 447
30.2. ################ 450
30.3. ############################ 453
30.4. ################ 454
30.5. J2EE ### Seam JavaBean ###################### 457
30.6. ########### 458
30.7. Seam Remoting######### 459
30.8. Seam ############### 459
30.9. ############ 460
30.10. JSF ############ 461
30.10.1. `dataTable` ############ 461
30.11. ###################### 462
30.12. ################ 463
30.13. ########################## 463
31. #### Seam ####### 465
31.1. ###################### 465
31.2. ############## 465
31.3. ############### 466
31.4. ################ 468
31.5. jBPM ########## 469
31.6. ################ 470
31.7. JMS ########## 471
31.8. ############# 471
31.9. ############ 471
31.10. ########### 474
31.11. ########## 474
32. Seam JSF ###### 477
32.1. ## 477
32.1.1. ####### ###### 477
32.1.2. ########### 480
32.1.3. ###### 485
32.1.4. Seam Text 488
32.1.5. ####### 489

32.1.6. ### 491
32.2. ####### 495
33. JBoss EL 497
33.1. ########## 497
33.1.1. ### 497
33.1.2. ###### 498
33.2. ######## 499
34. Seam############ 501
34.1. Seam################ 501
34.2. Seam############## 502
34.2.1. ############## 503
34.3. ################## 504
34.3.1. ## 508
34.3.2. ##########SeamTest### 508
34.3.3. ################ 509
34.3.4. Seam######### 510
35. Seam ### 513
35.1. jBPM ######### 513
35.1.1. ############ 513
35.1.2. ########## 513
36. OC4J ## Seam 515
36.1. OC4J ########## 515
36.2. jee5/booking #### 515
36.2.1. ############## 515
36.2.2. ########## 517
36.2.3. jee5/booking ######## 518
36.3. OC4J ## Seam ############## 519
36.4. seam-gen ################## OC4J ###### 520
36.4.1. seam-gen ############## 520
36.4.2. OC4J ############# 522
36.4.3. seam-gen ################ OC4J ###### 528
36.4.4. ################## CRUD # Drools ############ 529
36.5. ## 530
37. BEA Weblogic #### Seam 531
37.1. WebLogic########## 531
37.1.1. 10.3####### 531
37.1.2. Weblogic########### 532
37.1.3. ##### ##/##/##### ## 532
37.1.4. Weblogic#JSF####### 533
37.2. jee5/booking#### 534
37.2.1. Weblogic##EJB3### 534
37.2.2. jee5/booking ### 535
37.3. jpa ###### 541
37.3.1. jpa ############### 541

37.3.2. Weblogic 10.x#### 542
37.4. Weblogic 10.x #seam-gen####################### 544
37.4.1. seam-gen#p######### 544
37.4.2. Weblogic 10.X####### 546
37.4.3. ################# 548
38. Seam on IBM's Websphere 551
38.1. Websphere environment and deployment information 551
38.1.1. Installation versions and tips 551
38.1.2. Required custom properties 552
38.2. jee5/booking #### 552
38.2.1. ######### 552
38.2.2. jee5/booking ######## 558
38.2.3. Websphere ############### 559
38.3. jpa booking #### 562
38.3.1. jpa ######## 562
38.3.2. jpa ######### 562
38.3.3. Whats different for Websphere 6.1 563
38.4. Deploying an application created using seam-gen on Websphere 6.1.0.13 564
38.4.1. seam-gen ######### 564
38.4.2. Websphere ############ 566
39. GlassFish ############## Seam 575
39.1. GlassFish ############ 575
39.1.1. ###### 575
39.2. jee5/booking #### 576
39.2.1. GlassFish ############### 576
39.3. jpa booking #### 576
39.3.1. jpa ######## 576
39.3.2. jpa ######### 577
39.3.3. GlassFish v2 UR2 ##### 577
39.4. seam-gen ################# GlassFish v2 UR2 ###### 577
39.4.1. seam-gen ######### 578
39.4.2. GlassFish ############ 580
40. ### 587
40.1. JDK #### 587
40.1.1. Sun # JDK 6 ####### 587
40.2. ########## 587
40.2.1. Core 587
40.2.2. RichFaces 588
40.2.3. Seam Mail 588
40.2.4. Seam PDF 589
40.2.5. Seam Microsoft® Excel® 589
40.2.6. Seam RSS #### 589
40.2.7. JBoss Rules 589
40.2.8. JBPM 590

40.2.9. GWT 590
40.2.10. Spring 590
40.2.11. Groovy 590
40.3. Maven ########## 591

JBoss Seam

Seam ######### Java ######################################

######## *(###############)*

Seam ##Seam ### ##### Web ############################## ######## *(conversation context)* #######

Seam ##

Unlike plain Java EE or J2EE components, Seam components may *simultaneously* access state associated with the web request and state held in transactional resources (without the need to propagate web request state manually via method parameters). You might object that the application layering imposed upon you by the old J2EE platform was a Good Thing. Well, nothing stops you creating an equivalent layered architecture using Seam—the difference is that *you* get to architect your own application and decide what the layers are and how they work together.

JSF # EJB 3.0 ###

JSF # EJB 3.0 ##Java EE 5 ##################EJB3 ##JSF ### # EJB3 ##############################Java EE 5 ###

Seam # JSF# EJB3 ################# ################### (glue code) ##

It is possible to write Seam applications where "everything" is an EJB. This may come as a surprise if you're used to thinking of EJBs as coarse-grained, so-called "heavyweight" objects. However, version 3.0 has completely changed the nature of EJB from the point of view of the developer. An EJB is a fine-grained object—nothing more complex than an annotated JavaBean. Seam even encourages you to use session beans as JSF action listeners!

########### EJB 3.0 ############EJB 3.0 ###################### Java ######Seam ###################### Seam ##EJB ############################## (lightweight)#########################

AJAX

Seam################## JSF ### AJAX ##########JBoss RichFaces # ICEfaces ######################### JavaScript ############################ AJAX ################

###########Seam ###### JavaScript ## JavaScript

################################## JMS ###############AJAX ##########################

###############Seam ## AJAX ######################################

########################

#########Seam # jBPM ########################jBPM # Seam ##

Seam ##jBPM ###################### (jPDL) ######################################

JSF##Seam ##Seam ################## jBPM ######################################

########

EJB ##EJB 3.0 ## ############################## ## (set) ##### (get) ## ##################################

Declarative application state management is made possible by the richness of the *context model* defined by Seam. Seam extends the context model defined by the servlet spec—request, session, application—with two new contexts—conversation and business process—that are more meaningful from the point of view of the business logic.

##Hibernate #### JPA #### ORM ### Seam ########################## `LazyInitializationException` ## ##post-then-redirect ################################Seam ##Web ##

########

(IoC: Inversion of Control) #### ##### (DI: Dependency Injection) ########################JSF # EJB3 ################################### ## (### JSF ####)###

######## *(bijection)* ######## *(dynamic)* ############ *(contextual)* ########### *(bidirectional)* ######## IoC ###################(################################)###

######################

Seam ##(########) ######################Seam ###

XML##########

####Java##J2EE ###### ###########XML ##Java ############################Java 5 ######################

EJB 3.0 ## ## (configuration by exception)########## ###### JSF ###### XML ################## Seam ## EJB 3.0 ## ###### ###### JSF ##Bean######### ###### XML ######### XML ######## (JSF #########) #############

#########

Seam ############ Java ##Java # Web ##Seam ##################Seam ## (JSP ###### Facelets ###)## JUnit #### TestNG ################################ IDE ######################Seam # ##### JBoss ##### EJB ####################

#########

Java EE###(####GET ###### JSF ##########)#Seam ##########Seam ######JCP ##

Web##########HTML##################

Web ##########################Web ##############################Java ## Web ##E############PDF###################wiki #####Web ################################## Seam ######################################...

Seam######### JPA # Hibernate3 ################### EJB ######## Quartz########## jBPM############ JBoss Rules#E####### Meldware Mail# ############ Hibernate Search # Lucene############ JMS################### JBoss Cache #######Seam ##JAAS #JBoss Rules

##PDF ##################wiki ######## JSF #############Seam #########Web ################################ JavaScript #### Google Web Toolkit ######### JSF ###################

########## *!*

Seam #### Java EE ########################Tomcat ################### EJB 3.0 ## JPA #### Hibernate3 # Seam ###################################Tomcat ###### JBoss ########EJB 3.0 ######################

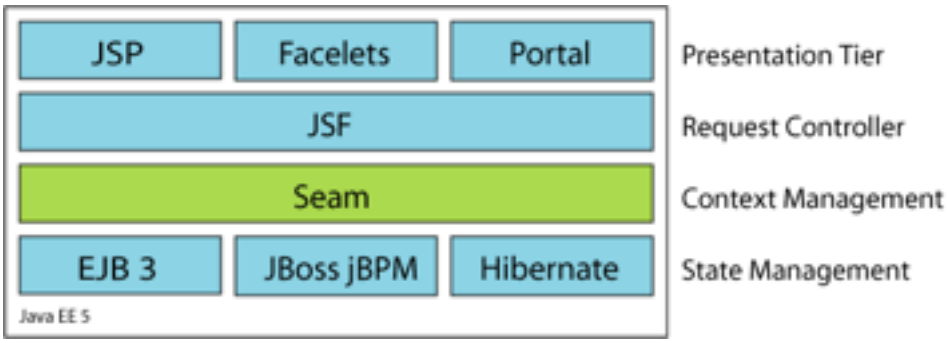

Seam # JSF # EJB3 ####### Java #### Web ##

1. Seam

Seam ########## *SeamFramework.org* [http://www.seamframework.org/Community/Contribute] ########

Seam

1.1. Seam

Seam # Seam ## ########################## Seam ################Seam ##### Seam ########### `examples` ################ ################`examples/registration` ###########

########################

- The `view` ########Web##
- `resources` ####################################
- `src` ##############################

####################### JBoss AS # Tomcat ####### ####################### Ant `build.xml` ######################### Ant #########################

1.1.1. JBoss AS

The examples are configured for use on JBoss 4.2. You'll need to set `jboss.home`, in the shared `build.properties` file in the root folder of your Seam installation, to the location of your JBoss AS installation .

Once you've done that and started the application server, you can build and deploy any example by typing `ant deploy` in the the directory for that example. The examples all deploy to a URL like `/seam-example`. For the registration example, the URL would be *`http://localhost:8080/seam-registration/`* [http://localhost:8080/seam-registration/].

1.1.2. Tomcat

Tomcat 6.0 ############Tomcat 6.0 #### JBoss######### *#29.6.1. #Embedded JBoss ##########* ###################### #### JBoss # Tomcat ## EJB3############ Seam ################## #### JBoss ###### Tomcat ####### non-EJB3

Seam ################## `build.properties` ###### `tomcat.home` # Tomcat ########################## Tomcat ####################

Tomcat ############# Ant ################## Tomcat ################ example ########## `ant tomcat.deploy` ##########

On Tomcat, the examples deploy to URLs like `/jboss-seam-example`, so for the registration example the URL would be *`http://localhost:8080/jboss-seam-registration/`* [http://localhost:8080/jboss-seam-registration/].

1.1.3.

Most of the examples come with a suite of TestNG integration tests. The easiest way to run the tests is to run `ant test`. It is also possible to run the tests inside your IDE using the TestNG plugin.

1.2. #### Seam ########:

################################ ### ################################ ######## Seam ######################### JSF ############ EJB3 ##### Bean ######### #### Seam ###############

EJB 3.0 ########################### ############

##################################### ##############################
##############################

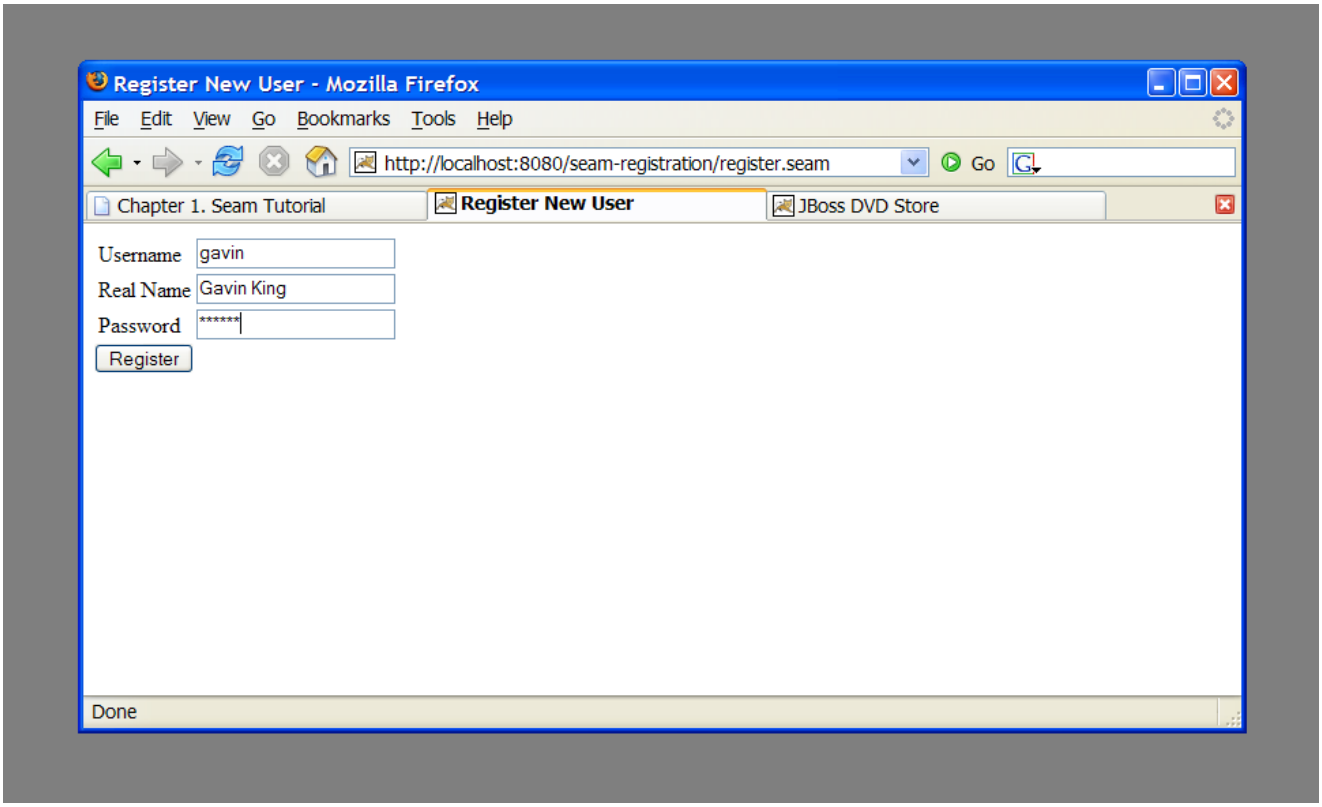

1.2.1.

########### Facelets ################ Bean ################ Bean ########## "bottom" ###############

1.2.1.1. ###### Bean: `User.java`

############EJB###### Bean###### ################### ### # ######## ############## Seam ##

 # 1.1. User.java

```
@Entity
```

```
@Name("user")                                                    2

@Scope(SESSION)                                                  3

@Table(name="users")                                             4
public class User implements Serializable
{
  private static final long serialVersionUID = 1881413500711441951L;


  private String username;                                       5
  private String password;
  private String name;

  public User(String name, String password, String username)
  {
    this.name = name;
    this.password = password;
    this.username = username;
  }


  public User() {}                                               6


  @NotNull @Length(min=5, max=15)                                7
  public String getPassword()
  {
    return password;
  }

  public void setPassword(String password)
  {
    this.password = password;
  }

  @NotNull
  public String getName()
  {
    return name;
  }

  public void setName(String name)
  {
    this.name = name;
```

```
  }


  @Id @NotNull @Length(min=5, max=15)                    (8)
  public String getUsername()
  {
    return username;
  }

  public void setUsername(String username)
  {
    this.username = username;
  }

}
```

1. EJB3 ## `@Entity` ######### `User` ########## Bean ##############
2. Seam ######## *`@Name`* ############## ######## ###### ##### Seam ########################## JSF # Seam # Seam ## (null) #### Seam ## ######### JSF #### `user` ############ Seam # `User` ############
3. Seam ######################## ########## ## ############ *`@Scope`* ################### `User` ####################
4. EJB ## `@Table` ######### `User` #### `users` ######################
5. `name#password# username` ## ###### Bean ######## ########################## ############################## JSF ##############################
6. ##########EJB # Seam ################
7. `@NotNull` # `@Length` ######### Hibernate Validator ############## Seam # Hibernate Validator ########## ######################## (#### Hiberenate ##################)#
8. EJB ## `@Id` ######### ###### Bean #################

######################### `@Name` # `@Scope` ########## ################ Seam ####################

#####`User` ########## ## JSF ############### ############ JSF ################## JSP ########## Bean ####################################

Bean ################################ ########## JSF ###################### ##### ##### Bean

1.2.1.2. ########## Bean ###: `RegisterAction.java`

Seam ############### Bean # JSF ################## (###### JavaBean ########)

########## JSF ################ ########Bean ##### ########## ######### ################ `User` Bean ########### ########## Bean #########

############################

1.2. RegisterAction.java

```
@Stateless                                                          (1)
@Name("register")
public class RegisterAction implements Register
{

  @In                                                               (2)
  private User user;

  @PersistenceContext                                               (3)
  private EntityManager em;

  @Logger                                                           (4)
  private Log log;

  public String register()                                          (5)
  {
    List existing = em.createQuery(
        "select username from User where username=#{user.username}")  (6)
        .getResultList();

    if (existing.size()==0)
    {
      em.persist(user);
      log.info("Registered new user #{user.username}");             (7)
      return "/registered.xhtml";                                   (8)
    }
    else
    {
```

```
        FacesMessages.instance().add("User #{user.username} already exists"); 9
        return null;
      }
    }

}
```

1. EJB `@Stateless` ########################## Bean ##############
2. *`@In`* ######### Seam ############# Bean ############### ##########`user` (#########) ############################
3. EJB ## `@PersistenceContext` ######### EJB3 ###### Entity Manager ###################
4. Seam `@Logger` ################ `Log` ############################
5. ################################ ## EJB3 `EntityManager` API #####JSF ## (outcome) ###### ######## Bean #### `register()` ############ ##
6. Seam ## EJB-QL ## JSF EL ############## ###################### ######## JPA `setParameter()` ### JPA `Query` ################## ######?
7. The `Log` API lets us easily display templated log messages.
8. JSF ### (outcome) ###### null ## (outcome) (#####void ############) ## ############ ### JSF ### ## (outcome) ## JSF ### id ######### ## JSF ######### ############ ###################################### ######################## Seam #### (outcome) ### JSF ### id ######### ###################### *## (outcome) ###### id ######## Seam* ############################
9. Seam provides a number of *built-in components* to help solve common problems. The `FacesMessages` component makes it easy to display templated error or success messages. Built-in Seam components may be obtained by injection, or by calling an `instance()` method.

####`@Scope` ######################## # Seam ## ########## Bean ########################## ###############

####### Bean ## ## Seam############### ##### Web ############### Seam ##

Seam ##

1.2.1.3. ##### Bean ########### : `Register.java`

######## Bean ####################

1.3. Register.java

```
@Local
public interface Register
{
  public String register();
}
```

Java ######### ## ##########

1.2.1.4. ### : `register.xhtml` # `registered.xhtml`

Seam ################## JSF ############################ #########JSP ############## Facelets #########

1.4. register.xhtml

```
<?xml version="1.0" encoding="utf-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
                  "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml"
    xmlns:s="http://jboss.com/products/seam/taglib"
    xmlns:h="http://java.sun.com/jsf/html"
    xmlns:f="http://java.sun.com/jsf/core">

  <head>
    <title
>Register New User</title>
  </head>
  <body>
    <f:view>
      <h:form>
        <s:validateAll>
          <h:panelGrid columns="2">
            Username: <h:inputText value="#{user.username}" required="true"/>
            Real Name: <h:inputText value="#{user.name}" required="true"/>
            Password: <h:inputSecret value="#{user.password}" required="true"/>
          </h:panelGrid>
        </s:validateAll>
```

```
        <h:messages/>
        <h:commandButton value="Register" action="#{register.register}"/>
      </h:form>
    </f:view>
  </body>

</html
>
```

Seam ####### `<s:validateAll>` ####### ## JSF ######## ######################## Bean ###### Hibernate Validator ################## JSF

1.5. registered.xhtml

```
<?xml version="1.0" encoding="utf-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
                "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml"
    xmlns:f="http://java.sun.com/jsf/core">

  <head>
    <title
>Successfully Registered New User</title>
  </head>
  <body>
    <f:view>
      Welcome, #{user.name}, you are successfully registered as #{user.username}.
    </f:view>
  </body>

</html>
```

This is a simple Facelets page using some embedded EL. There is nothing specific to Seam here.

1.2.1.5. Seam ################## : `components.xml`

Seam ########################## #######Seam ##################### ############Seam############################## ##############################

Java ##################### ############################## XML ### Seam ################## XML ################## ################ #### Seam ################ XML ########## ###### XML##################

(###Seam ##############)# ############### ############### WEB-INF ########## components.xml ###################### Seam # JNDI # EJB ###################### components.xml

1.6. components.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<components xmlns="http://jboss.com/products/seam/components"
            xmlns:core="http://jboss.com/products/seam/core"
            xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">

    <core:init jndi-pattern="@jndiPattern@"/>

</components
>
```

This code configures a property named `jndiPattern` of a built-in Seam component named `org.jboss.seam.core.init`. The funny `@` symbols are there because our Ant build script puts the correct JNDI pattern in when we deploy the application.

1.2.1.6. WEB ########## : `web.xml`

######################### WAR ########## ######Web #################

1.7. web.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<web-app version="2.5"
   xmlns="http://java.sun.com/xml/ns/javaee"
   xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
   xsi:schemaLocation="http://java.sun.com/xml/ns/javaee
                  http://java.sun.com/xml/ns/javaee/web-app_2_5.xsd">

   <!-- Seam -->

   <listener>
      <listener-class
>org.jboss.seam.servlet.SeamListener</listener-class>
   </listener>

   <!-- JSF -->
```

```
    <listener>
        <listener-class
>com.sun.faces.config.ConfigureListener</listener-class>
    </listener>

    <context-param>
        <param-name
>javax.faces.DEFAULT_SUFFIX</param-name>
        <param-value
>.xhtml</param-value>
    </context-param>

    <servlet>
        <servlet-name
>Faces Servlet</servlet-name>
        <servlet-class
>javax.faces.webapp.FacesServlet</servlet-class>
        <load-on-startup
>1</load-on-startup>
    </servlet>

    <servlet-mapping>
        <servlet-name
>Faces Servlet</servlet-name>
        <url-pattern
>*.seam</url-pattern>
    </servlet-mapping>

    <session-config>
        <session-timeout
>10</session-timeout>
    </session-config>

</web-app
>
```

`web.xml` ##### Seam # JSF ####### ######## Seam

1.2.1.7. JSF ## : `faces-config.xml`

Seam ###################### JSF ########## ##### `faces-config.xml` ###### ########## Facelets #########JSF ############## Faceles

1.8. faces-config.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<faces-config version="1.2"
              xmlns="http://java.sun.com/xml/ns/javaee"
              xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
                 xsi:schemaLocation="http://java.sun.com/xml/ns/javaee http://java.sun.com/xml/ns/
javaee/web-facesconfig_1_2.xsd">

   <!-- Facelets support -->
   <application>
      <view-handler
>com.sun.facelets.FaceletViewHandler</view-handler>
   </application>

</faces-config
>
```

Note that we don't need any JSF managed bean declarations! Our managed beans are annotated Seam components. In Seam applications, the `faces-config.xml` is used much less often than in plain JSF.

In fact, once you have all the basic descriptors set up, the *only* XML you need to write as you add new functionality to a Seam application is orchestration: navigation rules or jBPM process definitions. Seam takes the view that *process flow* and *configuration data* are the only things that truly belong in XML.

############ ### id ################## ################

1.2.1.8. EJB ########## : `ejb-jar.xml`

`ejb-jar.xml` ###### ################ Bean # `SeamInterceptor` ########## EJB3 #######

```
<ejb-jar xmlns="http://java.sun.com/xml/ns/javaee"
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
       xsi:schemaLocation="http://java.sun.com/xml/ns/javaee
                     http://java.sun.com/xml/ns/javaee/ejb-jar_3_0.xsd"
       version="3.0">

  <interceptors>
    <interceptor>
      <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
```

```
    </interceptor>
  </interceptors>

  <assembly-descriptor>
    <interceptor-binding>
      <ejb-name
>*</ejb-name>
      <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
    </interceptor-binding>
  </assembly-descriptor>

</ejb-jar
>
```

1.2.1.9. EJB ############ : `persistence.xml`

`persistence.xml` ######EJB ######### ####################################
##################################

```
<?xml version="1.0" encoding="UTF-8"?>
<persistence xmlns="http://java.sun.com/xml/ns/persistence"
         xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://java.sun.com/xml/ns/persistence
                     http://java.sun.com/xml/ns/persistence/persistence_1_0.xsd"
         version="1.0">

  <persistence-unit name="userDatabase">
    <provider
>org.hibernate.ejb.HibernatePersistence</provider>
    <jta-data-source
>java:/DefaultDS</jta-data-source>
    <properties>
      <property name="hibernate.hbm2ddl.auto" value="create-drop"/>
    </properties>
   </persistence-unit>

</persistence
>
```

1.2.1.10. EAR ########## : `application.xml`

####EAR### ####################################

1.9.

```
<?xml version="1.0" encoding="UTF-8"?>
<application xmlns="http://java.sun.com/xml/ns/javaee"
             xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
             xsi:schemaLocation="http://java.sun.com/xml/ns/javaee
                                 http://java.sun.com/xml/ns/javaee/application_5.xsd"
             version="5">

   <display-name
>Seam Registration</display-name>

   <module>
      <web>
         <web-uri
>jboss-seam-registration.war</web-uri>
         <context-root
>/seam-registration</context-root>
      </web>
   </module>
   <module>
      <ejb
>jboss-seam-registration.jar</ejb>
   </module>
   <module>
      <ejb
>jboss-seam.jar</ejb>
   </module>
   <module>
      <java
>jboss-el.jar</java>
   </module>

</application
>
```

WEB################### /seam-registration

#################################

1.2.2.

################ JSF ##Seam # `user` ################### ###################(## Seam ########)# Seam ##`user` ################ ### Seam ################### `User` ###### Bean ####### JSF ######

########## `User` ########### Hibernate Validator ########################## ########## JSF ############## ###### ######### `User` ###### Bean ###############

Next, JSF asks Seam to resolve the variable named `register`. Seam finds the `RegisterAction` stateless session bean in the stateless context and returns it. JSF invokes the `register()` action listener method.

Seam intercepts the method call and injects the `User` entity from the Seam session context, before continuing the invocation.

`register()` ################################ ####### ######### `FacesMessages` ################ null ## (outcome) ###################### `FacesMessages` ###################### JSF ###### ### # JSF `FacesMessage` #######

####################`"/registered.xhtml"` ## (outcome) ### `registered.xhtml` ###################### JSF ################## Seam # `user` ################ Seam ################ `User` ###################

1.3. Seam ###########:

############################ ################################Seam ##EJB-QL ###HQL ################## #####JSF `<h:dataTable>` ################################## JSF ############## ########################

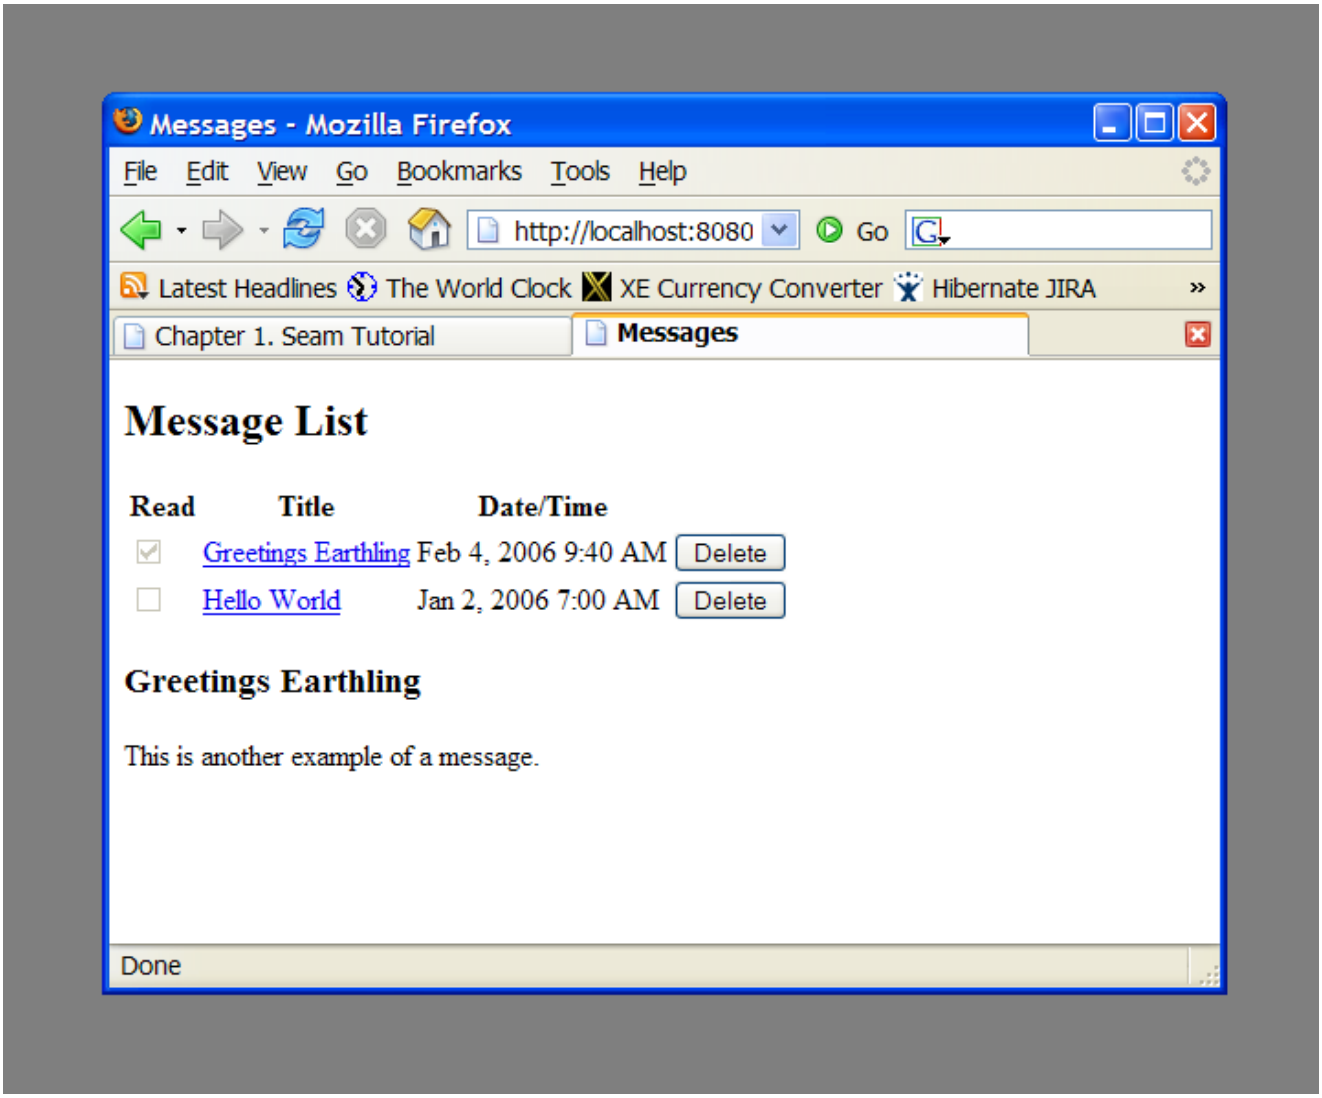

1.3.1.

########## ######### Bean ### `Message`# ######## Bean ### `MessageListBean`# ###### JSP ##########

1.3.1.1. ###### Bean : `Message.java`

`Message` ###### Bean ## ######################### ###############################

 # 1.10. Message.java

```
@Entity
@Name("message")
@Scope(EVENT)
public class Message implements Serializable
{
```

```
  private Long id;
  private String title;
  private String text;
  private boolean read;
  private Date datetime;

  @Id @GeneratedValue
  public Long getId() {
    return id;
  }
  public void setId(Long id) {
    this.id = id;
  }

  @NotNull @Length(max=100)
  public String getTitle() {
    return title;
  }
  public void setTitle(String title) {
    this.title = title;
  }

  @NotNull @Lob
  public String getText() {
    return text;
  }
  public void setText(String text) {
    this.text = text;
  }

  @NotNull
  public boolean isRead() {
    return read;
  }
  public void setRead(boolean read) {
    this.read = read;
  }

  @NotNull
  @Basic @Temporal(TemporalType.TIMESTAMP)
  public Date getDatetime() {
    return datetime;
  }
  public void setDatetime(Date datetime) {
```

```
    this.datetime = datetime;
  }

}
```

1.3.1.2. ########### Bean : `MessageManagerBean.java`

########## ######## Bean `MessageManagerBean` ###### ## ###################### ###################### ############################

But `MessageManagerBean` is also responsible for fetching the list of messages the first time we navigate to the message list page. There are various ways the user could navigate to the page, and not all of them are preceded by a JSF action—the user might have bookmarked the page, for example. So the job of fetching the message list takes place in a Seam *factory method*, instead of in an action listener method.

################################### ########### Bean #########

1.11. MessageManagerBean.java

```
@Stateful
@Scope(SESSION)
@Name("messageManager")
public class MessageManagerBean implements Serializable, MessageManager
{


  @DataModel                                          (1)
  private List<Message
> messageList;
                                                      (2)


                                                        (3)
  @DataModelSelection
  @Out(required=false)
  private Message message;
                                                      (4)

  @PersistenceContext(type=EXTENDED)
  private EntityManager em;
                                                      (5)

  @Factory("messageList")
  public void findMessages()
  {
```

```
    messageList = em.createQuery("select msg from Message msg order by msg.datetime desc")
                    .getResultList();
  }

                                                    (6)

  public void select()
  {
    message.setRead(true);
  }

                                                    (7)

  public void delete()
  {
    messageList.remove(message);
    em.remove(message);
    message=null;
  }

                                                    (8)

  @Remove
  public void destroy() {}

}
```

(1) `@DataModel` ######### `java.util.List` ######## `javax.faces.model.DataModel` ######### JSF ########## ######################## JSF `<h:dataTable>` ############## ######### `DataModel` ## `messageList` ##############################

(2) `@DataModelSelection` ######### Seam ################ `List` ####################

(3) The `@Out` annotation then exposes the selected value directly to the page. So ever time a row of the clickable list is selected, the `Message` is injected to the attribute of the stateful bean, and the subsequently *outjected* to the event context variable named `message`.

(4) ######## Bean ##EJB3 ########## ######## ## Bean ######## ######### messages ################# #### ########## Bean ########### #### `EntityManager` ########## ###########

(5) ### JSP ############ `messageList` ################### `@Factory` #########Seam # `MessageManagerBean` ############## ########## `findMessages()` ########### `findMessages()` # `messages` # ###############

(6) `select()` ############### ##### `Message`# ## ####### ################

(7) `delete()` ############### ##### `Message` ###############

(8) ############### Bean # Seam #########`@Remove` ################################ #####Seam ################################## Seam ####### Bean #########

############## Seam ######################
(Seam
##)

1.3.1.3. ##### Bean ############ : `MessageManager.java`

############### Bean ##############

1.12. MessageManager.java

```
@Local
public interface MessageManager
{
   public void findMessages();
   public void select();
   public void delete();
   public void destroy();
}
```

####################################

`components.xml#persistence.xml#web.xml#ejb-jar.xml#faces-config.xml` ###
`application.xml` ########################## JSP ########

1.3.1.4. ###: `messages.jsp`

##JSP#### JSF `<h:dataTable>` ##################### Seam ###############

1.13. messages.jsp

```
<%@ taglib uri="http://java.sun.com/jsf/html" prefix="h" %>
<%@ taglib uri="http://java.sun.com/jsf/core" prefix="f" %>
<html>
 <head>
  <title
>Messages</title>
 </head>
 <body>
  <f:view>
   <h:form>
    <h2
>Message List</h2>
    <h:outputText value="No messages to display"
```

```
                rendered="#{messageList.rowCount==0}"/>
    <h:dataTable var="msg" value="#{messageList}"
                 rendered="#{messageList.rowCount
>0}">
       <h:column>
         <f:facet name="header">
           <h:outputText value="Read"/>
         </f:facet>
         <h:selectBooleanCheckbox value="#{msg.read}" disabled="true"/>
       </h:column>
       <h:column>
         <f:facet name="header">
           <h:outputText value="Title"/>
         </f:facet>
         <h:commandLink value="#{msg.title}" action="#{messageManager.select}"/>
       </h:column>
       <h:column>
         <f:facet name="header">
           <h:outputText value="Date/Time"/>
         </f:facet>
         <h:outputText value="#{msg.datetime}">
           <f:convertDateTime type="both" dateStyle="medium" timeStyle="short"/>
         </h:outputText>
       </h:column>
       <h:column>
         <h:commandButton value="Delete" action="#{messageManager.delete}"/>
       </h:column>
     </h:dataTable>
     <h3
><h:outputText value="#{message.title}"/></h3>
     <div
><h:outputText value="#{message.text}"/></div>
   </h:form>
  </f:view>
 </body>
</html
>
```

1.3.2.

messages.jsp ################## messageList ##################### ######################## Seam ########## findMessages()######## ################## ####### (outject) ### DataModel ########### ## DataModel # <h:dataTable>

<h:commandLink> ######### JSF # select() ################# Seam ########################## messageManager ######## message ############ ################ ## Message ############ ########## Seam #### Message # message ########################## ### EJB ################### Message ######################## #### ############################

<h:commandButton> ######### JSF ##delete() ################# Seam ################ ########## messageList ######## message ############ ############## ## Message ########## EntityManager # remove() ######### ########## Seam # messageList ############# message ##################### EJB # ################### ######## Message ####### #### ################

1.4. Seam # jBPM : TO-DO

jBPM ############################ ##### jBPM # Seam ################ ### To-Do ################### ###############jBPM ########### ######## Java ##############

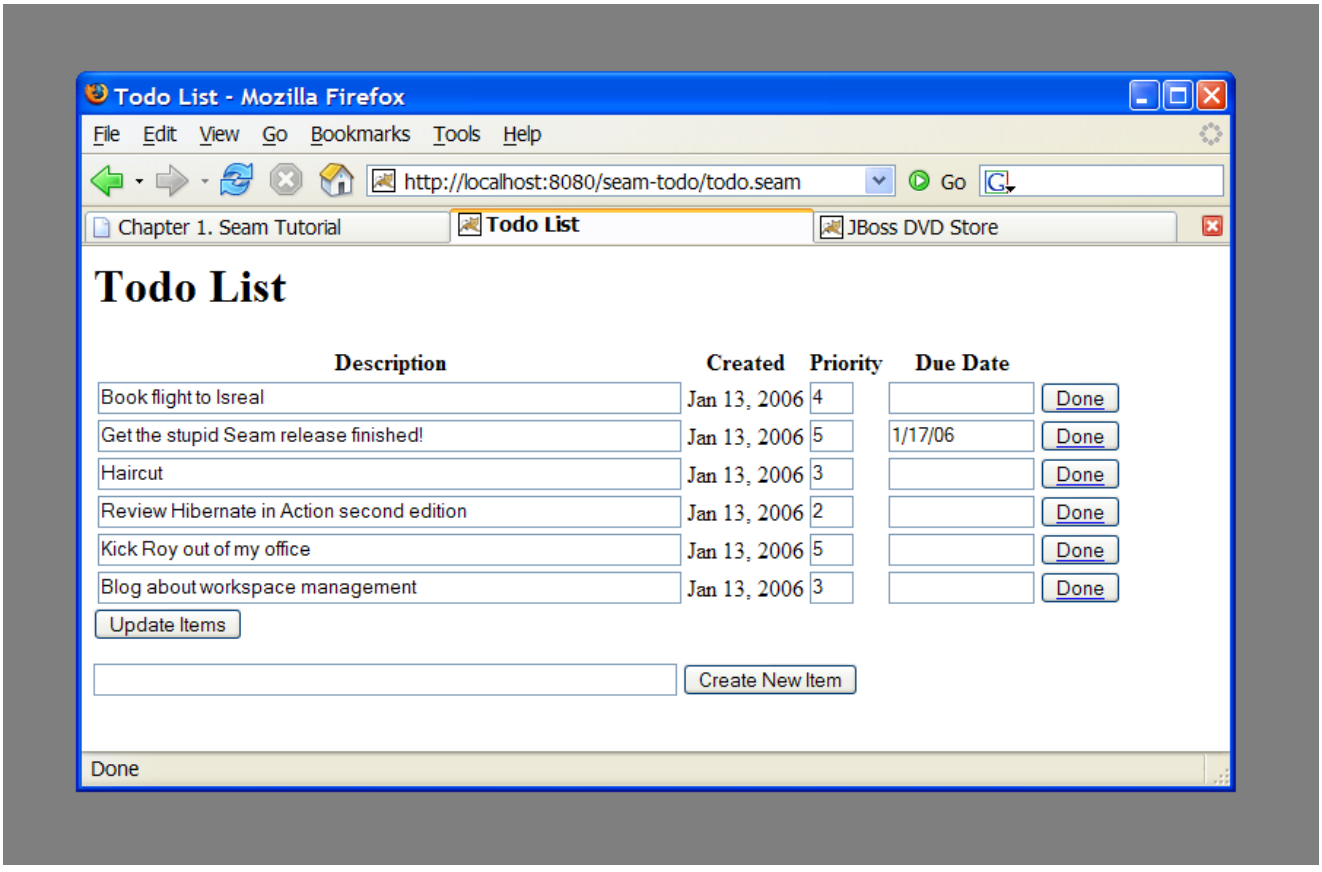

1.4.1.

###########jBPM ########## ### JSP ########## JavaBean ###### (########################## ##### Bean ###############) ###################

1.14. todo.jpdl.xml

```
<process-definition name="todo">

  <start-state name="start">
    <transition to="todo"/>
  </start-state>

  <task-node name="todo">
    <task name="todo" description="#{todoList.description}">
      <assignment actor-id="#{actor.id}"/>
    </task>
    <transition to="done"/>
  </task-node>

  <end-state name="done"/>

</process-definition
>
```

1. `<start-state>` ###################### ############ ###### `todo` #######
2. `<task-node>` ######### ###### ##
3. `<task>` ########################## ########################## ################ ############## ####### `todoList` ###### Seam ####### (JavaBean # ##) ## description #######
4. ## ################################## ######## `actor` ########## Seam ############### ##### Seam ######################################
5. `<end-state>`########################## ################ ##################

JBossIDE ################################## ###########

#################### ######## ####### ################################### ### ######### ########## ###############

JavaBean ####### `login.jsp` ####### ##### `actor` ############ jBPM actor id ###########

1.15. Login.java

```
@Name("login")
public class Login {

  @In
  private Actor actor;

  private String user;

  public String getUser() {
    return user;
  }

  public void setUser(String user) {
    this.user = user;
```

```
  }

  public String login()
  {
    actor.setId(user);
    return "/todo.jsp";
  }
}
```

######### Actor ##################### @In ################

JSP

1.16. login.jsp

```
<%@ taglib uri="http://java.sun.com/jsf/html" prefix="h"%>
<%@ taglib uri="http://java.sun.com/jsf/core" prefix="f"%>
<html>
<head>
<title
>Login</title>
</head>
<body>
<h1
>Login</h1>
<f:view>
   <h:form>
     <div>
       <h:inputText value="#{login.user}"/>
       <h:commandButton value="Login" action="#{login.login}"/>
     </div>
   </h:form>
</f:view>
</body>
</html
>
```

JavaBean

1.17. TodoList.java

```
@Name("todoList")
```

```
public class TodoList {

  private String description;


  public String getDescription()
  {
    return description;
  }

  public void setDescription(String description) {
    this.description = description;
  }


  @CreateProcess(definition="todo")
  public void createTodo() {}


  @StartTask @EndTask
  public void done() {}

}
```

1. The description property accepts user input form the JSP page, and exposes it to the process definition, allowing the task description to be set.
2. Seam `@CreateProcess` ######################## jBPM ##################
3. Seam `@StartTask` ######################## `@EndTask` ##############################

############## `@StartTask` # `@EndTask` ###################
##

#################### `todo.jsp` ######

1.18. todo.jsp

```
<%@ taglib uri="http://java.sun.com/jsf/html" prefix="h" %>
<%@ taglib uri="http://java.sun.com/jsf/core" prefix="f" %>
<%@ taglib uri="http://jboss.com/products/seam/taglib" prefix="s" %>
<html>
<head>
<title
>Todo List</title>
</head>
```

```
<body>
<h1
>Todo List</h1>
<f:view>
  <h:form id="list">
    <div>
      <h:outputText value="There are no todo items."
                    rendered="#{empty taskInstanceList}"/>
      <h:dataTable value="#{taskInstanceList}" var="task"
                   rendered="#{not empty taskInstanceList}">
        <h:column>
          <f:facet name="header">
            <h:outputText value="Description"/>
          </f:facet>
          <h:inputText value="#{task.description}"/>
        </h:column>
        <h:column>
          <f:facet name="header">
            <h:outputText value="Created"/>
          </f:facet>
          <h:outputText value="#{task.taskMgmtInstance.processInstance.start}">
            <f:convertDateTime type="date"/>
          </h:outputText>
        </h:column>
        <h:column>
          <f:facet name="header">
            <h:outputText value="Priority"/>
          </f:facet>
          <h:inputText value="#{task.priority}" style="width: 30"/>
        </h:column>
        <h:column>
          <f:facet name="header">
            <h:outputText value="Due Date"/>
          </f:facet>
          <h:inputText value="#{task.dueDate}" style="width: 100">
            <f:convertDateTime type="date" dateStyle="short"/>
          </h:inputText>
        </h:column>
        <h:column>
          <s:button value="Done" action="#{todoList.done}" taskInstance="#{task}"/>
        </h:column>
      </h:dataTable>
    </div>
    <div>
```

```
    <h:messages/>
    </div>
    <div>
      <h:commandButton value="Update Items" action="update"/>
    </div>
  </h:form>
  <h:form id="new">
    <div>
      <h:inputText value="#{todoList.description}"/>
      <h:commandButton value="Create New Item" action="#{todoList.createTodo}"/>
    </div>
  </h:form>
</f:view>
</body>
</html
>
```

##############

###################### ####taskInstanceList ##### Seam ################## #####JSF#################

1.19. todo.jsp

```
<h:form id="list">
  <div>
    <h:outputText value="There are no todo items." rendered="#{empty taskInstanceList}"/>
    <h:dataTable value="#{taskInstanceList}" var="task"
                 rendered="#{not empty taskInstanceList}">
      ...
    </h:dataTable>
  </div>
</h:form
>
```

####### jBPM ### TaskInstance ########## ##################################### #### (Description) # ### (Priority) ## #### (Due Date) ###### ##################################

```
<h:column>
   <f:facet name="header">
     <h:outputText value="Description"/>
```

```
   </f:facet>
   <h:inputText value="#{task.description}"/>
</h:column>
<h:column>
   <f:facet name="header">
      <h:outputText value="Created"/>
   </f:facet>
   <h:outputText value="#{task.taskMgmtInstance.processInstance.start}">
      <f:convertDateTime type="date"/>
   </h:outputText>
</h:column>
<h:column>
   <f:facet name="header">
      <h:outputText value="Priority"/>
   </f:facet>
   <h:inputText value="#{task.priority}" style="width: 30"/>
</h:column>
<h:column>
   <f:facet name="header">
      <h:outputText value="Due Date"/>
   </f:facet>
   <h:inputText value="#{task.dueDate}" style="width: 100">
      <f:convertDateTime type="date" dateStyle="short"/>
   </h:inputText>
</h:column
>
```

####### `@StartTask` `@EndTask` ###################################### ####task id ########### Seam ######

```
<h:column>
   <s:button value="Done" action="#{todoList.done}" taskInstance="#{task}"/>
</h:column
>
```

`seam-ui.jar` ####### Seam `<s:button>` JSF ########################## ############################## ################Seam # jBPM ################

```
<h:commandButton value="Update Items" action="update"/>
```

##############################
@CreateProcess##

```
<h:form id="new">
   <div>
      <h:inputText value="#{todoList.description}"/>
      <h:commandButton value="Create New Item" action="#{todoList.createTodo}"/>
   </div>
</h:form
>
```

1.4.2.

######todo.jsp ################ To-Do ######### taskInstanceList ## todo ########"Create New Item" ############{todoList.createTodo} ########## todo.jpdl.xml ################

###################start ########## todo ########################## ############################## #{todoList.description} ######## ############################## Seam # actor ############### ## ################################ ################################

todo.jsp ##########taskInstanceList ################### #### h:dataTable ######## ######### #{task.description}# #{task.priority}# #{task.dueDate} ############## ##############################

#To-Do### "Done" ############# #{todoList.done} ######## todoList ########## s:button # taskInstance="#{task}" ## @StartTast # @EndTask ######## ################################## ####################### done ######### ############ ################################

todo.jsp ###################### taskInstanceList ########## ##

1.5. Seam ######:

(#####) ######## Seam ############ JSF/Seam ################################## ############################ ########################## ## ########### ####### ######

Seam ##jPDL ############################ ##

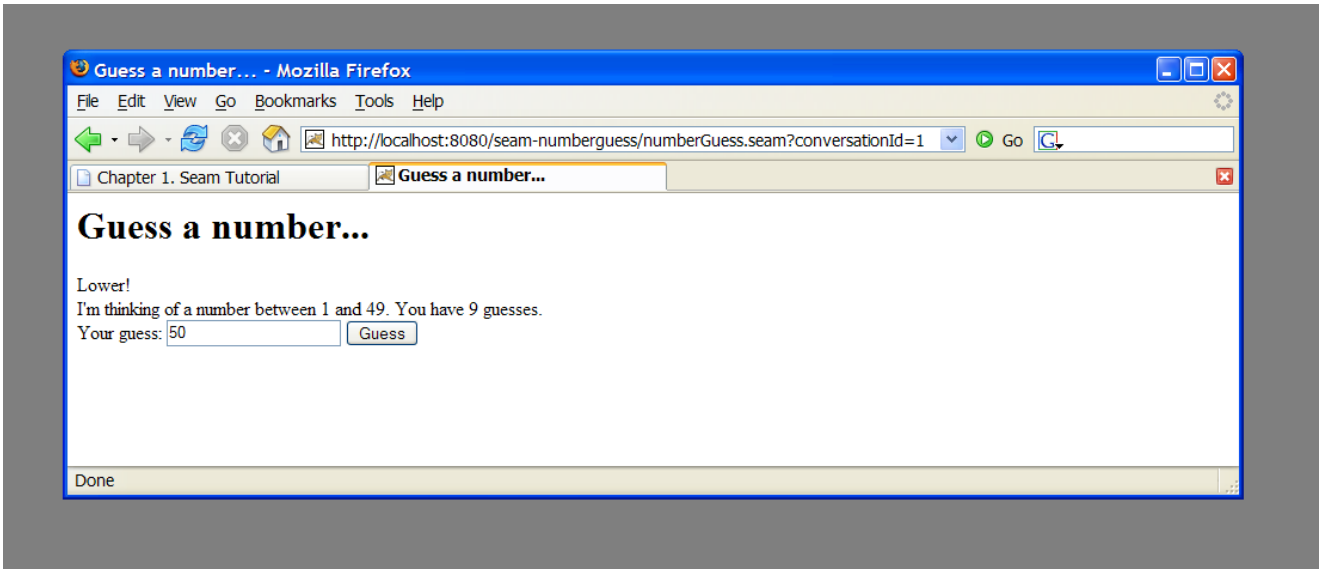

1.5.1.

######## ###JavaBean#### JSP ######## jPDL ###################### ################

1.20. pageflow.jpdl.xml

```
<pageflow-definition
      xmlns="http://jboss.com/products/seam/pageflow"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xsi:schemaLocation="http://jboss.com/products/seam/pageflow
                  http://jboss.com/products/seam/pageflow-2.1.xsd"
      name="numberGuess">


  <start-page name="displayGuess" view-id="/numberGuess.jspx">                    1
    <redirect/>

    <transition name="guess" to="evaluateGuess">                                  2

      <action expression="#{numberGuess.guess}"/>                                 3
    </transition>
    <transition name="giveup" to="giveup"/>
    <transition name="cheat" to="cheat"/>
  </start-page>

                                                                                  4
  <decision name="evaluateGuess" expression="#{numberGuess.correctGuess}">
    <transition name="true" to="win"/>
    <transition name="false" to="evaluateRemainingGuesses"/>
  </decision>
```

```
  <decision name="evaluateRemainingGuesses" expression="#{numberGuess.lastGuess}">
    <transition name="true" to="lose"/>
    <transition name="false" to="displayGuess"/>
  </decision>

  <page name="giveup" view-id="/giveup.jspx">
    <redirect/>
    <transition name="yes" to="lose"/>
    <transition name="no" to="displayGuess"/>
  </page>

  <process-state name="cheat">
    <sub-process name="cheat"/>
    <transition to="displayGuess"/>
  </process-state>

  <page name="win" view-id="/win.jspx">
    <redirect/>
    <end-conversation/>
  </page>

  <page name="lose" view-id="/lose.jspx">
    <redirect/>
    <end-conversation/>
  </page>

</pageflow-definition
>
```

1. `<page>` ################## ############# JSF ####################### `view-id` #### JSF ################## JSF ### ######## ############## `redirect` ####Seam # post-then-redirect ############ (######### URL ########)
2. `<transition>` ### JSF ## (outcome) ######### JSF ########## (outcome) ####### transition ######## jBPM ################ ########################
3. transition # `<action>` ## jBPM # transition############## JSF ########### ############# Seam ####################
4. `<decision>` ################ JSF EL ##############################

JBoss Developer Studio

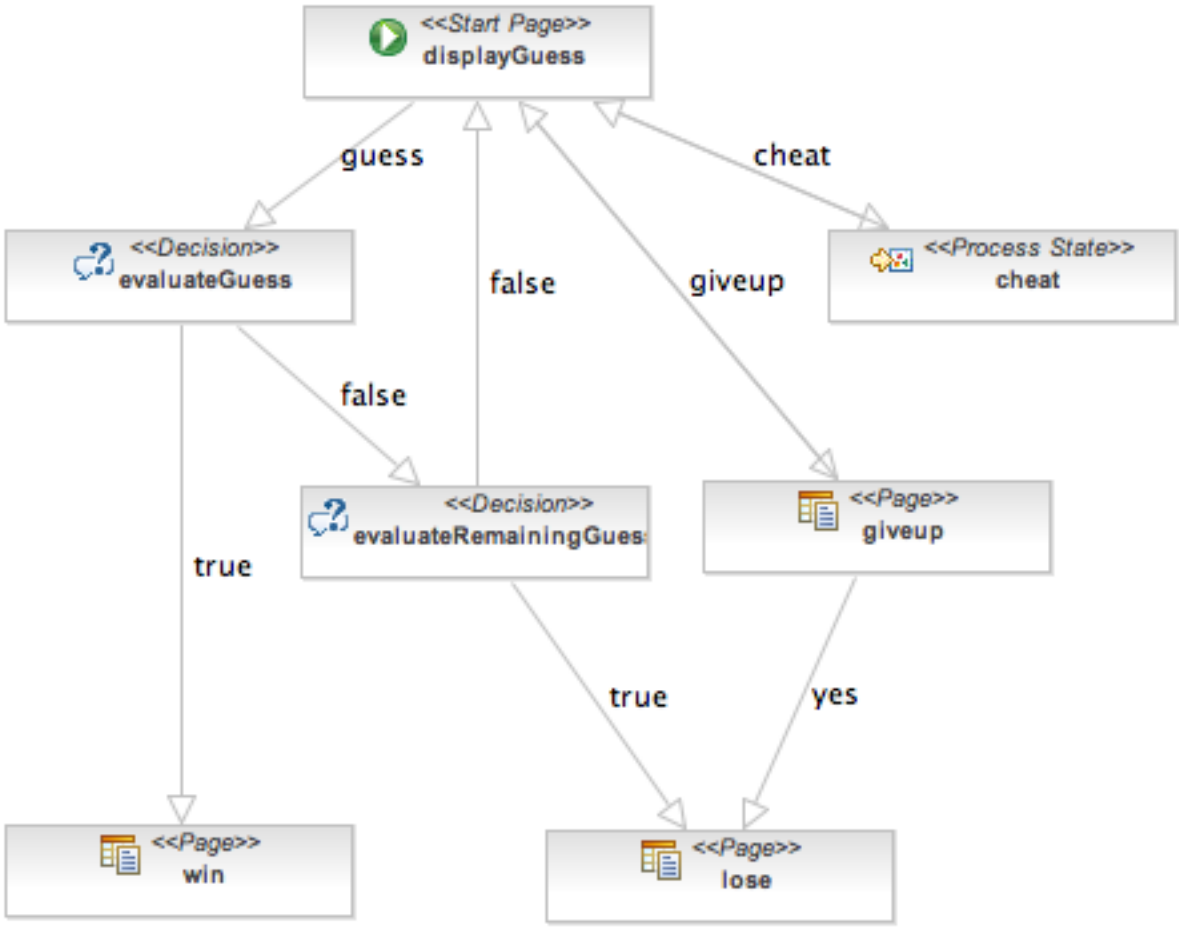

################ ##############################

################## `numberGuess.jspx` ###

1.21. numberGuess.jspx

```
<<?xml version="1.0"?>
<jsp:root xmlns:jsp="http://java.sun.com/JSP/Page"
        xmlns:h="http://java.sun.com/jsf/html"
        xmlns:f="http://java.sun.com/jsf/core"
        xmlns:s="http://jboss.com/products/seam/taglib"
        xmlns="http://www.w3.org/1999/xhtml"
        version="2.0">
  <jsp:output doctype-root-element="html"
            doctype-public="-//W3C//DTD XHTML 1.0 Transitional//EN"
            doctype-system="http://www.w3c.org/TR/xhtml1/DTD/xhtml1-transitional.dtd"/>
  <jsp:directive.page contentType="text/html"/>
```

```
<html>
<head>
  <title
>Guess a number...</title>
  <link href="niceforms.css" rel="stylesheet" type="text/css" />
  <script language="javascript" type="text/javascript" src="niceforms.js" />
</head>
<body>
  <h1
>Guess a number...</h1>
  <f:view>
      <h:form styleClass="niceform">

        <div>
        <h:messages globalOnly="true"/>
        <h:outputText value="Higher!"
            rendered="#{numberGuess.randomNumber gt numberGuess.currentGuess}"/>
        <h:outputText value="Lower!"
            rendered="#{numberGuess.randomNumber lt numberGuess.currentGuess}"/>
          </div>

          <div>
      I'm thinking of a number between
      <h:outputText value="#{numberGuess.smallest}"/> and
      <h:outputText value="#{numberGuess.biggest}"/>. You have
      <h:outputText value="#{numberGuess.remainingGuesses}"/> guesses.
      </div>

      <div>
      Your guess:
      <h:inputText value="#{numberGuess.currentGuess}" id="inputGuess"
            required="true" size="3"
            rendered="#{(numberGuess.biggest-numberGuess.smallest) gt 20}">
        <f:validateLongRange maximum="#{numberGuess.biggest}"
                  minimum="#{numberGuess.smallest}"/>
      </h:inputText>
      <h:selectOneMenu value="#{numberGuess.currentGuess}"
              id="selectGuessMenu" required="true"
              rendered="#{(numberGuess.biggest-numberGuess.smallest) le 20 and
                      (numberGuess.biggest-numberGuess.smallest) gt 4}">
        <s:selectItems value="#{numberGuess.possibilities}" var="i" label="#{i}"/>
      </h:selectOneMenu>
      <h:selectOneRadio value="#{numberGuess.currentGuess}" id="selectGuessRadio"
              required="true"
```

```
                    rendered="#{(numberGuess.biggest-numberGuess.smallest) le 4}">
        <s:selectItems value="#{numberGuess.possibilities}" var="i" label="#{i}"/>
      </h:selectOneRadio>
            <h:commandButton value="Guess" action="guess"/>
      <s:button value="Cheat" view="/confirm.jspx"/>
      <s:button value="Give up" action="giveup"/>
            </div>

            <div>
      <h:message for="inputGuess" style="color: red"/>
      </div>

        </h:form>
    </f:view>
  </body>
  </html>
</jsp:root
>
```

################## ##############guess transition###################

win.jspx ###############

1.22. win.jspx

```
<jsp:root xmlns:jsp="http://java.sun.com/JSP/Page"
        xmlns:h="http://java.sun.com/jsf/html"
        xmlns:f="http://java.sun.com/jsf/core"
        xmlns="http://www.w3.org/1999/xhtml"
        version="2.0">
  <jsp:output doctype-root-element="html"
            doctype-public="-//W3C//DTD XHTML 1.0 Transitional//EN"
            doctype-system="http://www.w3c.org/TR/xhtml1/DTD/xhtml1-transitional.dtd"/>
  <jsp:directive.page contentType="text/html"/>
  <html>
  <head>
    <title
>You won!</title>
    <link href="niceforms.css" rel="stylesheet" type="text/css" />
  </head>
  <body>
    <h1
>You won!</h1>
    <f:view>
```

```
    Yes, the answer was <h:outputText value="#{numberGuess.currentGuess}" />.
    It took you <h:outputText value="#{numberGuess.guessCount}" /> guesses.
    <h:outputText value="But you cheated, so it doesn't count!"
                  rendered="#{numberGuess.cheat}"/>
    Would you like to <a href="numberGuess.seam"
>play again</a
>?
   </f:view>
  </body>
  </html>
</jsp:root>
```

`lose.jspx` ######## #########

##########################

1.23. NumberGuess.java

```
@Name("numberGuess")
@Scope(ScopeType.CONVERSATION)
public class NumberGuess implements Serializable {

  private int randomNumber;
  private Integer currentGuess;
  private int biggest;
  private int smallest;
  private int guessCount;
  private int maxGuesses;
  private boolean cheated;


  @Create                                                    (1)
  public void begin()
  {
    randomNumber = new Random().nextInt(100);
    guessCount = 0;
    biggest = 100;
    smallest = 1;
  }

  public void setCurrentGuess(Integer guess)
  {
    this.currentGuess = guess;
  }
```

```
  public Integer getCurrentGuess()
  {
    return currentGuess;
  }

  public void guess()
  {
    if (currentGuess
>randomNumber)
    {
      biggest = currentGuess - 1;
    }
    if (currentGuess<randomNumber)
    {
      smallest = currentGuess + 1;
    }
    guessCount ++;
  }

  public boolean isCorrectGuess()
  {
    return currentGuess==randomNumber;
  }

  public int getBiggest()
  {
    return biggest;
  }

  public int getSmallest()
  {
    return smallest;
  }

  public int getGuessCount()
  {
    return guessCount;
  }

  public boolean isLastGuess()
  {
    return guessCount==maxGuesses;
  }
```

```
  public int getRemainingGuesses() {
     return maxGuesses-guessCount;
  }

  public void setMaxGuesses(int maxGuesses) {
     this.maxGuesses = maxGuesses;
  }

  public int getMaxGuesses() {
     return maxGuesses;
  }

  public int getRandomNumber() {
     return randomNumber;
  }

  public void cheated()
  {
     cheated = true;
  }

  public boolean isCheat() {
     return cheated;
  }

  public List<Integer
> getPossibilities()
  {
     List<Integer
> result = new ArrayList<Integer
>();
     for(int i=smallest; i<=biggest; i++) result.add(i);
     return result;
  }

}
```

1 ####JSP #### `numberGuess` ################ Seam ################## ####`@Create` ######### ######################

`pages.xml` ##### Seam ## *(conversation)* #### (#####)###################################

1.24. pages.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<pages xmlns="http://jboss.com/products/seam/pages"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://jboss.com/products/seam/pages  http://jboss.com/products/
seam/pages-2.1.xsd">

  <page view-id="/numberGuess.jspx">
    <begin-conversation join="true" pageflow="numberGuess"/>
  </page>

</pages
>
```

########## Seam ####################! ##################################### ##########################

1.5.2.

######################## #### numberGuess.jspx ######## ###############pages.xml ########## numberGuess ################ ####### #######start-page ######### numberGuess.xhtml ########

numberGuess ############## ############################ @Create ###################### ######### #{numberGuess.currentGuess} ###### h:form

"Guess" #### guess ############## Seam ##################################### evaluateGuess ############### ######## #{numberGuess.guess} # guess count # numberGuess ######### highest/lowest suggestions #######

evaluateGuess ### #{numberGuess.correctGuess} ######## win ### evaluatingRemainingGuesses ########## ######################## evaluatingRemainingGuesses ######## ### decision ###### ######################## #{numberGuess.lastGuess} ######## ############ (lastGuess # false)#### displayGuess ########## ####page ############# /numberGuess.jspx ############ redirect ###########Seam ###################################

######## win ### lose ##################################### / win.jspx ### /lose.jspx ############## ###### Seam ##

The numberguess example also contains Giveup and Cheat buttons. You should be able to trace the pageflow state for both actions relatively easily. Pay particular attention to the `cheat` transtition,

which loads a sub-process to handle that flow. Although it's overkill for this application, it does demonstrate how complex pageflows can be broken down into smaller parts to make them easier to understand.

1.6. ### Seam ########:

1.6.1.

##

- ######
- ####
- #####
- #######
- #####
- #####
- ####
- ####
- #######

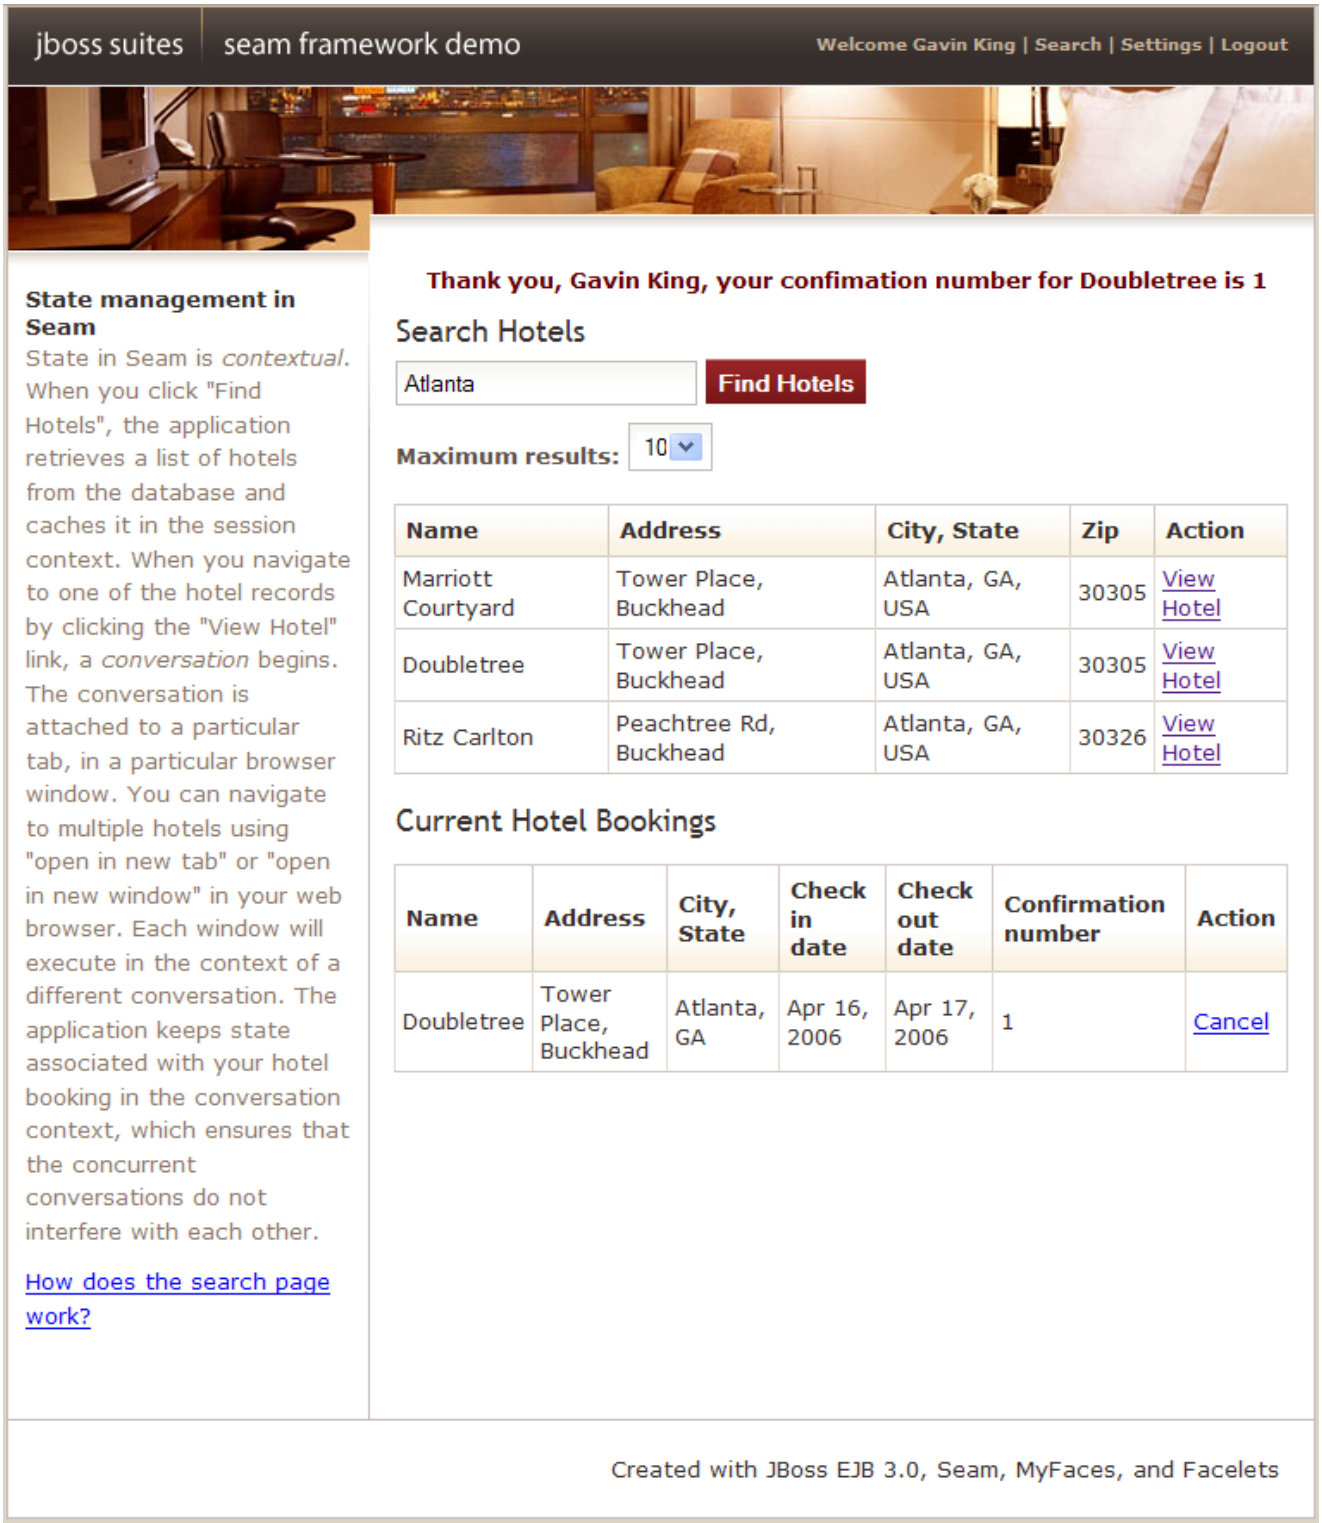

############## JSF#EJB 3.0#Seam ########## Facelet ######### JSF#Facelets#Seam#JavaBeans ####Hibernate3 ##################

#################### ##############################
##
Seam

WEB ############################## ################################ Seam ######################

###################### ############################ ################## ##

1.6.2.

###################### ######################*1.1. #Seam #########* ########## ###################### ###### *http://localhost:8080/seam-booking/* [http://localhost:8080/seam-booking/]###############

################################## 6 ######## Bean #########

- `AuthenticatorAction` ##################
- `BookingListAction` ##############################
- `ChangePasswordAction` ############################
- `HotelBookingAction` ###################### ##### ## ########## ############################
- `HotelSearchingAction` ###############
- `RegisterAction` ####################

######### Bean ############################

- `Hotel` ############### Bean ###
- `Booking` ################ Bean ###
- `User` ####################### Bean ###

1.6.3. Seam

############################## ## ############ ################################### ######## ################### ##

WEB ## ################################Java WEB ############################ ##### URL ######## ################ `HttpSession`

########################## ################################## ##Java ## (2 ####) ########## ###################### ## LRU ################## #### ############################ ##

HttpSession ################## HttpSession
################################
##
#######################HTTP ###################HTTP
################################
##
Seam

Seam ###################### *(conversation context)* #########
############################ ######################### #########
##
##

######################### Bean ###################### Java ###################
Bean ############################ ########## Java
################################## ########################## Bean
################################ ####JBoss AS ############ ####### bean
############## ###### Bean ################## HttpSession ############
###################################### Bean ## Web
Bean
###
#####################################Seam ####### Bean ##### POJO
############ Seam ##############

################## ################
##################
#################### ######Seam ################ ######################
########## ################### ################ ######################

JavaScript ## RichFaces Ajax
############

###################### Bean ########## ##########################

1.25. HotelSearchingAction.java

```
@Stateful                                                    (1)
@Name("hotelSearch")
@Scope(ScopeType.SESSION)

@Restrict("#{identity.loggedIn}")                                    (2)
public class HotelSearchingAction implements HotelSearching
{

   @PersistenceContext
   private EntityManager em;
```

```
  private String searchString;
  private int pageSize = 10;
  private int page;


  @DataModel
  private List<Hotel
> hotels;

  public void find()
  {
    page = 0;
    queryHotels();
  }
  public void nextPage()
  {
    page++;
    queryHotels();
  }

  private void queryHotels()
  {
    hotels =
        em.createQuery("select h from Hotel h where lower(h.name) like #{pattern} " +
                    "or lower(h.city) like #{pattern} " +
                    "or lower(h.zip) like #{pattern} " +
                    "or lower(h.address) like #{pattern}")
          .setMaxResults(pageSize)
          .setFirstResult( page * pageSize )
          .getResultList();
  }

  public boolean isNextPageAvailable()
  {
    return hotels!=null && hotels.size()==pageSize;
  }

  public int getPageSize() {
    return pageSize;
  }

  public void setPageSize(int pageSize) {
    this.pageSize = pageSize;
  }
```

```
  @Factory(value="pattern", scope=ScopeType.EVENT)
  public String getSearchPattern()
  {
    return searchString==null ?
        "%" : '%' + searchString.toLowerCase().replace('*', '%') + '%';
  }

  public String getSearchString()
  {
    return searchString;
  }

  public void setSearchString(String searchString)
  {
    this.searchString = searchString;
  }

  @Remove
  public void destroy() {}
}
```

1. EJB ## `@Stateful` ######### ################## Bean ############## ########### Bean ## ##########################
2. `@Restrict` ################################ ##################################### ###########Seam ##########################
3. *`@DataModel`* ######## JSF `ListDataModel` ### `List` ####### ############################## ############ `hotels` ########### `ListDataModel` ##############
4. EJB ### `@Remove` ### Bean ################## Seam ############ Bean ######### `@Remove` ################## Seam ################################

################## Facelets ###### ######################

1.26. main.xhtml

```
<div class="section">

   <span class="errors">
     <h:messages globalOnly="true"/>
   </span>
```

```
   <h1
>Search Hotels</h1>

       <h:form id="searchCriteria">
       <fieldset
>
         <h:inputText id="searchString" value="#{hotelSearch.searchString}"

                 style="width: 165px;">                                    (1)
        <a:support event="onkeyup" actionListener="#{hotelSearch.find}"
                 reRender="searchResults" />
      </h:inputText>
       
         <a:commandButton id="findHotels" value="Find Hotels" action="#{hotelSearch.find}"

                    reRender="searchResults"/>                             (2)
       
      <a:status>
        <f:facet name="start">
          <h:graphicImage value="/img/spinner.gif"/>
        </f:facet>
      </a:status>
         <br/>
      <h:outputLabel for="pageSize"
>Maximum results:</h:outputLabel
> 
      <h:selectOneMenu value="#{hotelSearch.pageSize}" id="pageSize">
        <f:selectItem itemLabel="5" itemValue="5"/>
        <f:selectItem itemLabel="10" itemValue="10"/>
        <f:selectItem itemLabel="20" itemValue="20"/>
      </h:selectOneMenu>
   </fieldset>

   </h:form>                                                               (3)

</div>

<a:outputPanel id="searchResults">
  <div class="section">
    <h:outputText value="No Hotels Found"
                 rendered="#{hotels != null and hotels.rowCount==0}"/>
    <h:dataTable id="hotels" value="#{hotels}" var="hot"
                rendered="#{hotels.rowCount
>0}">
```

```
      <h:column>
         <f:facet name="header"
>Name</f:facet>
         #{hot.name}
      </h:column>
      <h:column>
         <f:facet name="header"
>Address</f:facet>
         #{hot.address}
      </h:column>
      <h:column>
         <f:facet name="header"
>City, State</f:facet>
         #{hot.city}, #{hot.state}, #{hot.country}
      </h:column
>
      <h:column>
         <f:facet name="header"
>Zip</f:facet>
         #{hot.zip}
      </h:column>
      <h:column>
         <f:facet name="header"
>Action</f:facet>
         <s:link id="viewHotel" value="View Hotel"
               action="#{hotelBooking.selectHotel(hot)}"/>
      </h:column>
   </h:dataTable>
   <s:link value="More results" action="#{hotelSearch.nextPage}"
         rendered="#{hotelSearch.nextPageAvailable}"/>
 </div>
</a:outputPanel
>
```

(4)

1. RichFaces Ajax `<a:support>` ### `onkeyup` #### JavaScript ########## JSF ################## `XMLHttpRequest` ###################### ##########`reRender` ### JSF ##
2. RichFaces Ajax `<a:status>` ######################################
3. RichFaces Ajax `<a:outputPanel>` ###################################
4. Seam `<s:link>` #### JSF ############# (# JavaScript) HTML ############### ## `<h:commandLink>` ############# "##########" # "########"################## ##### `#{hotelBooking.selectHotel(hot)}` ################################

########## EL# ######### Seam ## ############################## EL# #########

##########################WEB-INF/pages.xml ############################## ####### #6.7. ########## #######

############################## ########## HotelBookingAction # selectHotel() ############### ######################

Bean ############## ##

1.27. HotelBookingAction.java

```
@Stateful
@Name("hotelBooking")
@Restrict("#{identity.loggedIn}")
public class HotelBookingAction implements HotelBooking
{


  @PersistenceContext(type=EXTENDED)                    (1)
  private EntityManager em;

  @In
  private User user;

  @In(required=false) @Out
  private Hotel hotel;

  @In(required=false)

  @Out(required=false)                                  (2)
  private Booking booking;

  @In
  private FacesMessages facesMessages;

  @In
  private Events events;

  @Logger
  private Log log;

  private boolean bookingValid;
```

```
@Begin                                                    3
public void selectHotel(Hotel selectedHotel)
{
  hotel = em.merge(selectedHotel);
}

public void bookHotel()
{
  booking = new Booking(hotel, user);
  Calendar calendar = Calendar.getInstance();
  booking.setCheckinDate( calendar.getTime() );
  calendar.add(Calendar.DAY_OF_MONTH, 1);
  booking.setCheckoutDate( calendar.getTime() );
}

public void setBookingDetails()
{
  Calendar calendar = Calendar.getInstance();
  calendar.add(Calendar.DAY_OF_MONTH, -1);
  if ( booking.getCheckinDate().before( calendar.getTime() ) )
  {
    facesMessages.addToControl("checkinDate", "Check in date must be a future date");
    bookingValid=false;
  }
  else if ( !booking.getCheckinDate().before( booking.getCheckoutDate() ) )
  {
    facesMessages.addToControl("checkoutDate",
                        "Check out date must be later than check in date");
    bookingValid=false;
  }
  else
  {
    bookingValid=true;
  }
}

public boolean isBookingValid()
{
  return bookingValid;
}

@End                                                      4
```

```
public void confirm()
{
   em.persist(booking);
   facesMessages.add("Thank you, #{user.name}, your confimation number " +
                     " for #{hotel.name} is #{booki g.id}");
   log.info("New booking: #{booking.id} for #{user.username}");
   events.raiseTransactionSuccessEvent("bookingConfirmed");
}

@End
public void cancel() {}


@Remove                                                    (5)
public void destroy() {}
```

1. ## Bean ##EJB3 ########## ####### ################### ########### Bean ####################
2. *@Out* ### *(outject)* ############### ################################### `hotel` ############# `hotel` ##################
3. *@Begin* ######## ################## *(long-running conversation)* ################ ################################ ####### ### `@End` ############################
4. *@End* ## ##################################
5. Seam ################## EJB remove ################ ########################

`HotelBookingAction` ## ################################ ####### `HttpSession` #### get/set ##

Seam ######################## ###################################### Seam
1.6.4. Seam

WAR # `seam-debug.jar` ###### Seam ######## `WEB-INF/lib` # Facelets ####### jar ########`init` ######## debug ############################

```
<core:init jndi-pattern="@jndiPattern@" debug="true"/>
```

################################ Seam ######## Seam ######################## ############ *http://localhost:8080/seam-booking/debug.seam* [http://localhost:8080/seam-booking/debug.seam] ##########

JBoss Seam Debug Page

This page allows you to view and inspect any component in any Seam context associated with the current session.

Conversations

conversation id	activity	description	view id	
4	1:51:34 AM - 1:51:34 AM	Search hotels: M	/main.xhtml	Select conversation context
6	1:51:40 AM - 1:52:23 AM	Book hotel: Marriott Courtyard	/book.xhtml	Select conversation context

- Component (booking)

checkinDate	Fri Jan 20 20:52:20 EST 2006
checkoutDate	Sat Jan 21 20:52:20 EST 2006
class	class org.jboss.seam.example.booking.Booking
creditCard	
description	Marriott Courtyard, Jan 20, 2006 to Jan 21, 2006
hotel	Hotel(Tower Place, Buckhead,Atlanta,30305)
id	
user	User(gavin)

- Conversation Context (6)

booking
conversation
hotel
hotelBooking
hotels

- Business Process Context

Empty business process context

+ Session Context

+ Application Context

1.7. ######## :

1.7.1.

##
##############################
###

##
##
#####################################

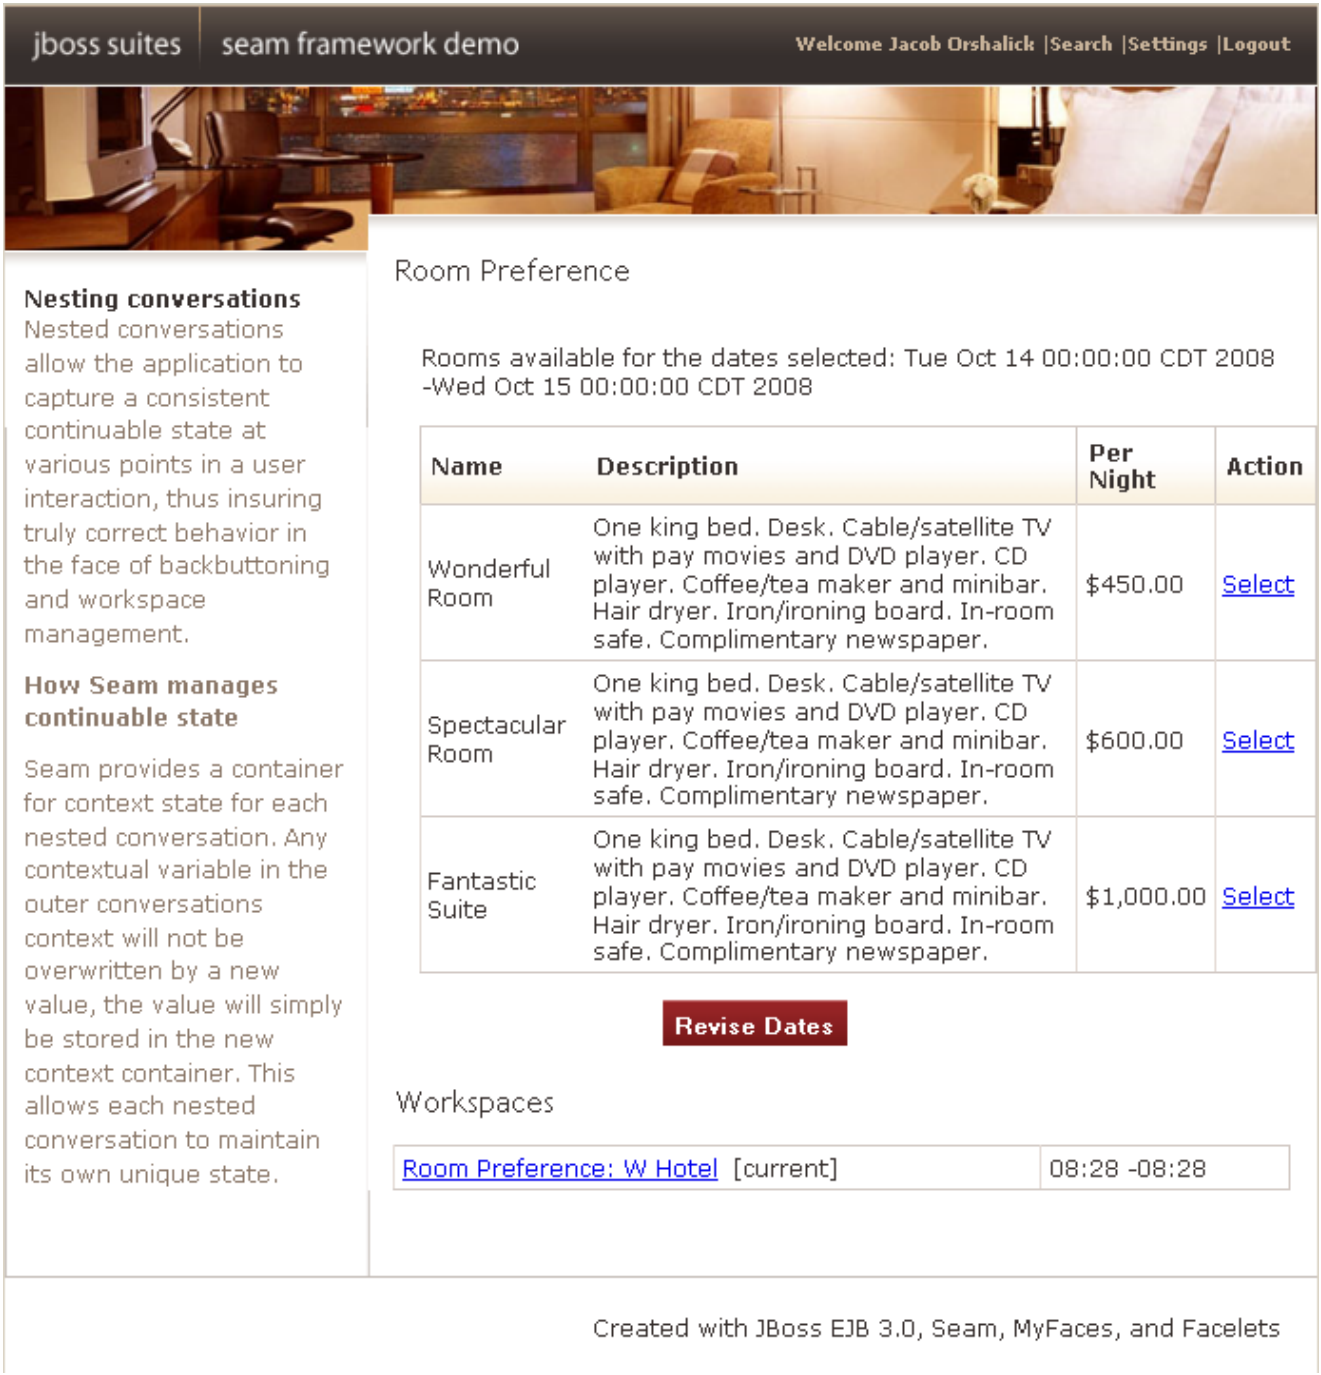

######################################
`HTTPSession`
###

Wonderful Room ############### ## *Fantastic Suite* ############### ################################ *Wonderful Room*

##
##

1.7.2.

###
####################################

 # 1.28. RoomPreferenceAction.java

```
@Stateful
@Name("roomPreference")
@Restrict("#{identity.loggedIn}")
public class RoomPreferenceAction implements RoomPreference
{

   @Logger
   private Log log;

   @In private Hotel hotel;

   @In private Booking booking;

   @DataModel(value="availableRooms")
   private List<Room
> availableRooms;

   @DataModelSelection(value="availableRooms")
   private Room roomSelection;

   @In(required=false, value="roomSelection")
   @Out(required=false, value="roomSelection")
   private Room room;


   @Factory("availableRooms")                                          (1)
   public void loadAvailableRooms()
   {
                          availableRooms     =     hotel.getAvailableRooms(booking.getCheckinDate(),
 booking.getCheckoutDate());
      log.info("Retrieved #0 available rooms", availableRooms.size());
   }

   public BigDecimal getExpectedPrice()
   {
```

```
    log.info("Retrieving price for room #0", roomSelection.getName());

    return booking.getTotal(roomSelection);
  }

                                                    (2)

  @Begin(nested=true)
  public String selectPreference()
  {
    log.info("Room selected");

                                                    (3)

    this.room = this.roomSelection;

    return "payment";
  }

  public String requestConfirmation()
  {
    // all validations are performed through the s:validateAll, so checks are already
    // performed
    log.info("Request confirmation from user");

    return "confirm";
  }


                                                          (4)
  @End(beforeRedirect=true)
  public String cancel()
  {
    log.info("ending conversation");

    return "cancel";
  }

  @Destroy @Remove
  public void destroy() {}
}
```

(1) The `hotel` instance is injected from the conversation context. The hotel is loaded through an *extended persistence context* so that the entity remains managed throughout the conversation. This allows us to lazily load the `availableRooms` through an `@Factory` method by simply walking the assocation.

```
                                                                    ###########
```

```
(2) @Begin(nested=true)                  ##################################
    ##########################################################################################
    ##########################################################################
(3) roomSelection       #       @DataModelSelection       ####################
    ##########################roomSelection   ##################################
    ################################################
(4) @End ################################## ############ roomSelection ########
```

```
##############################  nestedbooking  ######################  (booking)
############### (room selections) #########
```

1.29. rooms.xhtml

```
<div class="section">
      <h1
>Room Preference</h1>
</div>

<div class="section">
      <h:form id="room_selections_form">
            <div class="section">
                  <h:outputText styleClass="output"
                        value="No rooms available for the dates selected: "
                        rendered="#{availableRooms != null and availableRooms.rowCount == 0}"/>
                  <h:outputText styleClass="output"
                        value="Rooms available for the dates selected: "
                        rendered="#{availableRooms != null and availableRooms.rowCount
> 0}"/>

                  <h:outputText styleClass="output" value="#{booking.checkinDate}"/> -
                  <h:outputText styleClass="output" value="#{booking.checkoutDate}"/>
                                                      (1)
                  <br/><br/>

                  <h:dataTable value="#{availableRooms}" var="room"
                              rendered="#{availableRooms.rowCount
> 0}">
                        <h:column>
                              <f:facet name="header"
>Name</f:facet>
                              #{room.name}
                        </h:column>
                        <h:column>
```

```
                        <f:facet name="header"
>Description</f:facet>
                        #{room.description}
                    </h:column>
                    <h:column>
                        <f:facet name="header"                    (2)
>Per Night</f:facet>
                        <h:outputText value="#{room.price}">
                            <f:convertNumber type="currency" currencySymbol="$"/>
                        </h:outputText>
                    </h:column>
                    <h:column>
                        <f:facet name="header"
>Action</f:facet>
                        <h:commandLink id="selectRoomPreference(3)"
                            action="#{roomPreference.selectPreference}"
>Select</h:commandLink>
                    </h:column>
                </h:dataTable>
            </div>
            <div class="entry">
                <div class="label"
> </div>
                <div class="input">
                    <s:button id="cancel" value="Revise Dates" view="/book.xhtml"/>
                </div>
            </div
>
        </h:form>
</div>
```

(1) EL ##########RoomPreferenceAction ###### @Factory ####### #{availableRooms} ######### @Factory ##### *@DataModel* ############################## 1 ##########

(2) #{roomPreference.selectPreference} ###################### @DataModelSelection ########## ################################

(3) ######### /book.xhtml ####### ################ # room preference ######## ################################ <s:button > ######## /book.xhtml ############################

HotelBookingAction.#########################

1.30. HotelBookingAction.java

```
@Stateful
@Name("hotelBooking")
@Restrict("#{identity.loggedIn}")
public class HotelBookingAction implements HotelBooking
{

   @PersistenceContext(type=EXTENDED)
   private EntityManager em;

   @In
   private User user;

   @In(required=false) @Out
   private Hotel hotel;

   @In(required=false)
   @Out(required=false)
   private Booking booking;

   @In(required=false)
   private Room roomSelection;

   @In
   private FacesMessages facesMessages;

   @In
   private Events events;

   @Logger
   private Log log;

   @Begin
   public void selectHotel(Hotel selectedHotel)
   {
      log.info("Selected hotel #0", selectedHotel.getName());
      hotel = em.merge(selectedHotel);
   }

   public String setBookingDates()
   {
      // the result will indicate whether or not to begin the nested conversation
```

```
    // as well as the navigation.  if a null result is returned, the nested
    // conversation will not begin, and the user will be returned to the current
    // page to fix validation issues
    String result = null;

    Calendar calendar = Calendar.getInstance();
    calendar.add(Calendar.DAY_OF_MONTH, -1);

    // validate what we have received from the user so far
    if ( booking.getCheckinDate().before( calendar.getTime() ) )
    {
      facesMessages.addToControl("checkinDate", "Check in date must be a future date");
    }
    else if ( !booking.getCheckinDate().before( booking.getCheckoutDate() ) )
    {
       facesMessages.addToControl("checkoutDate", "Check out date must be later than check
in date");
    }
    else
    {
      result = "rooms";
    }

    return result;
  }

  public void bookHotel()
  {
    booking = new Booking(hotel, user);
    Calendar calendar = Calendar.getInstance();
    booking.setCheckinDate( calendar.getTime() );
    calendar.add(Calendar.DAY_OF_MONTH, 1);
    booking.setCheckoutDate( calendar.getTime() );
  }

  @End(root=true)
                                                                    (1)
  public void confirm()
  {
    // on confirmation we set the room preference in the booking.  the room preference
    // will be injected based on the nested conversation we are in.
    booking.setRoomPreference(roomSelection);
                                                                    (2)
    em.persist(booking);
```

```
      facesMessages.add("Thank you, #{user.name}, your confimation number for #{hotel.name}
 is #{booking.id}");
      log.info("New booking: #{booking.id} for #{user.username}");
      events.raiseTransactionSuccessEvent("bookingConfirmed");
    }


    @End(root=true, beforeRedirect=true)                    3
    public void cancel() {}

    @Destroy @Remove
    public void destroy() {}
}
```

1. Annotating an action with `@End(root=true)` ends the root conversation which effectively destroys the entire conversation stack. When any conversation is ended, it's nested conversations are ended as well. As the root is the conversation that started it all, this is a simple way to destroy and release all state associated with a workspace once the booking is confirmed.
2. `roomSelection` `###########` `booking` `#########` ## ##
3. `@End(root=true,` `beforeRedirect=true)` ##

##

1.8. Seam # jBPM ################: DVD

DVD ################ ################ jBPM #################

############################## jPDL ###############

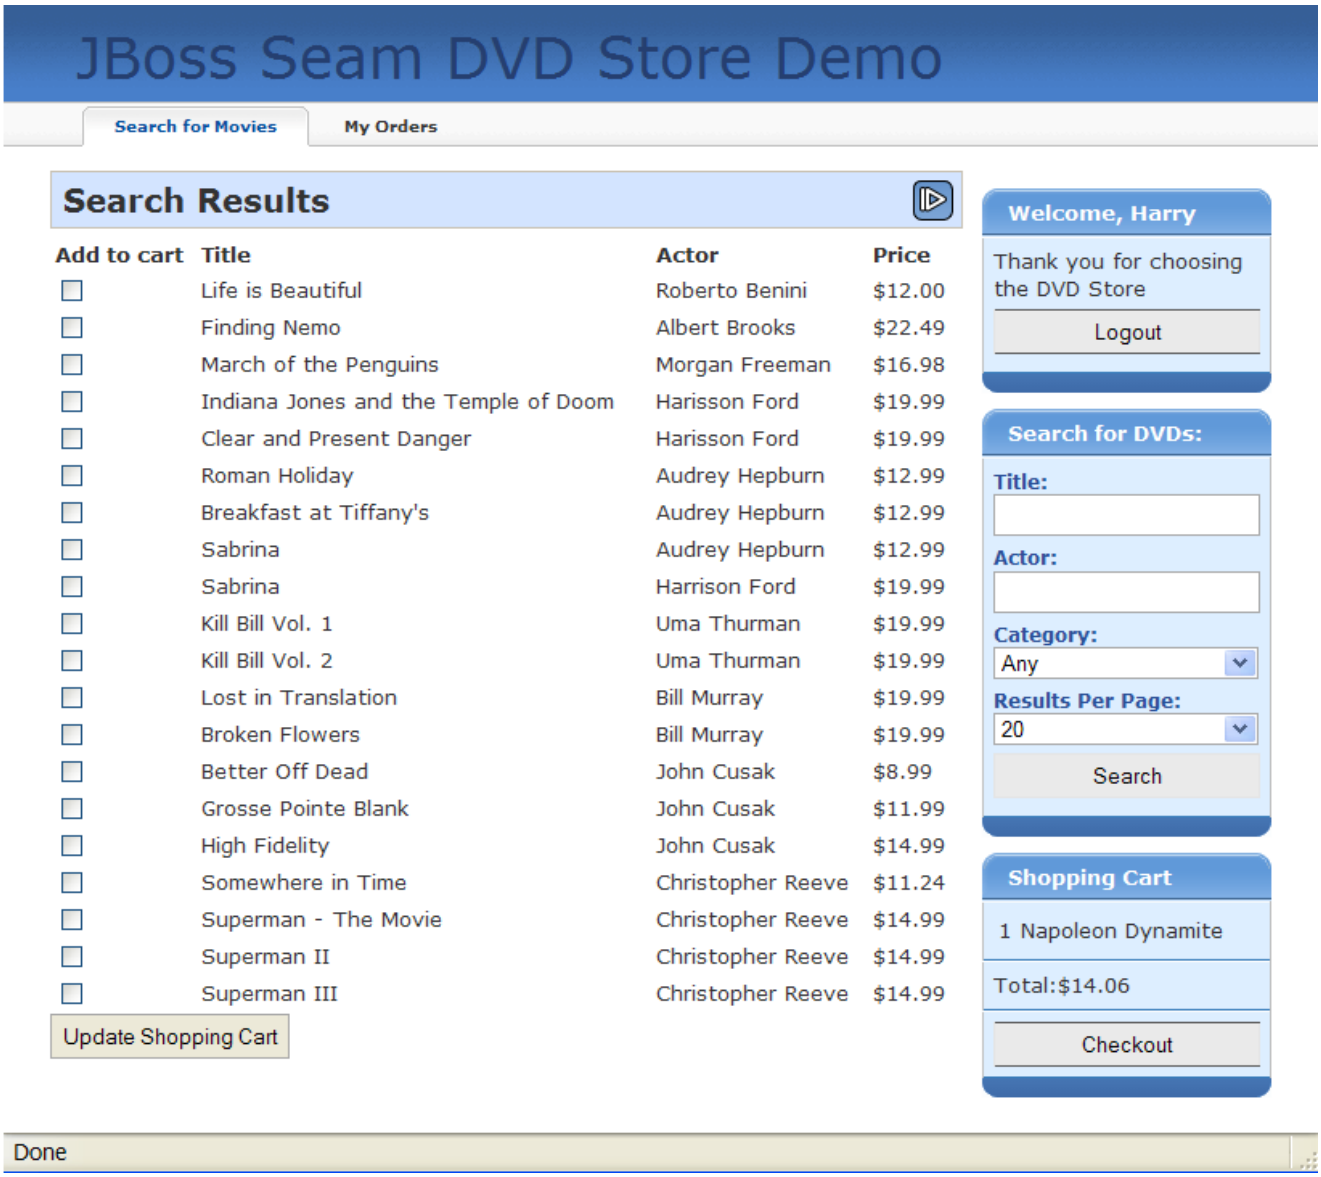
JBoss Seam DVD Store Demo
Search for Movies
My Orders
Search Results
Add to cart
Title
Actor
Price
Life is Beautiful
Roberto Benini
$12.00
Finding Nemo
Albert Brooks
$22.49
March of the Penguins
Morgan Freeman
$16.98
Indiana Jones and the Temple of Doom
Harisson Ford
$19.99
Clear and Present Danger
Harisson Ford
$19.99
Roman Holiday
Audrey Hepburn
$12.99
Breakfast at Tiffany's
Audrey Hepburn
$12.99
Sabrina
Audrey Hepburn
$12.99
Sabrina
Harrison Ford
$19.99
Kill Bill Vol. 1
Uma Thurman
$19.99
Kill Bill Vol. 2
Uma Thurman
$19.99
Lost in Translation
Bill Murray
$19.99
Broken Flowers
Bill Murray
$19.99
Better Off Dead
John Cusak
$8.99
Grosse Pointe Blank
John Cusak
$11.99
High Fidelity
John Cusak
$14.99
Somewhere in Time
Christopher Reeve
$11.24
Superman - The Movie
Christopher Reeve
$14.99
Superman II
Christopher Reeve
$14.99
Superman III
Christopher Reeve
$14.99
Update Shopping Cart
Welcome, Harry
Thank you for choosing the DVD Store
Logout
Search for DVDs:
Title:
Actor:
Category:
Any
Results Per Page:
20
Search
Shopping Cart
1 Napoleon Dynamite
Total:$14.06
Checkout
Done

################################## jBPM #######
##

Seam DVD ########## `dvdstore` ##########

1.9. Blog ############## URL

Seam ########## ########## (######## *(content)* ##########) ########## ########## ########## ## Blog ##### Seam ##### RESTful ########## ##########

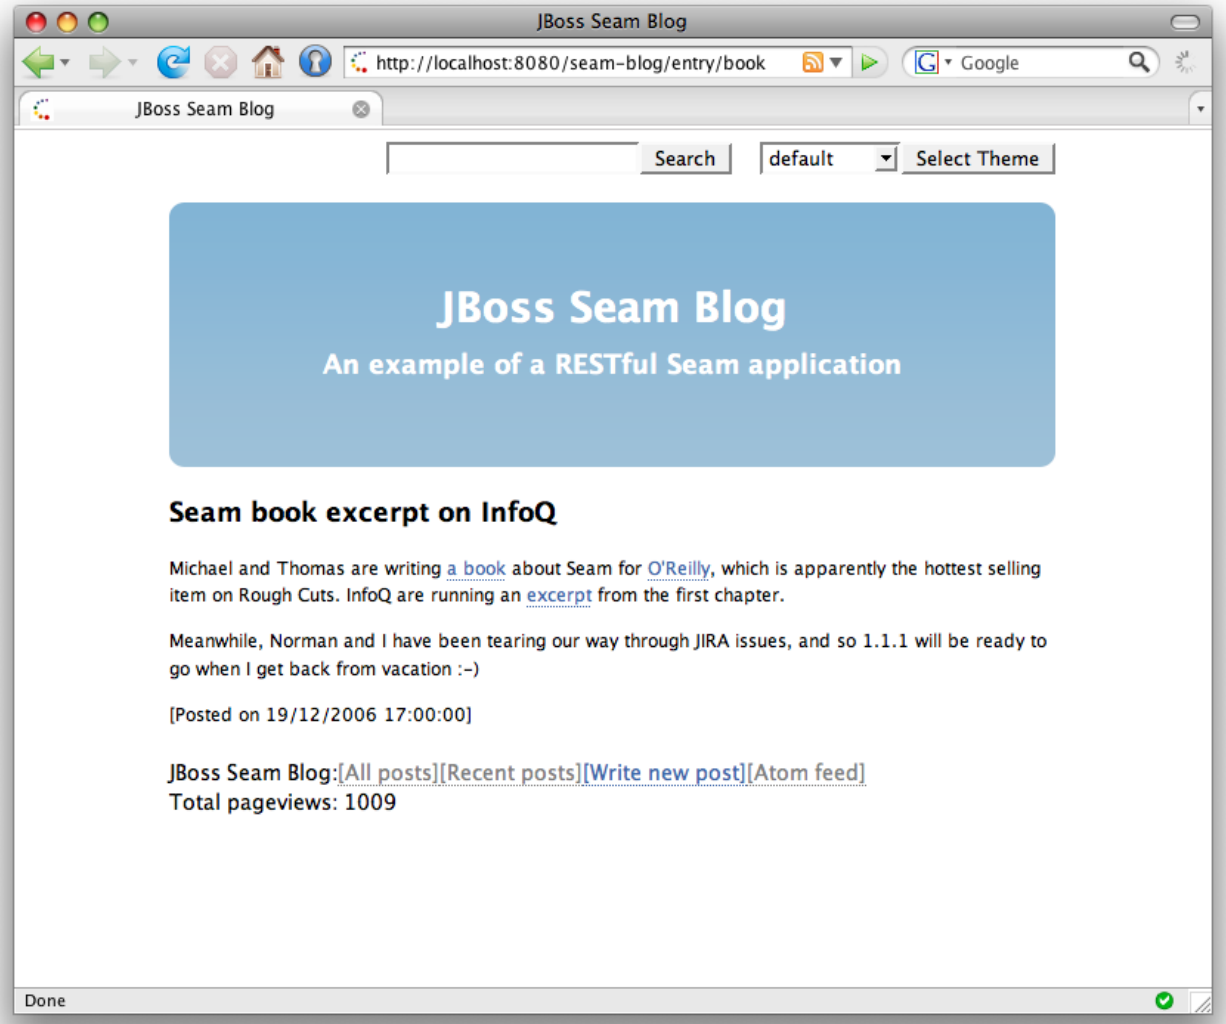

Blog ######"#### (PULL) " - #### MVC ############ ## ################################### (PULL)

1.9.1. "PULL" # MVC

`index.xhtml` facelets ##############################

 # 1.31.

```
<h:dataTable value="#{blog.recentBlogEntries}" var="blogEntry" rows="3">
 <h:column>
   <div class="blogEntry">
     <h3
>#{blogEntry.title}</h3>
```

```
      <div>
       <s:formattedText value="#{blogEntry.excerpt==null ? blogEntry.body : blogEntry.excerpt}"/>
      </div>
      <p>
        <s:link view="/entry.xhtml" rendered="#{blogEntry.excerpt!=null}" propagation="none"
            value="Read more...">
          <f:param name="blogEntryId" value="#{blogEntry.id}"/>
        </s:link>
      </p>
      <p>
        [Posted on 
        <h:outputText value="#{blogEntry.date}">
           <f:convertDateTime timeZone="#{blog.timeZone}" locale="#{blog.locale}" type="both"/>
        </h:outputText
>]
         
        <s:link view="/entry.xhtml" propagation="none" value="[Link]">
          <f:param name="blogEntryId" value="#{blogEntry.id}"/>
        </s:link>
      </p>
    </div>
 </h:column>
</h:dataTable
>
```

If we navigate to this page from a bookmark, how does the `#{blog.recentBlogEntries}` data used by the `<h:dataTable>` actually get initialized? The `Blog` is retrieved lazily—"pulled"—when needed, by a Seam component named `blog`. This is the opposite flow of control to what is used in traditional action-based web frameworks like Struts.

1.32.

```
@Name("blog")
@Scope(ScopeType.STATELESS)
@AutoCreate
public class BlogService
{

  @In EntityManager entityManager;  (1)

  @Unwrap  (2)
  public Blog getBlog()
```

```
  {
        return (Blog) entityManager.createQuery("select distinct b from Blog b left join fetch
 b.blogEntries")
         .setHint("org.hibernate.cacheable", true)
         .getSingleResult();
  }

}
```

1. ########## *Seam* ########## *(seam-managed persistence context)* ######### ##################################EJB3 ######### Seam ########## ######### Web ##
2. The `@Unwrap` annotation tells Seam to provide the return value of the method—the `Blog`—instead of the actual `BlogService` component to clients. This is the Seam *manager component pattern*.

################## ##

1.9.2.

Blog ###### ############ Blog ######################### ####facelet #######`template.xhtml` ##### `menu.xhtml`

1.33.

```
<div id="search">
  <h:form>
    <h:inputText value="#{searchAction.searchPattern}"/>
    <h:commandButton value="Search" action="/search.xhtml"/>
  </h:form>
</div>
>
```

####################### ################### ###################### ####### (outcome) ### JSF ### ID ########## Seam ###################### ### ID ########## ######################################

```
<navigation-rule>
  <navigation-case>
    <from-outcome
>searchResults</from-outcome>
    <to-view-id
>/search.xhtml</to-view-id>
```

```
    <redirect/>
  </navigation-case>
</navigation-rule
>
```

########################

```
<div id="search">
  <h:form>
    <h:inputText value="#{searchAction.searchPattern}"/>
    <h:commandButton value="Search" action="searchResults"/>
  </h:form>
</div
>
```

But when we redirect, we need to include the values submitted with the form in the URL get a bookmarkable URL like `http://localhost:8080/seam-blog/search/`. JSF does not provide an easy way to do this, but Seam does. We use two Seam features to accomplish this: *page parameters* and *URL rewriting*. Both are defined in `WEB-INF/pages.xml`:

1.34.

```
<pages>
  <page view-id="/search.xhtml">
    <rewrite pattern="/search/{searchPattern}"/>
    <rewrite pattern="/search"/>

    <param name="searchPattern" value="#{searchService.searchPattern}"/>

  </page>
  ...
</pages
>
```

Seam # searchPattern ############## #{searchService.searchPattern} ################ Seam # URL ###################################

Without URL rewriting, the URL for a search on the term `book` would be `http://localhost:8080/seam-blog/seam/search.xhtml?searchPattern=book`. This is nice, but Seam can make the URL even simpler using a rewrite rule. The first rewrite rule, for the pattern `/search/{searchPattern}`, says that any time we have have a URL for search.xhtml with a searchPattern

request parameter, we can fold that URL into the simpler URL. So,the URL we saw earlier, `http://localhost:8080/seam-blog/seam/search.xhtml?searchPattern=book` can be written instead as `http://localhost:8080/seam-blog/search/book`.

##############URL ########### Seam ###### URL
URL
#################### `components.xml` ################

```
<web:rewrite-filter view-mapping="/seam/*" />
```

########## `search.xhtml` ##########

```
<h:dataTable value="#{searchResults}" var="blogEntry">
  <h:column>
    <div>
      <s:link view="/entry.xhtml" propagation="none" value="#{blogEntry.title}">
        <f:param name="blogEntryId" value="#{blogEntry.id}"/>
      </s:link>
      posted on
      <h:outputText value="#{blogEntry.date}">
         <f:convertDateTime timeZone="#{blog.timeZone}" locale="#{blog.locale}" type="both"/>
      </h:outputText>
    </div>
  </h:column>
</h:dataTable
>
```

Hibernate ##################### "PULL" # MVC

```
@Name("searchService")
public class SearchService
{

   @In
   private FullTextEntityManager entityManager;

   private String searchPattern;

   @Factory("searchResults")
   public List<BlogEntry
> getSearchResults()
```

```
  {
    if (searchPattern==null || "".equals(searchPattern) ) {
      searchPattern = null;
            return  entityManager.createQuery("select be from BlogEntry be order by date
 desc").getResultList();
    }
    else
    {
      Map<String,Float
> boostPerField = new HashMap<String,Float
>();
      boostPerField.put( "title", 4f );
      boostPerField.put( "body", 1f );
      String[] productFields = {"title", "body"};
      QueryParser parser = new MultiFieldQueryParser(productFields, new StandardAnalyzer(),
 boostPerField);
      parser.setAllowLeadingWildcard(true);
      org.apache.lucene.search.Query luceneQuery;
      try
      {
        luceneQuery = parser.parse(searchPattern);
      }
      catch (ParseException e)
      {
        return null;
      }

      return entityManager.createFullTextQuery(luceneQuery, BlogEntry.class)
          .setMaxResults(100)
          .getResultList();
    }
  }

  public String getSearchPattern()
  {
    return searchPattern;
  }

  public void setSearchPattern(String searchPattern)
  {
    this.searchPattern = searchPattern;
  }
```

```
}
```

1.9.3. RESTful ######### "PUSH" # MVC

#####RESTful ######### PUSH # MVC ################## ####Seam ########## ########## Blog ###### Blog ###### `entry.xhtml` ################## ######################PULL # MVC #################

`entryAction` ######### Struts ######## PUSH # MVC ########################

```
@Name("entryAction")
@Scope(STATELESS)
public class EntryAction
{
  @In Blog blog;

  @Out BlogEntry blogEntry;

  public void loadBlogEntry(String id) throws EntryNotFoundException
  {
    blogEntry = blog.getBlogEntry(id);
    if (blogEntry==null) throw new EntryNotFoundException(id);
  }

}
```

##########`pages.xml` #########

```
<pages>
  ...

   <page view-id="/entry.xhtml"
>
      <rewrite pattern="/entry/{blogEntryId}" />
      <rewrite pattern="/entry" />

      <param name="blogEntryId"
           value="#{blogEntry.id}"/>

      <action execute="#{entryAction.loadBlogEntry(blogEntry.id)}"/>
   </page>
```

```
   <page view-id="/post.xhtml" login-required="true">
      <rewrite pattern="/post" />

      <action execute="#{postAction.post}"
            if="#{validation.succeeded}"/>

      <action execute="#{postAction.invalid}"
            if="#{validation.failed}"/>

      <navigation from-action="#{postAction.post}">
         <redirect view-id="/index.xhtml"/>
      </navigation>
   </page>

   <page view-id="*">
      <action execute="#{blog.hitCount.hit}"/>
   </page>

</pages
>
```

##
JSF EL ############Seam ############### JSF

When the `entry.xhtml` page is requested, Seam first binds the page parameter `blogEntryId` to the model. Keep in mind that because of the URL rewriting, the blogEntryId parameter name won't show up in the URL. Seam then runs the page action, which retrieves the needed data—the `blogEntry`—and places it in the Seam event context. Finally, the following is rendered:

```
<div class="blogEntry">
   <h3
>#{blogEntry.title}</h3>
   <div>
      <s:formattedText value="#{blogEntry.body}"/>
   </div>
   <p>
   [Posted on 
   <h:outputText value="#{blogEntry.date}">
      <f:convertDateTime timeZone="#{blog.timeZone}" locale="#{blog.locale}" type="both"/>
   </h:outputText
>]
   </p>
```

```
</div
>
```

blog ##################### `EntryNotFoundException` ########### exception is thrown. ##### 505 ####### 404 ########## ####################

```
@ApplicationException(rollback=true)
@HttpError(errorCode=HttpServletResponse.SC_NOT_FOUND)
public class EntryNotFoundException extends Exception
{
  EntryNotFoundException(String id)
  {
    super("entry not found: " + id);
  }
}
```

##################################

```
@Name("entryAction")
@Scope(STATELESS)
public class EntryAction
{
  @In(create=true)
  private Blog blog;

  @In @Out
  private BlogEntry blogEntry;

  public void loadBlogEntry() throws EntryNotFoundException
  {
    blogEntry = blog.getBlogEntry( blogEntry.getId() );
    if (blogEntry==null) throw new EntryNotFoundException(id);
  }
}
```

```
<pages>
  ...

  <page view-id="/entry.xhtml" action="#{entryAction.loadBlogEntry}">
    <param name="blogEntryId" value="#{blogEntry.id}"/>
```

```
  </page>

  ...
</pages
>
```

####################

atom

seam-gen #### Seam

Seam ################################## Eclipse ############## Seam ############ ##

####Seam ############ ## ############################## Ruby ################################ ############

#########seam-gen # JBoss AS ############ ## J2EE # Java 5 ####################

Eclipse ##### seam-gen ################### Eclipse ################################ Eclipse ############### ################### — ########################

Seam-gen ########################## Hibernate Tools ############ Ant ######## ##############################

2.1.

######JDK 5 ### JDK 6 (### *#40.1. #JDK #####* ##) # JBoss AS 4.2 # Ant 1.6 ######### Eclipse ## JBoss IDE ##### # TestNG ############################ Eclipse # JBoss ####### JBoss ############ ######## JBoss ########## ####Seam ##

JBoss # WAR # EAR ######################### ###### JVM ######### — ########## — EAR ################### JVM # perm gen ###################### ################# perm gen space ######## JVM # JBoss ############### JBoss IDE ## JBoss ########## #VM ################################ ##############

```
-Xms512m -Xmx1024m -XX:PermSize=256m -XX:MaxPermSize=512
```

##########################

```
-Xms256m -Xmx512m -XX:PermSize=128m -XX:MaxPermSize=256
```

######### JBoss ########### `bin/run.conf` # JVM #############

############################ — `OutOfMemoryException` ################

2.2. ### Eclipse

################ seam-gen ########## (JBoss AS ############Eclipse ###################) ########################

```
cd jboss-seam-2.1.x
seam setup
```

##########################

```
~/workspace/jboss-seam$ ./seam setup
Buildfile: build.xml

init:

setup:
     [echo] Welcome to seam-gen :-)
     [input] Enter your Java project workspace (the directory that contains your Seam projects) [C:/Projects] [C:/Projects]
/Users/pmuir/workspace
    [input] Enter your JBoss home directory [C:/Program Files/jboss-4.2.2.GA] [C:/Program Files/jboss-4.2.2.GA]
/Applications/jboss-4.2.2.GA
    [input] Enter the project name [myproject] [myproject]
helloworld
     [echo] Accepted project name as: helloworld
    [input] Select a RichFaces skin (not applicable if using ICEFaces) [blueSky] ([blueSky], classic, ruby, wine, deepMarine, emeraldTown, sakura, DEFAULT)

     [input] Is this project deployed as an EAR (with EJB components) or a WAR (with no EJB support) [ear]  ([ear], war, )

      [input] Enter the Java package name for your session beans [com.mydomain.helloworld] [com.mydomain.helloworld]
org.jboss.helloworld
        [input] Enter the Java package name for your entity beans [org.jboss.helloworld] [org.jboss.helloworld]

       [input] Enter the Java package name for your test cases [org.jboss.helloworld.test] [org.jboss.helloworld.test]

    [input] What kind of database are you using? [hsql]  ([hsql], mysql, oracle, postgres, mssql, db2, sybase, enterprisedb, h2)
mysql
     [input] Enter the Hibernate dialect for your database [org.hibernate.dialect.MySQLDialect] [org.hibernate.dialect.MySQLDialect]
```

```
    [input] Enter the filesystem path to the JDBC driver jar [lib/hsqldb.jar] [lib/hsqldb.jar]
/Users/pmuir/java/mysql.jar
            [input] Enter JDBC driver class for your database [com.mysql.jdbc.Driver]
 [com.mysql.jdbc.Driver]

    [input] Enter the JDBC URL for your database [jdbc:mysql:///test] [jdbc:mysql:///test]
jdbc:mysql:///helloworld
    [input] Enter database username [sa] [sa]
pmuir
    [input] Enter database password [] []

    [input] skipping input as property hibernate.default_schema.new has already been set.
    [input] Enter the database catalog name (it is OK to leave this blank) [] []

    [input] Are you working with tables that already exist in the database? [n]  (y, [n], )
y
    [input] Do you want to drop and recreate the database tables and data in import.sql each time
 you deploy? [n]  (y, [n], )
n
    [input] Enter your ICEfaces home directory (leave blank to omit ICEfaces) [] []

[propertyfile] Creating new property file: /Users/pmuir/workspace/jboss-seam/seam-gen/
build.properties
     [echo] Installing JDBC driver jar to JBoss server
     [echo] Type 'seam create-project' to create the new project

BUILD SUCCESSFUL
Total time: 1 minute 32 seconds
~/workspace/jboss-seam $
```

########################## ########### enter #############

########################## EAR ######## WAR ################## EAR ######## EJB 3.0 #### Java EE 5 ###### WAR ######## EJB 3.0 ######### J2EE ################ WAR # EAR ######################## JBoss #### EJB3 ################################ `ear` ########## ##### `war` ########## ### ########### EAR ######################## WAR ###################################

##################### ######################## seam-gen #############

`seam-gen/build.properties` ########### #### `seam setup`

################Eclipse ################ ##################

```
seam new-project
```

```
C:\Projects\jboss-seam>seam new-project
Buildfile: build.xml

...

new-project:
     [echo] A new Seam project named 'helloworld' was created in the C:\Projects directory
     [echo] Type 'seam explode' and go to http://localhost:8080/helloworld
    [echo] Eclipse Users: Add the project into Eclipse using File > New > Project and select General
 > Project (not Java Project)
     [echo] NetBeans Users: Open the project in NetBeans

BUILD SUCCESSFUL
Total time: 7 seconds
C:\Projects\jboss-seam>
```

Seam jar##### jar ### JDBC #### jar #### Eclipse ############ Eclipse ######## Ant ################################## facelets ########### ############## `## -> ######... -> ## -> ###### -> ##` ############### ####### (##### `helloworld`) ###### ## ######### Eclipse ################ JBoss AS ################## ############### `Java` ###### ############

Eclipse ###### JDK # Java SE 5 #### Java SE 6 # JDK ###### `###### -> ##### -> Java` ##### #####Java SE 5 ### JDK ###########

########Eclise ##### `seam explode` ############################

welcome page ######`http://localhost:8080/helloworld` ######### ########## `view/layout/template.xhtml` ##### facelets page, `view/home.xhtml` ### Eclipse ######################## ################################

############## XML ############################## ########### Java EE ######## ######## ############### # Seam ####### 90% ######## (seam-gen ##############################)

################################## HSQLDB #### TestNG ############### `persistence-test.xml` # `import-test.sql` ############ `import-test.sql` ## `myproject-dev-ds.xml#persistence-dev.xml # import-dev.sql` ################################## seam-gen ## `myproject-prod-ds.xml# persistence-prod.xml # import-prod.sql` ###### ################################## ############################

2.3.

############## Web ################# ######### Java ######################### Web ########################### #################

```
seam new-action
```

Seam ################################### facelets page # Seam ###############

```
C:\Projects\jboss-seam>seam new-action
Buildfile: build.xml

validate-workspace:

validate-project:

action-input:
   [input] Enter the Seam component name
ping
   [input] Enter the local interface name [Ping]

   [input] Enter the bean class name [PingBean]

   [input] Enter the action method name [ping]

   [input] Enter the page name [ping]


setup-filters:

new-action:
     [echo] Creating a new stateless session bean component with an action method
     [copy] Copying 1 file to C:\Projects\helloworld\src\hot\org\jboss\helloworld
     [copy] Copying 1 file to C:\Projects\helloworld\src\hot\org\jboss\helloworld
     [copy] Copying 1 file to C:\Projects\helloworld\src\hot\org\jboss\helloworld\test
     [copy] Copying 1 file to C:\Projects\helloworld\src\hot\org\jboss\helloworld\test
     [copy] Copying 1 file to C:\Projects\helloworld\view
     [echo] Type 'seam restart' and go to http://localhost:8080/helloworld/ping.seam

BUILD SUCCESSFUL
Total time: 13 seconds
```

```
C:\Projects\jboss-seam>
```

Seam ############### ############################## seam restart ####### Eclipse ############## build.xml #### # restart ######################## ############# Eclipse # resources/META-INF/application.xml ############## ################ *JBoss*

###http://localhost:8080/helloworld/ping.seam ###################### ####### src directory ###################################### ping() ################## ################

####PingTest.xml ##### test ########## Eclipse # TestNG ###################### ######## seam test ############### ########## test ############

2.4.

############################

```
seam new-form
```

```
C:\Projects\jboss-seam>seam new-form
Buildfile: C:\Projects\jboss-seam\seam-gen\build.xml

validate-workspace:

validate-project:

action-input:
   [input] Enter the Seam component name
hello
   [input] Enter the local interface name [Hello]

   [input] Enter the bean class name [HelloBean]

   [input] Enter the action method name [hello]

   [input] Enter the page name [hello]


setup-filters:

new-form:
     [echo] Creating a new stateful session bean component with an action method
```

```
    [copy] Copying 1 file to C:\Projects\hello\src\hot\com\hello
    [copy] Copying 1 file to C:\Projects\hello\src\hot\com\hello
    [copy] Copying 1 file to C:\Projects\hello\src\hot\com\hello\test
    [copy] Copying 1 file to C:\Projects\hello\view
    [copy] Copying 1 file to C:\Projects\hello\src\hot\com\hello\test
    [echo] Type 'seam restart' and go to http://localhost:8080/hello/hello.seam

BUILD SUCCESSFUL
Total time: 5 seconds
C:\Projects\jboss-seam>
```

################ http://localhost:8080/helloworld/hello.seam ###### ################ ########## ################ Seam ################## (Java ##)

2.5.

######################## (########################## seam setup #######) ##############

```
seam generate-entities
```

########## http://localhost:8080/helloworld ######### ########## ############ ################## ##################################### Seam ### ## seam-gen ######################

2.6. ### JPA/EJB3

################ src/main ##################

```
seam generate-ui
```

################http://localhost:8080/helloworld #########

2.7. EAR

Java EE 5 ### ### seam unexplode ############################ EAR ########## ########## seam deploy ####### ################ build ###### deploy ############ seam undeploy ### undeploy

################ *dev profile* ########## EAR # `persistence-dev.xml` ##### `import-dev.sql` ######## `myproject-dev-ds.xml` ############## ############# ########## *prod profile* #######

```
seam -Dprofile=prod deploy
```

—— ####`persistence-staging.xml`#`import-staging.sql`#`myproject-staging-ds.xml`##### `-Dprofile=staging`

2.8. Seam

############ Seam ################## ########################## `components.xml` ############## Seam # Facelets ########################

```
<core:init debug="true"
>
```

######### Web######################################

- facelets ###
- `pages.xml` ####

Java ################ ######################## (JBoss ################################## EAR ######### `application.xml`# WAR ######### `web.xml` ###)

########/#####/################ Seam # JavaBean ############################## ############## JavaBean ######## `WEB-INF/dev` ################### ############ WAR #### EAR ########### ### Seam

##################

- ######## JavaBean ################ EJB3 Bean ###### (###########)
- ##########################
- `components.xml` ##################################
- ################## `WEB-INF/dev` ######################
- Seam ########### `jboss-seam-debug.jar` # `WEB-INF/lib` ###########

- web.xml # Seam ######################
- ##

seam-gen ##### WAR ############## ##############src/hot ############################## ####### seam-gen # EAR ##############################

2.9. JBoss 4.0 # Seam

Seam 2.0 # JavaServer Faces 1.2 ########## JBoss AS #########JBoss 4.2 ############## ### JSF 1.2 ################### ## JBoss 4.0 ######### Seam 2.0 ############# ####### 2 ################ EJB3 ########## JBoss 4.0 ######## MyFaces # JSF 1.2 ############ ############Seam 2.0 ######### JBoss 4.0 #############

2.9.1. JBoss 4.0

JBoss 4.0 # Seam ###################### Seam ######## EJB3 ########### JEMS 1.2 ###### ###################### Seam # EJB3 ######################## JEMS ####### *http://labs.jboss.com/jemsinstaller/downloads* ##############

2.9.2. JSF 1.2 RI

JBoss 4.0 # Web ### `server/default/deploy/jbossweb-tomcat55.sar` ###### `jsf-libs` ######## `myfaces-api.jar` # `myfaces-impl.jar` ############ ########### `jsf-api.jar#jsf-impl.jar#el-api.jar` # `el-ri.jar` ############## JSF # JAR # Seam `lib` ############ el # JAR # Seam 1.2 ##############

`conf/web.xml` ############ `myfaces-impl.jar` # `jsf-impl.jar`

JBoss Tools #### Seam

JBoss Tools # Eclipse ############## JBoss Tools # Seam ###############facelets # Java #### Unified Expression Language (EL) #########jPDL################Seam ######################Eclipse ## Seam #################

#######Eclipse #########JBoss Tools ###########

seam-gen ## JBoss Tools # JBoss AS ## ################## seam-gen ##########

3.1.

JDK 5#JBoss AS 4.2#Eclipse 3.3#the JBoss Tools ##### (####Seam Tools#Visual Page Editor#jBPM Tools # JBoss AS Tools) ### TestNG ##### for Eclipse

TODO - ###################

3.2. ### Eclipse

Eclipse ##### *Seam* ##################

File -> New -> Seam Web Project #######

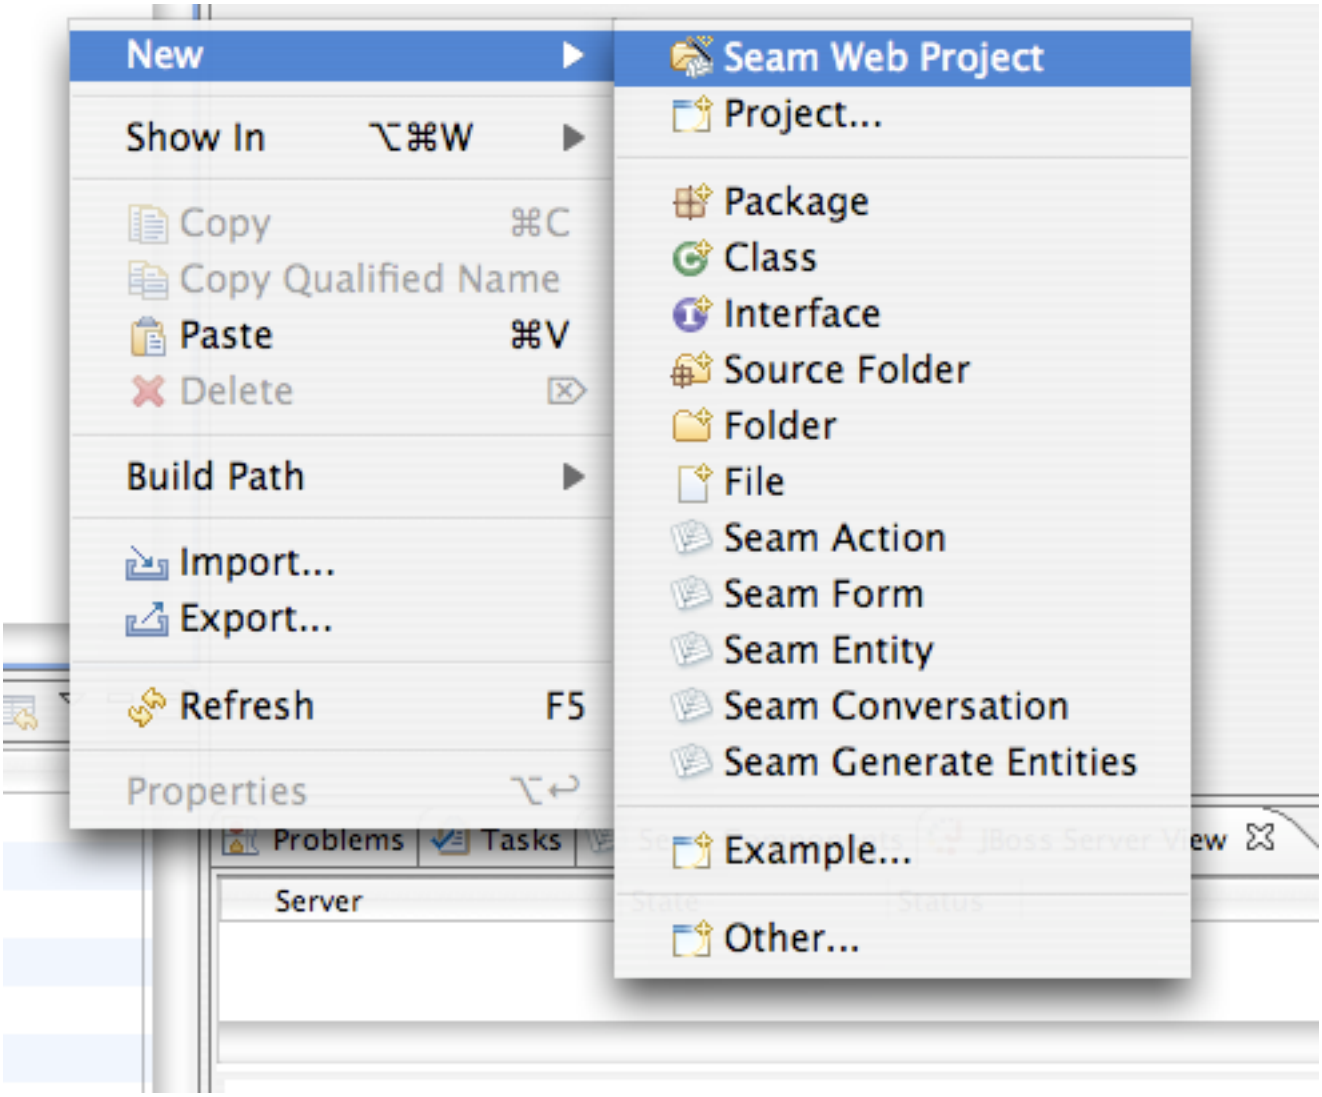

################## ########## `helloworld` #####

###JBoss Tools # JBoss AS ########## ### ########## ################ JBoss AS 4.2 ##########

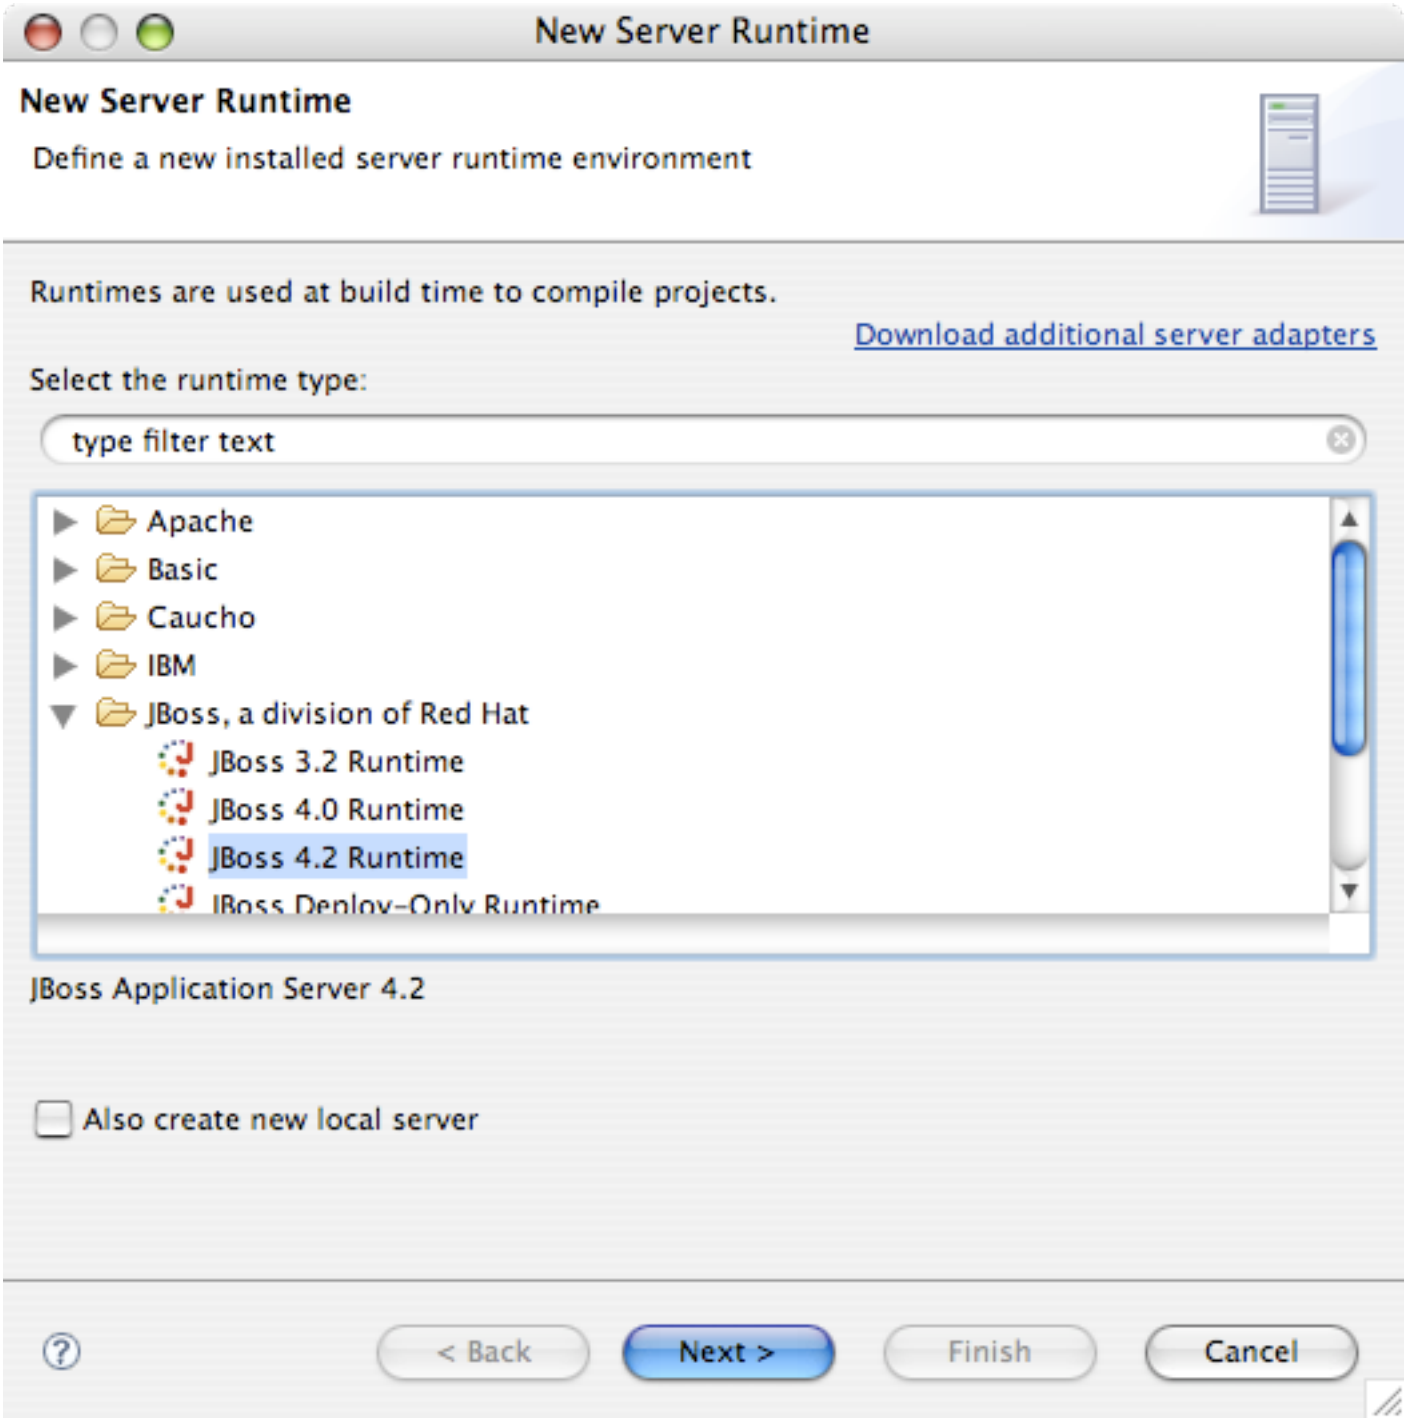
New Server Runtime
New Server Runtime
Define a new installed server runtime environment
Runtimes are used at build time to compile projects.
Download additional server adapters
Select the runtime type:
type filter text
Apache
Basic
Caucho
IBM
JBoss, a division of Red Hat
JBoss 3.2 Runtime
JBoss 4.0 Runtime
JBoss 4.2 Runtime
JBoss Deploy-Only Runtime
JBoss Application Server 4.2
Also create new local server
< Back
Next >
Finish
Cancel

##################################

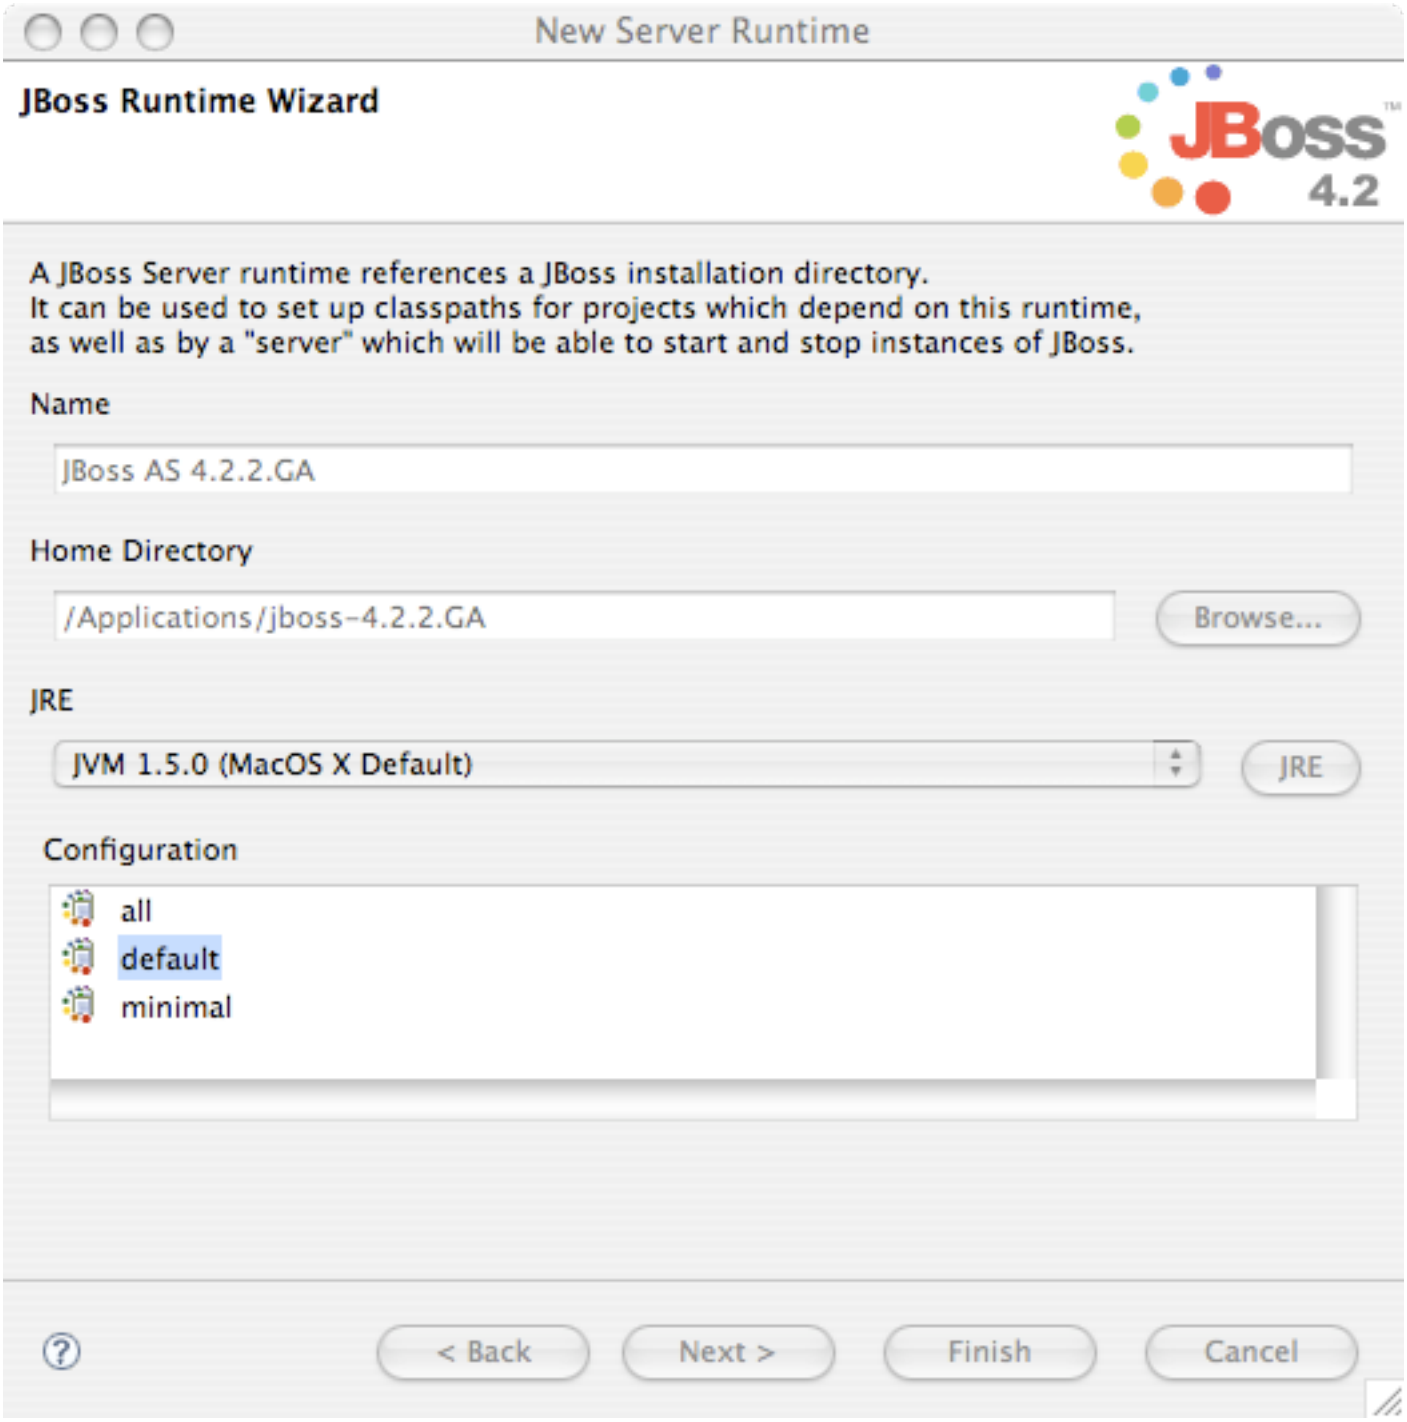

###JBoss Tools ################################ #### JBoss AS 4.2 ########################

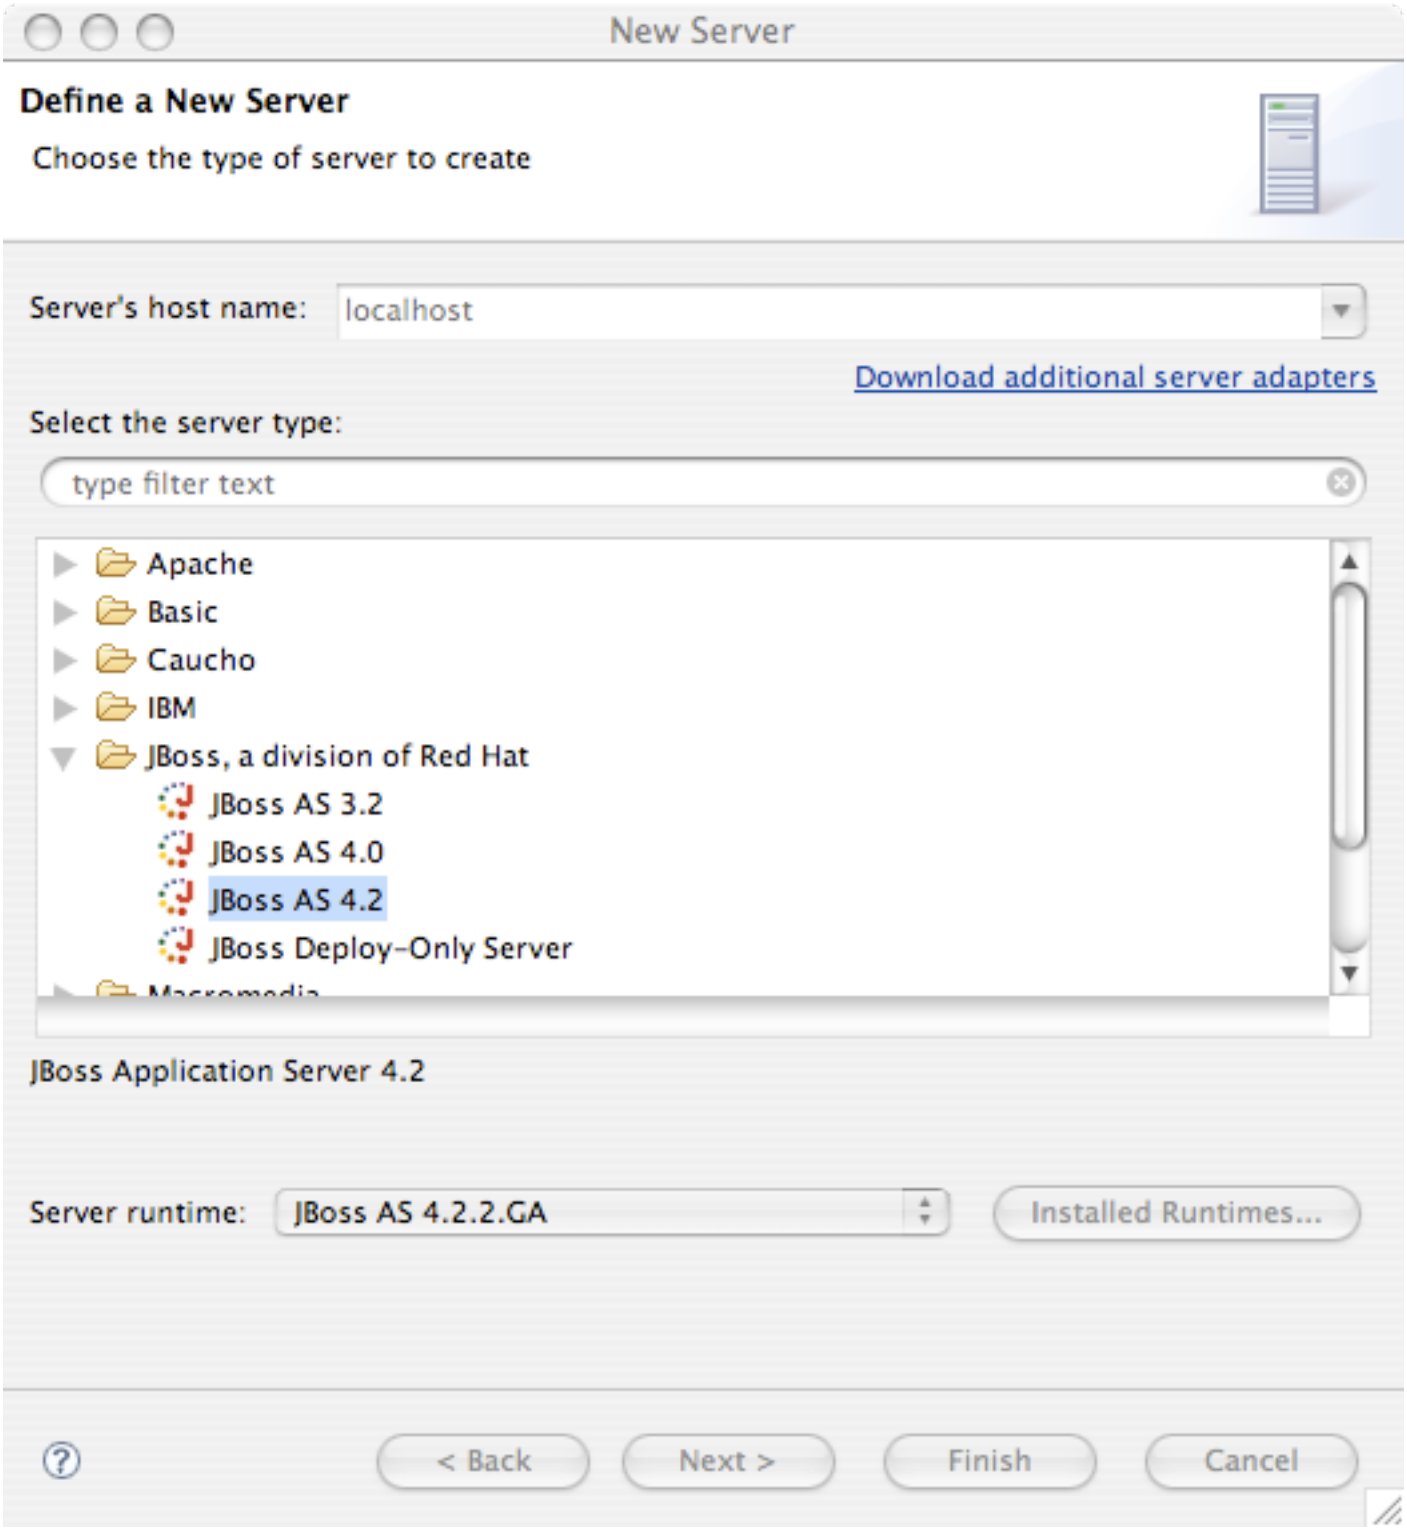
New Server
Define a New Server
Choose the type of server to create
Server's host name:
localhost
Download additional server adapters
Select the server type:
type filter text
Apache
Basic
Caucho
IBM
JBoss, a division of Red Hat
JBoss AS 3.2
JBoss AS 4.0
JBoss AS 4.2
JBoss Deploy-Only Server
JBoss Application Server 4.2
Server runtime:
JBoss AS 4.2.2.GA
Installed Runtimes...
< Back
Next >
Finish
Cancel

##################*Finish* #########

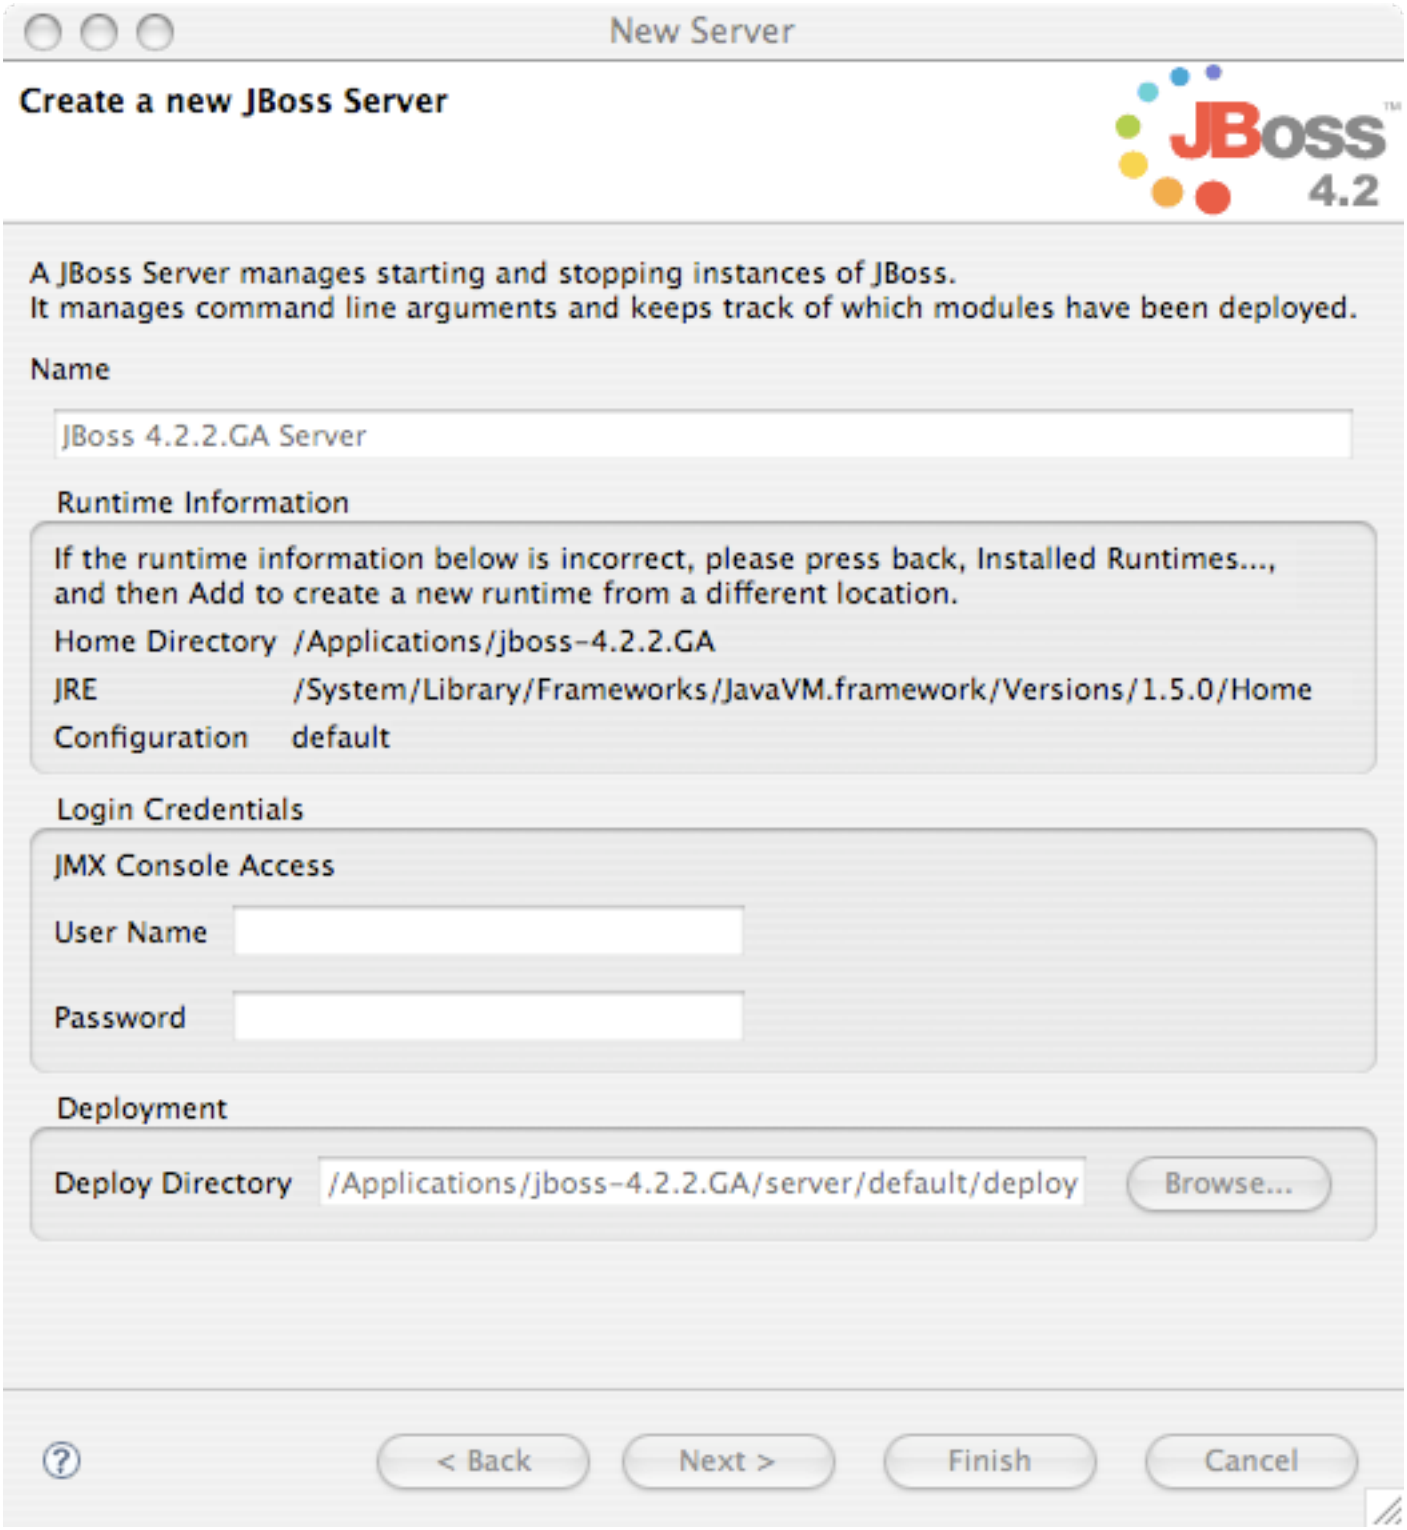

##########################Dynamic Web Project with Seam 2.0 (technology preview) ##### Next #########

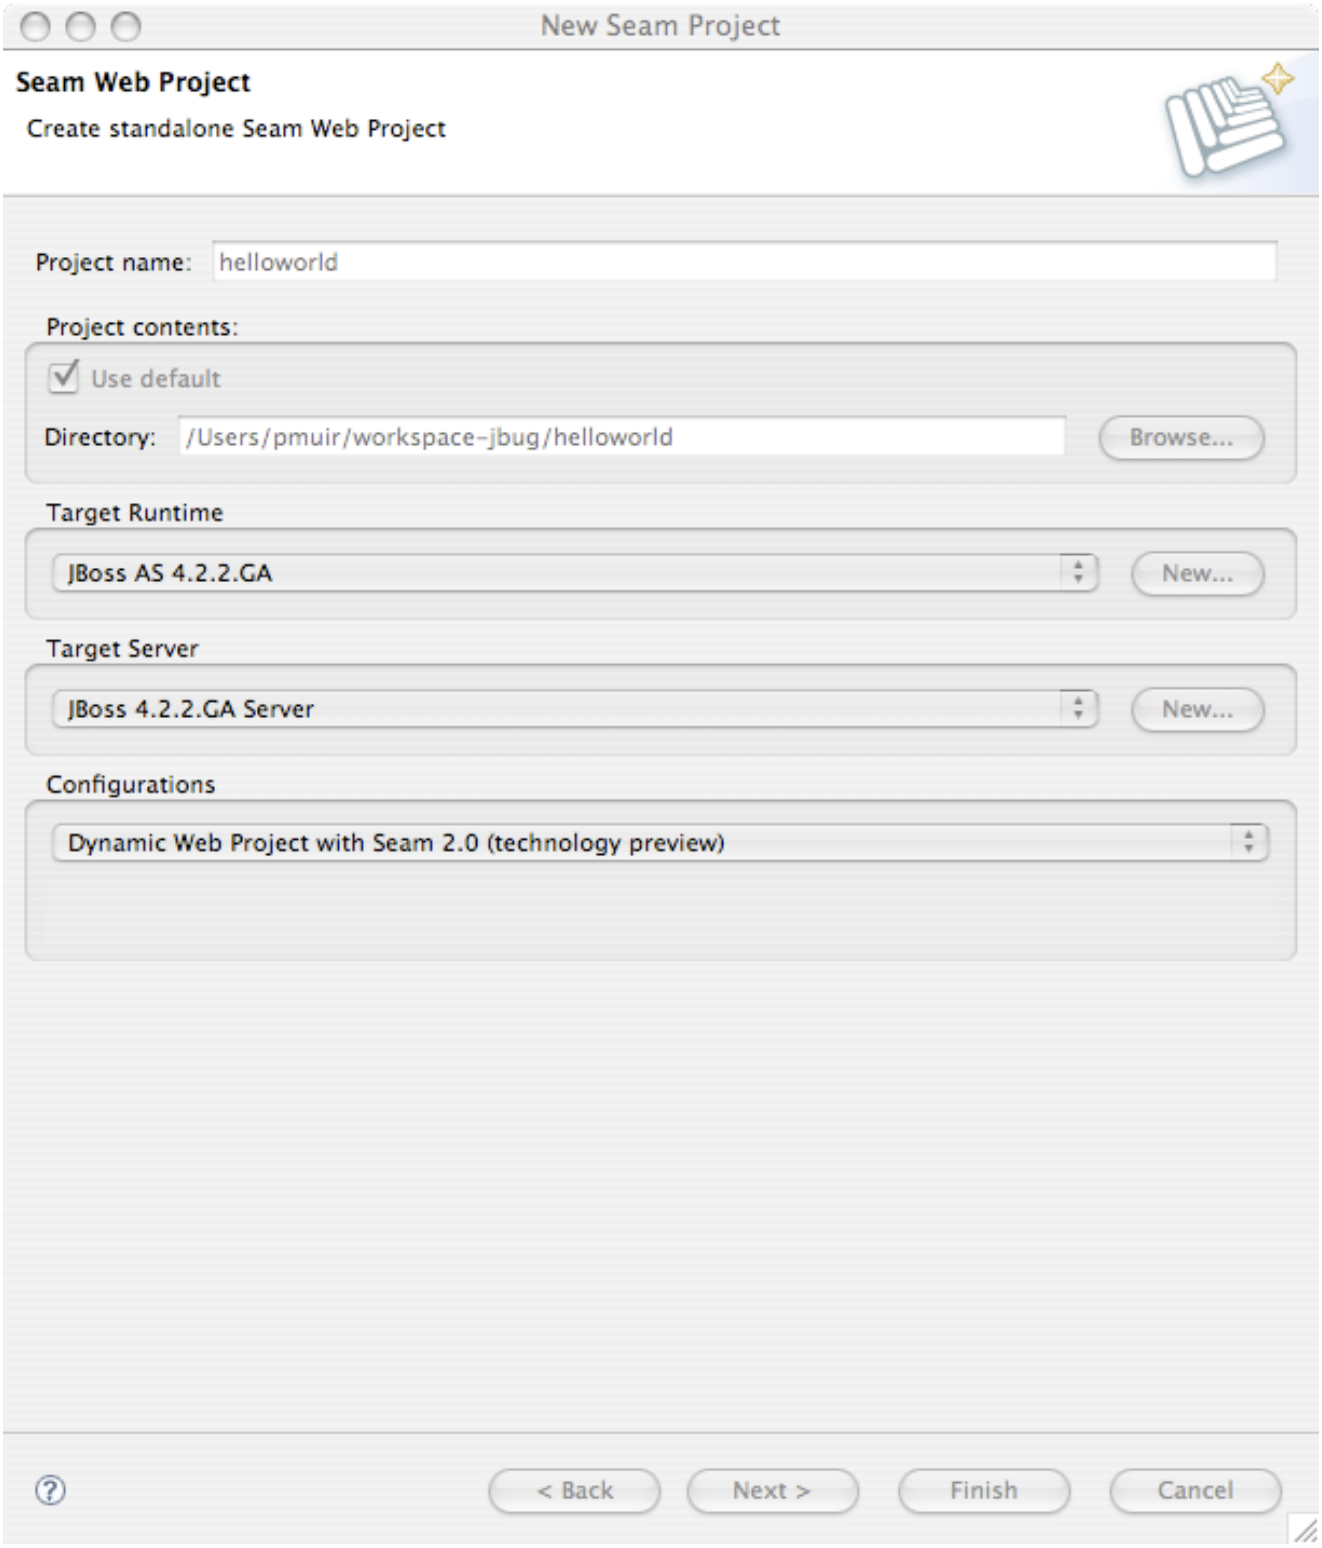

The next 3 screens allow you to further customize your new project, but for us the defaults are fine. So just hit
<empahsis>Next</empahsis>
until you reach the final screen.

######## JBoss Tools ########## Seam ############ ### *Seam Runtime* ####### - ################ *2.0* ##########

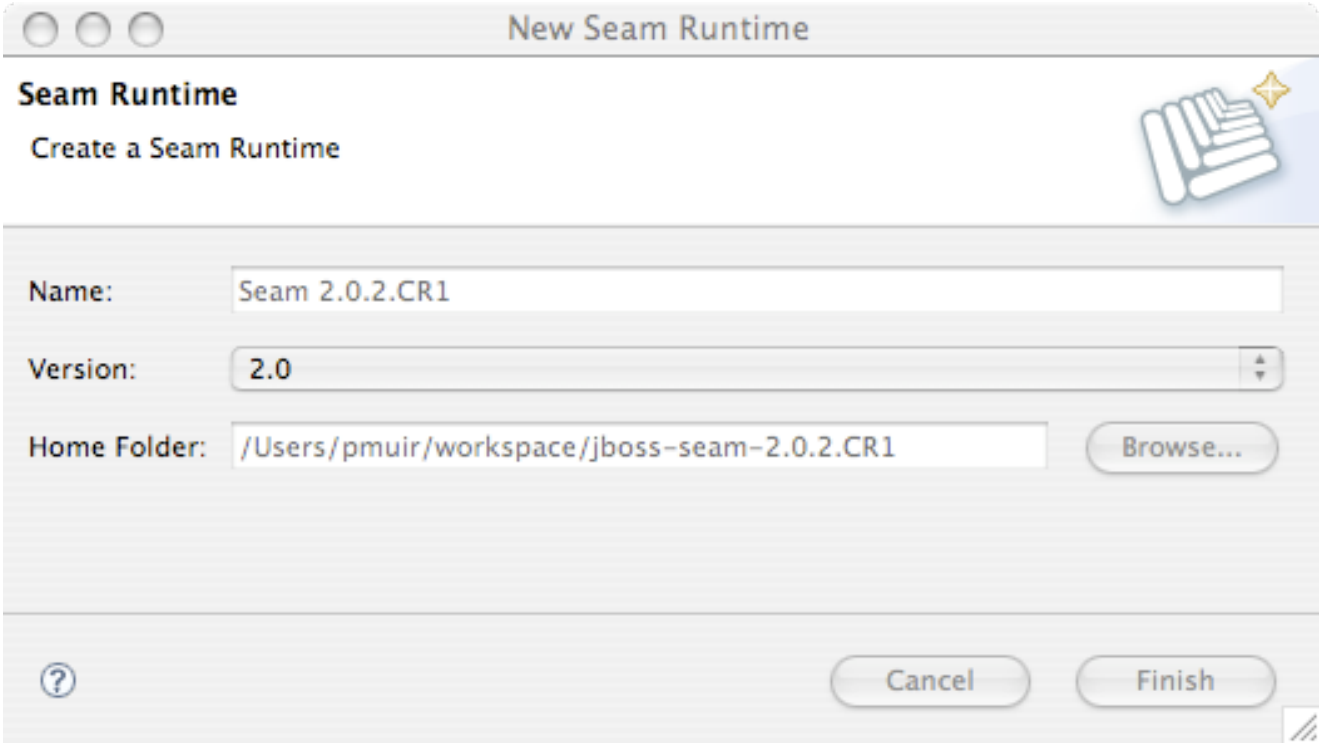

########################## EAR ####### WAR ################## EAR ####### EJB 3.0 #### Java EE 5 ###### WAR ####### EJB 3.0 ########## J2EE ########### WAR # EAR ###################### JBoss #### EJB3 ############################## EAR ########## ##### WAR ########## ### ########## WAR ###################### EAR ################################

#################### ############## MySQL ###################### JBoss Tools ################################## *MySQL* ################################## *Generic JDBC Connection* ##########

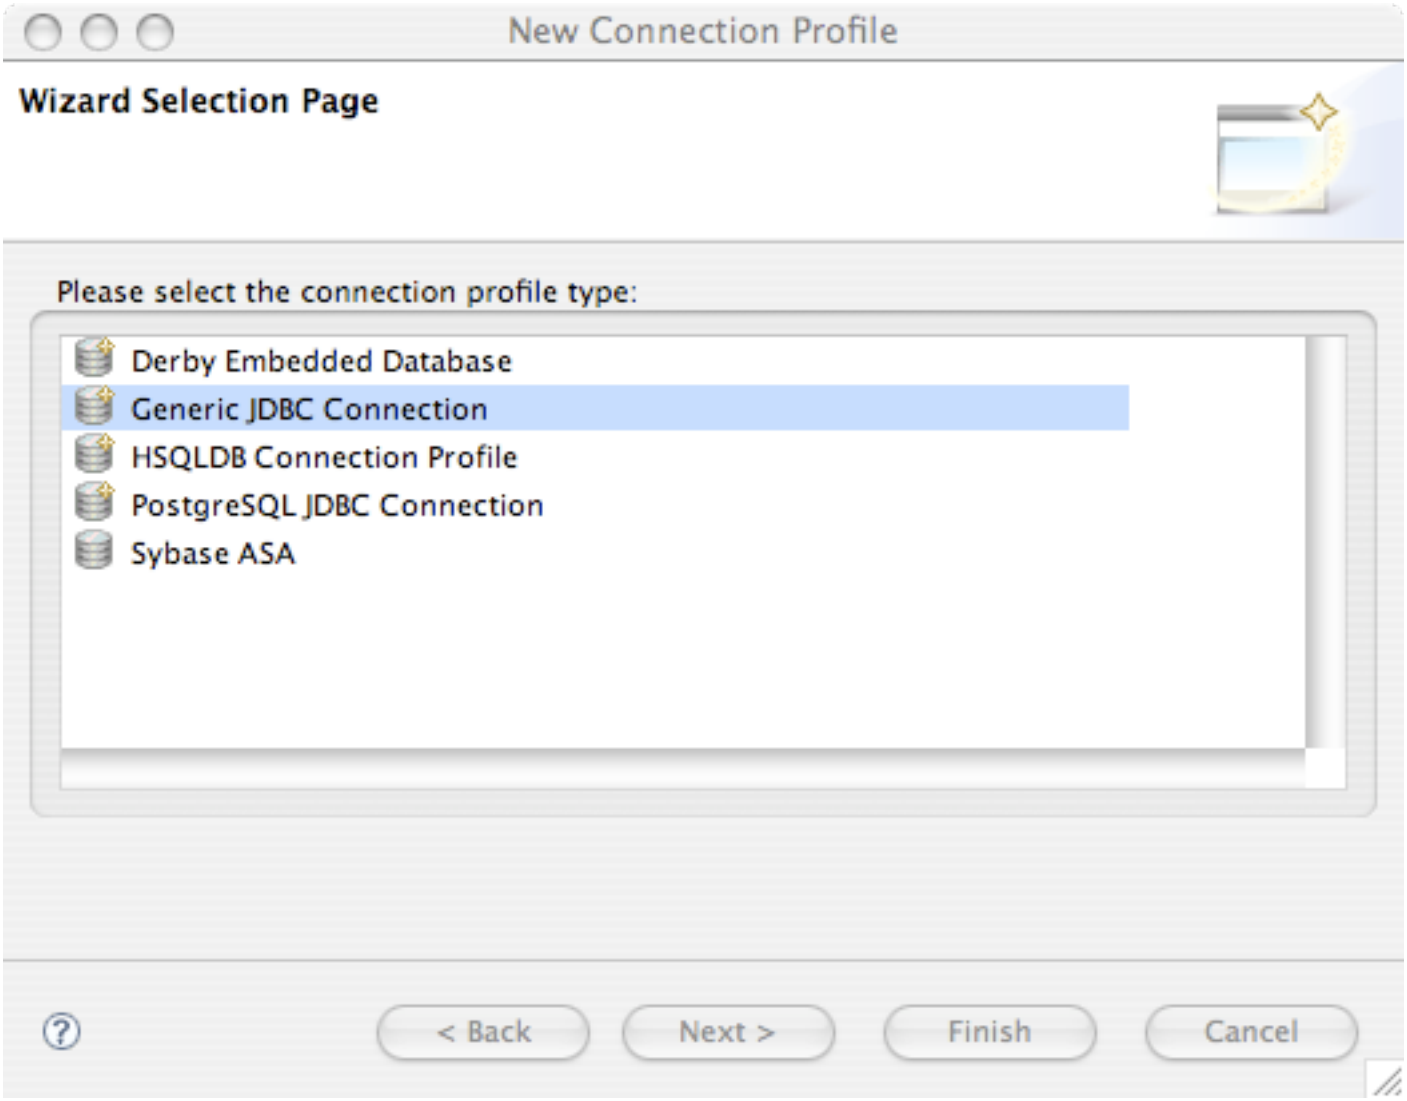
New Connection Profile
Wizard Selection Page
Please select the connection profile type:
Derby Embedded Database
Generic JDBC Connection
HSQLDB Connection Profile
PostgreSQL JDBC Connection
Sybase ASA
< Back
Next >
Finish
Cancel

############

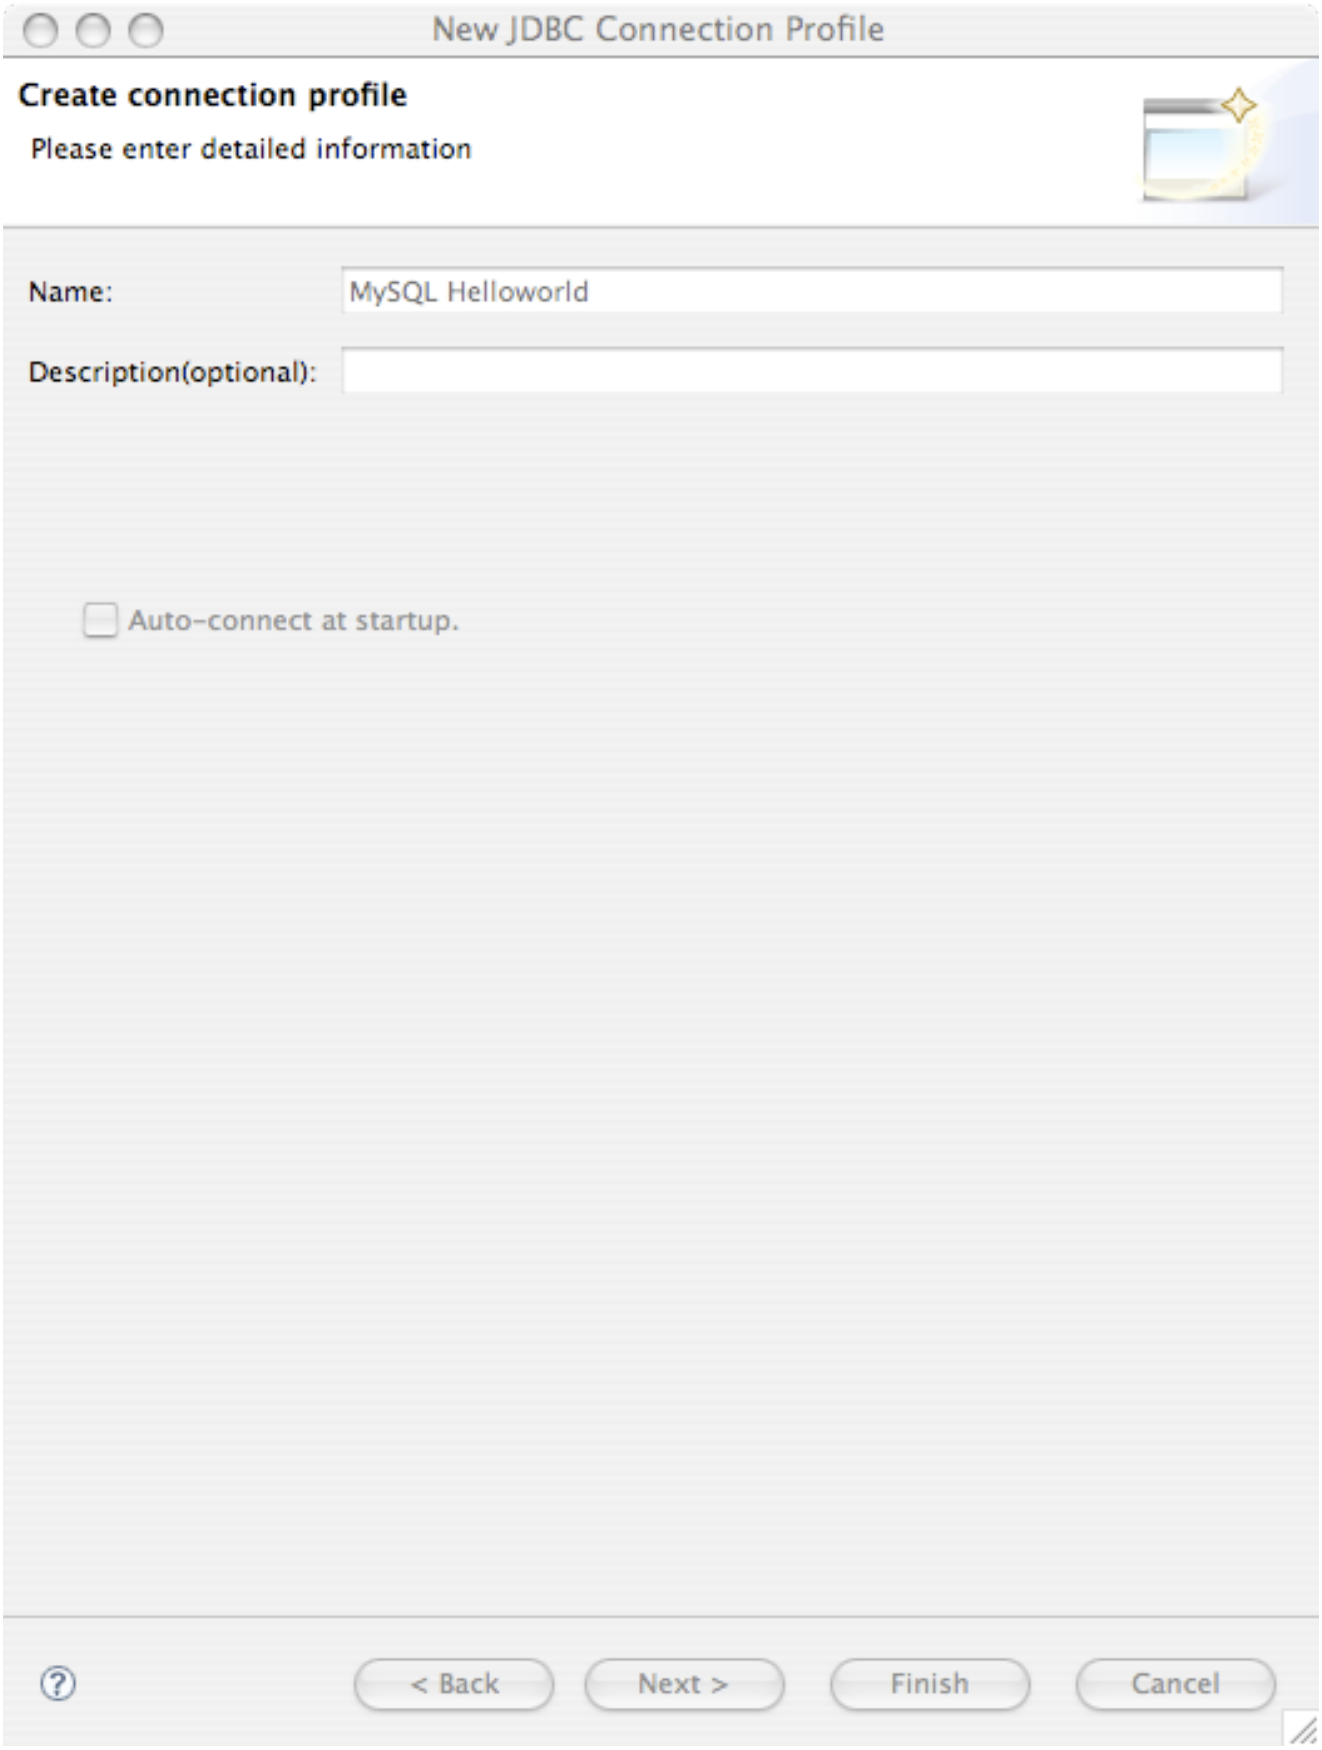
New JDBC Connection Profile
Create connection profile
Please enter detailed information
Name:
MySQL Helloworld
Description(optional):
Auto-connect at startup.
< Back
Next >
Finish
Cancel

JBoss Tools ######################JBoss Tools #### MySQL JDBC ################## ##########################

MySQL 5 *#####Add...* #########

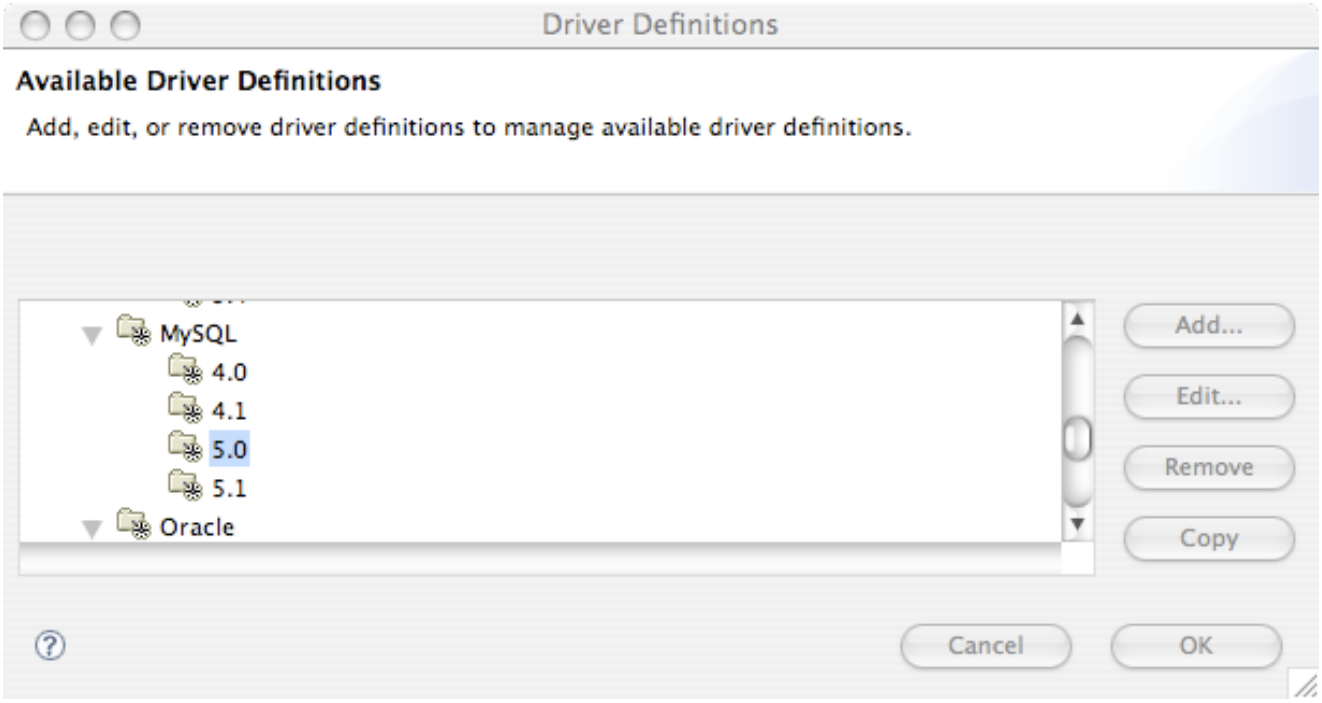

MySQL JDBC Driver #################

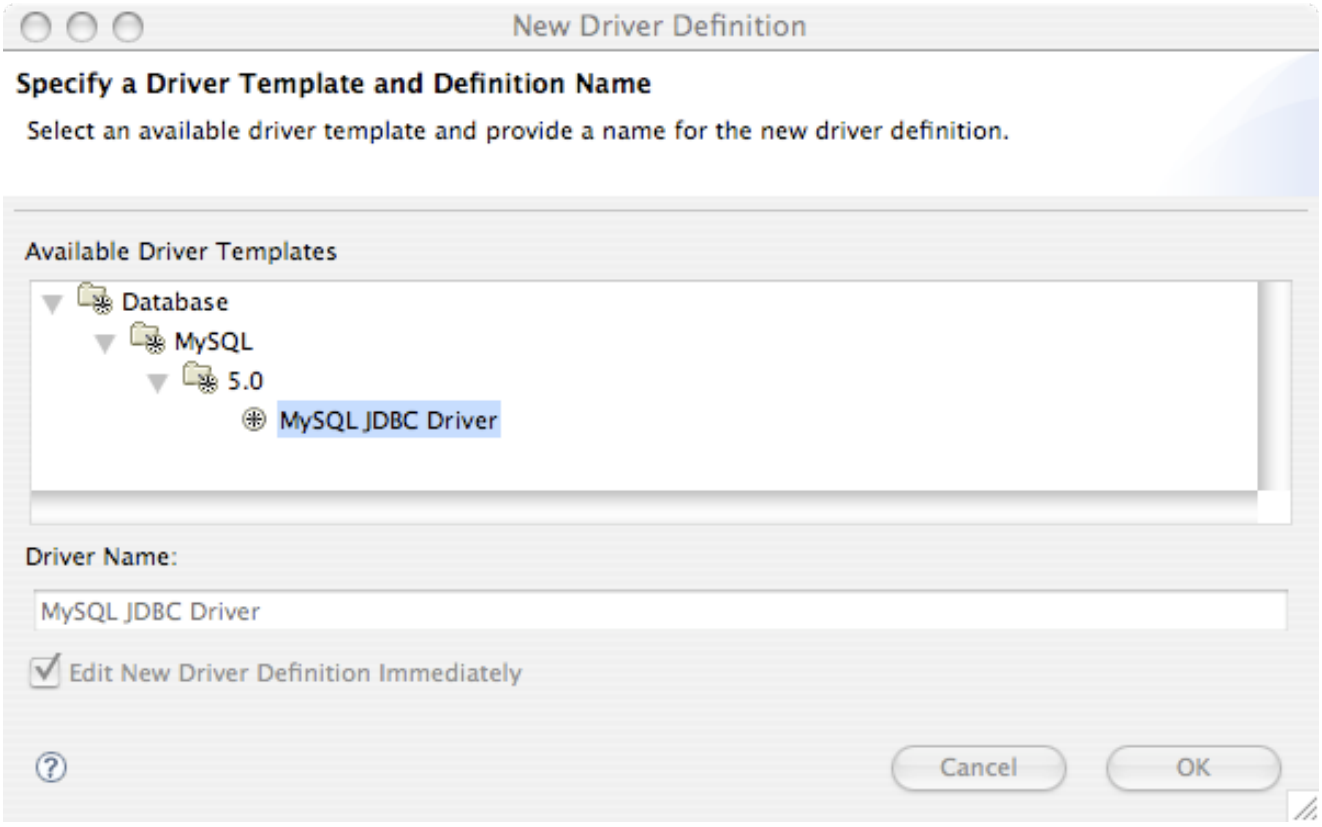

Edit Jar/Zip ################## jar ##############

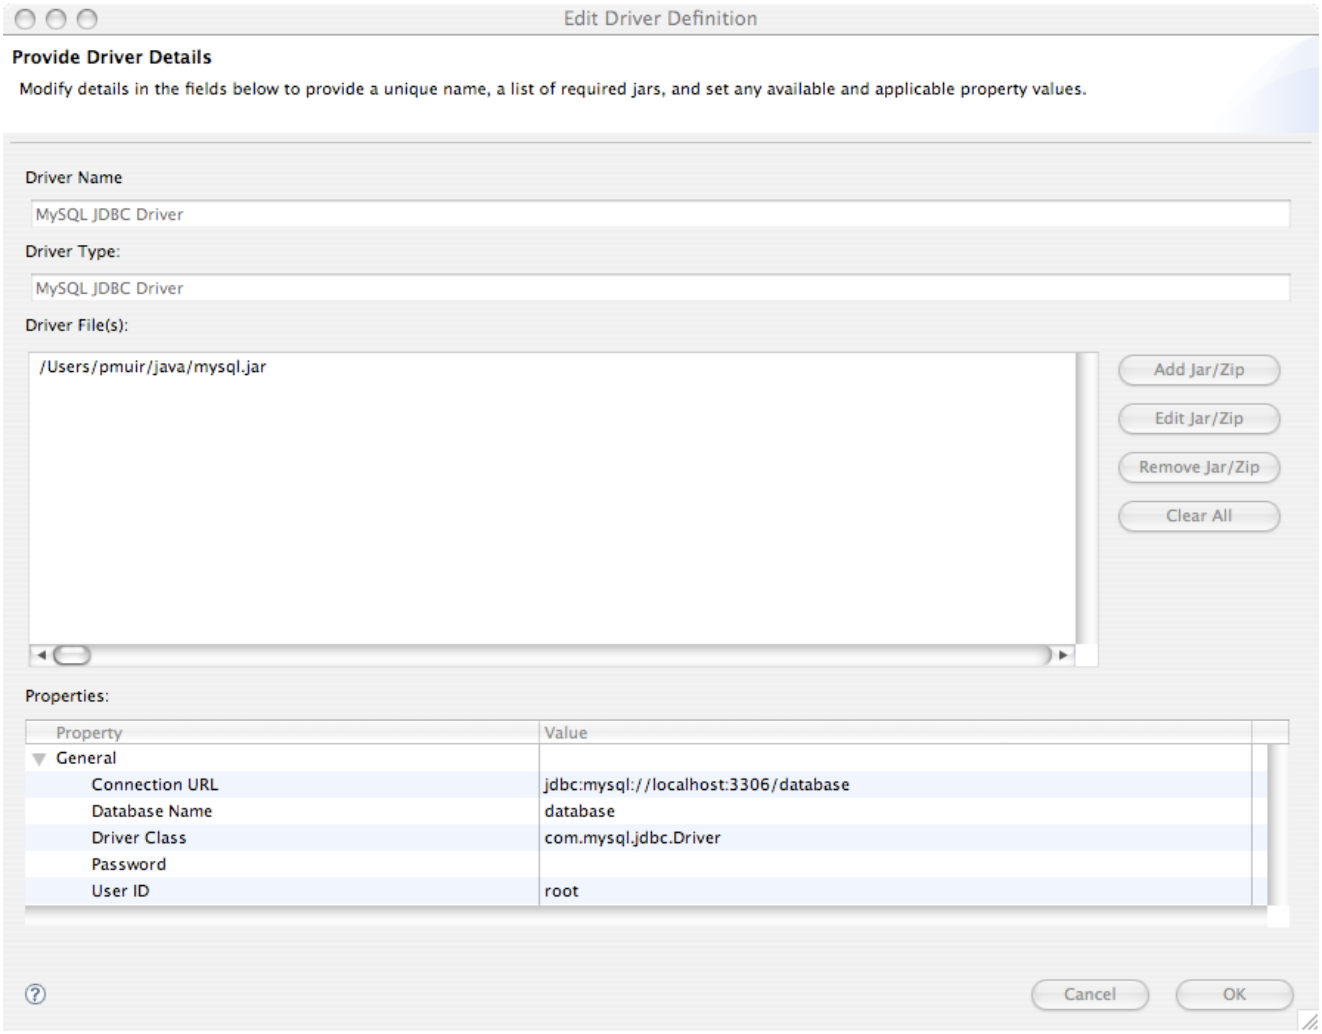

################################Ok #########

############################

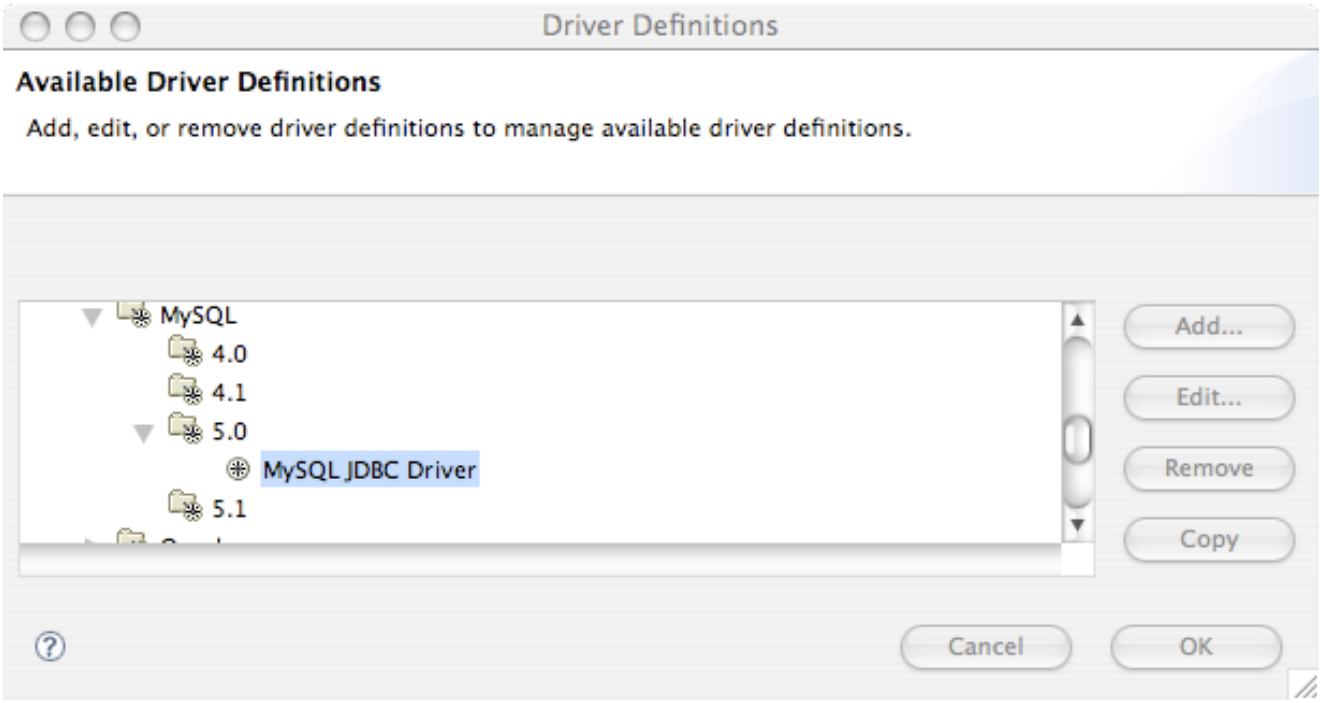

###################### ######################## JBoss Tools #############

########################*Test Connection* ################## ########*Finish* ######

######### Bean ####################*Finish* #########

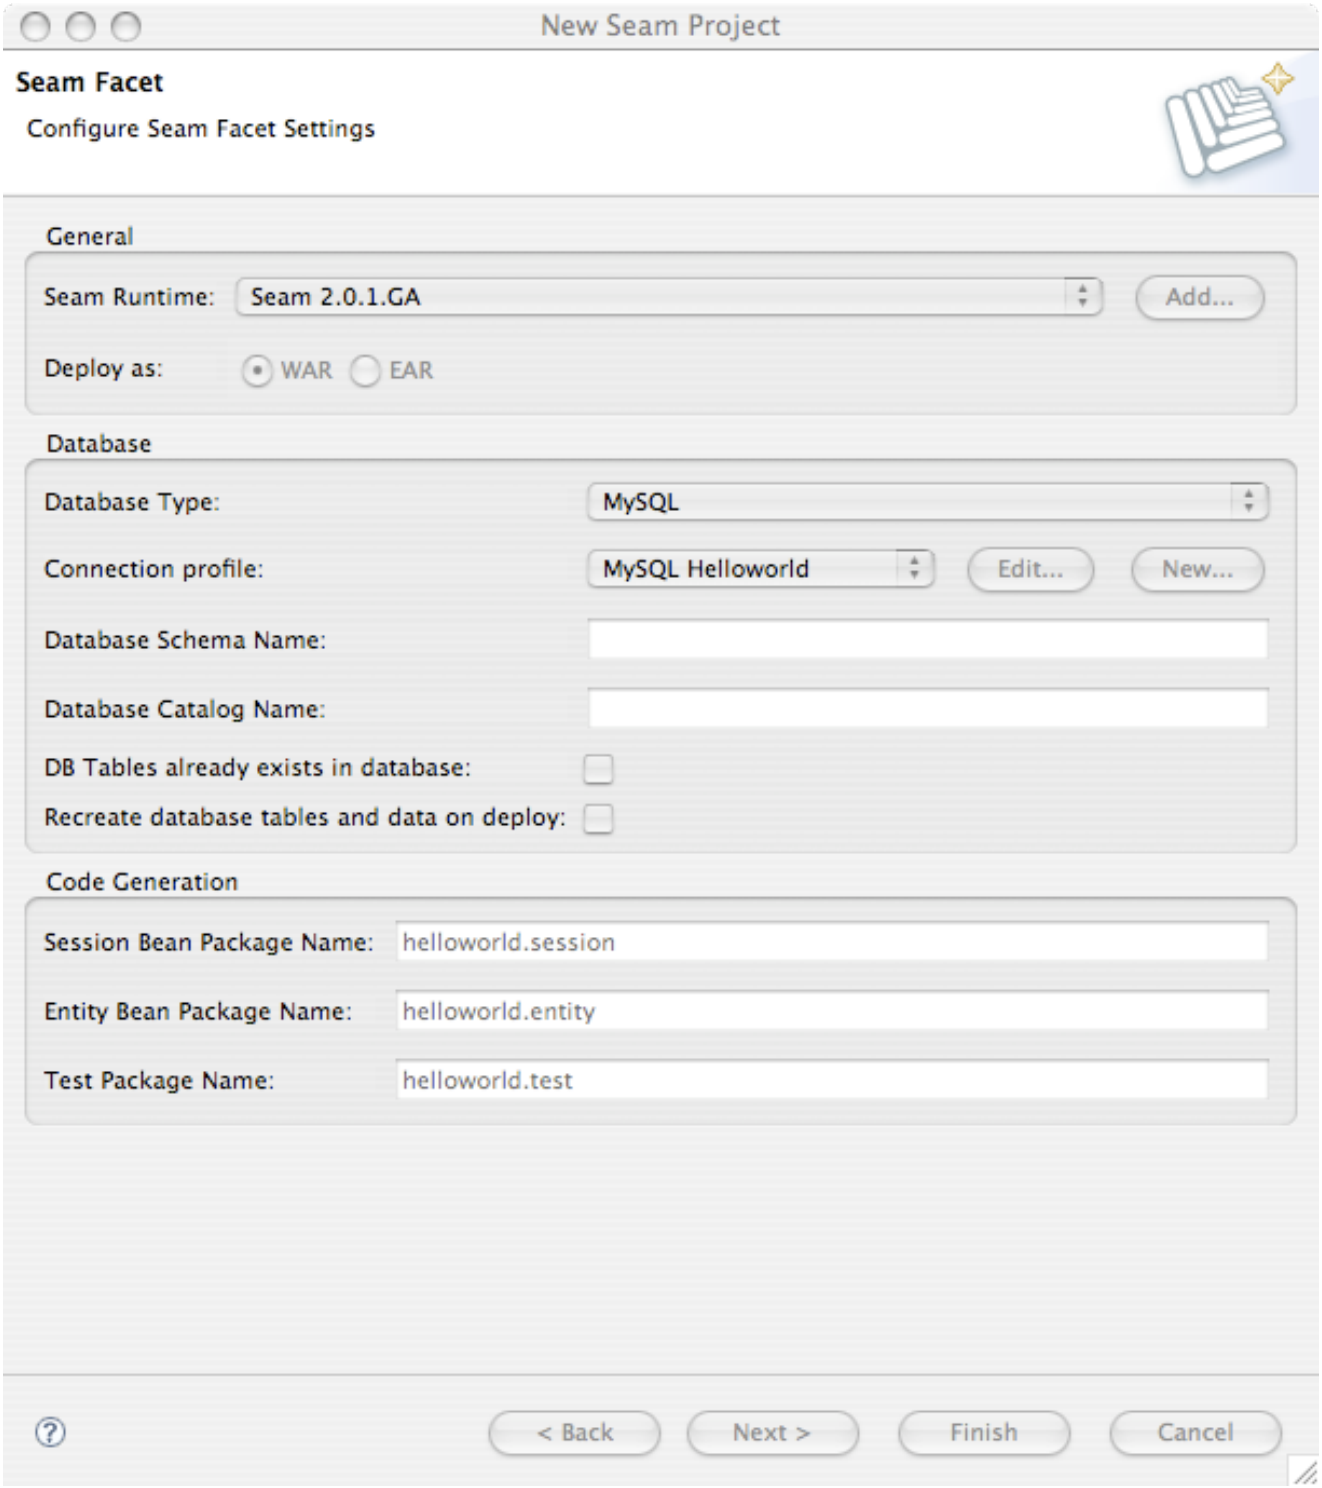

JBoss # WAR # EAR ########################## ###### JVM ######### — ########## — EAR ##################### JVM # perm gen ###################### ################## perm gen space ######## JVM # JBoss ################ ###############

```
-Xms512m -Xmx1024m -XX:PermSize=256m -XX:MaxPermSize=512
```

```
```

############################

```
-Xms256m -Xmx512m -XX:PermSize=128m -XX:MaxPermSize=256
```

JBoss Server View ######################## Edit Launch Configuration ###########

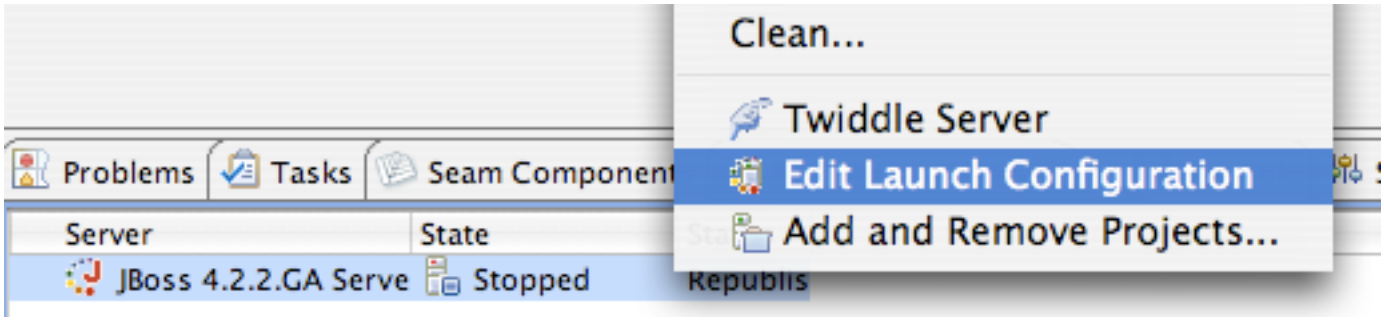

####VM #############

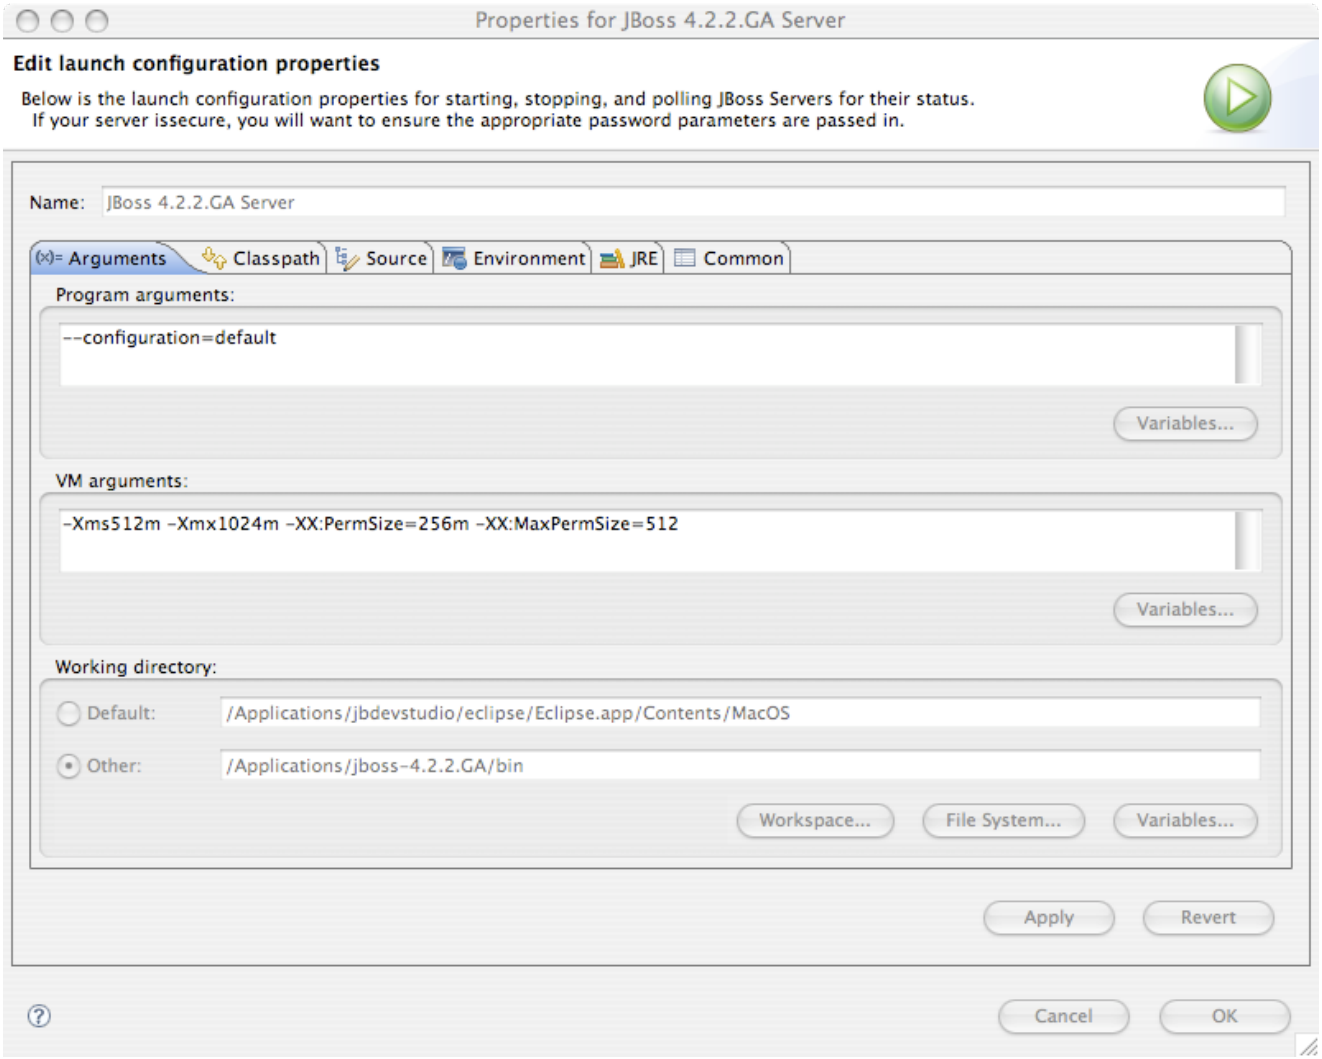

############################## — `OutOfMemoryException` ##################

JBoss ## *Start* ############ ################## *Debug* ############

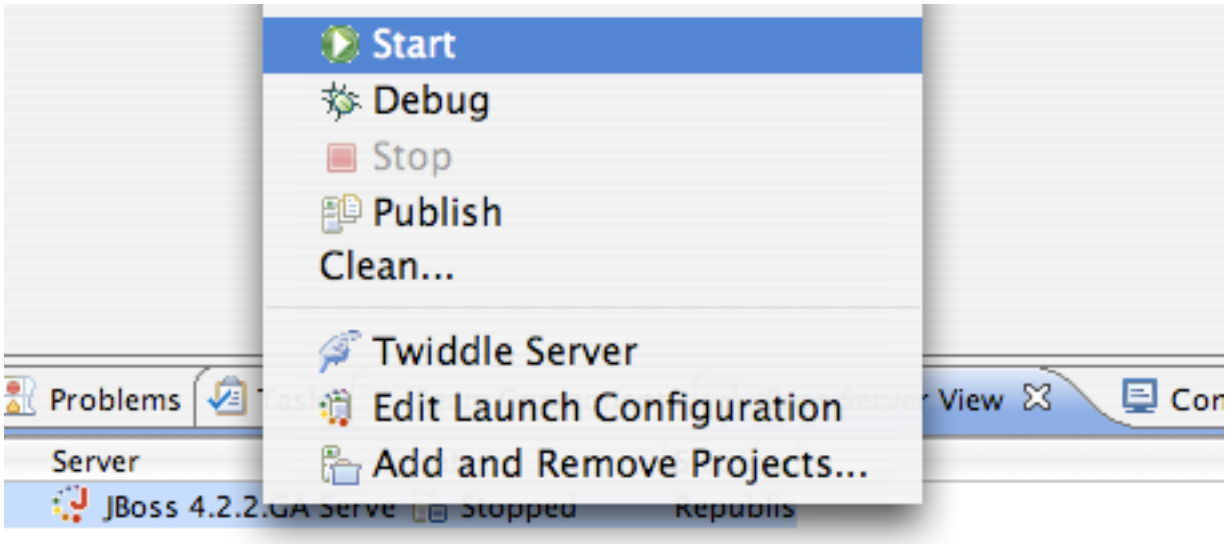

############## XML ############################## ############ Java EE ######## ######## ################ #### Seam ######## 90% #########

3.3.

############## Web ################# ######### Java ######################### Web ##########################

####New -> Seam Action ###########

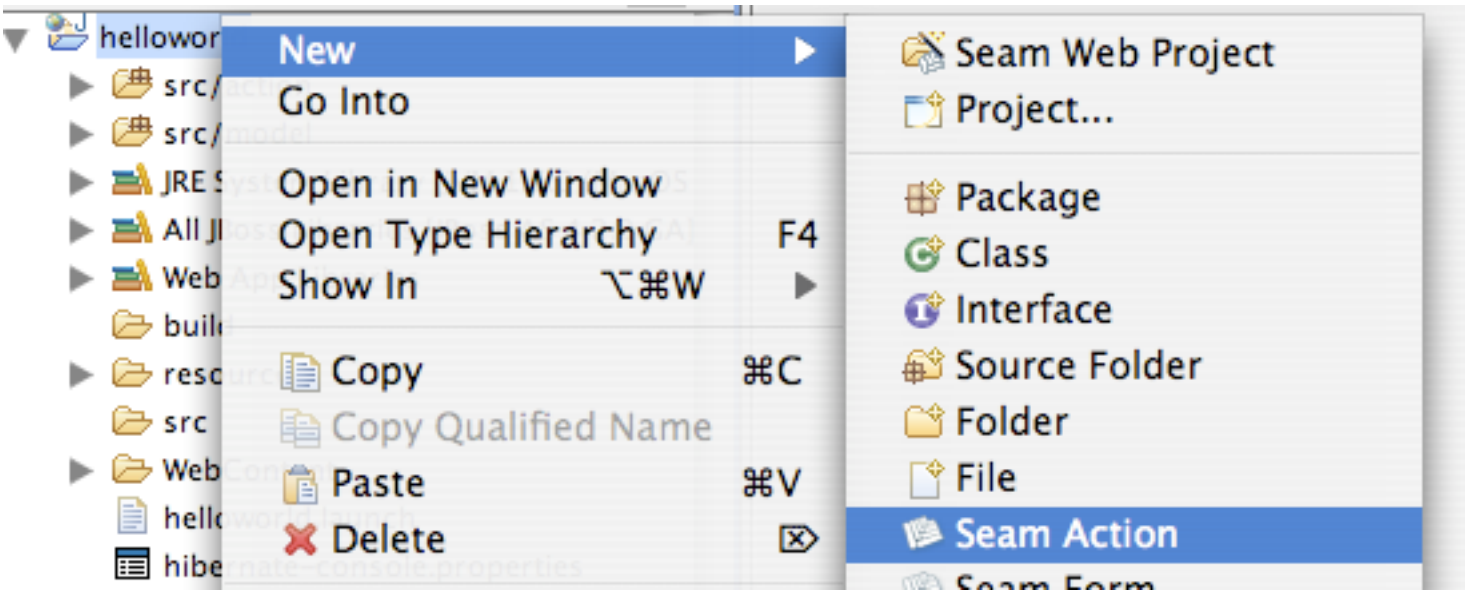

#####Seam ################## JBoss Tools ##############################

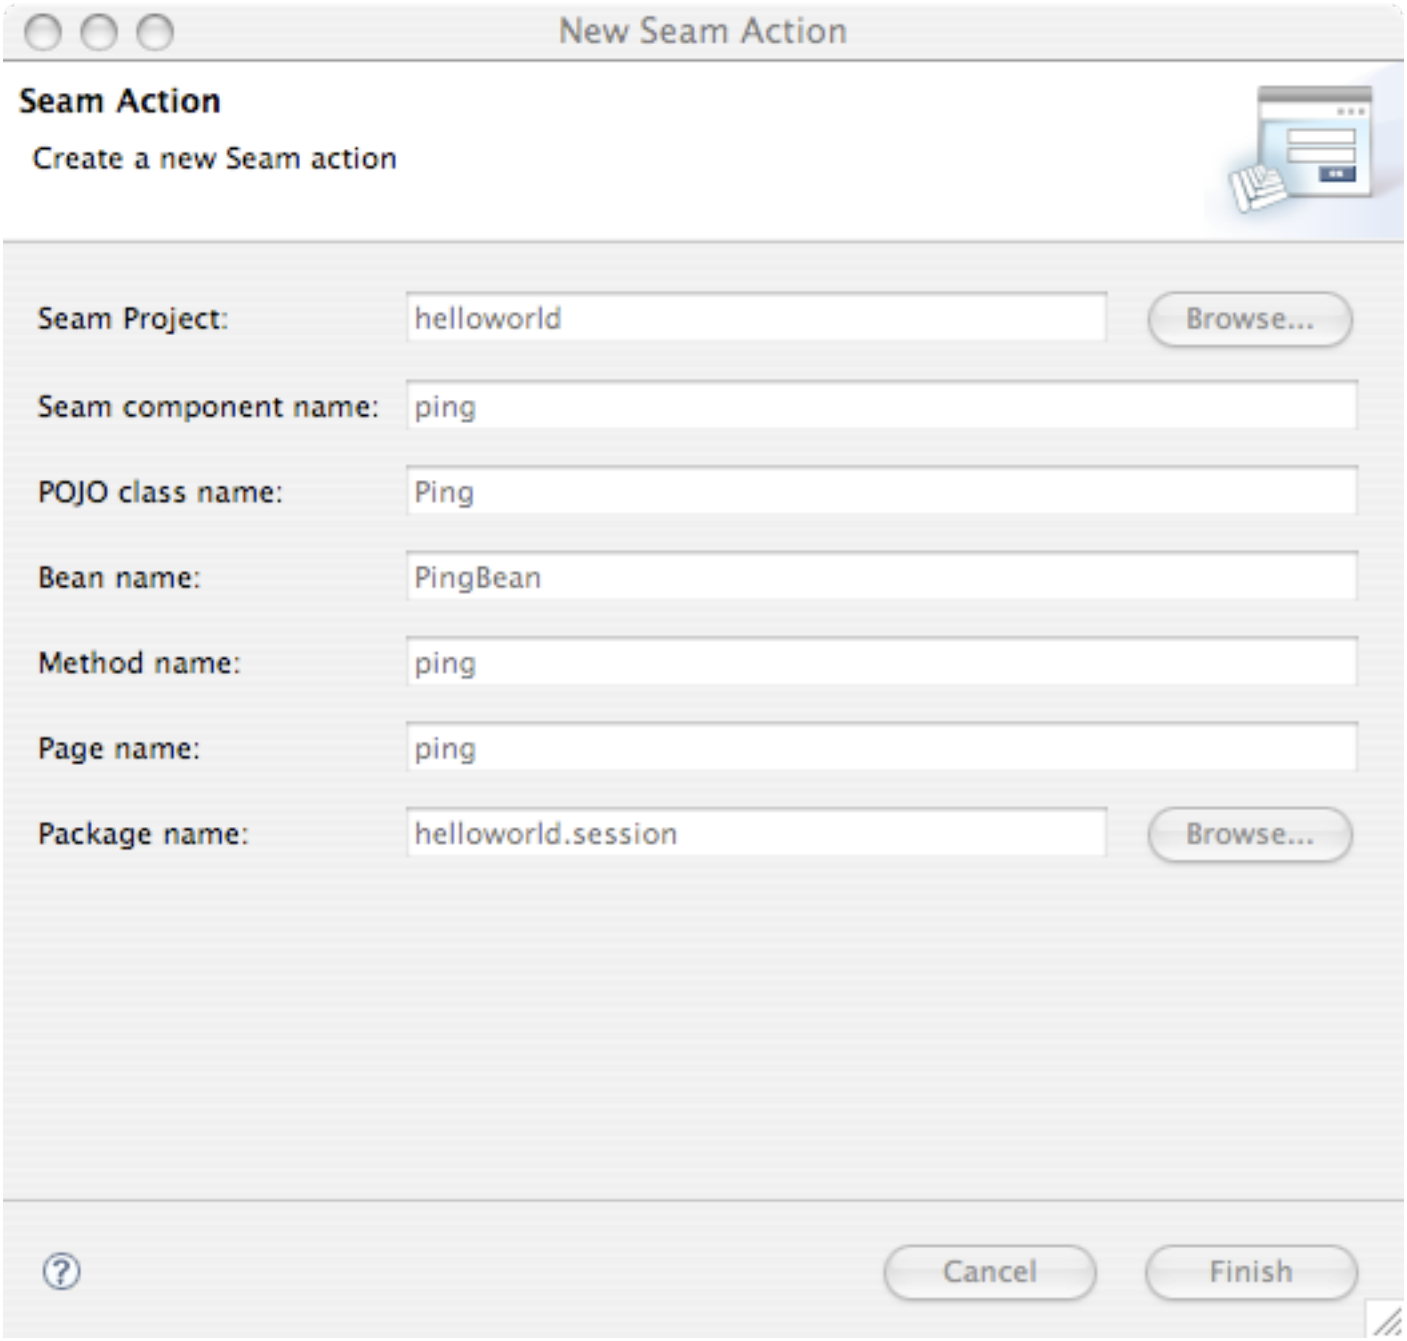

Finish

###http://localhost:8080/helloworld/ping.seam ###################### ####### src directory ###################################### ping() ################## ################

####helloworld-test ###########PingTest ######################*Run As -> TestNG Test* ##########

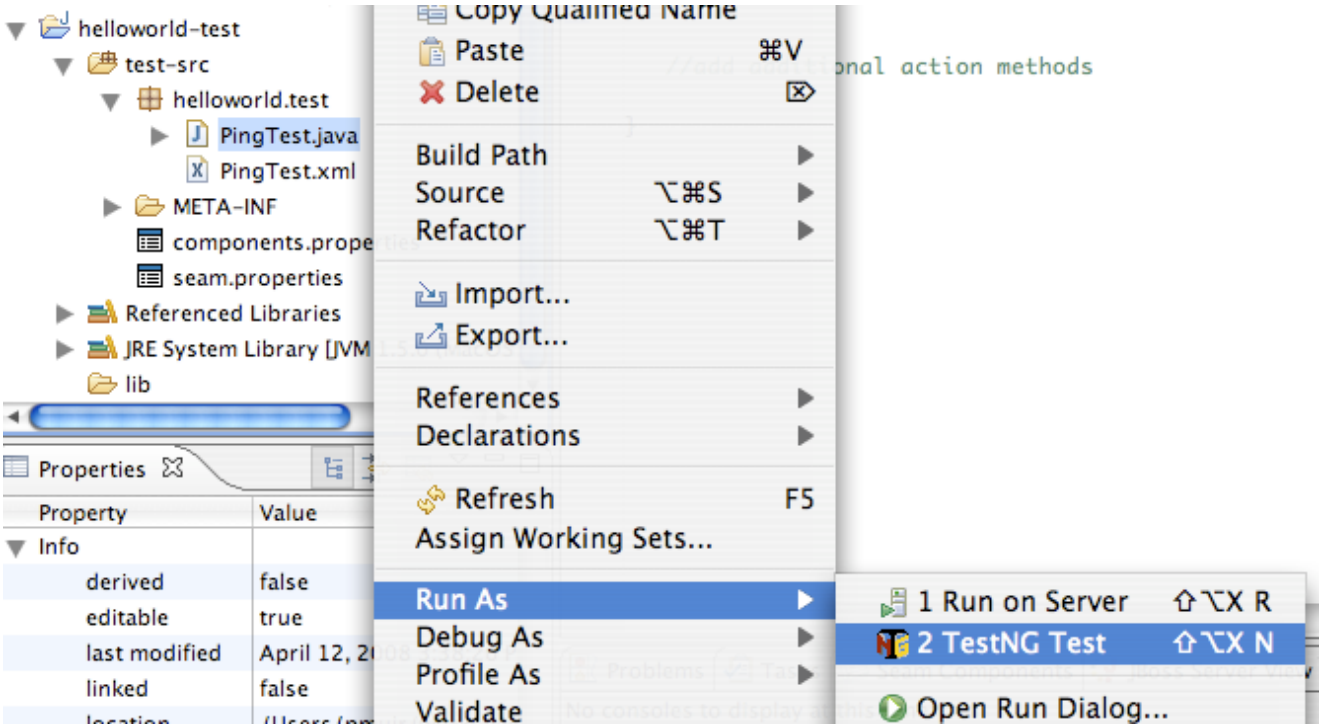

3.4.

######################## New -> Seam Form ###########

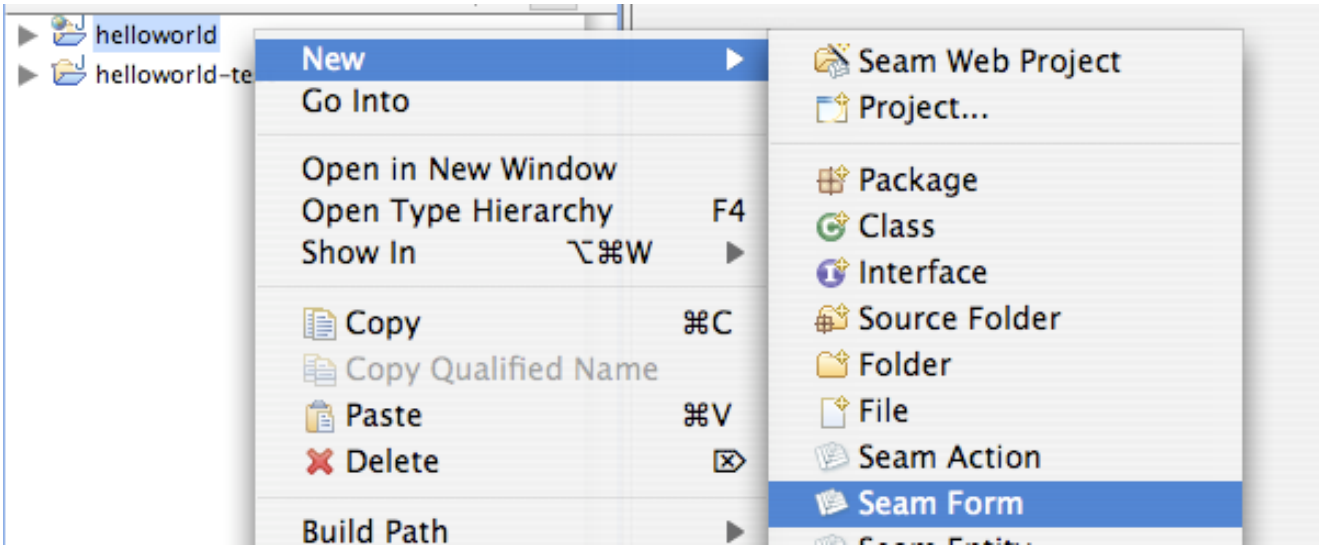

#####Seam ################### JBoss Tools ###############################

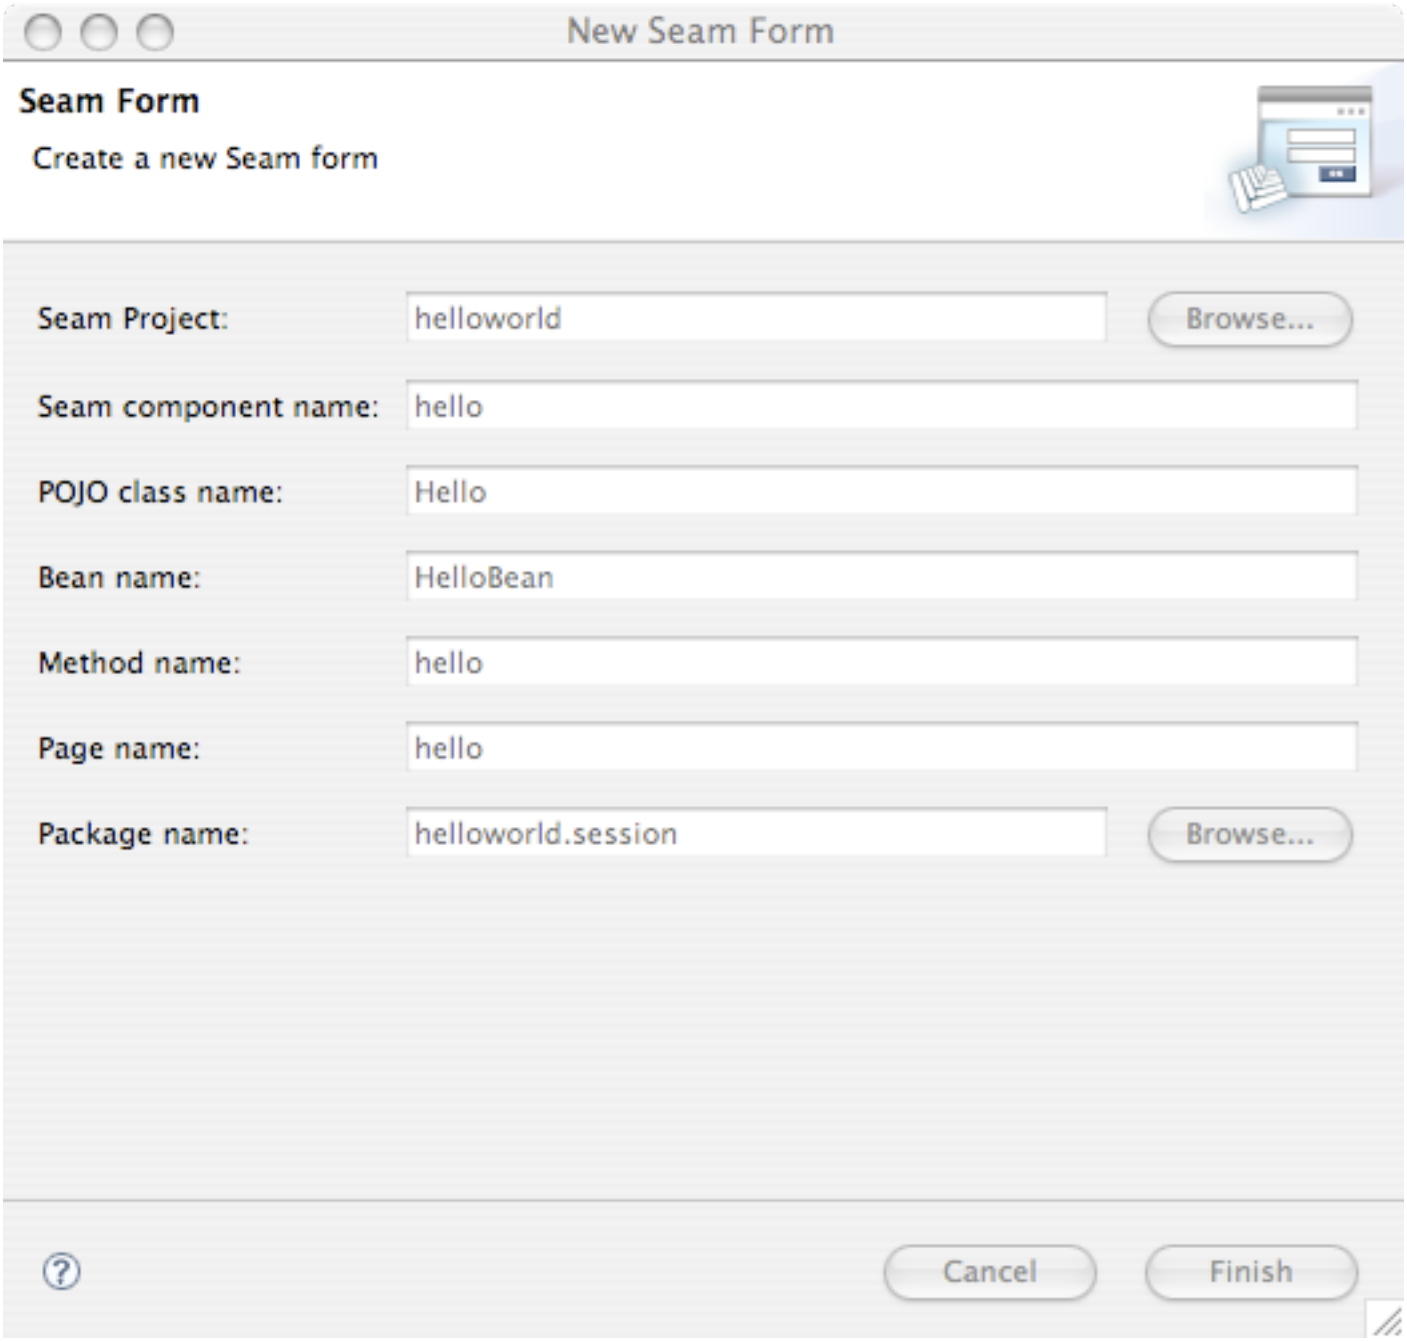

`http://localhost:8080/helloworld/hello.seam` ######### ################## ############# ##### Seam ##############################(Seam ################ *#3.6. #Seam # JBoss Tools ################* ##### `src/hot` ##)

3.5.

######################
(##) *####New -> Seam Generate Entities #######*

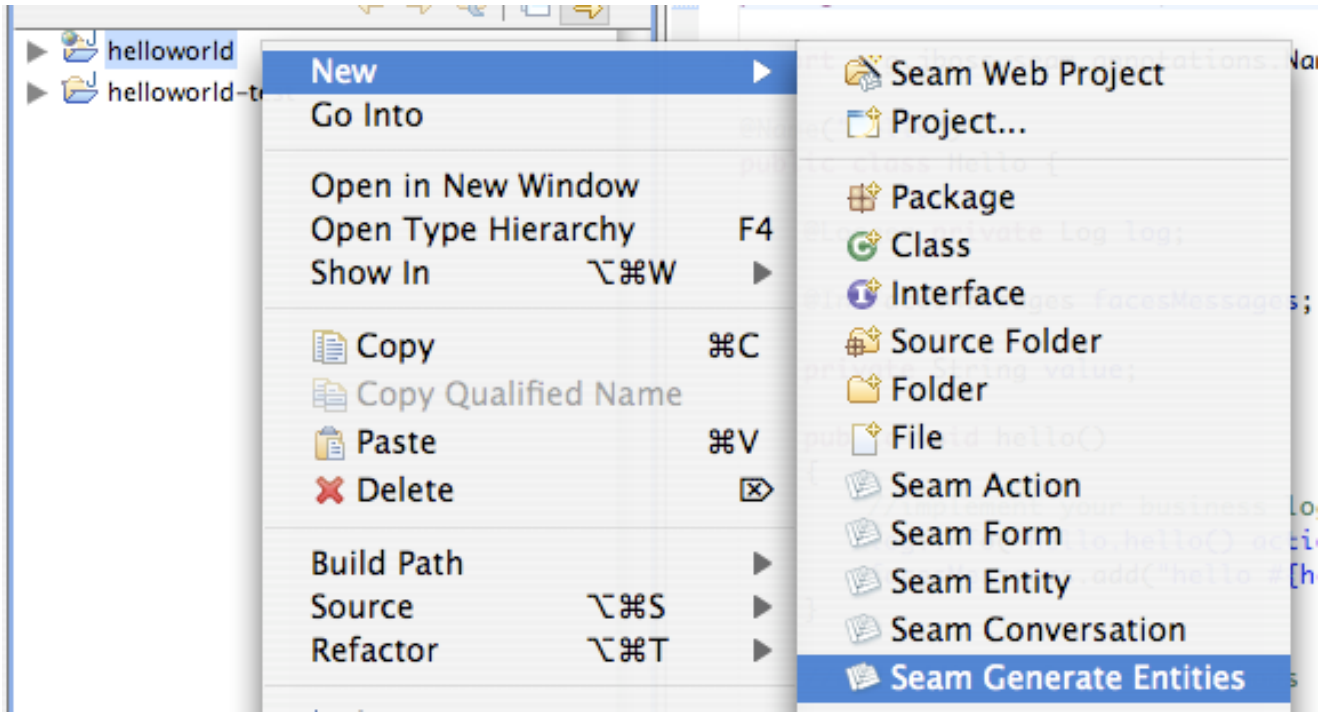

JBoss Tools ##
JPA ##
##################################

#############

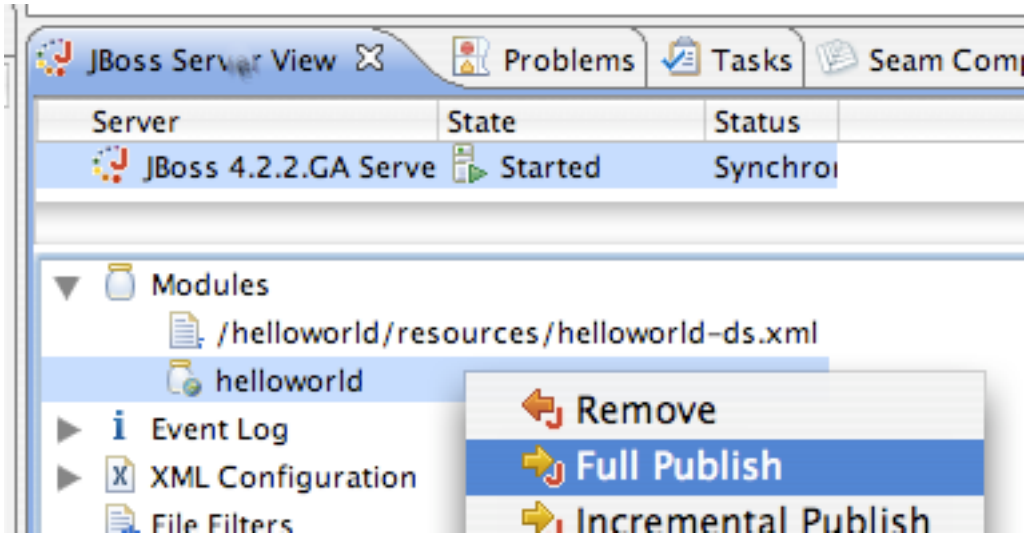

`http://localhost:8080/helloworld` ##########
##################################
Seam ################################## ##################################

3.6. Seam # JBoss Tools

JBoss Tools ############################

- facelets ###
- `pages.xml` ####

out of the box.

Java ##############*Full Publish*

########/#####/################ Seam # JavaBean ############################## ############### JavaBean ######## `WEB-INF/dev` ###################### ############# WAR #### EAR ########### ### Seam

###################

- ######## JavaBean ################ EJB3 Bean ###### (###########)
- ####################
- `components.xml` ###################################
- ################### `WEB-INF/dev` ######################
- Seam ########### `jboss-seam-debug.jar` # `WEB-INF/lib` ###########
- web.xml # Seam ######################
- ##

JBoss Tools ##### WAR ############## ##############`src/hot` ############################ #### JBoss Tools # EAR ############################

##################

Seam #### 2 ######### ###### #### ####### ###### ########################## EJB ### ## ######## (Bijection) ############## (########) ################### Seam ##

Seam ########################

4.1. Seam

Seam ############################ ######### Java API ################# (demarcation) ################## ##

Seam

- #############
- Event (or request) context
- #########
- ########
- ############
- ###############
- ###############

2 ############### ######## *(conversation context)* ################## Web ################################## 1 ###### 3 ############ (#################) ############################## ## ########## Seam ##

########################

4.1.1.

Components which are truly stateless (stateless session beans, primarily) always live in the stateless context (this is really a non-context). Stateless components are not very interesting, and are arguably not very object-oriented. Nevertheless, they are important and often useful.

4.1.2.

################################ ############## Web ################## ##########JSF ################################ ###################################### ###################################### ######################################

RMI ###### Seam Remoting ### Seam ################ ###################################

4.1.3.

######################################

4.1.4.

######### Seam ################## ## *(conversation)* ################### ## ##################1 ########### ################################### ######## 1 ##

1 ##

##

####### 1 ############## ##############Seam ######################################

Seam

####### "##" ############ ### ###### ##########

############################## Seam ################ Seam ###### ######## *(conversation timeout)* ##### ################ ##

Seam ##

#####Seam ##

4.1.5.

################################## ################################## ## ############################

JSR-168 ##

4.1.6.

BPM #### (JBoss jBPM) ################# ################################## ################################ ################################ ################# ######## *(process definition language)* #################

4.1.7.

####Seam ################# Seam

4.1.8.

#################### ########## ################################ ############################ ###Seam ################################

############## ######################## (######################) ######## `Contexts` ## ### `Context` ####################################

```
User user = (User) Contexts.getSessionContext().get("user");
```

############################

```
Contexts.getSessionContext().set("user", user);
```

##

4.1.9.

##########

- ##########
- #########
- ########
- ############
- ###############
- ###############

`Contexts.lookupInStatefulContexts()` ######################## JSF ######################################

4.1.10.

######### EJB ## ################################## ############################## EJB ### ######################## Bean ####################

################################ Web ######################### ################## (AJAX) ###################### ## Seam ############################

Seam ################################### Seam ################################## ############################## ################################ ## Seam ############## ################## ##########

################################## ##########Seam###################Seam ## ##Seam ########## ############## Bean # JavaBean ########## (############################) ## ## ################## ### ############ #### `@Synchronized` ################ ##### Bean ### JavaBean ################################

########## ########################## AJAX ######################################

4.2. Seam

Seam ######## POJO (Plain Old Java Objects) ### ######Seam ######## JavaBean #### EJB 3.0 ######## Bean ### Seam # ######## EJB ############### EJB 3.0

##################### Seam # EJB 3.0 ###########EJB 3.0 ############ Seam ##### ########## #########

- EJB 3.0 ########### Bean
- EJB 3.0 ########### Bean
- EJB 3.0 entity beans
- JavaBeans
- EJB 3.0 ######## Bean

4.2.1. ########### Bean

########### Bean ################################### ############### Seam ################################ #### JSF ########################### ###### JSF ##########################

########### Bean ######################

################################### Bean ###################### ################## EJB3 ########## (############################ ####Bean ##)

########### Bean ############# Seam ##########

Seam ########### Bean ######## `Component.getInstance()` ### `@In(create=true)` ###################### JNDI ####### ## new ##########################

4.2.2. ########### Bean

########### Bean ######### Bean ############################## ######################### ############################ ############## Bean ################# ### Seam ###### Web ######################### ########## `HttpSession` ########## ######################### Bean ###################### ####Seam ###################### ###################################

########### Bean ##### JSF ############## ############################## JSF ############## Bean ##########

################## Bean ################## ##############################

###################### Bean ########## ##Bean##Seam#################### Seam ###############

Seam ########### Bean ######## `Component.getInstance()` ### `@In(create=true)` ###################### JNDI ####### ## new ##########################

4.2.3. ###### Bean

Bean ################Seam###################### ################################### ################Seam ###################### ### Java

Bean ################################### ######### Bean

Bean #### JSF ##################### ######################### JSF ####################### Bean ######### ######### Bean ###### Bean ################## ## / ## / ########################### Bean

############## Bean ################## ########### Bean ###########

################ ########### Bean ######## Bean ############ ###### Bean ##################### Seam ## ############ Seam ######### Seam ################## Bean ###############

Seam ###### Bean ######## `Component.getInstance()` ### `@In(create=true)` ######################### `new` ##################

4.2.4. JavaBeans

JavaBean ###################### Bean ################ ############ Bean ############ (############ ######### ###################### EJB 3.0 #### ############)

#####EJB ####### Seam # Hibernate ################ ######################## Bean ##### JavaBean ### ###################### ########### Bean ################### ################ Seam JavaBean ##

#######JavaBean ####################

########## JavaBean ############ Seam ##############

Seam JavaBean ######## `Component.getInstance()` ### `@In(create=true)` ######################### `new` ##########################

4.2.5. ######## Bean

######## Bean # Seam ###################### ############ Bean #### Seam ########################### ########################## JMS ### ############################

######## Bean ##Seam ################# ################################### ############ Bean ############ Seam ############

######## Bean ## EJB ####################

4.2.6.

Seam##### (############################) ######### Seam ################################## JavaBean ###Seam ## ###### Bean ## ##### Bean ###EJB ############ Bean ######################## ####################

```
@Stateless
@Interceptors(SeamInterceptor.class)
public class LoginAction implements Login {
   ...
}
```

##########`ejb-jar.xml`#################

```
<interceptors>
  <interceptor>
    <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
  </interceptor>
</interceptors>

<assembly-descriptor>
  <interceptor-binding>
    <ejb-name
>*</ejb-name>
    <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
  </interceptor-binding>
</assembly-descriptor
>
```

4.2.7.

Seam ################ `@Name`

```
@Name("loginAction")
@Stateless
```

```
public class LoginAction implements Login {
   ...
}
```

######*Seam* ######## ## EJB ######################## ####Seam ############# JSF ## Bean ############ 2 ######################

`@Name` ############################ ######################## ########### Seam ######################

Just like in JSF, a seam component instance is usually bound to a context variable with the same name as the component name. So, for example, we would access the `LoginAction` using `Contexts.getStatelessContext().get("loginAction")`. In particular, whenever Seam itself instantiates a component, it binds the new instance to a variable with the component name. However, again like JSF, it is possible for the application to bind a component to some other context variable by programmatic API call. This is only useful if a particular component serves more than one role in the system. For example, the currently logged in `User` might be bound to the `currentUser` session context variable, while a `User` that is the subject of some administration functionality might be bound to the `user` conversation context variable.

For very large applications, and for built-in seam components, qualified names are often used.

```
@Name("com.jboss.myapp.loginAction")
@Stateless
public class LoginAction implements Login {
   ...
}
```

Java ###### JSF ############################

```
<h:commandButton type="submit" value="Login"
                 action="#{com.jboss.myapp.loginAction.login}"/>
```

#############Seam ############################ ######## `components.xml` ###############

```
<factory name="loginAction" scope="STATELESS" value="#{com.jboss.myapp.loginAction}"/>
```

######## Seam ####################
Seam##Seam JAR##### `components.xml` ###################

```
<components xmlns="http://jboss.com/products/seam/components">

    <import>org.jboss.seam.core</import>
    <import>org.jboss.seam.cache</import>
    <import>org.jboss.seam.transaction</import>
    <import>org.jboss.seam.framework</import>
    <import>org.jboss.seam.web</import>
    <import>org.jboss.seam.faces</import>
    <import>org.jboss.seam.international</import>
    <import>org.jboss.seam.theme</import>
    <import>org.jboss.seam.pageflow</import>
    <import>org.jboss.seam.bpm</import>
    <import>org.jboss.seam.jms</import>
    <import>org.jboss.seam.mail</import>
    <import>org.jboss.seam.security</import>
    <import>org.jboss.seam.security.management</import>
    <import>org.jboss.seam.security.permission</import>
    <import>org.jboss.seam.captcha</import>
    <import>org.jboss.seam.excel.exporter</import>
    <!-- ... --->
</components>
```

################Seam##components.xml##########

4.2.8.

@Scope################################ (######) ################## ##### Seam ################# ##

```
@Name("user")
@Entity
@Scope(SESSION)
public class User {
    ...
}
```

org.jboss.seam.ScopeType ###################

4.2.9.

Some Seam component classes can fulfill more than one role in the system. For example, we often have a User class which is usually used as a session-scoped component representing the current user but is used in user administration screens as a conversation-scoped component. The @Role

annotation lets us define an additional named role for a component, with a different scope—it lets us bind the same component class to different context variables. (Any Seam component *instance* may be bound to multiple context variables, but this lets us do it at the class level, and take advantage of auto-instantiation.)

```
@Name("user")
@Entity
@Scope(CONVERSATION)
@Role(name="currentUser", scope=SESSION)
public class User {
   ...
}
```

`@Roles` ##################################

```
@Name("user")
@Entity
@Scope(CONVERSATION)
@Roles({@Role(name="currentUser", scope=SESSION),
      @Role(name="tempUser", scope=EVENT)})
public class User {
   ...
}
```

4.2.10.

################## Seam ############################ (Eat Your Own Dog Food) # ##### Seam ###### (##) # Seam###################### ## ################################### Seam ######################### ############# Seam ##### `org.jboss.seam.core` # ##### Java ################

##############Seam ############################## ######### `instance()` ############

```
FacesMessages.instance().add("Welcome back, #{user.name}!");
```

4.3.

(dependency injection) #### ##### *(inversion of control)* ########## Java ############### ### ############ setter

################################## (################ ######################
############################## ################################
################################
##
###Seam############################## ################################## Seam
########################## *(bijection)* ##########
###################################

- ######## *(contextual)* - ##
  (##### (wider) ######################### (narrow) ########################)
- #### *(bidirectional)* - ####################################
  ############################## *(outject)* ########
  ##
- ## *(dynamic)* - ############################## ###################### Seam
  ####################

##
##
##

`@In` ######################################

```
@Name("loginAction")
@Stateless
public class LoginAction implements Login {
   @In User user;
   ...
}
```

#####setter ################

```
@Name("loginAction")
@Stateless
public class LoginAction implements Login {
   User user;

   @In
   public void setUser(User user) {
      this.user=user;
   }

   ...
```

```
}
```

######## Seam ################################### ###################### ####
@In("currentUser")###################################

Seam
@In(create=true) ############# ######## (null ####) #####@In(required=false)
##########

############### ###################### @In(create=true) ##################
######## ######## @AutoCreate ################## create=true #############
####################

####################

```
@Name("loginAction")
@Stateless
public class LoginAction implements Login {
   @In("#{user.username}") String username;
   ...
}
```

Injected values are disinjected (i.e, set to `null`) immediately after method completion and outjection.

(##)

@Out##

```
@Name("loginAction")
@Stateless
public class LoginAction implements Login {
   @Out User user;
   ...
}
```

getter

```
@Name("loginAction")
@Stateless
public class LoginAction implements Login {
   User user;
```

```
    @Out
    public User getUser() {
        return user;
    }

    ...
}
```

##################################

```
@Name("loginAction")
@Stateless
public class LoginAction implements Login {
    @In @Out User user;
    ...
}
```

####

```
@Name("loginAction")
@Stateless
public class LoginAction implements Login {
    User user;

    @In
    public void setUser(User user) {
        this.user=user;
    }

    @Out
    public User getUser() {
        return user;
    }

    ...
}
```

4.4.

Bean ####### Bean Seam ########### EJB 3.0
(`@PostConstruct#@PreDestroy` ##) ############### ####Seam # JavaBean #######

########################## ################ J2EE ##############Seam # @PostConstruct # @PreDestroy #### 2 ##################################

@Create ##### Seam ########################## ######## 1 ## @Create#############

@Destroy ##### Seam ################################## ######## 1 ## @Destroy ##############

################ Bean ################@Remove######### ######################## Seam #########

################ @Startup ########## ###################################### @Startup ######### ### Seam ############################ @Startup(depends={....}) ######### ###################################

4.5.

@Install ######### ## ###############

- ##################################
- ################################
- ################################## (##############)#

@Install # #### # ### ###############

############### ################################## ######################## Seam ########## Seam ######################## ###################### (##)#

1. BUILT_IN — Seam ##########################
2. FRAMEWORK — ##
3. APPLICATION — ########## ################################
4. DEPLOYMENT — ##############################
5. MOCK — ######################

JMS ######## messageSender ######################

```
@Name("messageSender")
public class MessageSender {
   public void sendMessage() {
      //do something with JMS
   }
```

```
}
```

########## ###JMS ################################
mock

```
@Name("messageSender")
@Install(precedence=MOCK)
public class MockMessageSender extends MessageSender {
    public void sendMessage() {
        //do nothing!
    }
}
```

Seam

############################## ##############
################################### ### Jar ################################
##
################################### `@Install` ##################### Seam
###
################################

4.6.

################################

```
private static final Log log = LogFactory.getLog(CreateOrderAction.class);

public Order createOrder(User user, Product product, int quantity) {
    if ( log.isDebugEnabled() ) {
        log.debug("Creating new order for user: " + user.username() +
            " product: " + product.name()
            + " quantity: " + quantity);
    }
    return new Order(user, product, quantity);
}
```

##
Java ####### 10
################################

Seam ################## API #######

```
@Logger private Log log;

public Order createOrder(User user, Product product, int quantity) {
    log.debug("Creating new order for user: #0 product: #1 quantity: #2", user.username(),
 product.name(), quantity);
   return new Order(user, product, quantity);
}
```

It doesn't matter if you declare the `log` variable static or not—it will work either way, except for entity bean components which require the `log` variable to be static.

`#########debug() ##### ## ####### ###### if ( log.isDebugEnabled() ) ######################## Seam ########### Log ################### ##################################`

`User` # `Product` ## ############# Seam ########################

```
@Logger private Log log;

public Order createOrder(User user, Product product, int quantity) {
   log.debug("Creating new order for user: #{user.username} product: #{product.name} quantity:
 #0", quantity);
   return new Order(user, product, quantity);
}
```

Seam ######### log4j #### JDK logging ################ log4j ##############Seam ########## ########Seam # JDK logging #######

4.7. `Mutable` ######### `@ReadOnly`

`############# setAttribute() ########## ##################################### ############################## HttpSession ################## ############################## ############################## ############################################################ ##############`

`#####EJB ########## Bean ################################## ##### EJB ################################ ######### Seam ##### EJB 3.0 ################################ ################ JavaBean ####### Bean ############ Seam # Web ##############################################`

`############# JavaBean ############Seam ## ################################ setAttribute() ################### ######################################## ######## org.jboss.seam.core.Mutable ##############`

org.jboss.seam.core.AbstractMutable #######
##########

```
@Name("account")
public class Account extends AbstractMutable
{
   private BigDecimal balance;

   public void setBalance(BigDecimal balance)
   {
      setDirty(this.balance, balance);
      this.balance = balance;
   }

   public BigDecimal getBalance()
   {
      return balance;
   }

   ...

}
```

################ @ReadOnly ################

```
@Name("account")
public class Account
{
   private BigDecimal balance;

   public void setBalance(BigDecimal balance)
   {
      this.balance = balance;
   }

   @ReadOnly
   public BigDecimal getBalance()
   {
      return balance;
   }

   ...
```

```
}
```

################## Bean ########## Seam # (#######) ########## *Seam* ## #### `setAttribute()` ########################## ###################### ################## Bean ############## ###### Bean ################# ########## Bean # JavaBean ################# ##########

```
@Stateful
@Name("account")
public class AccountManager extends AbstractMutable
{
   private Account account; // an entity bean

   @Unwrap
   public Account getAccount()
   {
      return account;
   }

   ...

}
```

Seam ################## `EntityHome` #### Seam ##################### Bean ######################################

4.8.

Seam ################################## ####### `@In` ##### Seam ################ ## ####### Seam ############################## (### `@Destroy`)# ####Seam ####### Seam ############################ Seam ################################## 2#3 ############

################ ## Seam ## ######### ## ########################## ################## `@Factory` ############################## ########################## ##################### ######################## #########Seam ########################

```
@Factory(scope=CONVERSATION)
```

```
public List<Customer
> getCustomerList() {
   return ... ;
}
```

########## ###################### `void` ###########

```
@DataModel List<Customer
> customerList;

@Factory("customerList")
public void initCustomerList() {
   customerList = ...  ;
}
```

######## `customerList` ################# null #### ########################## ################ ########## ############# ### ##### ############### Seam ########## ######################### ###################

########## `@Unwrap` ##################### ########################## ## ########################

```
@Name("customerList")
@Scope(CONVERSATION)
public class CustomerListManager
{
   ...

   @Unwrap
   public List<Customer
> getCustomerList() {
      return ... ;
   }
}
```

`@Unwrap` ############### `@Destroy`

```
@Name("hens")
@Scope(APPLICATION)
```

```
public class HenHouse {

    Set<Hen
> hens;

    @In(required=false) Hen hen;

    @Unwrap
    public List<Hen
> getHens() {
        if (hens == null) {
            // Setup our hens
        }
        return hens;
    }

    @Observer({"chickBorn", "chickenBoughtAtMarket"})
    public addHen() {
        hens.add(hen);
    }

    @Observer("chickenSoldAtMarket")
    public removeHen() {
        hens.remove(hen);
    }

    @Observer("foxGetsIn")
    public removeAllHens() {
        hens.clear();
    }
    ...
}
```

Seam##########

XML##################Seam#####################XML####Seam#####################
Java######################## ######################## Seam###################
Seam############################ ############ web.xml ################
components.xml ########

5.1.

Seam components may be provided with configuration properties either via servlet context parameters, or via a properties file named `seam.properties` in the root of the classpath.

The configurable Seam component must expose JavaBeans-style property setter methods for the configurable attributes. If a Seam component named `com.jboss.myapp.settings` has a setter method named `setLocale()`, we can provide a property named `com.jboss.myapp.settings.locale` in the `seam.properties` file or as a servlet context parameter, and Seam will set the value of the `locale` attribute whenever it instantiates the component.

The same mechanism is used to configure Seam itself. For example, to set the conversation timeout, we provide a value for `org.jboss.seam.core.manager.conversationTimeout` in `web.xml` or `seam.properties`. (There is a built-in Seam component named `org.jboss.seam.core.manager` with a setter method named `setConversationTimeout()`.)

5.2. components.xml##############

components.xml###################### ############

- Configure components that have been installed automatically—including both built-in components, and application components that have been annotated with the `@Name` annotation and picked up by Seam's deployment scanner.
- Install classes with no `@Name` annotation as Seam components—this is most useful for certain kinds of infrastructural components which can be installed multiple times different names (for example Seam-managed persistence contexts).
- `@Name`###`@Install`#####################################
- ################ (override) #####

components.xml#########################

- `war#WEB-INF######`
- `jar#META-INF######`
- `@Name`###################`jar`

###Seam#####################seam.properties #####META-INF/components.xml########## @Name################################## (####@Install ######################### #########) # components.xml######### ##

components.xml #####jBPM###########

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xmlns:bpm="http://jboss.com/products/seam/bpm">
   <bpm:jbpm/>
</components
>
```

###############

```
<components>
   <component class="org.jboss.seam.bpm.Jbpm"/>
</components
>
```

###2######Seam##############################

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:persistence="http://jboss.com/products/seam/persistence"

   <persistence:managed-persistence-context name="customerDatabase"
            persistence-unit-jndi-name="java:/customerEntityManagerFactory"/>

   <persistence:managed-persistence-context name="accountingDatabase"
            persistence-unit-jndi-name="java:/accountingEntityManagerFactory"/>

</components
>
```

###########

```
<components>
   <component name="customerDatabase"
         class="org.jboss.seam.persistence.ManagedPersistenceContext">
```

```
      <property name="persistenceUnitJndiName"
>java:/customerEntityManagerFactory</property>
   </component>

   <component name="accountingDatabase"
         class="org.jboss.seam.persistence.ManagedPersistenceContext">
      <property name="persistenceUnitJndiName"
>java:/accountingEntityManagerFactory</property>
   </component>
</components
>
```

###############Seam################### ######################

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:persistence="http://jboss.com/products/seam/persistence"

 <persistence:managed-persistence-context name="productDatabase"
                              scope="session"
               persistence-unit-jndi-name="java:/productEntityManagerFactory"/>

</components
>
```

```
<components>

   <component name="productDatabase"
         scope="session"
         class="org.jboss.seam.persistence.ManagedPersistenceContext">
      <property name="persistenceUnitJndiName"
>java:/productEntityManagerFactory</property>
   </component>

</components
>
```

############################auto-create ################################@In
#################create=true########## ########

```
<components xmlns="http://jboss.com/products/seam/components"
```

```
        xmlns:persistence="http://jboss.com/products/seam/persistence"

 <persistence:managed-persistence-context name="productDatabase"
                                auto-create="true"
                    persistence-unit-jndi-name="java:/productEntityManagerFactory"/>

</components
>
```

```
<components>

   <component name="productDatabase"
      auto-create="true"
           class="org.jboss.seam.persistence.ManagedPersistenceContext">
      <property name="persistenceUnitJndiName"
>java:/productEntityManagerFactory</property>
   </component>

</components
>
```

`<factory>`############################ ##

```
<components>

                        <factory       name="contact"       method="#{contactManager.loadContact}"
 scope="CONVERSATION"/>

</components
>
```

Seam################ (##) ########

```
<components>

   <factory name="user" value="#{actor}" scope="STATELESS"/>

</components
>
```

##################################

```
<components>

   <factory name="contact" value="#{contactManager.contact}" scope="STATELESS"/>

</components
>
```

<factory>###auto-create="true"###### ###############

```
<components>

     <factory name="session" value="#{entityManager.delegate}" scope="STATELESS" auto-
create="true"/>

</components
>
```

################ components.xml ##
Seam# components.xml ######@wildcard@ ######################Ant########
(#####) ####### components.properties ############ (###)
############################Seam####################

5.3.

###XML########################components.xml
##################################### Seam###### com.helloworld.Hello#### com/
helloworld/Hello.component.xml#####################
(################################## Hibernate##################)
##############<components> ### <component>#############

##################################

```
<components>
   <component class="com.helloworld.Hello" name="hello">
      <property name="name"
>#{user.name}</property>
   </component>
   <factory name="message" value="#{hello.message}"/>
</components
```

```
>
```

################################## ##########

```
<component name="hello">
   <property name="name"
>#{user.name}</property>
</component
>
```

##

#####com/helloworld/components.xml# com.helloworld##############################

5.4.

##

org.jboss.seam.core.manager.conversationTimeout 60000

```
<core:manager conversation-timeout="60000"/>
```

```
<component name="org.jboss.seam.core.manager">
   <property name="conversationTimeout"
>60000</property>
</component
>
```

##

org.jboss.seam.bpm.jbpm.processDefinitions order.jpdl.xml, return.jpdl.xml, inventory.jpdl.xml

```
<bpm:jbpm>
   <bpm:process-definitions>
      <value
>order.jpdl.xml</value>
      <value
```

```
>return.jpdl.xml</value>
      <value
>inventory.jpdl.xml</value>
   </bpm:process-definitions>
</bpm:jbpm
>
```

```
<component name="org.jboss.seam.bpm.jbpm">
   <property name="processDefinitions">
      <value
>order.jpdl.xml</value>
      <value
>return.jpdl.xml</value>
      <value
>inventory.jpdl.xml</value>
   </property>
</component
>
```

##

```
<component name="issueEditor">
   <property name="issueStatuses">
      <key
>open</key
> <value
>open issue</value>
      <key
>resolved</key
> <value
>issue resolved by developer</value>
      <key
>closed</key
> <value
>resolution accepted by user</value>
   </property>
</component
>
```

When configuring multi-valued properties, by default, Seam will preserve the order in which you place the attributes in `components.xml` (unless you use a `SortedSet`/`SortedMap` then Seam will

use `TreeMap`/`TreeSet`). If the property has a concrete type (for example `LinkedList` Seam will use that type.

####################################

```
<component name="issueEditor">
  <property name="issueStatusOptions" type="java.util.LinkedHashMap">
    <key
>open</key
> <value
>open issue</value>
    <key
>resolved</key
> <value
>issue resolved by developer</value>
    <key
>closed</key
> <value
>resolution accepted by user</value>
  </property>
</component
>
```

############## (value-binding expression) ##########################
###`@In`############################ ######################################
######JSF#Spring#######IoC############################

```
<drools:managed-working-memory name="policyPricingWorkingMemory"
   rule-base="#{policyPricingRules}"/>
```

```
<component name="policyPricingWorkingMemory"
   class="org.jboss.seam.drools.ManagedWorkingMemory">
   <property name="ruleBase"
>#{policyPricingRules}</property>
</component
>
```

Seam##########Bean#################EL###

```
<component name="greeter" class="com.example.action.Greeter">
```

```
   <property name="message"
>Nice to see you, #{identity.username}!</property>
</component
>
```

##Seam#ValueExpression ### MethodExpression########EL##Seam##############

```
<framework:entity-home name="myEntityHome"
   class="com.example.action.MyEntityHome" entity-class="com.example.model.MyEntity"
   created-message="'#{myEntityHome.instance.name}' has been successfully added."/>
```

############ ValueExpression ### MethodExpression ## getExpressionString() ###################################### ValueExpression########## getValue() ########################MethodExpression###### invoke(Object args...)########################MethodExpression##### ########################EL############

5.5. XML#######

######################XML##components.xml###

```
<?xml version="1.0" encoding="UTF-8"?>
<components xmlns="http://jboss.com/products/seam/components"
            xsi:schemaLocation="http://jboss.com/products/seam/components http://jboss.com/products/seam/components-2.1.xsd">

   <component class="org.jboss.seam.core.init">
      <property name="debug"
>true</property>
      <property name="jndiPattern"
>@jndiPattern@</property>
   </component>

</components
>
```

################ ##

########################

```
<?xml version="1.0" encoding="UTF-8"?>
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:core="http://jboss.com/products/seam/core"
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:schemaLocation=
          "http://jboss.com/products/seam/core http://jboss.com/products/seam/core-2.1.xsd
                http://jboss.com/products/seam/components  http://jboss.com/products/seam/
components-2.1.xsd">

   <core:init debug="true" jndi-pattern="@jndiPattern@"/>

</components
>
```

####################XML##################
XML############################
#################components.xml#######################

##########Seam###
####Seam################### ######################<component> ###
################################
Seam###

###Java########@Namespace#########################XML#################
(################################package-info.java##################)
###seapay#########

```
@Namespace(value="http://jboss.com/products/seam/examples/seampay")
package org.jboss.seam.example.seampay;

import org.jboss.seam.annotations.Namespace;
```

##############components.xml################## ######################

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:pay="http://jboss.com/products/seam/examples/seampay"
        ... >

   <pay:payment-home new-instance="#{newPayment}"
            created-message="Created a new payment to #{newPayment.payee}" />

   <pay:payment name="newPayment"
```

```
            payee="Somebody"
            account="#{selectedAccount}"
            payment-date="#{currentDatetime}"
            created-date="#{currentDatetime}" />
    ...
</components
>
```

####

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:pay="http://jboss.com/products/seam/examples/seampay"
        ... >

   <pay:payment-home>
      <pay:new-instance
>"#{newPayment}"</pay:new-instance>
      <pay:created-message
>Created a new payment to #{newPayment.payee}</pay:created-message>
   </pay:payment-home>

   <pay:payment name="newPayment">
      <pay:payee
>Somebody"</pay:payee>
      <pay:account
>#{selectedAccount}</pay:account>
      <pay:payment-date
>#{currentDatetime}</pay:payment-date>
      <pay:created-date
>#{currentDatetime}</pay:created-date>
    </pay:payment>
    ...
</components
>
```

################################## #######<pay:payment-home># paymentHome################

```
package org.jboss.seam.example.seampay;
...
@Name("paymentHome")
public class PaymentController
```

```
   extends EntityHome<Payment>
{
   ...
}
```

################################## ##################################

#########<pay:payment>###org.jboss.seam.example.seampay#######Payment##########
Payment #################Seam######################

```
package org.jboss.seam.example.seampay;
...
@Entity
public class Payment
   implements Serializable
{
   ...
}
```

##
##############Seam###Seam#######

##Seam################

- components — `http://jboss.com/products/seam/components`
- core — `http://jboss.com/products/seam/core`
- drools — `http://jboss.com/products/seam/drools`
- framework — `http://jboss.com/products/seam/framework`
- jms — `http://jboss.com/products/seam/jms`
- remoting — `http://jboss.com/products/seam/remoting`
- theme — `http://jboss.com/products/seam/theme`
- security — `http://jboss.com/products/seam/security`
- mail — `http://jboss.com/products/seam/mail`
- web — `http://jboss.com/products/seam/web`
- pdf — `http://jboss.com/products/seam/pdf`
- spring — `http://jboss.com/products/seam/spring`

################

##############################Seam##
############JSF#################method binding expression)
#################################### ######################################
(cross-cutting concerns) ##

6.1. Seam####

Seam########################## ########################## (fine-grained eventing model) ########################## Seam#################################

- JSF####
- jBPM########
- Seam########
- Seam##############
- Seam#############

###############JSF EL################Seam################JSF######JSF##################

```
<h:commandButton value="Click me!" action="#{helloWorld.sayHello}"/>
```

jBPM########jBPM##########################

```
<start-page name="hello" view-id="/hello.jsp">
   <transition to="hello">
      <action expression="#{helloWorld.sayHello}"/>
   </transition>
</start-page
>
```

JSF ##### jPBM ################################ #### Seam ##############################

6.2.

Seam################################## #########WEB-INF/pages.xml####### ###JSF###id#########################

```
<pages>
   <page view-id="/hello.jsp" action="#{helloWorld.sayHello}"/>
</pages
>
```

* ############################ ID##############

```
<pages>
   <page view-id="/hello/*" action="#{helloWorld.sayHello}"/>
</pages
>
```

################################id######## Seam################# (least-specific to most-specific) ## ####################

###############JSF outcome##################outcome #null######Seam#####################################

####<page>###########id#####JSP#Facelets ############### ##################Struts#WebWork#### ###################################

```
TODO: translate struts action into page action
```

non-faces## (##### HTTP Get ##) ##############################

####################<action>#############

```
<pages>
   <page view-id="/hello.jsp">
      <action execute="#{helloWorld.sayHello}" if="#{not validation.failed}"/>
      <action execute="#{hitCount.increment}"/>
   </page>
</pages
>
```

6.3.

JSF faces ## (######) ######## (###########) ######## (###########) ############## ############################

GET ################ ################################## (JSF ##############)#

##

6.3.1.

Seam##

```
<pages>
    <page view-id="/hello.jsp" action="#{helloWorld.sayHello}">
      <param name="firstName" value="#{person.firstName}"/>
      <param name="lastName" value="#{person.lastName}"/>
    </page>
 </pages
>
```

`<param>`##########JSF#################

- ########id####non-faces (GET) ##########
  Seam##
- ### `<s:link>` # `<s:button>` ################## ######## ############# (`<s:link>` ############) ##########################
- ###id####`<redirect/>`###
- ###########id###########JSF#############
  #############faces######PAGE##############################

########################## `/hello.jsp` ## (### `/hello.jsp` ## `/hello.jsp` ######)
############# ######################### (#############) ########################

6.4.

`name` ################### PAGE

```
<pages>
    <page view-id="/hello.jsp" action="#{helloWorld.sayHello}">
      <param name="firstName" />
      <param name="lastName" />
    </page>
 </pages
>
```

##CRUD###

- ### <s:link> # <s:button> ##
- ############id############JSF############# ##############faces######PAGE#########################

###
faces###

6.5. ############URL####

#####pages.xml#############################Seam#URL#############################URL#######

```
<page view-id="/home.xhtml">
   <rewrite pattern="/home" />
</page>
```

/home ############ /home.xhtml ###################### /home.seam ############ /home ################################URL################# / home.seam?conversationId=13 # /home.seam?color=red

##

```
<page view-id="/home.xhtml">
   <rewrite pattern="/home/{color}" />
   <rewrite pattern="/home" />
</page>
```

/home/red ########## /home.seam?color=red ##################color ############ /home.seam?color=blue ##########URL###### /home/blue

Seam####################################Seam##########URL#####################/ search.seam?conversationId=13#/search-13##########

```
<page view-id="/search.xhtml">
   <rewrite pattern="/search-{conversationId}" />
   <rewrite pattern="/search" />
</page>
```

Seam
URL##################################Seam##################################Seam##############
`org.tuckey URLRewriteFilter` ########Web#########################

URL#####Seam###*#29.1.4.3. #URL ######*#######

6.6.

#################JSF##################

```
<pages>
  <page view-id="/calculator.jsp" action="#{calculator.calculate}">
    <param name="x" value="#{calculator.lhs}"/>
    <param name="y" value="#{calculator.rhs}"/>
                  <param    name="op"    converterId="com.my.calculator.OperatorConverter"
 value="#{calculator.op}"/>
  </page>
</pages
>
```

########################

```
<pages>
  <page view-id="/calculator.jsp" action="#{calculator.calculate}">
    <param name="x" value="#{calculator.lhs}"/>
    <param name="y" value="#{calculator.rhs}"/>
    <param name="op" converter="#{operatorConverter}" value="#{calculator.op}"/>
  </page>
</pages
>
```

######JSF###### `required="true"` ########

```
<pages>
   <page view-id="/blog.xhtml">
      <param name="date"
           value="#{blog.date}"
           validatorId="com.my.blog.PastDate"
           required="true"/>
   </page>
</pages
```

```
>
```

######################

```
<pages>
  <page view-id="/blog.xhtml">
    <param name="date"
         value="#{blog.date}"
         validator="#{pastDateValidator}"
         required="true"/>
  </page>
</pages
>
```

##################Hiberante###################################

######################## `FacesMessage` #`FacesContext`########

6.7.

Seam##########`faces-config.xml`#########JSF####################JSF####################

- ##############################
- ###### (conversation) ##############
- ############################## ########EL################

###`pages.xml` # `faces-config.xml` ##
`pages.xml` ###############

##JSF############

```
<navigation-rule>
  <from-view-id
>/editDocument.xhtml</from-view-id>

  <navigation-case>
    <from-action
>#{documentEditor.update}</from-action>
    <from-outcome
>success</from-outcome>
    <to-view-id
>/viewDocument.xhtml</to-view-id>
```

```
    <redirect/>
  </navigation-case>

</navigation-rule
>
```

##################

```
<page view-id="/editDocument.xhtml">

   <navigation from-action="#{documentEditor.update}">
      <rule if-outcome="success">
         <redirect view-id="/viewDocument.xhtml"/>
      </rule>
   </navigation>

</page
>
```

####DocumentEditor
##################JSF##Seam##################

```
<page view-id="/editDocument.xhtml">

   <navigation from-action="#{documentEditor.update}"
               evaluate="#{documentEditor.errors.size}">
      <rule if-outcome="0">
         <redirect view-id="/viewDocument.xhtml"/>
      </rule>
   </navigation>

</page
>
```

######################

```
<page view-id="/editDocument.xhtml">

   <navigation from-action="#{documentEditor.update}">
      <rule if="#{documentEditor.errors.empty}">
```

```
        <redirect view-id="/viewDocument.xhtml"/>
      </rule>
   </navigation>

</page
>
```

########################coutcome######################
##########outcome############################

#################### (conversation) ############## ##############

```
<page view-id="/editDocument.xhtml">

   <navigation from-action="#{documentEditor.update}">
      <rule if="#{documentEditor.errors.empty}">
         <end-conversation/>
         <redirect view-id="/viewDocument.xhtml"/>
      </rule>
   </navigation>

</page
>
```

###ID#########################

```
<page view-id="/editDocument.xhtml">

   <navigation from-action="#{documentEditor.update}">
      <rule if="#{documentEditor.errors.empty}">
         <end-conversation/>
         <redirect view-id="/viewDocument.xhtml">
            <param name="documentId" value="#{documentEditor.documentId}"/>
         </redirect>
      </rule>
   </navigation>

</page
>
```

outcome#null#####JSF###########coucome#null###############
##########################null####outcome########outcome#null#############

```
<page view-id="/editDocument.xhtml">

   <navigation from-action="#{documentEditor.update}">
      <rule>
         <render view-id="/viewDocument.xhtml"/>
      </rule>
   </navigation>

</page
>
```

outcome#null###################### ###############

```
<page view-id="/editDocument.xhtml">

   <navigation from-action="#{documentEditor.update}">
      <render view-id="/viewDocument.xhtml"/>
   </navigation>

</page
>
```

###id#JSF EL################

```
<page view-id="/editDocument.xhtml">

   <navigation>
      <rule if-outcome="success">
         <redirect view-id="/#{userAgent}/displayDocument.xhtml"/>
      </rule>
   </navigation>

</page
>
```

6.8.

################################## ################################ ###id#/calc/calculator.jsp############ calc/calculator.page.xml ################## ###########<page>#######id##########

```
<page action="#{calculator.calculate}">
   <param name="x" value="#{calculator.lhs}"/>
   <param name="y" value="#{calculator.rhs}"/>
   <param name="op" converter="#{operatorConverter}" value="#{calculator.op}"/>
</page
>
```

6.9.

Seam################################## ##############observer/observable##################
##Seam####################

######## (observers) #components.xml#######

```
<components>
   <event type="hello">
      <action execute="#{helloListener.sayHelloBack}"/>
      <action execute="#{logger.logHello}"/>
   </event>
</components
>
```

###event type #############

################################components.xml
##Seam#########################

```
@Name("helloWorld")
public class HelloWorld {
   public void sayHello() {
      FacesMessages.instance().add("Hello World!");
      Events.instance().raiseEvent("hello");
   }
}
```

########################

```
@Name("helloWorld")
public class HelloWorld {
   @RaiseEvent("hello")
   public void sayHello() {
      FacesMessages.instance().add("Hello World!");
   }
}
```

##
##

```
@Name("helloListener")
public class HelloListener {
   public void sayHelloBack() {
      FacesMessages.instance().add("Hello to you too!");
   }
}
```

components.xml ## components.xml
##

```
@Name("helloListener")
public class HelloListener {
   @Observer("hello")
   public void sayHelloBack() {
      FacesMessages.instance().add("Hello to you too!");
   }
}
```

##Seam###

```
@Name("helloWorld")
public class HelloWorld {
   private String name;
   public void sayHello() {
      FacesMessages.instance().add("Hello World, my name is #0.", name);
      Events.instance().raiseEvent("hello", name);
   }
```

```
}
```

```
@Name("helloListener")
public class HelloListener {
   @Observer("hello")
   public void sayHelloBack(String name) {
      FacesMessages.instance().add("Hello #0!", name);
   }
}
```

6.10.

Seam###

- `org.jboss.seam.validationFailed` — JSF####################
- `org.jboss.seam.noConversation` — ################################
- `org.jboss.seam.preSetVariable.<name>` — ######## <name> ##############
- `org.jboss.seam.postSetVariable.<name>` — ######## <name> ###############
- `org.jboss.seam.preRemoveVariable.<name>` — ######## <name> #################
- `org.jboss.seam.postRemoveVariable.<name>` — ######## <name> #################
- `org.jboss.seam.preDestroyContext.<SCOPE>` — <SCOPE> ###################
- `org.jboss.seam.postDestroyContext.<SCOPE>` — <SCOPE> ###################
- `org.jboss.seam.beginConversation` — called whenever a long-running conversation begins
- `org.jboss.seam.endConversation` — called whenever a long-running conversation ends
- `org.jboss.seam.conversationTimeout`— called when a conversation timeout occurs. The conversation id is passed as a parameter.
- `org.jboss.seam.beginPageflow` — called when a pageflow begins
- `org.jboss.seam.beginPageflow.<name>` — called when the pageflow <name> begins
- `org.jboss.seam.endPageflow` — called when a pageflow ends
- `org.jboss.seam.endPageflow.<name>` — called when the pageflow <name> ends
- `org.jboss.seam.createProcess.<name>` — called when the process <name> is created

- `org.jboss.seam.endProcess.<name>` — called when the process <name> ends
- `org.jboss.seam.initProcess.<name>` — called when the process <name> is associated with the conversation
- `org.jboss.seam.initTask.<name>` — called when the task <name> is associated with the conversation
- `org.jboss.seam.startTask.<name>` — called when the task <name> is started
- `org.jboss.seam.endTask.<name>` — called when the task <name> is ended
- `org.jboss.seam.postCreate.<name>` — called when the component <name> is created
- `org.jboss.seam.preDestroy.<name>` — called when the component <name> is destroyed
- `org.jboss.seam.beforePhase` — called before the start of a JSF phase
- `org.jboss.seam.afterPhase` — called after the end of a JSF phase
- `org.jboss.seam.postInitialization` — called when Seam has initialized and started up all components
- `org.jboss.seam.postReInitialization` — called when Seam has re-initialized and started up all components after a redeploy
- `org.jboss.seam.postAuthenticate.<name>` — called after a user is authenticated
- `org.jboss.seam.preAuthenticate.<name>` — called before attempting to authenticate a user
- `org.jboss.seam.notLoggedIn` — called there is no authenticated user and authentication is required
- `org.jboss.seam.rememberMe` — occurs when Seam security detects the username in a cookie
- `org.jboss.seam.exceptionHandled.<type>` — ##########Seam##########
- `org.jboss.seam.exceptionHandled` — ##########Seam##########
- `org.jboss.seam.exceptionNotHandled` — ##########
- `org.jboss.seam.afterTransactionSuccess` — Seam##########
- `org.jboss.seam.afterTransactionSuccess.<name>` — `<name>`##########Seam##########

Seam########## (observe) ######### ##########

6.11. Seam######

EJB 3.0 ###### Bean ################################ Bean ############### `@AroundInvoke` ################################ ## Bean ################### `@Interceptors` ####################

```
public class LoggedInInterceptor {

  @AroundInvoke
  public Object checkLoggedIn(InvocationContext invocation) throws Exception {

    boolean isLoggedIn = Contexts.getSessionContext().get("loggedIn")!=null;
    if (isLoggedIn) {
      //the user is already logged in
      return invocation.proceed();
    }
    else {
      //the user is not logged in, fwd to login page
      return "login";
    }
  }

}
```

##############################Bean####################Bean# `@Interceptors(LoggedInInterceptor.class)` ##Seam################################ `@Interceptors` #######EJB3################################### `@LoggedIn` ###############

```
@Target(TYPE)
@Retention(RUNTIME)
@Interceptors(LoggedInInterceptor.class)
public @interface LoggedIn {}
```

Bean #`@LoggedIn`

```
@Stateless
@Name("changePasswordAction")
@LoggedIn
@Interceptors(SeamInterceptor.class)
```

```
public class ChangePasswordAction implements ChangePassword {

   ...

   public String changePassword() { ... }

}
```

################ (########)# ############ @Interceptor ##################################

```
@Interceptor(around={BijectionInterceptor.class,
                    ValidationInterceptor.class,
                    ConversationInterceptor.class},
             within=RemoveInterceptor.class)
public class LoggedInInterceptor
{
   ...
}
```

########################## EJB3 ##########################

```
@Interceptor(type=CLIENT)
public class LoggedInInterceptor
{
   ...
}
```

EJB ################ ## ######################## Seam ## @Interceptor(stateless=true) ##############################

Seam###################################Seam###

Seam ####### EJB3 Bean ##### JavaBean ##################

EJB ## ######### (@AroundInvoke ####) ############## ########### @PostConstruct# @PreDestroy# @PrePassivate ### @PostActive ########### Seam ## ## EJB3 Bean ##### JavaBean ################## (JavaBean ################ @PreDestroy #####)#

6.12.

JSF ###################### ################ Seam ################## XML ## ###### ## EJB 3.0 ### @ApplicationException ##############################

6.12.1.

Bean ######################## ## EJB ######### ###### ###################### ########## ###################### @ApplicationException(rollback=true) ################## (############ ########### ### @ApplicationException ###################### ######### @ApplicationException ########################)

########################## ###################### ## ##

Seam # EJB 3.0 ############ Seam JavaBean ##################

Seam ################## ### ############## Seam ################ ### JSF ################## ###################################### ###### Seam ################## Seam

6.12.2. Seam

Seam##############################web.xml####################

```
<filter>
   <filter-name
>Seam Filter</filter-name>
   <filter-class
>org.jboss.seam.servlet.SeamFilter</filter-class>
</filter>

<filter-mapping>
   <filter-name
>Seam Filter</filter-name>
   <url-pattern
>*.seam</url-pattern>
</filter-mapping
>
```

################ `web.xml` # Facelets ######## `components.xml` # Seam ######################

6.12.3.

Seam ################## HTTP 404 ######### ################################## ## Seam

```
@HttpError(errorCode=404)
public class ApplicationException extends Exception { ... }
```

Seam ################################## ### ############

```
@Redirect(viewId="/failure.xhtml", end=true)
@ApplicationException(rollback=true)
public class UnrecoverableApplicationException extends RuntimeException { ... }
```

##
Seam#JSF###

EL############ `###id` #############

Seam ## ###

```
@Redirect(viewId="/error.xhtml", message="Unexpected error")
public class SystemException extends RuntimeException { ... }
```

6.12.4. ##### XML

#####################################Seam###### `pages.xml` ################

```
<pages>

  <exception class="javax.persistence.EntityNotFoundException">
    <http-error error-code="404"/>
```

```
  </exception>

  <exception class="javax.persistence.PersistenceException">
    <end-conversation/>
    <redirect view-id="/error.xhtml">
      <message
>Database access failed</message>
    </redirect>
  </exception>

  <exception>
    <end-conversation/>
    <redirect view-id="/error.xhtml">
      <message
>Unexpected failure</message>
    </redirect>
  </exception>

</pages
>
```

<exception> ################## ########## pages.xml

EL############ view-id ##############

EL ################################## Seam##

```
...
throw new AuthorizationException("You are not allowed to do this!");

<pages>

  <exception class="org.jboss.seam.security.AuthorizationException">
    <end-conversation/>
    <redirect view-id="/error.xhtml">
      <message severity="WARN"
>#{org.jboss.seam.handledException.message}</message>
    </redirect>
  </exception>

</pages
```

```
>
```

`org.jboss.seam.handledException`
`##################################################org.jboss.seam.caughtException##########`

6.12.4.1.

For the exception handlers defined in `pages.xml`, it is possible to declare the logging level at which the exception will be logged, or to even suppress the exception being logged altogether. The attributes `log` and `logLevel` can be used to control exception logging. By setting `log="false"` as per the following example, then no log message will be generated when the specified exception occurs:

```
  <exception class="org.jboss.seam.security.NotLoggedInException" log="false">
    <redirect view-id="/register.xhtml">
      <message severity="warn"
>You must be a member to use this feature</message>
    </redirect>
  </exception
>
```

If the `log` attribute is not specified, then it defaults to `true` (i.e. the exception will be logged). Alternatively, you can specify the `logLevel` to control at which log level the exception will be logged:

```
  <exception class="org.jboss.seam.security.NotLoggedInException" logLevel="info">
    <redirect view-id="/register.xhtml">
      <message severity="warn"
>You must be a member to use this feature</message>
    </redirect>
  </exception
>
```

The acceptable values for `logLevel` are: `fatal`, `error`, `warn`, `info`, `debug` or `trace`. If the `logLevel` is not specified, or if an invalid value is configured, then it will default to `error`.

6.12.5.

##JPA########

```
<exception class="javax.persistence.EntityNotFoundException">
  <redirect view-id="/error.xhtml">
```

```
    <message
>Not found</message>
  </redirect>
</exception>

<exception class="javax.persistence.OptimisticLockException">
  <end-conversation/>
  <redirect view-id="/error.xhtml">
    <message
>Another user changed the same data, please try again</message>
  </redirect>
</exception
>
```

##Seam#########################

```
<exception class="org.jboss.seam.framework.EntityNotFoundException">
  <redirect view-id="/error.xhtml">
    <message
>Not found</message>
  </redirect>
</exception
>
```

##Seam###############

```
<exception class="org.jboss.seam.security.AuthorizationException">
  <redirect>
    <message
>You don't have permission to do this</message>
  </redirect>
</exception>

<exception class="org.jboss.seam.security.NotLoggedInException">
  <redirect view-id="/login.xhtml">
    <message
>Please log in first</message>
  </redirect>
</exception
>
```

####JSF###

```
<exception class="javax.faces.application.ViewExpiredException">
  <redirect view-id="/error.xhtml">
    <message
>Your session has timed out, please try again</message>
  </redirect>
</exception
>
```

`ViewExpiredException`
`##################################################################no-conversation-view-id # conversation-required ##############################`

##########

Seam

######## 3 ############## Seam ################

- ####### ######## ### 2002 ########## (#######) ################ ########### Struts ############################2 ######################
- ## ## (Hibernate #### `LazyInitializationException` ################## ####### Hibernate ########### ### Spring ######## J2EE ####### *stateless session facade* (anti) ##)
- ################

#################################### ##

7.1. Seam

#################################

- JSF ############ ####### ########## ######## ############## ################## ####################
- JSF ############################ Seam ######################### ######## Seam ####################
- `@Begin` ########## ########################
- `@End` ########## ################################
- JSF ################################## Seam ##################### ######################
- ##### faces ## (JSF ######) ################ ######## non-faces ## (#### GET ##) ################## ####################
- If the JSF request lifecycle is foreshortened by a redirect, Seam transparently stores and restores the current conversation context—unless the conversation was already ended via `@End(beforeRedirect=true)`.

Seam ############ (###############) # JSF ######################## ######### # *faces* ## (#### GET ####) ################################ ########## ################## non-faces ##### Seam ########### ########## Seam ## *ID (conversation id)* ##################

```
<a href="main.jsf?#{manager.conversationIdParameter}=#{conversation.id}"
>Continue</a
>
```

JSF ####################

```
<h:outputLink value="main.jsf">
    <f:param name="#{manager.conversationIdParameter}" value="#{conversation.id}"/>
    <h:outputText value="Continue"/>
</h:outputLink
>
```

Seam ################ ########

```
<h:outputLink value="main.jsf">
    <s:conversationId/>
    <h:outputText value="Continue"/>
</h:outputLink
>
```

############################### ##############

```
<h:commandLink action="main" value="Exit">
    <f:param name="conversationPropagation" value="none"/>
</h:commandLink
>
```

Seam ################ ########

```
<h:commandLink action="main" value="Exit">
    <s:conversationPropagation type="none"/>
</h:commandLink
>
```

###################### ################################

`conversationPropagation ####### ### <s:conversationPropagation> #### ######################################`

```
<h:commandLink action="main" value="Exit">
   <s:conversationPropagation type="end"/>
</h:commandLink
>
```

```
<h:commandLink action="main" value="Select Child">
   <s:conversationPropagation type="nested"/>
</h:commandLink
>
```

```
<h:commandLink action="main" value="Select Hotel">
   <s:conversationPropagation type="begin"/>
</h:commandLink
>
```

```
<h:commandLink action="main" value="Select Hotel">
   <s:conversationPropagation type="join"/>
</h:commandLink
>
```

######### ##
############################## ##

- ##### ## ##### ######## *(nested conversation)* ################ ####################
- ## ########################

7.2.

###################### `@Begin(nested=true)` ##############################
################################## ##############################
##
################################

- ## ################
- ##

- ##
  ## ########## ##########

@End ####### ############(Pop)########
######################

############### (################) #### ################################
Seam
#####################################

############################## ############################## @End(root=true)
########################

######################## ############
####
####################################

######## ################################### ################################
##
@PerNestedConversation
#########################

7.3. GET

non-faces ## (## HTTP GET ##) ############ JSF
######################### <h:outputLink> ########################

################################ JSF ############### ###### @Begin
#####################################

################################ ############ ####2 ################ Seam
#################### @Create ################### ########## ############
@Factory #################

#################### Seam ## pages.xml ##### ######## ##########

```
<pages>
  <page view-id="/messageList.jsp" action="#{messageManager.list}"/>
  ...
</pages
>
```

######################### ## #########
null ########## Seam #### JSF ### Seam ##################
################################

############################## ##########################

```
<pages>
  <page view-id="/messageList.jsp" action="#{conversation.begin}"/>
  ...
</pages
>
```

JSF ################## ### #{conversation.end}

############################## ###################################### <begin-conversation> ###############

```
<pages>
  <page view-id="/messageList.jsp">
    <begin-conversation nested="true" pageflow="AddItem"/>
  <page>
  ...
</pages
>
```

<end-conversation>

```
<pages>
  <page view-id="/home.jsp">
    <end-conversation/>
  <page>
  ...
</pages
>
```

1 ############ ## 5 ################

- @Create ##### @Begin ############
- @Factory ##### @Begin ############
- Seam ############ @Begin ############
- pages.xml # <begin-conversation> #####
- #{conversation.begin} # Seam ##################

7.4. <s:link> # <s:button>

JSF ########## JavaScript ########## ## ##### JFS ########## <h:outputLink> ########## #### <h:outputLink> ######## 2 ######

- JSF ########## <h:outputLink> ##########
- ################## JSF ###### DataModel ##########

Seam provides the notion of a *page action* to help solve the first problem, but this does nothing to help us with the second problem. We *could* work around this by using the RESTful approach of passing a request parameter and requerying for the selected object on the server side. In some cases—such as the Seam blog example application—this is indeed the best approach. The RESTful style supports bookmarking, since it does not require server-side state. In other cases, where we don't care about bookmarks, the use of @DataModel and @DataModelSelection is just so convenient and transparent!

############################## Seam # <s:link> JSF ##########

JSF ### ID

```
<s:link view="/login.xhtml" value="Login"/>
```

(##### #####################)#

```
<s:link action="#{login.logout}" value="Logout"/>
```

JSF ### ID ################### ########## *null* ##########################

```
<s:link view="/loggedOut.xhtml"  action="#{login.logout}" value="Logout"/>
```

<h:dataTable> ###### DataModel

```
<s:link view="/hotel.xhtml" action="#{hotelSearch.selectHotel}" value="#{hotel.name}"/>
```

########################

```
<s:link view="/main.xhtml" propagation="none"/>
```

################

```
<s:link action="#{issueEditor.viewComment}" propagation="nest"/>
```

############ ########################

```
<s:link action="#{documentEditor.getDocument}" propagation="begin"
        pageflow="EditDocument"/>
```

jBPM ############ `taskInstance` #####

```
<s:link action="#{documentApproval.approveOrReject}" taskInstance="#{task}"/>
```

(##### DVD ########################)

`<s:button>`

```
<s:button action="#{login.logout}" value="Logout"/>
```

7.5.

JSF `FacesMessage` ######### ###### ############################ JSF ########## faces ############## ######## JSF

########## Seam ########## `facesMessages` ################ (Seam ##############################)

```
@Name("editDocumentAction")
@Stateless
public class EditDocumentBean implements EditDocument {
   @In EntityManager em;
   @In Document document;
   @In FacesMessages facesMessages;

   public String update() {
      em.merge(document);
      facesMessages.add("Document updated");
   }
```

```
}
```

`facesMessages` ## ### Seam ##

JSF EL ## faces ######################

```
facesMessages.add("Document #{document.title} was updated");
```

########################

```
<h:messages globalOnly="true"/>
```

7.6. ######## ID

################################## ID ##

###############

########## 2 ################################## ######### # #ebay ## ################################## ################################## ## ############################ #

With a natural conversation its really easy to have the user rejoin the existing conversation, and pick up where they left off - just have them to rejoin the payForItem conversation with the itemId as the conversation id.

########## *URL*

############# (URL ##########) ##### URL (## Wiki ############# ID #########) ################# ######################## URL ####################

With a natural conversations, when you are building your hotel booking system (or, of course, whatever your app is) you can generate a URL like `http://seam-hotels/book.seam?hotel=BestWesternAntwerpen` (of course, whatever parameter `hotel` maps to on your domain model must be unique) and with URLRewrite easily transform this to http://seam-hotels/book/BestWesternAntwerpen.

#############

7.7.

######## `pages.xml` ########

```
<conversation name="PlaceBid"
              parameter-name="auctionId"
              parameter-value="#{auction.auctionId}"/>
```

########################## #### PlaceBid ###### ################### page ########################

parameter-name ######### ID ################## ID ################ ##### parameter-name # auctionId ###### #### #### URL ###### cid=123 ################ auctionId=765432

############ parameter-value ### ID ############################## EL ######## ######## ID ######## auction ################

###################### page ### conversation ###############

```
<page view-id="/bid.xhtml" conversation="PlaceBid" login-required="true">
    <navigation from-action="#{bidAction.confirmBid}"
>
        <rule if-outcome="success">
            <redirect view-id="/auction.xhtml">
                <param name="id" value="#{bidAction.bid.auction.auctionId}"/>
            </redirect>
        </rule
>
    </navigation>
</page
>
```

7.8.

######################### ############################## ####################

```
<page view-id="/auction.xhtml">
  <param name="id" value="#{auctionDetail.selectedAuctionId}"/>

  <navigation from-action="#{bidAction.placeBid}">
    <redirect view-id="/bid.xhtml"/>
  </navigation>
</page
>
```

auction ########## #{bidAction.placeBid} ########## (########## Seam ### seamBay ########)# ########## PlaceBid ###### /bid.xhtml ##################### ########################

```
@Begin(join = true)
public void placeBid()
```

########## <page/> ########## ## ## ################################## s:conversationName ########################

```
<h:commandButton id="placeBidWithAmount" styleClass="placeBid"
 action="#{bidAction.placeBid}">
  <s:conversationName value="PlaceBid"/>
 </h:commandButton
>
```

######### s:link ### s:button ########## conversationName ##########

```
<s:link value="Place Bid" action="#{bidAction.placeBid}" conversationName="PlaceBid"/>
```

7.9.

##########1 ######################### Seam ########## Java ################## ###################################

- ######## ID (JSF ### Seam #################) ######### (jPDL ######) ############### ######################################
- ###### 1 ################## JSF ### facelets ########## ################## ####### ####### (breadcrumbs) ######################

7.9.1. ########## JSF

JSF ### Seam ################## Seam ####### view-id ################ ################ pages.xml ############### Seam ######## WEB-INF ######## faces-config.xml ####################

```
<pages>
```

```
    <page view-id="/main.xhtml">
      <description
>Search hotels: #{hotelBooking.searchString}</description>
    </page>
    <page view-id="/hotel.xhtml">
      <description
>View hotel: #{hotel.name}</description>
    </page>
    <page view-id="/book.xhtml">
      <description
>Book hotel: #{hotel.name}</description>
    </page>
    <page view-id="/confirm.xhtml">
      <description
>Confirm: #{booking.description}</description>
    </page>
    </pages
>
```

################## Seam ###################### ############################

7.9.2. ########## jPDL

jPDL ############## Seam #### jBPM ############################## ## `view-id` #### `<page>` ### ######## `<page>` ###########

```
<pageflow-definition name="shopping">

  <start-state name="start">
    <transition to="browse"/>
  </start-state>

  <page name="browse" view-id="/browse.xhtml">
    <description
>DVD Search: #{search.searchPattern}</description>
    <transition to="browse"/>
    <transition name="checkout" to="checkout"/>
  </page>

  <page name="checkout" view-id="/checkout.xhtml">
    <description
>Purchase: $#{cart.total}</description>
    <transition to="checkout"/>
    <transition name="complete" to="complete"/>
```

```
  </page>

  <page name="complete" view-id="/complete.xhtml">
    <end-conversation />
  </page>

</pageflow-definition
>
```

7.9.3.

JSP ### facelets
##

```
<h:selectOneMenu value="#{switcher.conversationIdOrOutcome}">
   <f:selectItem itemLabel="Find Issues" itemValue="findIssue"/>
   <f:selectItem itemLabel="Create Issue" itemValue="editIssue"/>
   <f:selectItems value="#{switcher.selectItems}"/>
</h:selectOneMenu>
<h:commandButton action="#{switcher.select}" value="Switch"/>
```

2 ##############

######## (`pages.xml` ###) ####################

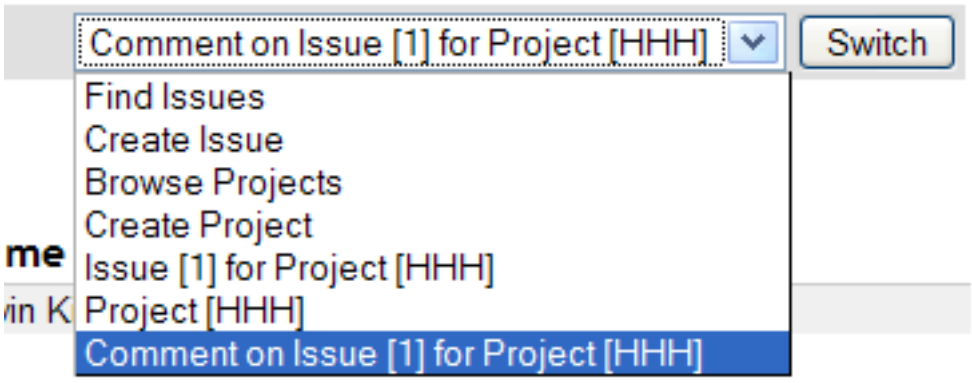

7.9.4.

######################## #################

```
<h:dataTable value="#{conversationList}" var="entry"
```

```
        rendered="#{not empty conversationList}">
    <h:column>
        <f:facet name="header"
>Workspace</f:facet>
        <h:commandLink action="#{entry.select}" value="#{entry.description}"/>
        <h:outputText value="[current]" rendered="#{entry.current}"/>
    </h:column>
    <h:column>
        <f:facet name="header"
>Activity</f:facet>
        <h:outputText value="#{entry.startDatetime}">
            <f:convertDateTime type="time" pattern="hh:mm a"/>
        </h:outputText>
        <h:outputText value=" - "/>
        <h:outputText value="#{entry.lastDatetime}">
            <f:convertDateTime type="time" pattern="hh:mm a"/>
        </h:outputText>
    </h:column>
    <h:column>
        <f:facet name="header"
>Action</f:facet>
        <h:commandButton action="#{entry.select}" value="#{msg.Switch}"/>
        <h:commandButton action="#{entry.destroy}" value="#{msg.Destroy}"/>
    </h:column>
</h:dataTable
>
```

##

Workspace	Workspace activity	Action
Comment on Issue [1] for Project [HHH]	01:18 PM - 01:18 PM	Switch Destroy
Issue [1] for Project [HHH]	01:18 PM - 01:18 PM	Switch Destroy
Project [HHH]	01:18 PM - 01:18 PM	Switch Destroy

######################

##

7.9.5. ####### (Breadcrumbs)

######### ############################### ######### ############################

```
<ui:repeat value="#{conversationStack}" var="entry">
```

```
    <h:outputText value=" | "/>
    <h:commandLink value="#{entry.description}" action="#{entry.select}"/>
</ui:repeat
```

7.10. ############ JSF

############ JSF ## (###### ## ################### JSF ######################### postback #### Seam ################ ###################################

########## ## ##################################

```
@Name("grid")
@Scope(ScopeType.EVENT)
public class Grid
{
    private HtmlPanelGrid htmlPanelGrid;

    // getters and setters
    ...
}
```

```
@Name("gridEditor")
@Scope(ScopeType.CONVERSATION)
public class GridEditor
{
    @In(required=false)
    private Grid grid;

    ...
}
```

JSF ## #### `facesMessages` ############## Seam

Alternatively, you can access the JSF component tree through the implicit `uiComponent` handle. The following example accesses `getRowIndex()`of the `UIData` component which backs the data table during iteration, it prints the current row number:

```
<h:dataTable id="lineItemTable" var="lineItem" value="#{orderHome.lineItems}">
  <h:column>
    Row: #{uiComponent['lineItemTable'].rowIndex}
  </h:column>
  ...
</h:dataTable
>
```

JSF UI ####################################

7.11.

Seam ###################### *#4.1.10.* ########## ######## ################################ (AJAX ######################)# ################### Ajax ################################## RichFaces ######################

################################ Seam ############################## ############################ #### ################### ### ############################## ## (##########)# ### ######################## AJAX ##

Seam ######################### (##########)# ## ##### AJAX

components.xml ##

```
<core:manager concurrent-request-timeout="500" />
```

################################

```
<page view-id="/book.xhtml"
      conversation-required="true"
      login-required="true"
      concurrent-request-timeout="2000" />
```

###################### AJAX ################ ############################ ###################### ##### AJAX ################# (1 ######################################)# #### ### 1 ############################

################################ ############ AJAX ####### ########################## (#################)# ########################## ################## (##############) ##

7.11.1. ### AJAX

##################################

###################################### ## ################################ (#####)# ## ########### (######## keypress # onblur ##) ## ############ ######################################

##

###################################### ######### @Asynchronous ########################

```
int total;

// This method is called when an event occurs on the client
// It takes a really long time to execute
@Asynchronous
public void calculateTotal() {
  total = someReallyComplicatedCalculation();
}

// This method is called as the result of the poll
// It's very quick to execute
public int getTotal() {
  return total;
}
```

7.11.2.

concurrent-request-timeout ############################ ####### Seam # pages.xml ####### ConcurrentRequestTimeoutException ####### HTTP 503

```
  <exception class="org.jboss.seam.ConcurrentRequestTimeoutException" logLevel="trace">
    <http-error error-code="503" />
  </exception
>
```

503 Service Unavailable (HTTP/1.1 RFC)

######## ##
####################################

##############################

```
<exception class="org.jboss.seam.ConcurrentRequestTimeoutException" logLevel="trace">
  <end-conversation/>
  <redirect view-id="/error.xhtml">
    <message
>The server is too busy to process your request, please try again later</message>
  </redirect>
</exception
>
```

ICEfaces, RichFaces Ajax and Seam Remoting can all handle HTTP error codes. Seam Remoting will pop up a dialog box showing the HTTP error and ICEfaces will indicate the error in it's connection status component. RichFaces Ajax provides the most complete support for handling HTTP errors by providing a user definable callback. For example, to show the error message to the user:

```
<script type="text/javascript">
  A4J.AJAX.onError = function(req,status,message) {
    alert("message");
  };
</script
>
```

7.11.3. RichFaces Ajax

RichFaces Ajax # Seam ############# AJAX ######### ####################

- `eventsQueue` — provide a queue in which events are placed. All events are queued and requests are sent to the server serially. This is useful if the request can to the server can take some time to execute (e.g. heavy computation, retrieving information from a slow source) as the server isn't flooded.
- `ignoreDupResponses` — ignore the response produced by the request if a more recent 'similar' request is already in the queue. ignoreDupResponses="true" does *not cancel* the the processing of the request on the server side — just prevents unnecessary updates on the client side.

  ################################ Seam ##################

- `requestDelay` — ################### (#####)# ############################ (####################) ## (######################) #####

  ################################ Seam ################## ######################## (###############) ####################

- `<a:poll reRender="total" interval="1000" />` — ##############################

###############

JBoss jBPM #Java SE # EE ###################### jBPM ######################## ###############WEB######################## ############## jPDL ##### XML ############### Eclipse ################################ jPDL ###########WEB ##SOA ##############################

Seam ######### jBPM #2 ##############

- ################################## jPDL ############################ Seam##
- ################### ###################################### ##### jBPM ################################ ################### ### ####jBPM ##

##*Pageflow*, *conversation* # *task* ##############################

Seam######JPDL#########################Seam###

8.1. Seam#######

Seam ############# 2 ##########

- JSF####Seam ############ - #################
- jPDL ### - #################

################################### ############################## ##########################

8.1.1.

########### ################### (outcome) ## ########################## ## ################################## ## ##

JSF

```
<navigation-rule>
   <from-view-id
>/numberGuess.jsp</from-view-id>

   <navigation-case>
      <from-outcome
>guess</from-outcome>
```

```
        <to-view-id
>/numberGuess.jsp</to-view-id>
        <redirect/>
    </navigation-case>

    <navigation-case>
        <from-outcome
>win</from-outcome>
        <to-view-id
>/win.jsp</to-view-id>
        <redirect/>
    </navigation-case>

    <navigation-case>
        <from-outcome
>lose</from-outcome>
        <to-view-id
>/lose.jsp</to-view-id>
        <redirect/>
    </navigation-case>

</navigation-rule
>
```

Seam

```
<page view-id="/numberGuess.jsp">

    <navigation>
        <rule if-outcome="guess">
            <redirect view-id="/numberGuess.jsp"/>
        </rule>
        <rule if-outcome="win">
            <redirect view-id="/win.jsp"/>
        </rule>
        <rule if-outcome="lose">
            <redirect view-id="/lose.jsp"/>
        </rule>
    </navigation>

</page
>
```

######################## ######################ID############

```
public String guess() {
   if (guess==randomNumber) return "/win.jsp";
   if (++guessCount==maxGuesses) return "/lose.jsp";
   return null;
}
```

########################## ###############################

```
public String search() {
   return "/searchResults.jsp?searchPattern=#{searchAction.searchPattern}";
}
```

#######jPDL
##
##

jPDL

```
<pageflow-definition name="numberGuess">

  <start-page name="displayGuess" view-id="/numberGuess.jsp">
    <redirect/>
    <transition name="guess" to="evaluateGuess">
          <action expression="#{numberGuess.guess}" />
    </transition>
  </start-page>

  <decision name="evaluateGuess" expression="#{numberGuess.correctGuess}">
    <transition name="true" to="win"/>
    <transition name="false" to="evaluateRemainingGuesses"/>
  </decision>

  <decision name="evaluateRemainingGuesses" expression="#{numberGuess.lastGuess}">
    <transition name="true" to="lose"/>
    <transition name="false" to="displayGuess"/>
  </decision>

  <page name="win" view-id="/win.jsp">
    <redirect/>
```

```
    <end-conversation />
  </page>

  <page name="lose" view-id="/lose.jsp">
    <redirect/>
    <end-conversation />
  </page>

</pageflow-definition
>
```

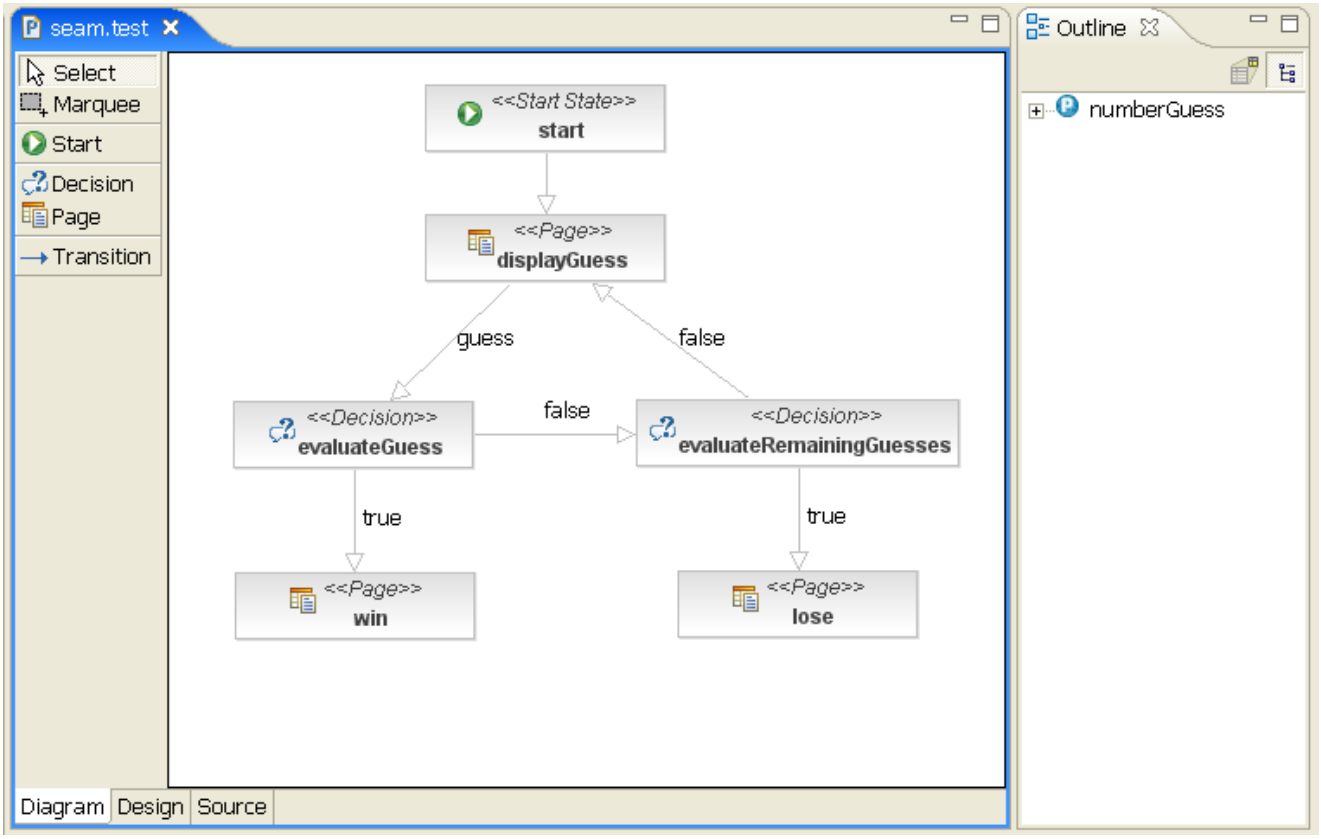

######### ############

- JSF/Seam ############# ##### (############# Java ##############################)
- jPDL #JSP # Java ############ ########################

#################### ### ### ####### (#############)
################################ ################ ###### ################
##

/ ################## ######## /
################################ ##### 1 ########## Seam ##########
####################### ####Seam ########## ##############################

########### ######################## ############################## ##################################

############## #############

8.1.2. Seam #

JSF #### Seam ################## Seam ###################################### ########## ##################### ############## Struts # WebWork ################# WEB ################ ####EJB ##########Bean # Spring framework ################################ ###################################### ####Seam ############## ########## Bean ######################### ############ ######################### no-conversation-view-id ######## null ######################## ######################## ####################

#####no-conversation-view-id#### pages.xml###### ######################## ### Seam ################################

```
<page view-id="/checkout.xhtml"
      no-conversation-view-id="/main.xhtml"/>
```

##(faces message######)##

```
<page name="checkout"
      view-id="/checkout.xhtml"
      back="enabled">
   <redirect/>
   <transition to="checkout"/>
   <transition name="complete" to="complete"/>
</page
>
```

####checkout ## ######### ##################

###
##################no-conversation-view-id ##################:

```
<page name="checkout"
      view-id="/checkout.xhtml"
      back="enabled"
```

```
      no-conversation-view-id="/main.xhtml">
   <redirect/>
   <transition to="checkout"/>
   <transition name="complete" to="complete"/>
</page
>
```

##

8.2. jPDL

8.2.1.

Seam # jBPM ###################Seam ##### # `seam.properties` ########### # ############### (### `jpdl.xml` #######) ############ ## components.xml # Seam ###############

```
<bpm:jbpm />
```

Seam # jBPM ### ## `components.xml` # Seam ###############

```
<bpm:jbpm>
   <bpm:pageflow-definitions>
      <value
>pageflow.jpdl.xml</value>
   </bpm:pageflow-definitions>
</bpm:jbpm
>
```

8.2.2.

`@Begin#@BeginTask` ##### `@StartTask` ############ ################### jPDL ################:

```
@Begin(pageflow="numberguess")
public void begin() { ... }
```

#####pages.xml###################

```
<page>
      <begin-conversation pageflow="numberguess"/>
   </page
>
```

If we are beginning the pageflow during the `RENDER_RESPONSE` phase—during a `@Factory` or `@Create` method, for example—we consider ourselves to be already at the page being rendered, and use a `<start-page>` node as the first node in the pageflow, as in the example above.

(outcome) ######################## ###################### `<start-state>` ##### ########## (outcome)

```
<pageflow-definition name="viewEditDocument">

   <start-state name="start">
      <transition name="documentFound" to="displayDocument"/>
      <transition name="documentNotFound" to="notFound"/>
   </start-state>

   <page name="displayDocument" view-id="/document.jsp">
      <transition name="edit" to="editDocument"/>
      <transition name="done" to="main"/>
   </page>

   ...

   <page name="notFound" view-id="/404.jsp">
      <end-conversation/>
   </page>

</pageflow-definition
>
```

8.2.3.

`<page>`

```
<page name="displayGuess" view-id="/numberGuess.jsp">
   <redirect/>
   <transition name="guess" to="evaluateGuess">
```

```
    <action expression="#{numberGuess.guess}" />
  </transition>
</page
>
```

view-id #JSF####ID### <redirect/>###JSF#############<redirect/>############################post-then-redirect####################(Seam#####################################Ruby on Rails # "flash"#######Seam###########

#####numberGuess.jsp ##### ### ########################## JSF ## (outcome) ######

```
<h:commandButton type="submit" value="Guess" action="guess"/>
```

################################ numberGuess ######## guess () ################ jBPM ################ jPDL ############################ JSF EL ########## ################## ######## Seam ########## Seam ########################## ####JSF ######################## jBPM ############## (###### (The One Kind of Stuff principle))

null##outcome ### (####action ################)# ##################Seam ################## ## ##############################

```
<h:commandButton type="submit" value="Guess"/>
```

############################

```
<page name="displayGuess" view-id="/numberGuess.jsp">
  <redirect/>
  <transition to="evaluateGuess">
    <action expression="#{numberGuess.guess}" />
  </transition>
</page
>
```

########################## ########## (outcome) ##########

```
<h:commandButton type="submit" value="Guess" action="#{numberGuess.guess}"/>
```

```
<page name="displayGuess" view-id="/numberGuess.jsp">
   <transition name="correctGuess" to="win"/>
   <transition name="incorrectGuess" to="evaluateGuess"/>
</page
>
```

######################## ##
#################################

8.2.4.

####################jPDL######################<decision>#########

```
<decision name="evaluateGuess" expression="#{numberGuess.correctGuess}">
   <transition name="true" to="win"/>
   <transition name="false" to="evaluateRemainingGuesses"/>
</decision
>
```

decision (####) # Seam ######### JSF EL #############

8.2.5.

<end-conversation>####@End ############### (############ #########)

```
<page name="win" view-id="/win.jsp">
   <redirect/>
   <end-conversation/>
</page
>
```

########transition ######################## ####Seam
#################################

```
<page name="win" view-id="/win.jsp">
   <redirect/>
   <end-task transition="success"/>
</page
>
```

8.2.6.

##<process-state>
###################################

```
<process-state name="cheat">
   <sub-process name="cheat"/>
   <transition to="displayGuess"/>
</process-state
>
```

<start-state> ################# <end-state>
############################<process-state> ###################

8.3. Seam

###
Seam # jBPM ## Seam
###

<page> #####<task-node> ######### ######################################
(###### (The One Kind of Stuff principle)) ################
##

```
<process-definition name="todo">

  <start-state name="start">
    <transition to="todo"/>
  </start-state>

  <task-node name="todo">
    <task name="todo" description="#{todoList.description}">
      <assignment actor-id="#{actor.id}"/>
    </task>
    <transition to="done"/>
  </task-node>

  <end-state name="done"/>

</process-definition
>
```

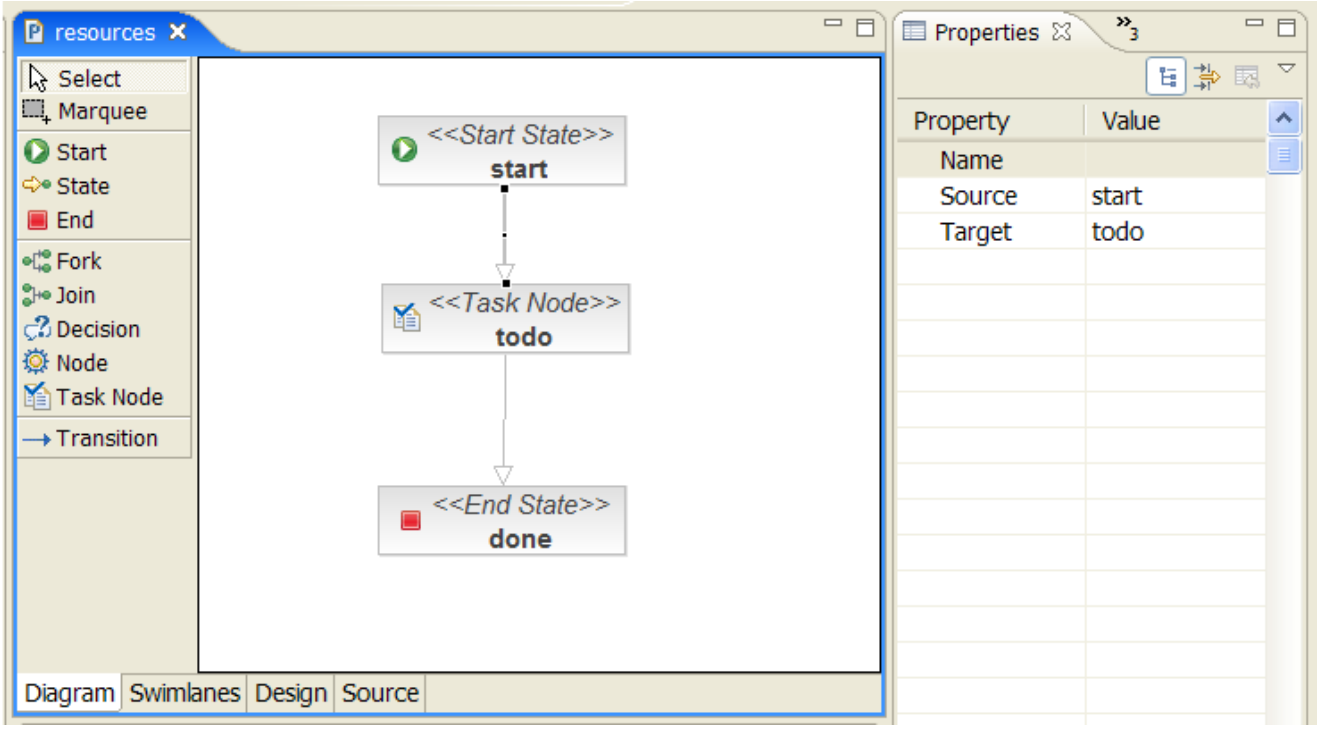

############jPDL ############ jPDL ################### ######2 ##### ########## <task># ###### <process-definition>#########

8.4. jPDL

8.4.1.

jBPM #######jBPM#############################

```
<bpm:jbpm>
   <bpm:process-definitions>
      <value
>todo.jpdl.xml</value>
   </bpm:process-definitions>
</bpm:jbpm
>
```

jBPM ############################ Seam ##Seam##############jBPM############ ######################

8.4.2. ####ID####

################################ jBPM *#actor id # group actor id*################ `actor` ######### Seam ##################### actor id ########

```
@In Actor actor;

public String login() {
   ...
   actor.setId( user.getUserName() );
   actor.getGroupActorIds().addAll( user.getGroupNames() );
   ...
}
```

8.4.3.

######################### `@CreateProcess` ###############

```
@CreateProcess(definition="todo")
public void createTodo() { ... }
```

pages.xml#######################:

```
<page>
   <create-process definition="todo" />
</page
>
```

8.4.4.

###ID###

```
<task name="todo" description="#{todoList.description}">
   <assignment actor-id="#{actor.id}"/>
</task
>
```

######################

```
<task name="todo" description="#{todoList.description}">
   <assignment pooled-actors="employees"/>
</task
```

```
>
```

8.4.5.

######### Seam ############################## pooledTaskInstanceList # ####################################

```
<h:dataTable value="#{pooledTaskInstanceList}" var="task">
   <h:column>
      <f:facet name="header"
>Description</f:facet>
      <h:outputText value="#{task.description}"/>
   </h:column>
   <h:column>
     <s:link action="#{pooledTask.assignToCurrentActor}" value="Assign" taskInstance="#{task}"/
>
   </h:column
>
</h:dataTable
>
```

<s:link> ######## JSF <h:commandLink> ##############

```
<h:commandLink action="#{pooledTask.assignToCurrentActor}"
>
   <f:param name="taskId" value="#{task.id}"/>
</h:commandLink
>
```

pooledTask ##

taskInstanceListForType ######### ################################

```
<h:dataTable value="#{taskInstanceListForType['todo']}" var="task">
   <h:column>
      <f:facet name="header"
>Description</f:facet>
      <h:outputText value="#{task.description}"/>
   </h:column>
   <h:column>
      <s:link action="#{todoList.start}" value="Start Work" taskInstance="#{task}"/>
```

```
   </h:column
>
</h:dataTable
>
```

8.4.6.

######################### `@StartTask` #### `@BeginTask`#######

```
@StartTask
public String start() { ... }
```

pages.xml ################:

```
<page>
   <start-task />
</page
>
```

##
##

`@EndTask` ################Seam ##################

```
@EndTask(transition="completed")
public String completed() { ... }
```

pages.xml#######:

```
<page>
   <end-task transition="completed" />
</page
>
```

pages.xml####EL############

#####jBPM ##########################
(##)

jBPM

Seam

Seam # EJB 3.0 ###### Java Persistence API ### Hibernate3 ########## Java ############################## Seam ################## ############################## ORM #########

9.1.

Seam grew out of the frustration of the Hibernate team with the statelessness typical of the previous generation of Java application architectures. The state management architecture of Seam was originally designed to solve problems relating to persistence—in particular problems associated with *optimistic transaction processing*. Scalable online applications always use optimistic transactions. An atomic (database/JTA) level transaction should not span a user interaction unless the application is designed to support only a very small number of concurrent clients. But almost all interesting work involves first displaying data to a user, and then, slightly later, updating the same data. So Hibernate was designed to support the idea of a persistence context which spanned an optimistic transaction.

Seam # EJB 3.0 ## ##### ## ### ###################### ## Hibernate ################### `LazyInitializationException` ##########

EJB 3.0 ########## ##################### ########## ################## (########### Bean) ############## ############################ (############) # ###########

- ########### Bean ################################### (################################)#
- ##

Seam ## ############################## Bean ################## 1 ############ (####################################) ## (Seam #########) ########## ## ###################################### ##### Seam # EJB 3.0 ##

9.2. Seam

EJB ##### Bean ######################### EJB ##### Bean ######################### ################################ JSF ###################### Bean ############ ################### 1 ###################

Seam

1 ###### Seam ########################## Bean

- The request might require processing by several loosly-coupled components, each of which is called independently from the web layer. It is common to see several or even many calls per request from the web layer to EJB components in Seam.
- ################################

1 ##################### ## ########### ### ############################

Hibernate ################ *#open session in view#* ############ Spring ### ############################## `LazyInitializationException` ######### Hibernate #########open session in view##############

This pattern is usually implemented as a single transaction which spans the entire request. There are several problems with this implementation, the most serious being that we can never be sure that a transaction is successful until we commit it—but by the time the "open session in view" transaction is committed, the view is fully rendered, and the rendered response may already have been flushed to the client. How can we notify the user that their transaction was unsuccessful?

Seam ################################### #open session in view############## ##############

- ######################### ##############################
- ############################ 1 ################ (###) ############################ 2 ######################

########## ################################### ##### Seam ################################## Seam ### ## Seam ###################### Seam ## #### ############################ ###########

Seam ########## EJB 3.0 ################################### Java EE 5 ###### Seam ######## ######### Seam ##############################

9.2.1. Seam

Seam ###################### JSF ############ ##### ###### ### `components.xml` ##########

```
<core:init transaction-management-enabled="false"/>

<transaction:no-transaction />
```

9.2.2. Seam##################

Seam ############## ##### ####### ############################## ####### Seam ############## EJB ############ JTA ###################### Java EE 5 ############ `components.xml` # EJB ######################

```
<transaction:ejb-transaction />
```

EE 5 ################ Seam ################################## Seam

- JPA RESOURCE_LOCAL ######### `javax.persistence.EntityTransaction` ############## `EntityTransaction` ##############################
- Hibernate ########### `org.hibernate.Transaction` ############# `HibernateTransaction` ##############################
- Spring ########### `org.springframework.transaction.PlatformTransactionManager` ############## Spring # `PlatformTransactionManagement` ###### `userConversationContext` ##
- Seam ###################

components.xml ####### JPA RESOURCE_LOCAL ################# `#{em}` # `persistence:managed-persistence-context` ########### ############ `entityManager` ## `entity-manager` ############### (*Seam* ########### ###)

```
<transaction:entity-transaction entity-manager="#{em}"/>
```

Hibernate ################# ## components.xml ####### `#{hibernateSession}` ######## `persistence:managed-hibernate-session` ########### ## Hibernate ####### `session` ## `session` ############### (*Seam* ########### ###)

```
<transaction:hibernate-transaction session="#{hibernateSession}"/>
```

Seam ######################## components.xml #######

```
<transaction:no-transaction />
```

Spring ############## *Spring # PlatformTransactionManagement #####* ##########

9.2.3.

############ beforeCompletion() # afterCompletion() ################################ ####### Seam ################################ ## Seam ################################ Java EE 5 #### <transaction:ejb-transaction/> ######## components.xml ##### ##### Seam ########################## Seam ##############################

9.3. Seam

Seam # Java EE 5 ############## ################################ EE 5 ######## ## ##

######### ######## ########## (JPA #) ### ####### (Hibernate #) ################## Seam ################## Seam ########## ######### EntityManager ### Session ############## @In ##################

Seam ################################ EJB 3.0 ## Seam ############ ## (################## ### EJB ######################)

9.3.1. JPA # Seam

################## components.xml ############

```
<persistence:managed-persistence-context name="bookingDatabase"
                                         auto-create="true"
                                         persistence-unit-jndi-name="java:/EntityManagerFactories/bookingData"/>
```

############## bookingDatabase ###### Seam ############ JNDI # java:/EntityManagerFactories/bookingData ######### (EntityManagerFactory ######) # EntityManager ################

EntityManagerFactory # JNDI ###################### JBoss ### ########## persistence.xml

```
<property name="jboss.entity.manager.factory.jndi.name"
```

```
        value="java:/EntityManagerFactories/bookingData"/>
```

######## `EntityManager` ############

```
@In EntityManager bookingDatabase;
```

EJB 3 ################## `@TransactionAttribute(REQUIRES_NEW)` ## #### Seam ################################### `REQUIRES_NEW` ################### ###### ##### `REQUIRES_NEW` ######### @PersistenceContext ############################

9.3.2. Seam ### Hibernate

Seam ## Hibernate #########`components.xml` ##################

```
<persistence:hibernate-session-factory name="hibernateSessionFactory"/>

<persistence:managed-hibernate-session name="bookingDatabase"
                        auto-create="true"
                session-factory-jndi-name="java:/bookingSessionFactory"/>
```

`java:/bookingSessionFactory` # `hibernate.cfg.xml` ######################

```
<session-factory name="java:/bookingSessionFactory">
   <property name="transaction.flush_before_completion"
>true</property>
   <property name="connection.release_mode"
>after_statement</property>
   <property name="transaction.manager_lookup_class"
>org.hibernate.transaction.JBossTransactionManagerLookup</property>
   <property name="transaction.factory_class"
>org.hibernate.transaction.JTATransactionFactory</property>
   <property name="connection.datasource"
>java:/bookingDatasource</property>
   ...
</session-factory
>
```

Seam ################## `hibernate.transaction.flush_before_completion` ############## JTA ##

JavaBean ########## Hibernate `Session`

```
@In Session bookingDatabase;
```

9.3.3. Seam

`merge()` ######### ################## `LazyInitializationException` # `NonUniqueObjectException` #########
##

Hibernate # EJB 3.0 #### `@Version`
################################

######## ################################ (############)# ####################
###
######################## EJB 3.0 ############ JBoss# Sun# Sybase ## EJB 3.0
Hibernate ############ `FlushModeType` ##########################
###################################

Seam ######### `FlushModeType.MANUAL` ############ ### Hibernate ############################ ##########################

```
@In EntityManager em; //a Seam-managed persistence context

@Begin(flushMode=MANUAL)
public void beginClaimWizard() {
   claim = em.find(Claim.class, claimId);
}
```

`claim` ############### ##################### ## claim

```
public void addPartyToClaim() {
   Party party = ....;
   claim.addParty(party);
}
```

##

```
@End
```

```
public void commitClaim() {
   em.flush();
}
```

pages.xml ## `flushMode` # `MANUAL` ##############

```
<begin-conversation flush-mode="MANUAL" />
```

Seam

```
<components xmlns="http://jboss.com/products/seam/components"
  xmlns:core="http://jboss.com/products/seam/core">
  <core:manager conversation-timeout="120000" default-flush-mode="manual" />
</components
>
```

9.4. JPA

`EntityManager` ########## `getDelegate()` ############### API ############### ##### Hibernate ################ `org.hibernate.Session` ########################## ########################## ############ ## JPA ################### *### JPA* ########## ########

Hibernate ########################## #### Seam ################################

```
@In EntityManager entityManager;

@Create
public void init() {
   ( (Session) entityManager.getDelegate() ).enableFilter("currentVersions");
}
```

Java ###################### ################ ###################### ### ##### `components.xml`

```
<factory name="session"
      scope="STATELESS"
      auto-create="true"
```

```
        value="#{entityManager.delegate}"/>
```

############################

```
@In Session session;

@Create
public void init() {
   session.enableFilter("currentVersions");
}
```

9.5. EJB-QL/HQL # EL

Seam ################## @PersistenceContext ################################ Seam # EntityManager ### Session ############### ###### EL ###################################### ##### #########

```
User user = em.createQuery("from User where username=#{user.username}")
        .getSingleResult();
```

##############

```
User user = em.createQuery("from User where username=:username")
        .setParameter("username", user.getUsername())
        .getSingleResult();
```

####################

```
User user = em.createQuery("from User where username=" + user.getUsername()) //BAD!
        .getSingleResult();
```

(###### SQL ######################)

9.6. Hibernate

Hibernate ######### #### ###### ## ######### Hibernate ################## ##### ##### Seam ###################################### ## Seam Application Framework ################

Seam ################################ #### `EntityManager` # Hibernate `Session` ###################### (### Hibernate ############################)

```
<persistence:filter name="regionFilter">
   <persistence:name
>region</persistence:name>
   <persistence:parameters>
      <key
>regionCode</key>
      <value
>#{region.code}</value>
   </persistence:parameters>
</persistence:filter>

<persistence:filter name="currentFilter">
   <persistence:name
>current</persistence:name>
   <persistence:parameters>
      <key
>date</key>
      <value
>#{currentDate}</value>
   </persistence:parameters>
</persistence:filter>

<persistence:managed-persistence-context name="personDatabase"
   persistence-unit-jndi-name="java:/EntityManagerFactories/personDatabase">
   <persistence:filters>
      <value
>#{regionFilter}</value>
      <value
>#{currentFilter}</value>
   </persistence:filters>
</persistence:managed-persistence-context
>
```

Seam ## JSF

JSF ###

```
<h:form>
   <h:messages/>

   <div>
      Country:
      <h:inputText value="#{location.country}" required="true">
         <my:validateCountry/>
      </h:inputText>
   </div>

   <div>
      Zip code:
      <h:inputText value="#{location.zip}" required="true">
         <my:validateZip/>
      </h:inputText>
   </div>

   <h:commandButton/>
</h:form
>
```

########
DRY ########### Seam # Hibernate Validator ####################################

`Location` ######################

```
public class Location {
   private String country;
   private String zip;

   @NotNull
   @Length(max=30)
   public String getCountry() { return country; }
   public void setCountry(String c) { country = c; }

   @NotNull
   @Length(max=6)
   @Pattern("^\d*$")
   public String getZip() { return zip; }
```

```
    public void setZip(String z) { zip = z; }
}
```

############## #### Hibernate Validator ######################################

```
public class Location {
    private String country;
    private String zip;

    @NotNull
    @Country
    public String getCountry() { return country; }
    public void setCountry(String c) { country = c; }

    @NotNull
    @ZipCode
    public String getZip() { return zip; }
    public void setZip(String z) { zip = z; }
}
```

############### JSF ################################ ##### <s:validate> ######################################

```
<h:form>
    <h:messages/>

    <div>
        Country:
        <h:inputText value="#{location.country}" required="true">
            <s:validate/>
        </h:inputText>
    </div>

    <div>
        Zip code:
        <h:inputText value="#{location.zip}" required="true">
            <s:validate/>
        </h:inputText>
    </div>

    <h:commandButton/>
```

```
</h:form
>
```

##: ###### `@NotNull` ###################### `required="true"` ######################## JSF ####################

This approach *defines* constraints on the model, and *presents* constraint violations in the view—a significantly better design.

`<s:validateAll>`

```
<h:form>

   <h:messages/>

   <s:validateAll>

      <div>
         Country:
         <h:inputText value="#{location.country}" required="true"/>
      </div>

      <div>
         Zip code:
         <h:inputText value="#{location.zip}" required="true"/>
      </div>

      <h:commandButton/>

   </s:validateAll>

</h:form
>
```

######## `<s:validate>` ###################### ############### ############################

`label`

```
<h:inputText value="#{location.zip}" required="true" label="Zip:">
   <s:validate/>
```

```
</h:inputText
>
```

########### {0} ################################## (Hiberate Validator ##### JSF ######################)# ######################### (Internationalization) ###############

```
validator.length={0} ### {min} # {max} ############
```

########## ########################## (#### JSF ###)# ################## (######)# ############################ (######) ##### ### ## ########################

```
###################################
#############################################################################
#### facelets ######################
```

```
<ui:composition xmlns="http://www.w3.org/1999/xhtml"
                xmlns:ui="http://java.sun.com/jsf/facelets"
                xmlns:h="http://java.sun.com/jsf/html"
                xmlns:f="http://java.sun.com/jsf/core"
                xmlns:s="http://jboss.com/products/seam/taglib">

   <div>

      <s:label styleClass="#{invalid?'error':''}">
         <ui:insert name="label"/>
         <s:span styleClass="required" rendered="#{required}"
>*</s:span>
      </s:label>

      <span class="#{invalid?'error':''}">
         <h:graphicImage value="/img/error.gif" rendered="#{invalid}"/>
         <s:validateAll>
            <ui:insert/>
         </s:validateAll>
      </span>

      <s:message styleClass="error"/>

   </div>
```

```
</ui:composition
>
```

`<s:decorate>` ######################################

```
<h:form>

   <h:messages globalOnly="true"/>

   <s:decorate template="edit.xhtml">
      <ui:define name="label"
>Country:</ui:define>
      <h:inputText value="#{location.country}" required="true"/>
   </s:decorate>

   <s:decorate template="edit.xhtml">
      <ui:define name="label"
>Zip code:</ui:define>
      <h:inputText value="#{location.zip}" required="true"/>
   </s:decorate>

   <h:commandButton/>

</h:form
>
```

RichFaces Ajax

```
<h:form>

   <h:messages globalOnly="true"/>

   <s:decorate id="countryDecoration" template="edit.xhtml">
      <ui:define name="label"
>Country:</ui:define>
      <h:inputText value="#{location.country}" required="true">
         <a:support event="onblur" reRender="countryDecoration" bypassUpdates="true"/>
      </h:inputText>
   </s:decorate>

   <s:decorate id="zipDecoration" template="edit.xhtml">
      <ui:define name="label"
```

```
>Zip code:</ui:define>
      <h:inputText value="#{location.zip}" required="true">
         <a:support event="onblur" reRender="zipDecoration" bypassUpdates="true"/>
      </h:inputText>
   </s:decorate>

   <h:commandButton/>

</h:form
>
```

#################### ID #################### ## UI ######## Selenium ############################## #### ID ######## JSF ####################################

```
<h:form id="form">

   <h:messages globalOnly="true"/>

   <s:decorate id="countryDecoration" template="edit.xhtml">
      <ui:define name="label"
>Country:</ui:define>
      <h:inputText id="country" value="#{location.country}" required="true">
         <a:support event="onblur" reRender="countryDecoration" bypassUpdates="true"/>
      </h:inputText>
   </s:decorate>

   <s:decorate id="zipDecoration" template="edit.xhtml">
      <ui:define name="label"
>Zip code:</ui:define>
      <h:inputText id="zip" value="#{location.zip}" required="true">
         <a:support event="onblur" reRender="zipDecoration" bypassUpdates="true"/>
      </h:inputText>
   </s:decorate>

   <h:commandButton/>

</h:form
>
```

################################### Seam ######### (########## EL ############################) # Hibernate Validator ##############

```
public class Location {
    private String name;
    private String zip;

    // Getters and setters for name

    @NotNull
    @Length(max=6)
    @ZipCode(message="#{messages['location.zipCode.invalid']}")
    public String getZip() { return zip; }
    public void setZip(String z) { zip = z; }
}
```

```
location.zipCode.invalid = #{location.name} ###################
```

Groovy

JBoss Seam############RAD#####################RAD###API###API#####################################Java ################################*Groovy* [http://groovy.codehaus.org]######################

JBoss Seam ##########################Java EE ######################JBoss Seam ## Seam #################Seam ###################################API##########################

11.1.

Groovy ##Java#####################Python#Ruby#Smalltalk#####################Groovy #########2####

- Java ##################Groovy#####Java####################
- Groovy ############Java##########Java############################

TODO:Groovy ################

11.2. Groovy ### Seam

#########################Groovy###### # Java ############Seam ####################Groovy#################################Groovy#####Java##################

11.2.1. Groovy

###############Seam###Groovy 1.1 ####################Seam###############Groovy########

11.2.1.1.

```
@Entity
   @Name("hotel")
   class Hotel implements Serializable
   {
      @Id @GeneratedValue
      Long id

      @Length(max=50) @NotNull
      String name
```

```
    @Length(max=100) @NotNull
    String address

    @Length(max=40) @NotNull
    String city

    @Length(min=2, max=10) @NotNull
    String state

    @Length(min=4, max=6) @NotNull
    String zip

    @Length(min=2, max=40) @NotNull
    String country

    @Column(precision=6, scale=2)
    BigDecimal price

    @Override
    String toString()
    {
        return "Hotel(${name},${address},${city},${zip})"
    }
}
```

Groovy###########(getter/
setter)#######################getter#setter#########################hotel####Java##hotel.getCity()######

11.2.1.2. Seam

Seam########Groovy########Java############Seam#####################################

```
@Scope(ScopeType.SESSION)
@Name("bookingList")
class BookingListAction implements Serializable
{
    @In EntityManager em
    @In User user
    @DataModel List<Booking> bookings
    @DataModelSelection Booking booking
    @Logger Log log

    @Factory public void getBookings()
```

```
    {
        bookings = em.createQuery("'
                select b from Booking b
                where b.user.username = :username
                order by b.checkinDate"')
            .setParameter("username", user.username)
            .getResultList()
    }

    public void cancel()
    {
        log.info("Cancel booking: #{bookingList.booking.id} for #{user.username}")
        Booking cancelled = em.find(Booking.class, booking.id)
        if (cancelled != null) em.remove( cancelled )
        getBookings()
                    FacesMessages.instance().add("Booking cancelled for confirmation number
 #{bookingList.booking.id}", new Object[0])
    }
}
```

11.2.2. seam-gen

seam-gen #Groovy###########seam-gen
################################Groovy###########Groovy################.groovy#####src/
main###################################.groovy#####src/hot########

11.3.

Groovy##########Java###3###########

###################JavaBeans#Seam####################JBoss
Seam#################################/
##########################.groovy################GroovyBeans#Seam####################

11.3.1. Groovy

Groovy########Java###################Java##########Groovy#######Groovy#####bean#Groovy
Seam##groovyc
ant####################Groovy####Java###Groov

11.3.2. ######### .groovy

JBoss
Seam##############################.groovy###

#Seam ######################Groovy###(.groovy ####)#WEB-INF/dev#####################################GroovyBean##

#####.groovy###############Seam############################

- ##########JavaBeans #### GroovyBeans###EJB3 bean############
- ####################
- ################### WEB-INF/dev ########################
- Seam ######################

11.3.3. seam-gen

Seam-gen #Groovy###.groovy################src/hot#WAR, Java, Groovy#########seam-gen###Groovy###############

examples/groovybooking###Groovy#######################################

######################Apache Wicket#####

Seam#JSF######################Wicket#########Seam######`wicket`#########################Wick

##

Wicket#####Seam#################JSF#################Wicket#####################

12.1. Seam##Wicket###############

Wicket###

Wicket###Seam#######

##`this()`#`super()`#####################################

##

######################

##

12.1.1.

Seam######Wicket####################Seam#######`EVENT`#`CONVERSATION`#`SESSION`#`APPLICATION`#`BUSINES`

Wicket##Seam######################`@In`######################

```
@In(create=true)
private HotelBooking hotelBooking;
```

####

Wicket#######Seam######################`@Name`##############

Wicket##########Seam###################################

```
@Out(scope=ScopeType.EVENT, required=false)
private String verify;
```

TODO ###################

12.1.2.

Wicket############@Restrict###15.############@Rest
###############

#:

```
@Restrict
public class Main extends WebPage {

  ...
```

####

Seam#################################

Wicket############@Begin#@End###Seam################

##

ifOutcome##############

#:

```
item.add(new Link("viewHotel") {

  @Override
  @Begin
  public void onClick() {
    hotelBooking.selectHotel(hotel);
    setResponsePage(org.jboss.seam.example.wicket.Hotel.class);
  }
};
```

###@NoConversationPage########

```
@Restrict
@NoConversationPage(Main.class)
```

```
public class Hotel extends WebPage {
```

############################Seam####################Events.instance().raiseEvent("foo")#####(outcome)############################

Wicket######@CreateProcess#@ResumeTask#@BeginTask#@EndTask#@StartTask#@Transition############

TODO - BPM####### - JBSEAM-3194

12.2.

To enable bijection and orchestration control via annotations in Wicket you must place your classes in `WEB-INF/wicket`. Seam needs to instrument the bytecode of your Wicket classes to be able to intercept the annotations you use.

##

Currently only bytecode instrumentation using a custom classloader which reads classes in `WEB-INF/wicket` is supported. In the an Ant task or Maven plugin may be developed to support bytecode instrumentation when the project artifacts are built.

12.2.1.

Seam############Wicket#WebApplication####SeamWebApplication####################Wicket#########

#:

SeamAuthorizationStrategy##Wicket#########@Restrict##########Seam####################SeamWeb

#######getHomePage()####################################

```
public class WicketBookingApplication extends SeamWebApplication {

  @Override
  public Class getHomePage() {
    return Home.class;
  }

  @Override
  protected Class getLoginPage() {
    return Home.class;
  }
```

```
}
```

Seam automatically installs the Wicket filter for you (ensuring that it is inserted in the correct place for you). But you still need to tell Wicket which `WebApplication` class to use:

```
<components xmlns="http://jboss.com/products/seam/components"
  xmlns:wicket="http://jboss.com/products/seam/wicket">

                                        <wicket:web-application                application-
class="org.jboss.seam.example.wicket.WicketBookingApplication" />
</components
```

####

####################Application##############################Wicket#####

Seam################

Seam ############################## ### Java ## #### `components.xml`### (#######) ## ##

Seam################ JPA #Hibernae ##

We should emphasize that the framework is extremely simple, just a handful of simple classes that are easy to understand and extend. The "magic" is in Seam itself—the same magic you use when creating any Seam application even without using this framework.

13.1.

Seam ############################## ######################## ####### ## Seam ###################### `components.xml` ################################ ##### ### `components.xml` ####### `Person` ############## CRUD ######## 1 ####################

```
<framework:entity-home name="personHome"
                       entity-class="eg.Person"
                       entity-manager="#{personDatabase}">
   <framework:id
>#{param.personId}</framework:id>
</framework:entity-home
>
```

####XML ########################## ########################

```
@Name("personHome")
public class PersonHome extends EntityHome<Person
> {

   @In EntityManager personDatabase;

   public EntityManager getEntityManager() {
     return personDatabase;
   }

}
```

(########)
(##)

EJB ############ Bean
(##EJB##################JavaBean###########) JBoss AS
#########4.2.2.GA####################

```
@Stateful
@Name("personHome")
public class PersonHome extends EntityHome<Person
> implements LocalPersonHome {

}
```

################ Bean ############ ##### ##### `entityManager`
##

```
@Stateless
@Name("personHome")
public class PersonHome extends EntityHome<Person
> implements LocalPersonHome {

  @In EntityManager entityManager;

  public EntityManager getPersistenceContext() {
    entityManager;
  }

}
```

#####Seam#################CRUD ##`EntityHome`
`#HibernateEntityHome`####Query####`EntityQuery` #
`HibernateEntityQuery`#4#########################

Home#Query#####################################
####################################

Seam################Seam#########################
#######`entityManager`####################

13.2. Home######

Home####################################`Person`################

```
@Entity
public class Person {
   @Id private Long id;
   private String firstName;
   private String lastName;
   private Country nationality;

   //getters and setters...
}
```

##############personHome####################

```
<framework:entity-home name="personHome" entity-class="eg.Person" />
```

############################

```
@Name("personHome")
public class PersonHome extends EntityHome<Person
> {}
```

Home ####### persist()# remove()# update()# getInstance() # ##############
remove()##### update() ######### setId() ###################################

Home # JSF ##########################

```
<h1
>Create Person</h1>
<h:form>
   <div
>First name: <h:inputText value="#{personHome.instance.firstName}"/></div>
   <div
>Last name: <h:inputText value="#{personHome.instance.lastName}"/></div>
   <div>
      <h:commandButton value="Create Person" action="#{personHome.persist}"/>
   </div>
</h:form
>
```

###Person#person###############components.xml#######################

```
<factory name="person"
        value="#{personHome.instance}"/>

<framework:entity-home name="personHome"
                    entity-class="eg.Person" />
```

(################) `PersonHome` # `@Factory` #######

```
@Name("personHome")
public class PersonHome extends EntityHome<Person
> {

   @Factory("person")
   public Person initPerson() { return getInstance(); }

}
```

(###########) ######### JSF ###############

```
<h1
>Create Person</h1>
<h:form>
   <div
>First name: <h:inputText value="#{person.firstName}"/></div>
   <div
>Last name: <h:inputText value="#{person.lastName}"/></div>
   <div>
      <h:commandButton value="Create Person" action="#{personHome.persist}"/>
   </div>
</h:form
>
```

`####Person############################` ############
############################
`Person################PersonHome############################`
############################

```
<pages>
   <page view-id="/editPerson.jsp">
```

```
      <param name="personId" value="#{personHome.id}"/>
   </page>
</pages
>
```

####JSF#######################

```
<h1>
   <h:outputText rendered="#{!personHome.managed}" value="Create Person"/>
   <h:outputText rendered="#{personHome.managed}" value="Edit Person"/>
</h1>
<h:form>
   <div
>First name: <h:inputText value="#{person.firstName}"/></div>
   <div
>Last name: <h:inputText value="#{person.lastName}"/></div>
   <div>
                  <h:commandButton value="Create Person" action="#{personHome.persist}"
 rendered="#{!personHome.managed}"/>
                  <h:commandButton value="Update Person" action="#{personHome.update}"
 rendered="#{personHome.managed}"/>
                  <h:commandButton value="Delete Person" action="#{personHome.remove}"
 rendered="#{personHome.managed}"/>
   </div>
</h:form
>
```

########################Person###############personId
####################Person#################

Person ##### nationality ### ##############

```
<factory name="person"
      value="#{personHome.instance}"/>

<framework:entity-home name="personHome"
                  entity-class="eg.Person"
                  new-instance="#{newPerson}"/>

<component name="newPerson"
        class="eg.Person">
   <property name="nationality"
```

```
>#{country}</property>
</component
>
```

########################

```
@Name("personHome")
public class PersonHome extends EntityHome<Person
> {

   @In Country country;

   @Factory("person")
   public Person initPerson() { return getInstance(); }

   protected Person createInstance() {
      return new Person(country);
   }

}
```

#####Country##########CountryHome##### Home ############################

############### ################ PersonHome ########################

```
@Name("personHome")
public class PersonHome extends EntityHome<Person
> {

   @In Country country;

   @Factory("person")
   public Person initPerson() { return getInstance(); }

   protected Person createInstance() {
      return new Person(country);
   }

   public void migrate()
   {
      getInstance().setCountry(country);
      update();
```

```
  }

}
```

Home ###################### (persist()# update() ### remove() ###########) org.jboss.seam.afterTransactionSuccess ############# ## ################ ## org.jboss.seam.afterTransactionSuccess.<name> ################ (<name> ##############)#

Home###################################### ##############################

```
<factory name="person"
      value="#{personHome.instance}"/>

<framework:entity-home name="personHome"
                entity-class="eg.Person"
                new-instance="#{newPerson}">
  <framework:created-message
>New person #{person.firstName} #{person.lastName} created</framework:created-message>
  <framework:deleted-message
>Person #{person.firstName} #{person.lastName} deleted</framework:deleted-message>
  <framework:updated-message
>Person #{person.firstName} #{person.lastName} updated</framework:updated-message>
</framework:entity-home>

<component name="newPerson"
       class="eg.Person">
  <property name="nationality"
>#{country}</property>
</component
>
```

############################

```
@Name("personHome")
public class PersonHome extends EntityHome<Person
> {

   @In Country country;
```

```
   @Factory("person")
   public Person initPerson() { return getInstance(); }

   protected Person createInstance() {
      return new Person(country);
   }

      protected String getCreatedMessage() { return createValueExpression("New person
#{person.firstName} #{person.lastName} created"); }
         protected String getUpdatedMessage() { return createValueExpression("Person
#{person.firstName} #{person.lastName} updated"); }
         protected String getDeletedMessage() { return createValueExpression("Person
#{person.firstName} #{person.lastName} deleted"); }

}
```

###################### (###### `messages` ######) Seam ############################

```
Person_created=New person #{person.firstName} #{person.lastName} created
Person_deleted=Person #{person.firstName} #{person.lastName} deleted
Person_updated=Person #{person.firstName} #{person.lastName} updated
```

###

########<s:validateAll>
#<s:decorate>###

13.3. Query######

########`Person`#####################Query##########################

```
<framework:entity-query name="people"
                        ejbql="select p from Person p"/>
```

############JSF###############

```
<h1
>List of people</h1>
<h:dataTable value="#{people.resultList}" var="person">
   <h:column>
      <s:link view="/editPerson.jsp" value="#{person.firstName} #{person.lastName}">
```

```
        <f:param name="personId" value="#{person.id}"/>
      </s:link>
   </h:column>
</h:dataTable
>
```

##############################

```
<framework:entity-query name="people"
                        ejbql="select p from Person p"
                        order="lastName"
                        max-results="20"/>
```

##############################

```
<pages>
   <page view-id="/searchPerson.jsp">
      <param name="firstResult" value="#{people.firstResult}"/>
   </page>
</pages
>
```

##########JSF######################

```
<h1
>Search for people</h1>
<h:dataTable value="#{people.resultList}" var="person">
   <h:column>
      <s:link view="/editPerson.jsp" value="#{person.firstName} #{person.lastName}">
         <f:param name="personId" value="#{person.id}"/>
      </s:link>
   </h:column>
</h:dataTable>

<s:link view="/search.xhtml" rendered="#{people.previousExists}" value="First Page">
   <f:param name="firstResult" value="0"/>
</s:link>

<s:link view="/search.xhtml" rendered="#{people.previousExists}" value="Previous Page">
   <f:param name="firstResult" value="#{people.previousFirstResult}"/>
```

```
</s:link>

<s:link view="/search.xhtml" rendered="#{people.nextExists}" value="Next Page">
   <f:param name="firstResult" value="#{people.nextFirstResult}"/>
</s:link>

<s:link view="/search.xhtml" rendered="#{people.nextExists}" value="Last Page">
   <f:param name="firstResult" value="#{people.lastFirstResult}"/>
</s:link
>
```

##
#######################Query################################

```
<component name="examplePerson" class="Person"/>

<framework:entity-query name="people"
                        ejbql="select p from Person p"
                        order="lastName"
                        max-results="20">
   <framework:restrictions>
      <value
>lower(firstName) like lower( concat(#{examplePerson.firstName},'%') )</value>
      <value
>lower(lastName) like lower( concat(#{examplePerson.lastName},'%') )</value>
   </framework:restrictions>
</framework:entity-query
>
```

######example#######################

```
<h1
>Search for people</h1>
<h:form>
   <div
>First name: <h:inputText value="#{examplePerson.firstName}"/></div>
   <div
>Last name: <h:inputText value="#{examplePerson.lastName}"/></div>
   <div
><h:commandButton value="Search" action="/search.jsp"/></div>
</h:form>
```

```
<h:dataTable value="#{people.resultList}" var="person">
   <h:column>
      <s:link view="/editPerson.jsp" value="#{person.firstName} #{person.lastName}">
         <f:param name="personId" value="#{person.id}"/>
      </s:link>
   </h:column>
</h:dataTable
>
```

############################## org.jboss.seam.afterTransactionSuccess ###########

```
<event type="org.jboss.seam.afterTransactionSuccess">
   <action execute="#{people.refresh}" />
</event
>
```

PersonHome # person ########### ###

```
<event type="org.jboss.seam.afterTransactionSuccess.Person">
   <action execute="#{people.refresh}" />
   </event
>
```

################ *join fetch* ################ ############################ getCountEjbql() ##

############################Query################################

13.4. Controller######

Seam################################Controller############ EntityController# HibernateEntityController #BusinessProcessController###### ##Seam###############

#####Seam#Registration###RegisterAction#Seam################################

```
@Stateless
@Name("register")
public class RegisterAction extends EntityController implements Register
{
```

```
  @In private User user;

  public String register()
  {
    List existing = createQuery("select u.username from User u where u.username=:username")
        .setParameter("username", user.getUsername())
        .getResultList();

    if ( existing.size()==0 )
    {
      persist(user);
      info("Registered new user #{user.username}");
      return "/registered.jspx";
    }
    else
    {
      addFacesMessage("User #{user.username} already exists");
      return null;
    }
  }

}
```

###########################

Seam # JBoss Rules

Seam ###Seam ########## jBPM ######## JBoss Rules (Drools) # RuleBase ##########

14.1.

#########Seam ######### `org.drools.RuleBase` ################### #######Seam ## ########## `components.xml` ####################

```
<drools:rule-base name="policyPricingRules">
   <drools:rule-files>
      <value
>policyPricingRules.drl</value>
   </drools:rule-files>
</drools:rule-base
>
```

###########`.drl` ################### Seam `APPLICATION` ####### `org.drools.RuleBase` ################ 1 ################### RuleBase ###################################

Drools DSL########## DSL ################

```
<drools:rule-base name="policyPricingRules" dsl-file="policyPricing.dsl">
   <drools:rule-files>
      <value
>policyPricingRules.drl</value>
   </drools:rule-files>
</drools:rule-base
>
```

#################### ################################### RuleBase #### Drools RuleAgent ######### RuleAgent # Drools ####### (BRMS) ## RulesAgent ### RuleBase # `components.xml` #########

```
<drools:rule-agent name="insuranceRules"
                   configurationFile="/WEB-INF/deployedrules.properties" />
```

############ RulesAgent ################## Drools ##################################

```
newInstance=true
url=http://localhost:8080/drools-jbrms/org.drools.brms.JBRMS/package/org.acme.insurance/fmeyer
localCacheDir=/Users/fernandomeyer/projects/jbossrules/drools-examples/drools-examples-brms/cache
poll=30
name=insuranceconfig
```

######################################

```
<drools:rule-agent name="insuranceRules"
    url="http://localhost:8080/drools-jbrms/org.drools.brms.JBRMS/package/org.acme.insurance/fmeyer"
                local-cache-dir="/Users/fernandomeyer/projects/jbossrules/drools-examples/drools-examples-brms/cache"
   poll="30"
   configuration-name="insuranceconfig" />
```

########## org.drools.WorkingMemory ################### (# WorkingMemory ############ fact #######)

```
<drools:managed-working-memory name="policyPricingWorkingMemory" auto-create="true"
 rule-base="#{policyPricingRules}"/>
```

policyPricingWorkingMemory ## ruleBase ########### RuleBase ######################

14.2. Seam

WorkingMemory ## ### Seam ################ fact ############################

```
@In WorkingMemory policyPricingWorkingMemory;

@In Policy policy;
@In Customer customer;

public void pricePolicy() throws FactException
```

```
{
    policyPricingWorkingMemory.assertObject(policy);
    policyPricingWorkingMemory.assertObject(customer);
    policyPricingWorkingMemory.fireAllRules();
}
```

14.3. jBPM

You can even allow a rule base to act as a jBPM action handler, decision handler, or assignment handler—in either a pageflow or business process definition.

```
<decision name="approval">

    <handler class="org.jboss.seam.drools.DroolsDecisionHandler">
        <workingMemoryName
>orderApprovalRulesWorkingMemory</workingMemoryName>
        <assertObjects>
            <element
>#{customer}</element>
            <element
>#{order}</element>
            <element
>#{order.lineItems}</element>
        </assertObjects>
    </handler>

    <transition name="approved" to="ship">
        <action class="org.jboss.seam.drools.DroolsActionHandler">
            <workingMemoryName
>shippingRulesWorkingMemory</workingMemoryName>
            <assertObjects>
                <element
>#{customer}</element>
                <element
>#{order}</element>
                <element
>#{order.lineItems}</element>
            </assertObjects>
        </action>
    </transition>

    <transition name="rejected" to="cancelled"/>
```

```
</decision
>
```

<assertObjects> ###### WorkingMemory # fact ###################### 1 ######### EL ########

jBPM ############ Drools ###############

```
<task-node name="review">
   <task name="review" description="Review Order">
      <assignment handler="org.jboss.seam.drools.DroolsAssignmentHandler">
         <workingMemoryName
>orderApprovalRulesWorkingMemory</workingMemoryName>
         <assertObjects>
            <element
>#{actor}</element>
            <element
>#{customer}</element>
            <element
>#{order}</element>
            <element
>#{order.lineItems}</element>
         </assertObjects>
      </assignment>
   </task>
   <transition name="rejected" to="cancelled"/>
   <transition name="approved" to="approved"/>
</task-node
>
```

################## Drools ################# jBPM Assignable # assignable #### Seam Decision ####### decision ########## decision ######### decision.setOutcome"result") ################## assignment ######### Assignable ##########ID##########

```
package org.jboss.seam.examples.shop

import org.jboss.seam.drools.Decision

global Decision decision

rule "Approve Order For Loyal Customer"
```

```
  when
    Customer( loyaltyStatus == "GOLD" )
    Order( totalAmount <= 10000 )
  then
    decision.setOutcome("approved");
end
```

```
package org.jboss.seam.examples.shop

import org.jbpm.taskmgmt.exe.Assignable

global Assignable assignable

rule "Assign Review For Small Order"
  when
    Order( totalAmount <= 100 )
  then
    assignable.setPooledActors( new String[] {"reviewers"} );
end
```

##

Drools ##### http://www.drools.org ###########

##

Seam ##################### Drools ############## Drools ##

####

Drools ## Java 1.4 ########## MVEL ###### Java 1.4# Java 5# Java 6 ########## ######################### MVEL jar ####################

######

15.1.

Seam#######API#Seam#################################
########################

- ######################################JAAS##############
- ID###Seam##########################API######
- ##
- ##Seam############
- CAPCHA######Seam##
- ##

########################

15.2.

In some situations it may be necessary to disable Seam Security, for example during unit tests. This can be done by calling the static method `Identity.setSecurityEnabled(false)` to disable security checks. Doing this prevents any security checks being performed for the following:

- ##############
- Hibernate#############
- Seam#############
- ########

15.3.

Seam ################ JAAS (Java Authentication and Authorization Service) ########### ####################### API ######### ####### Seam# # JAAS ################################

15.3.1.

##
########Seam#ID################authenticator###

#########Seam#########################SeamLoginModule#####Seam########JAAS###################
############Seam###
##############################
####################components.xml######identity###################

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:core="http://jboss.com/products/seam/core"
        xmlns:security="http://jboss.com/products/seam/security"
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:schemaLocation=
                "http://jboss.com/products/seam/components  http://jboss.com/products/seam/
components-2.1.xsd
                http://jboss.com/products/seam/security  http://jboss.com/products/seam/security-
2.1.xsd">

   <security:identity authenticate-method="#{authenticator.authenticate}"/>

</components
>
```

EL# #{authenticator.authenticate}
#authenticator########authenticate###

15.3.2.

components.xml ##identity#authenticate-
method######SeamLoginModule#####################
############################boolean#######
#####username#password#Credentials.getUsername() #
Credentials.getPassword()################Identity.instance().getCredentials()##credentials#####
####################Identity.addRole()################
###POJO##########################

```
@Name("authenticator")
public class Authenticator {
  @In EntityManager entityManager;
  @In Credentials credentials;
  @In Identity identity;

  public boolean authenticate() {
    try {
      User user = (User) entityManager.createQuery(
        "from User where username = :username and password = :password")
```

```
        .setParameter("username", credentials.getUsername())
        .setParameter("password", credentials.getPassword())
        .getSingleResult();

    if (user.getRoles() != null) {
      for (UserRole mr : user.getRoles())
        identity.addRole(mr.getName());
    }

    return true;
  }
  catch (NoResultException ex) {
    return false;
  }

 }

}
```

#######User#UserRole###################Bean######## ##### roles #
"admin", "user" ##########Set################
#######user#######NoResultException###################false###################

####

##
##########API###
##
Seam###

15.3.2.1. Identity.addRole()

Identity.addRole()###################################
####################addRole()###
##

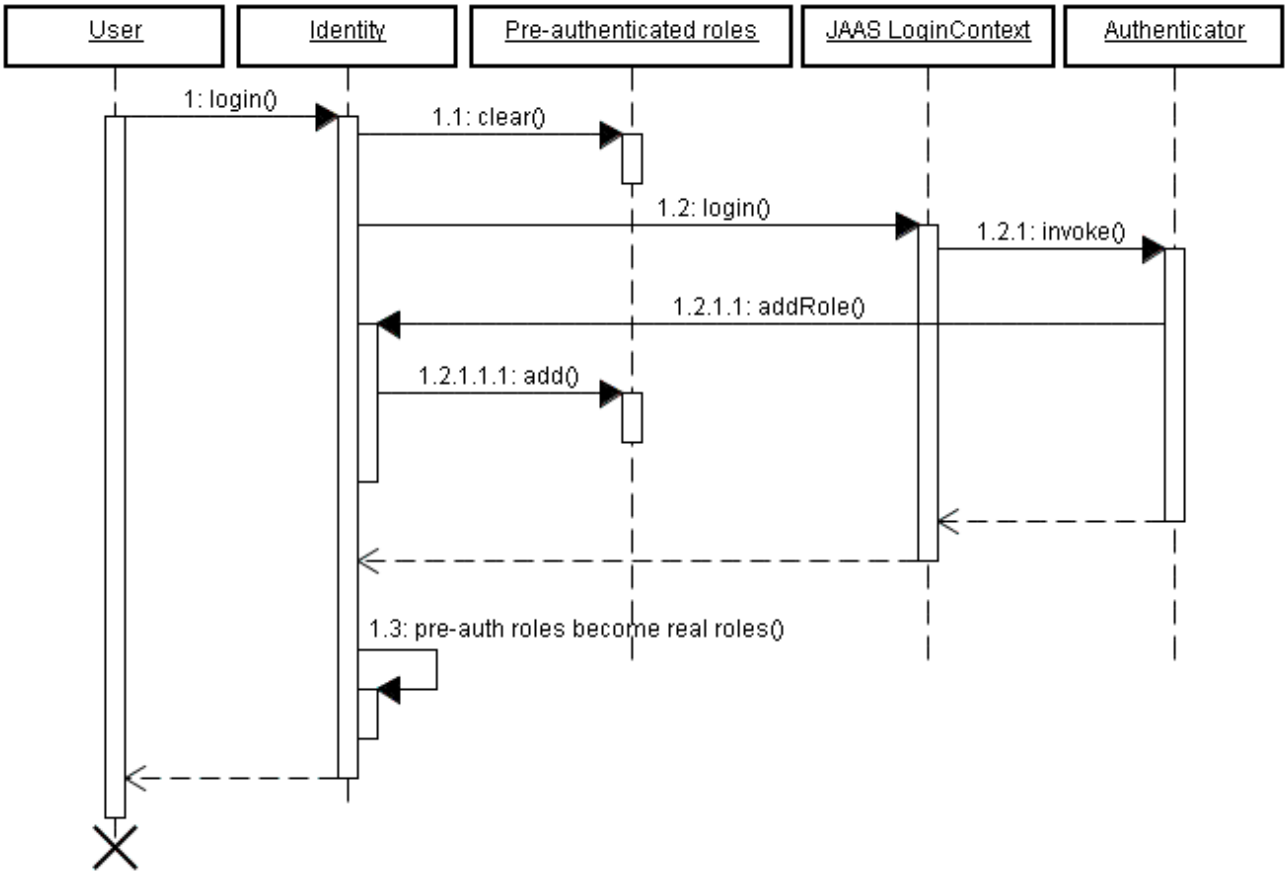

########################Identity.addRole()################################

15.3.2.2.

##
####org.jboss.seam.security.loginSuccessful#################################

```
@In UserStats userStats;

@Observer("org.jboss.seam.security.loginSuccessful")
public void updateUserStats()
{
  userStats.setLastLoginDate(new Date());
  userStats.incrementLoginCount();
}
```

#############Authenticator#########################
################################

15.3.3.

`credentials` ########username###password#################################
################username#password###################
###################`identity.login()`##################username#password#####################

```
<div>
   <h:outputLabel for="name" value="Username"/>
   <h:inputText id="name" value="#{credentials.username}"/>
</div>

<div>
   <h:outputLabel for="password" value="Password"/>
   <h:inputSecret id="password" value="#{credentials.password}"/>
</div>

<div>
   <h:commandButton value="Login" action="#{identity.login}"/>
</div
>
```

#login#############`{identity.logout}`###

15.3.4.

##

- `#######components.xml######`
- ############
- ############################

15.3.5. Remember Me

Seam##################WEB####################"Remember
me"(######################
##############################username#############################password#####################

#2###password#####################################

##

############################2###
################XSS###

```
            ##################################################################
            ####################Remember me################################### ###

            ########################################Remember
            Password############
            ##############################username#password####################
            ##########################################Remember
            Me############################                                    OS-
            x#Safari#############OS################################
            ##################################################################

            ################Remember
            Me############################################
            ######username##############################
```

######Remember me(username############################## ##################remember me#################rememberMe.enabled############

```
 <div>
   <h:outputLabel for="name" value="User name"/>
   <h:inputText id="name" value="#{credentials.username}"/>
 </div>

 <div>
   <h:outputLabel for="password" value="Password"/>
   <h:inputSecret id="password" value="#{credentials.password}" redisplay="true"/>
 </div
>

 <div class="loginRow">
   <h:outputLabel for="rememberMe" value="Remember me"/>
   <h:selectBooleanCheckbox id="rememberMe" value="#{rememberMe.enabled}"/>
 </div
>
```

15.3.5.1. ########remember me##

################ remember me ################################## Seam## ####org.jboss.seam.security.TokenStore ################################## ################JpaTokenStore##

################################ ######################

```
@Entity
public class AuthenticationToken implements Serializable {
  private Integer tokenId;
  private String username;
  private String value;

  @Id @GeneratedValue
  public Integer getTokenId() {
    return tokenId;
  }

  public void setTokenId(Integer tokenId) {
    this.tokenId = tokenId;
  }

  @TokenUsername
  public String getUsername() {
    return username;
  }

  public void setUsername(String username) {
    this.username = username;
  }

  @TokenValue
  public String getValue() {
    return value;
  }

  public void setValue(String value) {
    this.value = value;
  }
}
```

######################username##############@TokenUsername
#@TokenValue###

############Bean###################### JpaTokenStore####### #### components.xml
#token-class#################

```
                                    <security:jpa-token-store                    token-
class="org.jboss.seam.example.seamspace.AuthenticationToken"/>
```

```
```

##############components.xml   #RememberMe#################
mode#autoLogin#################

```
<security:remember-me mode="autoLogin"/>
```

####remember me##

####################################components.xml#################

```
<event type="org.jboss.seam.security.notLoggedIn">
  <action execute="#{redirect.captureCurrentView}"/>
  <action execute="#{identity.tryLogin()}"/>
</event>
<event type="org.jboss.seam.security.loginSuccessful">
  <action execute="#{redirect.returnToCapturedView}"/>
</event
>
```

15.3.6.

##pages.xml###
######API#########################

- NotLoggedInException - ##
- AuthorizationException -
  ##

NotLoggedInException###
###AuthorizationException##############################
#####################################pages.xml########

```
<pages>

  ...

  <exception class="org.jboss.seam.security.NotLoggedInException">
    <redirect view-id="/login.xhtml">
```

```
        <message
>You must be logged in to perform this action</message>
      </redirect>
   </exception>

   <exception class="org.jboss.seam.security.AuthorizationException">
      <end-conversation/>
      <redirect view-id="/security_error.xhtml">
         <message
>You do not have the necessary security privileges to perform this action.</message>
      </redirect>
   </exception>

</pages
>
```

#####web#####################################Seam##############################

15.3.7.

##Seam##############################
(`pages.xml`#) ##########

```
<pages login-view-id="/login.xhtml">

   <page view-id="/members/*" login-required="true"/>

   ...

</pages
>
```

####

##

##
##############`components.xml`###

```
<event type="org.jboss.seam.security.notLoggedIn">
   <action execute="#{redirect.captureCurrentView}"/>
```

```
</event>

<event type="org.jboss.seam.security.postAuthenticate">
   <action execute="#{redirect.returnToCapturedView}"/>
</event
>
```

################################authenticate()##################

15.3.8. HTTP##

######################Seam##RFC2617##HTTPBasic####HTTPDigest####################
####################components.xml# authentication-filter####################

```
 <web:authentication-filter url-pattern="*.seam" auth-type="basic"/>
```

####################auth-type#basic########################digest#######
################# key # realm#############

```
   <web:authentication-filter  url-pattern="*.seam"  auth-type="digest"  key="AA3JK34aSDlkj"
realm="My App"/>
```

key########## realm################################

15.3.8.1.

################org.jboss.seam.security.digest.DigestAuthenticator################validatePass
##########

```
 public boolean authenticate()
 {
   try
   {
      User user = (User) entityManager.createQuery(
        "from User where username = :username")
        .setParameter("username", identity.getUsername())
```

```
        .getSingleResult();

      return validatePassword(user.getPassword());
    }
    catch (NoResultException ex)
    {
      return false;
    }
  }
```

15.3.9.

################################API############################

15.3.9.1. ############JAAS###

##Seam#######API############JAAS#############components.xml#jaas-config-name
#########################JAAS#############
#####JBossAS####################### other#####JBossAS#####
UsersRolesLoginModule#########################components.xml###############

```
<security:identity jaas-config-name="other"/>
```

#####Seam################JAAS###################################Seam#######################

15.4. ID###

ID###########ID###############LDAP#########Seam###################API#######
ID##API####identityManager###

######identityManager######IdentityStores#############
##############################LDAP##############################

15.4.1. ID########

identityManager
####################ID##################LDAP####################RDB#####################

Seam#IdentityStore######IdentityStore############
####RDB####################JpaIdentityStore########ID##############identityManager
############################
#####LdapIdentityStore##LDAP##########################

identityManager   #########identityStore   #
roleIdentityStore############################IdentityStore############Seam############EL#####
############################
JpaIdentityStore#########identityStore############roleIdentityStore
######################
####components.xml#LdapIdentityStore#identityManager###

```
<security:identity-manager identity-store="#{ldapIdentityStore}"/>
```

###############LdapIdentityStore###############JpaIdentityStore#######identityManager
#########

```
<security:identity-manager
  identity-store="#{ldapIdentityStore}"
  role-identity-store="#{jpaIdentityStore}"/>
```

##########ID##########################

15.4.2. JpaIdentityStore

##ID##
###
##########################Bean############################

15.4.2.1. JpaIdentityStore###

JpaIdentityStore   #   user-class   ###role-class###############
###
##############SeamSpace#components.xml#############

```
<security:jpa-identity-store
  user-class="org.jboss.seam.example.seamspace.MemberAccount"
  role-class="org.jboss.seam.example.seamspace.MemberRole"/>
```

15.4.2.2.

##Bean#######
##################################

15.1.

#######	##	##
`@UserPrincipal`	####	###############username##########

`@UserPassword`	####	##################################
		password############hash##########
		sha # none######
		
		@UserPassword(hash = "md5")
		public String getPasswordHash() {
		return passwordHash;
		}
		
		Seam##############################

`@UserFirstName`	#####	##################################
`@UserLastName`	#####	##################################
`@UserEnabled`	#####	################################## ############################boolean ##################################
`@UserRoles`	####	################################## #######################

15.2.

#######	##	##
`@RoleName`	####	##################################

#######	##	##
`@RoleGroups`	#####	##################################
`@RoleConditional`	#####	##################################

15.4.2.3. ###### Bean##

`########JpaIdentityStore#############################################################################################`

15.4.2.3.1.

`###################UserRoles`####many-to-many###########user#role###############

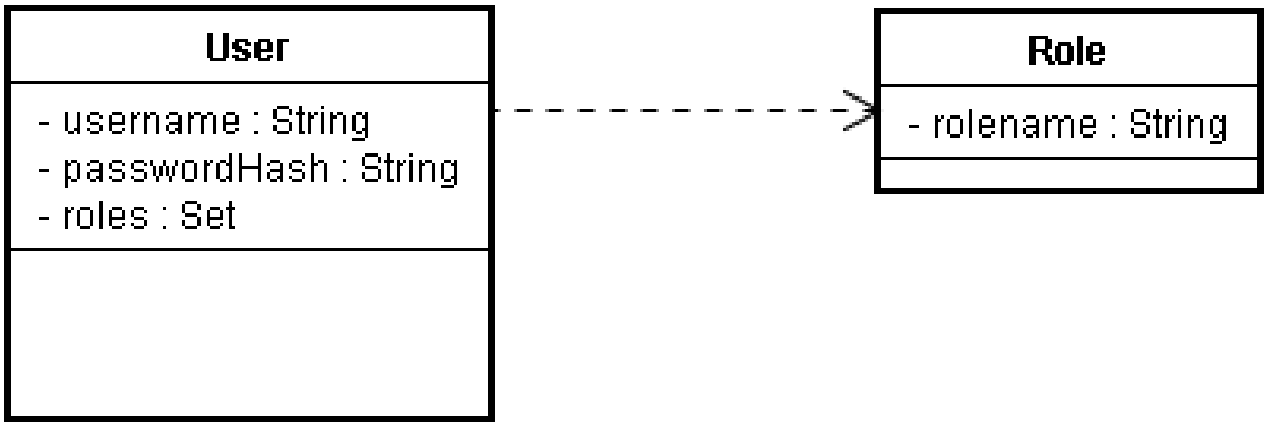


```
@Entity
public class User {
  private Integer userId;
  private String username;
  private String passwordHash;
  private Set<Role
> roles;

  @Id @GeneratedValue
  public Integer getUserId() { return userId; }
  public void setUserId(Integer userId) { this.userId = userId; }

  @UserPrincipal
  public String getUsername() { return username; }
  public void setUsername(String username) { this.username = username; }

  @UserPassword(hash = "md5")
  public String getPasswordHash() { return passwordHash; }
  public void setPasswordHash(String passwordHash) { this.passwordHash = passwordHash; }
```

```
  @UserRoles
  @ManyToMany(targetEntity = Role.class)
  @JoinTable(name = "UserRoles",
    joinColumns = @JoinColumn(name = "UserId"),
    inverseJoinColumns = @JoinColumn(name = "RoleId"))
  public Set<Role
> getRoles() { return roles; }
  public void setRoles(Set<Role
> roles) { this.roles = roles; }
}
```

```
@Entity
public class Role {
  private Integer roleId;
  private String rolename;

  @Id @Generated
  public Integer getRoleId() { return roleId; }
  public void setRoleId(Integer roleId) { this.roleId = roleId; }

  @RoleName
  public String getRolename() { return rolename; }
  public void setRolename(String rolename) { this.rolename = rolename; }
}
```

15.4.2.3.2.

##

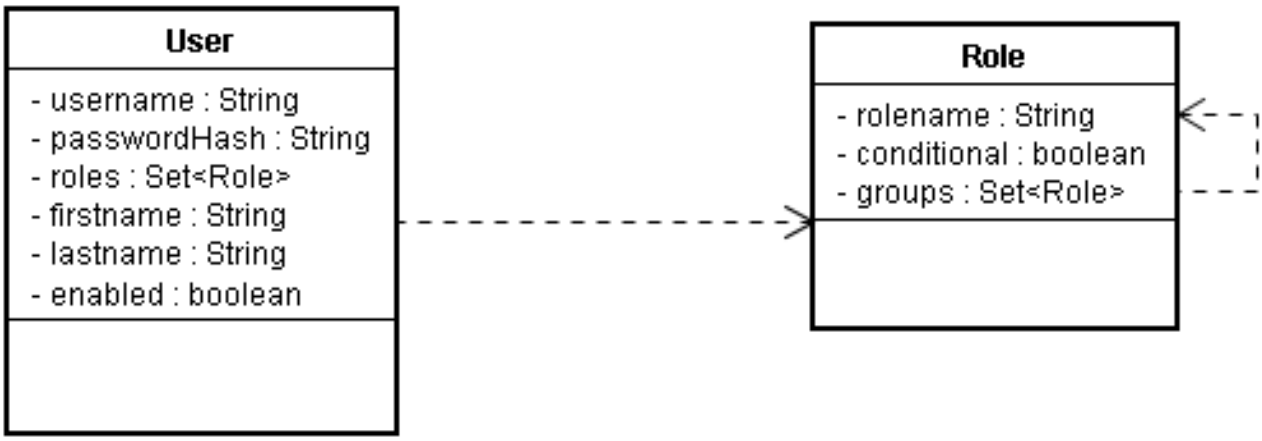

```
@Entity
public class User {
  private Integer userId;
  private String username;
  private String passwordHash;
  private Set<Role
> roles;
  private String firstname;
  private String lastname;
  private boolean enabled;

  @Id @GeneratedValue
  public Integer getUserId() { return userId; }
  public void setUserId(Integer userId) { this.userId = userId; }

  @UserPrincipal
  public String getUsername() { return username; }
  public void setUsername(String username) { this.username = username; }

  @UserPassword(hash = "md5")
  public String getPasswordHash() { return passwordHash; }
  public void setPasswordHash(String passwordHash) { this.passwordHash = passwordHash; }

  @UserFirstName
  public String getFirstname() { return firstname; }
  public void setFirstname(String firstname) { this.firstname = firstname; }

  @UserLastName
  public String getLastname() { return lastname; }
  public void setLastname(String lastname) { this.lastname = lastname; }

  @UserEnabled
  public boolean isEnabled() { return enabled; }
  public void setEnabled(boolean enabled) { this.enabled = enabled; }

  @UserRoles
  @ManyToMany(targetEntity = Role.class)
  @JoinTable(name = "UserRoles",
    joinColumns = @JoinColumn(name = "UserId"),
    inverseJoinColumns = @JoinColumn(name = "RoleId"))
  public Set<Role
> getRoles() { return roles; }
  public void setRoles(Set<Role
```

```
> roles) { this.roles = roles; }
}
```

```
@Entity
public class Role {
  private Integer roleId;
  private String rolename;
  private boolean conditional;

  @Id @Generated
  public Integer getRoleId() { return roleId; }
  public void setRoleId(Integer roleId) { this.roleId = roleId; }

  @RoleName
  public String getRolename() { return rolename; }
  public void setRolename(String rolename) { this.rolename = rolename; }

  @RoleConditional
  public boolean isConditional() { return conditional; }
  public void setConditional(boolean conditional) { this.conditional = conditional; }

  @RoleGroups
  @ManyToMany(targetEntity = Role.class)
  @JoinTable(name = "RoleGroups",
    joinColumns = @JoinColumn(name = "RoleId"),
    inverseJoinColumns = @JoinColumn(name = "GroupId"))
  public Set<Role
> getGroups() { return groups; }
  public void setGroups(Set<Role
> groups) { this.groups = groups; }

}
```

15.4.2.4. JpaIdentityStore#######

```
IdentityManager#ID#########JpaIdentityStore###########
IdentityManager#####################
```

15.4.2.4.1. JpaIdentityStore.EVENT_PRE_PERSIST_USER

```
#######IdentityManager.createUser()##########
#################################################################
#########JpaIdentityStore##### user-class##########
```

##########createUser()##

15.4.2.4.2. JpaIdentityStore.EVENT_USER_CREATED

#######IdentityManager.createUser()################
##
#######EVENT_PRE_PERSIST_USER#####################################
###

15.4.2.4.3. JpaIdentityStore.EVENT_USER_AUTHENTICATED

#######IdentityManager.authenticate()############
###

15.4.3. LdapIdentityStore

##ID#######LDAP#################################
##
#############IID#######################################

15.4.3.1. LdapIdentiyStore###

#####components.xml ######LdapIdentityStore############

 # 15.3. LdapIdentityStore######

#####	######	##
server-address	localhost	LDAP########
server-port	389	LDAP################
user-context-DN	ou=Person,dc=acme,dc=com	###################DN)
user-DN-prefix	uid=	######################username####
user-DN-suffix	,ou=Person,dc=acme,dc=com	######################username####
role-context-DN	ou=Role,dc=acme,dc=com	####################DN)
role-DN-prefix	cn=	##################################
role-DN-suffix	,ou=Roles,dc=acme,dc=com	##################################
bind-DN	cn=Manager,dc=acme,dc=com	LDAP########################
bind-credentials	secret	LDAP################################
user-role-attribute	roles	##################################
role-attribute-is-DN	true	##################################
user-name-attribute	uid	##############username############
user-password-attribute	userPassword	##############password############

#####	######	##
first-name-attribute	null	##############first name###############
last-name-attribute	sn	##############last name###############
full-name-attribute	cn	##################################
enabled-attribute	null	##################################
role-name-attribute	cn	################################
object-class-attribute	objectClass	##################################
role-object-classes	organizationalRole	##############################
user-object-classes	person,uidObject	##############################

15.4.3.2. LdapIdentityStore###

############## directory.mycompany.com########LDAP############LdapIdentityStore ############
##################ou=Person,dc=mycompany,dc=com################username#####uid############
################ou=Roles,dc=mycompany,dc=com##################roles#############
##############################cn ############
############enabled###false######################

```
<security:ldap-identity-store
  server-address="directory.mycompany.com"
  bind-DN="cn=Manager,dc=mycompany,dc=com"
  bind-credentials="secret"
  user-DN-prefix="uid="
  user-DN-suffix=",ou=Person,dc=mycompany,dc=com"
  role-DN-prefix="cn="
  role-DN-suffix=",ou=Roles,dc=mycompany,dc=com"
  user-context-DN="ou=Person,dc=mycompany,dc=com"
  role-context-DN="ou=Roles,dc=mycompany,dc=com"
  user-role-attribute="roles"
  role-name-attribute="cn"
  user-object-classes="person,uidObject"
  enabled-attribute="enabled"
  />
```

15.4.4. ###ID########

Seam##################################ID##########org.jboss.seam.security.management.Identit

IdentityStore####################JavaDoc##########

15.4.5. ID#######

Seam#########ID###components.xml#identity####a
method########## ################SeamLoginModule
#######IdentityManager#######################

15.4.6. ID########

IdentityManager####################Seam##################

```
@In IdentityManager identityManager;
```

########instance()################

```
IdentityManager identityManager = IdentityManager.instance();
```

#######IdentityManager#API###########

15.4. ID###API

####	###	##
createUser(String name, String password)	###	#####username#password##########
deleteUser(String name)	###	################### #######true#######false######
createRole(String role)	###	###################### ##########true#######false#####
deleteRole(String name)	###	################## ##########true#######false#####
enableUser(String name)	###	########################## ##################################
disableUser(String name)	###	########################## #######true#######false######
changePassword(String name, String password)	###	##################password##### #######true#######false######
isUserEnabled(String name)	###	############################## true#######false######

####	###	##
grantRole(String name, String role)	####	########################## ##################### ###############true##########
revokeRole(String name, String role)	####	############################## ##############################
userExists(String name)	####	################true######fals
listUsers()	###	ABC##########################
listUsers(String filter)	###	############################ABC
listRoles()	###	################
getGrantedRoles(String name)	###	##############################
getImpliedRoles(String name)	###	############################## ############################## ####admin####user############ user###########
authenticate(String name, String password)	###	#####ID#######username#password ########true######false###### ############################## login##########Identity.login()#
addRoleToGroup(String role, String group)	###	############################ ##########true######
removeRoleFromGroup(String role, String group)	###	############################ #######true######
listRoles()	###	###########

ID##API##
#####IdentityManager############################ ################

15.5. ID##

####	##########	##############
createUser()	seam.user	##
deleteUser()	seam.user	##
createRole()	seam.role	##

####	##########	############
`deleteRole()`	`seam.role`	##
`enableUser()`	`seam.user`	##
`disableUser()`	`seam.user`	##
`changePassword()`	`seam.user`	##
`isUserEnabled()`	`seam.user`	####
`grantRole()`	`seam.user`	##
`revokeRole()`	`seam.user`	##
`userExists()`	`seam.user`	####
`listUsers()`	`seam.user`	####
`listRoles()`	`seam.role`	####
`addRoleToGroup()`	`seam.role`	##
`removeRoleFromGroup()`	`seam.role`	##

`######admin##################ID########################################`

```
rule ManageUsers
  no-loop
  activation-group "permissions"
when
  check: PermissionCheck(name == "seam.user", granted == false)
  Role(name == "admin")
then
  check.grant();
end

rule ManageRoles
  no-loop
  activation-group "permissions"
when
  check: PermissionCheck(name == "seam.role", granted == false)
  Role(name == "admin")
then
  check.grant();
end
```

15.5.

######API##
###############message.properties#################################
###

15.6.

#######	##
org.jboss.seam.loginSuccessful	######API########################
org.jboss.seam.loginFailed	##
org.jboss.seam.NotLoggedIn	##
org.jboss.seam.AlreadyLoggedIn	######################################

15.6.

Seam#######API##
######################
##components.xml#################################

15.6.1.

Seam###
Seam######API###

15.6.1.1.

##"admin"# "user"#
"customer"################
###



15.6.1.2.

###################################1###########
###
#################### ”##(target)”#”##(action)” #”###(receipient)”###############
###
#########Bob#####################################
##Bob##########

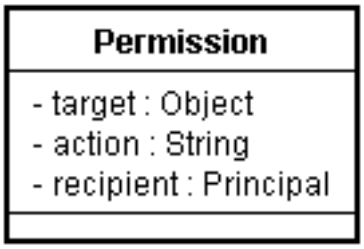

##################################target:action ###############

15.6.2.

####################################@Restrict#################

@Restrict####### ####################

@Restrict##########EL###

15.6.2.1. @Restrict#######

@Restrict##########Seam##
###################@Restrict###
################################Identity.checkRestriction()############
############@Restrict##############################@Restrict###################

##@Restrict#component:methodName####### ######################

```
@Name("account")
public class AccountAction {
   @Restrict public void delete() {
     ...
   }
}
```

######delete()#########account:delete####################
######@Restrict("#{s:hasPermission('account','delete')}")##############################

```
@Restrict @Name("account")
public class AccountAction {
   public void insert() {
     ...
   }
```

```
    @Restrict("#{s:hasRole('admin')}")
    public void delete() {
      ...
    }
}
```

##################@Restrict#####################`Restrict###

############# #{s:hasRole()} ############# s:hasRole # s:hasPermission#EL#####
Identity################### #########API########EL#############

EL########@Restrict#########Seam##
###

```
@Name("account")
public class AccountAction {
    @In Account selectedAccount;
    @Restrict("#{s:hasPermission(selectedAccount,'modify')}")
    public void modify() {
        selectedAccount.modify();
    }
}
```

##########hasPermission()############selectedAccout##########
#######Seam##############Identity#hasPermission()###############Account####################

15.6.2.2.

#####@Restrict###Identity.checkRestri

```
public void deleteCustomer() {
    Identity.instance().checkRestriction("#{s:hasPermission(selectedCustomer,'delete')}");
}
```

####true##############

- ######################NotLoggedInException######
- ###################AuthorizationException########

########Java#######hasRole()#hasPermission()###############

```
if (!Identity.instance().hasRole("admin"))
```

```
    throw new AuthorizationException("Must be admin to perform this action");

if (!Identity.instance().hasPermission("customer", "create"))
    throw new AuthorizationException("You may not create new customers");
```

15.6.3.

##
Seam##EL##########1######
2########### ###############

############################
##
identity.isLoggedIn()#################

```
<h:form class="loginForm" rendered="#{not identity.loggedIn}"
>
```

##
###manager#######################################
############################

```
<h:outputLink action="#{reports.listManagerReports}" rendered="#{s:hasRole('manager')}">
   Manager Reports
</h:outputLink
>
```

####################manager############outputLink#########rendered###################<s:div>
<s:span>###############

########## h:dataTable##
EL#s:hasPermission###
########################h:dataTable########

```
<h:dataTable value="#{clients}" var="cl">
   <h:column>
      <f:facet name="header"
>Name</f:facet>
      #{cl.name}
   </h:column>
   <h:column>
```

```
        <f:facet name="header"
>City</f:facet>
        #{cl.city}
    </h:column>
    <h:column>
        <f:facet name="header"
>Action</f:facet>
        <s:link value="Modify Client" action="#{clientAction.modify}"
                rendered="#{s:hasPermission(cl,'modify')}"/>
        <s:link value="Delete Client" action="#{clientAction.delete}"
                rendered="#{s:hasPermission(cl,'delete')}"/>
    </h:column>
</h:dataTable
>
```

15.6.4.

########################pages.xml###
page######<restrict/>########## ####restrict##########
#########GET############## /viewId.xhtml:render
##########JSF######################### /viewId.xhtml:restore###########
################

```
<page view-id="/settings.xhtml">
    <restrict/>
</page
>
```

############GET######/settings.xhtml:render##################/
settings.xhtml:restore###########

```
<page view-id="/reports.xhtml">
    <restrict
>#{s:hasRole('admin')}</restrict>
</page
>
```

#########faces####non-faces#########admin##################

15.6.5.

Seam###################read,insert,update###delete################################

##@Restrict##############

```
@Entity
@Name("customer")
@Restrict
public class Customer {
  ...
}
```

###@Restrict#########################entity:action#################
################################action # read, insert, update #### delete########

########################@Restrict ##

- @PostLoad - ##read ####################
- @PrePersist - ################## (####################### #######insert ####################
- @PreUpdate - ###################### #######update###################
- @PreRemove - ###################### #######delete###################

####insert##
##

```
@PrePersist @Restrict
public void prePersist() {}
```

/META-INF/orm.xml###

/META-INF/orm.xml#######################:

```
<?xml version="1.0" encoding="UTF-8"?>
<entity-mappings xmlns="http://java.sun.com/xml/ns/persistence/orm"
                 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
                     xsi:schemaLocation="http://java.sun.com/xml/ns/persistence/orm
 http://java.sun.com/xml/ns/persistence/orm_1_0.xsd"
                 version="1.0">
```

```
    <entity class="Customer">
      <pre-persist method-name="prePersist" />
    </entity>

  </entity-mappings
  >
```

```
#### #####Customer#prePersist() #####@Restrict#############
```

####################MemberBlog###seamspace########
##MemberBlog#########

```
rule InsertMemberBlog
  no-loop
  activation-group "permissions"
when
  principal: Principal()
                    memberBlog:          MemberBlog(member          :          member          ->
 (member.getUsername().equals(principal.getName())))
  check: PermissionCheck(target == memberBlog, action == "insert", granted == false)
then
  check.grant();
end;
```

######Principal###memberBlog:insert##############
############### "principal: Principal()" ############
##########Principal################principal##########
###################################Principal######################### ####JBoss
Rules ################

####JPA######Seam#################################

15.6.5.1. JPA##############

EJB3######Bean############EntityListener#############META-INF/
orm.xml#########################

```
<?xml version="1.0" encoding="UTF-8"?>
<entity-mappings xmlns="http://java.sun.com/xml/ns/persistence/orm"
                 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
               xsi:schemaLocation="http://java.sun.com/xml/ns/persistence/orm http://java.sun.com/
xml/ns/persistence/orm_1_0.xsd"
```

```
            version="1.0">

    <persistence-unit-metadata>
        <persistence-unit-defaults>
            <entity-listeners>
                <entity-listener class="org.jboss.seam.security.EntitySecurityListener"/>
            </entity-listeners>
        </persistence-unit-defaults>
    </persistence-unit-metadata>

</entity-mappings
>
```

15.6.5.2. #####Hibernate######################

Seam######Hibernate#SessionFactory######################orm.xml##############################

15.6.6.

Seam#@Restrict#################################@Restrict#####EL#############################

Seam#####CRUD###
###org.jboss.seam.annotations.security######################

- @Insert
- @Read
- @Update
- @Delete

##
#############

```
@Insert(Customer.class)
public void createCustomer() {
  ...
}
```

#############Customer#######################################
###############Customer.class#java.lang.Class###inse

##
##

```
 public void updateCustomer(@Update Customer customer) {
   ...
 }
```

################################@PermissionCheck#############

```
@Target({METHOD, PARAMETER})
@Documented
@Retention(RUNTIME)
@Inherited
@PermissionCheck
public @interface Promote {
  Class value() default void.class;
}
```

###@PermissionCheck#########################

```
@PermissionCheck("upgrade")
```

15.6.7.

###################################Seam###
Seam#################admin###org.jboss.s
################################org.jboss.seam.annotations.security.RoleCheck############

```
@Target({METHOD})
@Documented
@Retention(RUNTIME)
@Inherited
@RoleCheck
public @interface User {
}
```

#############@User###user#

15.6.8.

Seam###
###############Seam##

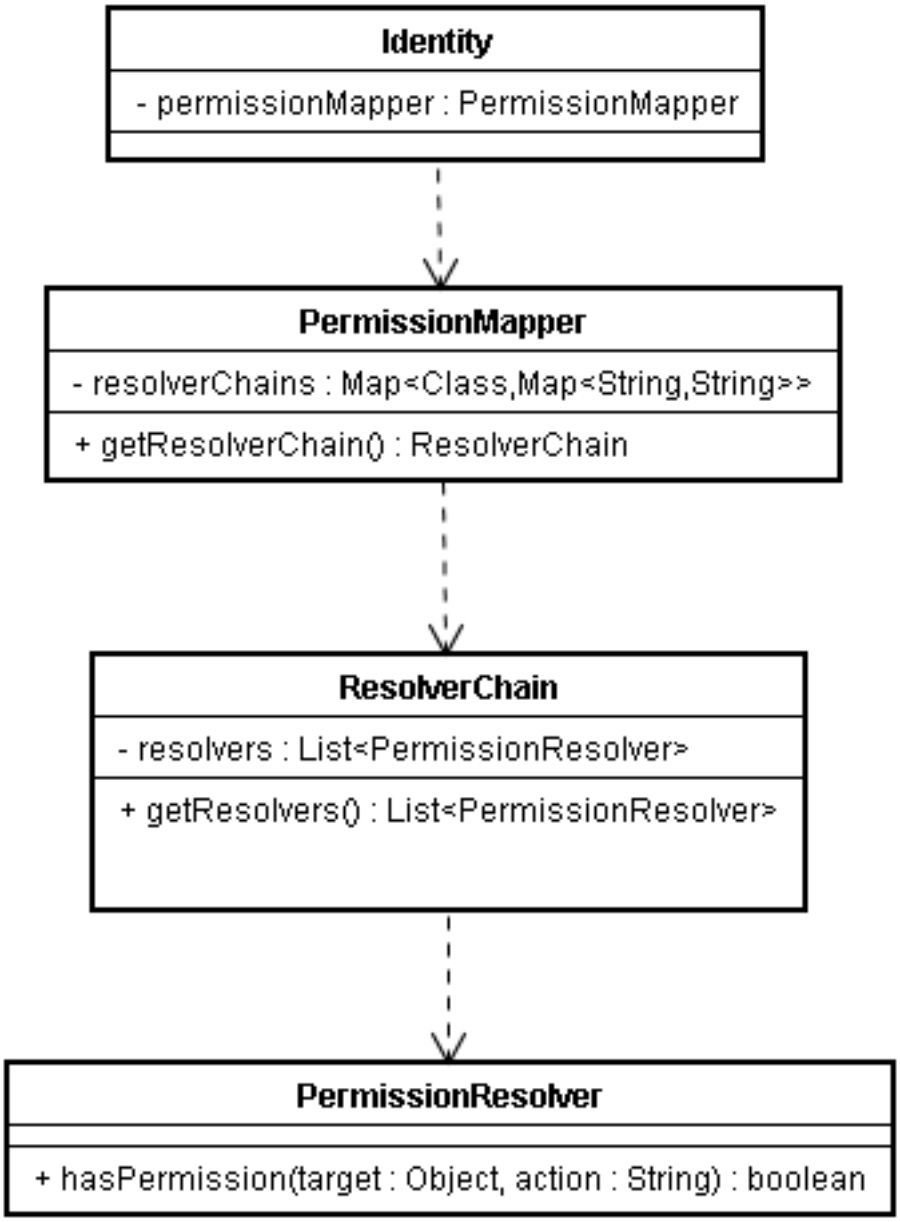

############################

15.6.8.1.

##
Seam####PermissionResolver######### ####################

- RuleBasedPermissionResolver - ###############Drools###########################
- PersistentPermissionResolver - ##

15.6.8.1.1.

##############################PermissionResolver############################
###PermissionResolver###Seam###ResolverChai

15.7.

#####	####	##
####	`hasPermission(Object target, String action)`	#######Identity.getPrincipal
`void`	`filterSetByAction(Set<Object> targets, String action)`	This method should remove any objects from the specified set, that would otherwise return `false` if passed to the `hasPermission()` method with the same `action` parameter value.

15.6.8.2.

`ResolverChain#PermissionResolvers`###

##
##############################EL#`s:hasPermission`#####API`Identity.checkPermission`############

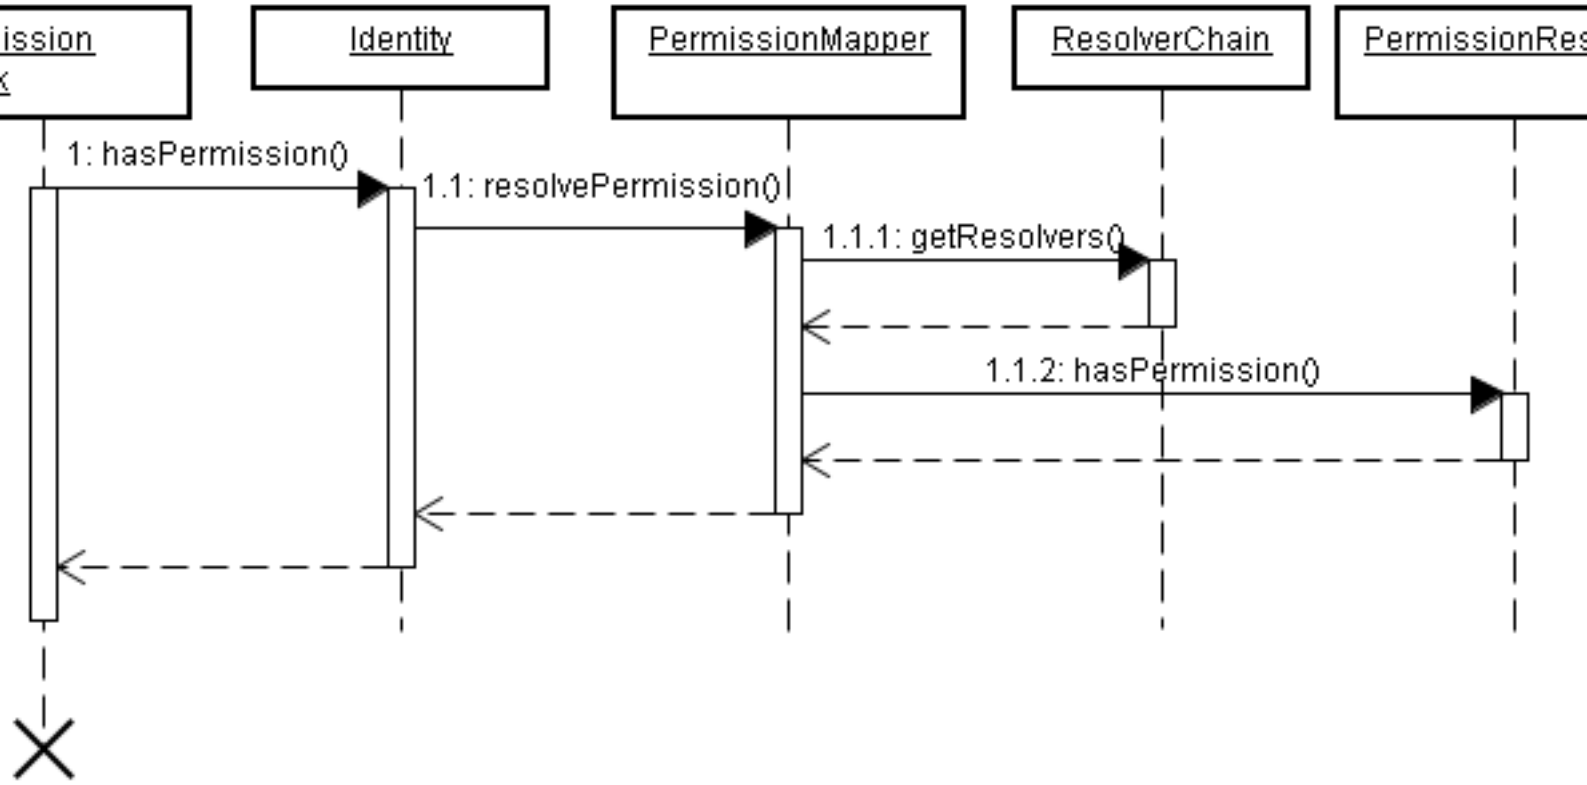

- 1 ##################EL######Identity.hasPermission()###################
- 1.1. Identity##############PermissionMapper.resolvePermission()###########
- 1.1.1. PermissionMapper##############ResolverChain#######Map################################Resolv ###ResolverChain#######ResolverChain.getResolvers()############PermissionResolvers########
- 1.1.2. ResolverChain#####PermissionResolver####PermissionMapper############################hasPermis #####PermissionResolvers #true#########################PermissionMapper#Identity####true###### ####PermissionResolvers#true######## ######################

15.6.9.

Seam#######################RuleBasedPermissionResolver##Drools(JBoss Rules)################################## ################ 1## 2######Drool###

15.6.9.1.

Seam################################Drool#######jar############################

- drools-compiler.jar
- drools-core.jar
- janino.jar
- antlr-runtime.jar
- mvel14.jar

15.6.9.2.

RuleBasedPermissionResolver##########components.xml#Drool#####################
########################securityRules###################

```
<components xmlns="http://jboss.com/products/seam/components"
            xmlns:core="http://jboss.com/products/seam/core"
            xmlns:security="http://jboss.com/products/seam/security"
            xmlns:drools="http://jboss.com/products/seam/drools"
            xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
            xsi:schemaLocation=
              "http://jboss.com/products/seam/core http://jboss.com/products/seam/core-2.1.xsd
                    http://jboss.com/products/seam/components  http://jboss.com/products/seam/
components-2.1.xsd
              http://jboss.com/products/seam/drools http://jboss.com/products/seam/drools-2.1.xsd"
                    http://jboss.com/products/seam/security  http://jboss.com/products/seam/
security-2.1.xsd">

    <drools:rule-base name="securityRules">
       <drools:rule-files>
          <value
>/META-INF/security.drl</value>
       </drools:rule-files>
    </drools:rule-base>

  </components
>
```

################RuleBasedPermissionResolver#security-rules###############

```
  <security:rule-based-permission-resolver security-rules="#{prodSecurityRules}"/>
```

RuleBase##################################

15.6.9.3.

##############################jar#####/META-INF#########################
#########security.drl############components.xml##############################

##############
######Drools###

```
package MyApplicationPermissions;

 import org.jboss.seam.security.permission.PermissionCheck;
 import org.jboss.seam.security.Role;

 rule CanUserDeleteCustomers
 when
   c: PermissionCheck(target == "customer", action == "delete")
   Role(name == "admin")
 then
   c.grant();
 end
```

################ #############
Drool###

####PermissionCheck####Role#########################
###

(######################)
#######CanUserDeleteCustomers###

##################################### (LHS) #### (RHS)
########################LHS######### (###################################)
#########
LHS#when##################RHS#LHS#####################################
RHS#then############ ##########end#######

#######LHS###################### #################

```
c: PermissionCheck(target == "customer", action == "delete")
```

#########################target#####"customer"####target#####"delete"###PermissionCheck##########

############
Drool###
hasPermission()###############PermissionCheck################*(Fact)*#################

##PermissionCheck##############################hasPermission("account",
"create")#######target###
"account"#action###"create"###PermissionCheck##

PermissionCheck##########################org.jboss.seam.security.Role##########
Role##
###################################Role###
##########PermissionCheck#
Role##################java.security.Principal################

######################RuleBasedPermissionResolver.instance().getSecurityContext().insert()####
################Role###

#######LHS#c:####################
##PermissionCheck##
LHS#2###############

```
Role(name == "admin")
```

################"admin"###name#Role############################
###admin##############customer:de

######################### ######RHS##########

```
c.grant()
```

RHS#Java###################c######### (#########PermissionCheck############) #grant()##########

15.6.9.4.

##
##
##
############################MemberBlog######################user##############################

```
rule CanCreateBlogComment
  no-loop
  activation-group "permissions"
when
  blog: MemberBlog()
  check: PermissionCheck(target == blog, action == "create", granted == false)
  Role(name == "user")
then
  check.grant();
```

```
end
```

15.6.9.5.

##PermissionCheck#acti

```
rule CanDoAnythingToCustomersIfYouAreAnAdmin
when
  c: PermissionCheck(target == "customer")
  Role(name == "admin")
then
  c.grant();
end;
```

#########admin###############customer###################################

15.6.10.

Seam##########################PersistentPermissionResolver##################################
#####################################

15.6.10.1.

########components.xml#####PersistentPermissionResolver#####PermissionStore#############
############################JpaIdentityStore#########
############################permission-store##############

```
  <security:persistent-permission-resolver permission-store="#{myCustomPermissionStore}"/>
```

15.6.10.2.

PersistentPermissionResolver###
Seam#######PermissionStore##JpaPermissionStore#####################################
##############PermissionStore##

15.8.

#####	####	##
List<Permission>	listPermissions(Object target)	############################
List<Permission>	listPermissions(Object target, String action)	############################

#####	####	##
List<Permission>	listPermissions(Set<Object> targets, String action)	############################
####	grantPermission(Permission)	##########Permission########
####	grantPermissions(List<Permission> permissions)	############ List########Permission######
####	revokePermission(Permission permission)	############Permission######
####	revokePermissions(List<Permission> permissions)	######################Permis
List<String>	listAvailableActions(Object target)	############################ ############################

15.6.10.3. JpaPermissionStore####

##############Seam#########PermissionStore#####################################
##
##

##DB###############user-permission-class######### ##user-permission-class######role-permission-class###############

##

```
<security:jpa-permission-store user-permission-class="com.acme.model.AccountPermission"/>
```

##

```
<security:jpa-permission-store user-permission-class="com.acme.model.UserPermission"
  role-permission-class="com.acme.model.RolePermission"/>
```

15.6.10.3.1. #######

##org.jboss.seam.annotations.security.permission#########
################################

15.9. ###### #######

#######	#####	##
@PermissionTarget	##########	

#######	#####	##
		############################ #####java.lang.String#######
@PermissionAction	##########	############################ #####java.lang.String#######
@PermissionUser	##########	############################ #####java.lang.String#######
@PermissionRole	##########	############################ #####java.lang.String#######
@PermissionDiscriminator	##########	############################ ############################ #######user################# ########userValue#roleValue ####user#####u##role#####r## = "u", roleValue = "r")

15.6.10.3.2.

###############SeamSpace########

```
@Entity
@Name("message")
@Scope(EVENT)
public class Message implements Serializable
{
  private Long id;
  private String title;
  private String text;
  private boolean read;
  private Date datetime;

  @Id @GeneratedValue
  public Long getId() {
    return id;
  }
  public void setId(Long id) {
```

```
    this.id = id;
  }

  @NotNull @Length(max=100)
  public String getTitle() {
    return title;
  }
  public void setTitle(String title) {
    this.title = title;
  }

  @NotNull @Lob
  public String getText() {
    return text;
  }
  public void setText(String text) {
    this.text = text;
  }

  @NotNull
  public boolean isRead() {
    return read;
  }
  public void setRead(boolean read) {
    this.read = read;
  }

  @NotNull
  @Basic @Temporal(TemporalType.TIMESTAMP)
  public Date getDatetime() {
    return datetime;
  }
  public void setDatetime(Date datetime) {
    this.datetime = datetime;
  }

}
```

```
##########getDiscriminator()#####
@PermissionDiscriminator#########################################################################JpaPermissio
####getRecipient()#####@PermissionUser#@PermissionRole#############
############
discriminator################recipient##########################################
```

15.6.10.3.3.

##
############org.jboss.seam.annotation.security.permission###########

15.10. ### #######

#######	#####	##
@Permissions	###	############ ##########@Permission#######
@Permission	###	############################ action################## ############################ mask################

######################## ############SeamSpace#######

```
@Permissions({
  @Permission(action = "view"),
  @Permission(action = "comment")
})
@Entity
public class MemberImage implements Serializable {
```

#####view#comment#################MemberImage##########################

15.6.10.3.4. #######

##action###DB#########################
##

####### "Bob"####MemberImage#######Bean###########
view#comment#################################action################################"view,comm
##

```
@Permissions({
  @Permission(action = "view", mask = 1),
  @Permission(action = "comment", mask = 2)
})
@Entity
public class MemberImage implements Serializable {
```

###############

action##########"3"#bit 1 # 2 #on##########
###

mask###2####################

15.6.10.3.5.

JpaPermissionStore###
#################ID#######################*identifier* *strategy*##########
#####ID#########################ID##########

IdentifierStrategy####################################

```
public interface IdentifierStrategy {
  boolean canIdentify(Class targetClass);
  String getIdentifier(Object target);
}
```

#######canIdentify()###true######
#2#####getIdentifier()#####################################

Seam####IdentifierStrategy###ClassIdentifierStrategy#EntityIdentifierStrategy#################

###############ID####################org.jboss.seam.annotations.security.permission.Identifier#
############################## ########name############################
IdentifierStrategy#############

15.6.10.3.6.

###name######ID##########Seam###D#####################@Identifier##
##########ID#"customer"######

```
@Identifier(name = "customer")
public class Customer {
```

###########"customerAction"#####:

```
@Name("customerAction")
public class CustomerAction {
```

################ "Customer"#####:

```
public class Customer {
```

15.6.10.3.7.

##ID#########Bean#######ID###ID#########
ID################ClassIdentifierStrategy###### ######## (##########*id*)
#
PersistenceProvider###
@Entity#######################, ######################ID###############

```
@Identifier(value = EntityIdentifierStrategy.class)
public class Customer {
```

##

```
@Entity
public class Customer {
  private Integer id;
  private String firstName;
  private String lastName;

  @Id
  public Integer getId() { return id; }
  public void setId(Integer id) { this.id = id; }

  public String getFirstName() { return firstName; }
  public void setFirstName(String firstName) { this.firstName = firstName; }

  public String getLastName() { return lastName; }
  public void setLastName(String lastName) { this.lastName = lastName; }
}
```

id#1#Customer################"Customer:1"######
###################################

```
@Entity
@Identifier(name = "cust")
public class Customer {
```

######id#123#Customer#"cust:123"################

15.7.

Seam############################ID##API#######################################API#PermissionManager##########

15.7.1.

PermissionManager##Seam##JpaPermissionStore####################################components.xml#permission-store#######

```
<security:permission-manager permission-store="#{ldapPermissionStore}"/>
```

#####PermissionManager#################

15.11. ############API#####

#####	####	##
List<Permission>	listPermissions(Object target, String action)	############################
List<Permission>	listPermissions(Object target)	############################
####	grantPermission(Permission permission)	######################Permis#########true####
####	grantPermissions(List<Permission> permissions)	##########################Per#########true####
####	revokePermission(Permission permission)	######################Permi
####	revokePermissions(List<Permission> permissions)	##########################Pe#########true####
List<String>	listAvailableActions(Object target)	##

15.7.2.

PermissionManager###

15.12. #########

####	##########	##############
listPermissions(#)	##target	seam.read-permissions
grantPermission(#)	########Permission##############PermissionS########	seam.grant-permission
grantPermission(#)	########Permission	seam.grant-permission
grantPermissions(#)	############PermissionS	seam.grant-permission
revokePermission(#)	#######Permission	seam.revoke-permission
revokePermissions(#)	############PermissionS	seam.revoke-permission

15.8. SSL#########

Seam#HTTPS########page#############################
######pages.xml###########scheme######################### #####/login.xhtml#HTTPS#############

```
<page view-id="/login.xhtml" scheme="https"/>
```

############JSF#s:link#s:button####### (view#######)
##/
login.xhtml#HTTPS#################s:link##login.xhmtl##HTTPS################

```
<s:link view="/login.xhtml" value="Login"/>
```

############# (##########) ##
schema="https"############http###################https###############

##################*scheme*#####################HTTPS################
#####################################
#########HTTPS#######################HTTPS###############HTTPS##########################
HTTP#######scheme################pages.xml##########

```
<page view-id="*" scheme="http" />
```

#####HTTPS#################schema##############

#######components.xml##############################HTTP#####################

```
<web:session invalidate-on-scheme-change="true"/>
```

########HTTPS#######HTTP#####################ID##################

15.8.1.

#####HTTP#HTTPS###################pages.xml #pages ######http-port #### https-port###############

```
<pages xmlns="http://jboss.com/products/seam/pages"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://jboss.com/products/seam/pages  http://jboss.com/products/seam/pages-2.1.xsd"
      no-conversation-view-id="/home.xhtml"
      login-view-id="/login.xhtml"
      http-port="8080"
      https-port="8443"
>
```

15.9.

##########API##########Seam#CAPCHA(*C*ompletely *A*utomated *P*ublic *T*uring test to tell *C*omputers and *H*umans *A*part)###

15.9.1. #####

###################Seam###################web.xml###

```
<servlet>
   <servlet-name
>Seam Resource Servlet</servlet-name>
   <servlet-class
>org.jboss.seam.servlet.SeamResourceServlet</servlet-class>
</servlet>
```

```
<servlet-mapping>
   <servlet-name
>Seam Resource Servlet</servlet-name>
   <url-pattern
>/seam/resource/*</url-pattern>
</servlet-mapping
>
```

15.9.2.

####################################:

```
<h:graphicImage value="/seam/resource/captcha"/>
<h:inputText id="verifyCaptcha" value="#{captcha.response}" required="true">
  <s:validate />
</h:inputText>
<h:message for="verifyCaptcha"/>
```

######### graphicImage ####################inputText##################
#####################################

15.9.3.

###

```
@Name("org.jboss.seam.captcha.captcha")
@Scope(SESSION)
public class HitchhikersCaptcha extends Captcha
{
  @Override @Create
  public void init()
  {
    setChallenge("What is the answer to life, the universe and everything?");
    setCorrectResponse("42");
  }

  @Override
  public BufferedImage renderChallenge()
  {
     BufferedImage img = super.renderChallenge();
     img.getGraphics().drawOval(5, 3, 60, 14); //add an obscuring decoration
     return img;
```

```
  }
}
```

15.10. ######

######################Seam################### 6. ############################

15.13. ######

######	##
org.jboss.seam.security.loginSuccessful	#############
org.jboss.seam.security.loginFailed	#############
org.jboss.seam.security.alreadyLoggedIn	############################
org.jboss.seam.security.notLoggedIn	###################################
org.jboss.seam.security.notAuthorized	##
org.jboss.seam.security.preAuthenticate	###############
org.jboss.seam.security.postAuthenticate	###############
org.jboss.seam.security.loggedOut	################
org.jboss.seam.security.credentialsUpdated	############################
org.jboss.seam.security.rememberMe	Identity#rememberMe###############

15.11.

```
#########################################################################
Seam#########RunAsOperation############                    ####################
Principal#Subject###################################
```

```
#########RunAsOperation##########addRole()
################################### execute() ################################
```

```
new RunAsOperation() {
  public void execute() {
    executePrivilegedOperation();
  }
}.addRole("admin")
 .run();
```

```
###getPrincipal()            #            getSubject()#####Principal#########
Subject###################### ####RunAsOperation########run()###########
```

15.12. ID########Identity component####

##############################Identity###Credent
#############Identity################APPLICATION######Identity###Identity##############################

```
@Name("org.jboss.seam.security.identity")
@Scope(SESSION)
@Install(precedence = APPLICATION)
@BypassInterceptors
@Startup
public class CustomIdentity extends Identity
{
  private static final LogProvider log = Logging.getLogProvider(CustomIdentity.class);

  private String companyCode;

  public String getCompanyCode()
  {
    return companyCode;
  }

  public void setCompanyCode(String companyCode)
  {
    this.companyCode = companyCode;
  }

  @Override
  public String login()
  {
    log.info("###### CUSTOM LOGIN CALLED ######");
    return super.login();
  }
}
```

##

SESSION##############################Identity########@Startup##########
#############Seam#######################

##########

Seam ########################## ###
Seam

16.1.

JEE ##########################
###

########## 1
UTF-8
################## ##########################

16.1.1.

tomcat
################ Tomcat ### JBoss AS ######## `URIEncoding="UTF-8"`
################ JBoss AS 4.2 ## `${JBOSS_HOME}/server/(default)/deploy/jboss-web.deployer/server.xml` #######

```
<Connector port="8080" URIEncoding="UTF-8"/>
```

######## ############## JBoss AS ##

```
<Connector port="8080" useBodyEncodingForURI="true"/>
```

16.1.2.

############## ##### ################## (## ##############)# ###
ASCII ######## ASCII
################ ##########################

######### ASCII ############### #### Unicode ###### Unicode ################
JVM ############## ##### ASCII
ASCII ############################ \uXXXX ########## Java ###### Unicode
############# XXXX ######## 16 #####

################################ (
<xlink>###</xlink>
) ################## JDK ###### `native2ascii` ########################
############################## Unicode ########### ASCII ##############

########## *Java 5 ######* [http://java.sun.com/j2se/1.5.0/docs/tooldocs/index.html#intl] ### *Java 6 ######* [http://java.sun.com/javase/6/docs/technotes/tools/#intl] ########## ##### ####### UTF-8 ##################

```
$ native2ascii -encoding UTF-8 messages_cs.properties >
 messages_cs_escaped.properties
```

16.1.3.

##
##

#################### <f:view locale="cs_CZ"/> ##############
(#### JSF ##################)# xml ##################### xml
################################ ####### xml ### <?xml version="1.0"
encoding="UTF-8"?> ########################

JSF # Facelet
components.xml

```
<web:character-encoding-filter encoding="UTF-8"
  override-client="true"
  url-pattern="*.seam" />
```

16.2.

################ java.util.Locale ############## (########### locale
####################)# ######## ################### Seam ##################
JSF #########

- HTTP ############ (#########) #### #### faces-config.xml
  ################################## ##########################
- ################ faces-config.xml ########## ##########################
- ############################

Seam ######## org.jboss.seam.international.localeSelector.language#
org.jboss.seam.international.localeSelector.country ###
org.jboss.seam.international.localeSelector.variant ################ ## ####
###################

############################ ################################ Seam
#######JSP ####Facelet
########################

```
<h:selectOneMenu value="#{localeSelector.language}">
   <f:selectItem itemLabel="English" itemValue="en"/>
   <f:selectItem itemLabel="Deutsch" itemValue="de"/>
   <f:selectItem itemLabel="Francais" itemValue="fr"/>
</h:selectOneMenu>
<h:commandButton action="#{localeSelector.select}"
   value="#{messages['ChangeLanguage']}"/>
```

#####faces-config.xml############################ ###########

```
<h:selectOneMenu value="#{localeSelector.localeString}">
   <f:selectItems value="#{localeSelector.supportedLocales}"/>
</h:selectOneMenu>
<h:commandButton action="#{localeSelector.select}"
   value="#{messages['ChangeLanguage']}"/>
```

Seam # JSF

JSF ###### (/META-INF/faces-config.xml) # <locale-config> ################################ #### Seam ################# Java EE ############################## ######## org.jboss.seam.international.localeConfig ## ######### Seam ########### Seam ########## XML ###########

```
<international:locale-config default-locale="fr_CA" supported-locales="en fr_CA fr_FR"/>
```

######################### ######################### ########################

16.3.

JSF ################################ <f:loadBundle /> ################### Seam ######################### ########## EL ##################### Seam messages ####################

16.3.1.

Seam # java.util.ResourceBundle ######## (########## org.jboss.seam.core.resourceBundle #######)# ### ######## Seam ###############

messages ###### messages.properties# messages_en.properties# messages_en_AU.properties ########################## ########## WEB-INF/classes ##########

####messages_en.properties ###

```
Hello=Hello
```

####messages_en_AU.properties ###

```
Hello=G'day
```

org.jboss.seam.core.resourceLoader.bundleNames ##### Seam ########## ############################## ############################## (####) ########

```
<core:resource-loader>
   <core:bundle-names>
      <value>mycompany_messages</value>
      <value>standard_messages</value>
   </core:bundle-names>
</core:resource-loader>
```

########################## ##JSF###ID##################### ####ID#### / ############## ### /welcome/hello.jsp ################### ########## welcome/hello_en.properties #######

pages.xml ######################

```
<page view-id="/welcome/hello.jsp" bundle="HelloMessages"/>
```

HelloMessages.properties ########## /welcome/hello.jsp

16.3.2.

###Seam######################## ######### <f:loadBundle ... /> ###################### ##################

```
<h:outputText value="#{messages['Hello']}"/>
```

####

```
<h:outputText value="#{messages.Hello}"/>
```

##################### EL #############

```
Hello=Hello, #{user.firstName} #{user.lastName}
```

```
Hello=G'day, #{user.firstName}
```

#########################

```
@In private Map<String, String> messages;
```

```
@In("#{messages['Hello']}") private String helloMessage;
```

16.3.3. Faces

`facesMessages` ################################### ########faces messages #######

```
@Name("hello")
@Stateless
public class HelloBean implements Hello {
   @In FacesMessages facesMessages;

   public String sayIt() {
      facesMessages.addFromResourceBundle("Hello");
   }
}
```

###################`Hello, Gavin King` ##### `G'day, Gavin` ########

16.4.

`java.util.Timezone` ################## ###`org.jboss.seam.international.timezone` ############ Seam ######## ### `org.jboss.seam.international.timezoneSelector`

<f:convertDateTime> ################## ##### JSF ############## UTC #########UTC ##########

Seam################################Seam########## ###Seam##Seam############### <s:convertDateTime> #########

16.5.

Seam############################## ###API##########API########## ###################### ######################################

########################:

```
<theme:theme-selector cookie-enabled="true">
   <theme:available-themes>
      <value>default</value>
      <value>accessible</value>
      <value>printable</value>
   </theme:available-themes>
</theme:theme-selector>
```

####################################

################################## #### default #### default.properties ################## ####default.properties #############

```
css ../screen.css
template /template.xhtml
```

CSS ############ facelet ################ (##################################)#

###JSP#facelet#################### ####facelet##################:

```
<link href="#{theme.css}" rel="stylesheet" type="text/css" />
```

##

```
<link href="#{facesContext.externalContext.requestContextPath}#{theme.css}"
   rel="stylesheet" type="text/css" />
```

############ facelet## `<ui:composition>` ##################

```
<ui:composition xmlns="http://www.w3.org/1999/xhtml"
    xmlns:ui="http://java.sun.com/jsf/facelets"
    xmlns:h="http://java.sun.com/jsf/html"
    xmlns:f="http://java.sun.com/jsf/core"
    template="#{theme.template}">
```

################## ##

```
<h:selectOneMenu value="#{themeSelector.theme}">
    <f:selectItems value="#{themeSelector.themes}"/>
</h:selectOneMenu>
<h:commandButton action="#{themeSelector.select}" value="Select Theme"/>
```

16.6.

################################## ################################## ### `components.xml` # `cookie-enabled` ############

```
<theme:theme-selector cookie-enabled="true">
    <theme:available-themes>
        <value>default</value>
        <value>accessible</value>
        <value>printable</value>
    </theme:available-themes>
</theme:theme-selector>

<international:locale-selector cookie-enabled="true"/>
```

Seam Text

##########
##########wiki####blog##
Seam## *Seam Text* ########################## Web ############### `<s:formattedText/>` ############# Seam Text#ANTLR###################### Seam Text##########ANTLR######################

17.1.

######:

```
It's easy to make *emphasis*, |monospace|,
~deleted text~, super^scripts^ or _underlines_.
```

`<s:formattedText/>` ######## ###HTML#######:

```
<p>
It's easy to make <i
>emphasis</i
>, <tt
>monospace</tt>
<del
>deleted text</del
>, super<sup
>scripts</sup
> or <u
>underlines</u
>.
</p
>
```

########################## ###+ ##########:

```
+This is a big heading
You /must/ have some text following a heading!

++This is a smaller heading
This is the first paragraph. We can split it across multiple
lines, but we must end it with a blank line.
```

```
This is the second paragraph.
```

(################ ##) ###### HTML ##:

```
<h1
>This is a big heading</h1>
<p>
You <i
>must</i
> have some text following a heading!
</p>

<h2
>This is a smaller heading</h2>
<p>
This is the first paragraph. We can split it across multiple
lines, but we must end it with a blank line.
</p>

<p>
This is the second paragraph.
</p
>
```

######## # ################### = #######:

```
An ordered list:

#first item
#second item
#and even the /third/ item

An unordered list:

=an item
=another item
```

```
<p>
An ordered list:
</p>
```

```
<ol
>
<li
>first item</li>
<li
>second item</li>
<li
>and even the <i
>third</i
> item</li>
</ol>

<p>
An unordered list:
</p>

<ul>
<li
>an item</li>
<li
>another item</li>
</ul
>
```

##########:

```
The other guy said:

"Nyeah nyeah-nee
/nyeah/ nyeah!"

But what do you think he means by "nyeah-nee"?
```

```
<p>
The other guy said:
</p>

<q
>Nyeah nyeah-nee
<i
```

```
>nyeah</i
> nyeah!</q>

<p>
But what do you think he means by <q
>nyeah-nee</q
>?
</p
>
```

17.2.

*, |, # #########<, >, & ###HTML######### \ #########:

```
You can write down equations like 2\*3\=6 and HTML tags
like \<body\
> using the escape character: \\.
```

```
<p>
You can write down equations like 2*3=6 and HTML tags
like &lt;body&gt; using the escape character: \.
</p
>
```

(`)

```
My code doesn't work:

`for (int i=0; i<100; i--)
{
    doSomething();
}`

Any ideas?
```

```
<p>
My code doesn't work:
</p>
```

```
<pre
>for (int i=0; i&lt;100; i--)
{
   doSomething();
}</pre>

<p>
Any ideas?
</p
>
```

##################################
(##)#
###

```
This is a |<tag attribute="value"/>| example.
```

(##### ####)#

17.3.

####################:

```
Go to the Seam website at [=
>http://jboss.com/products/seam].
```

####################:

```
Go to [the Seam website=
>http://jboss.com/products/seam].
```

####################wiki################Seam Text####################

17.4. HTML###

############HTML################## (############
##)# ####################

```
You might want to link to <a href="http://jboss.com/products/seam"
>something
```

```
cool</a
>, or even include an image: <img src="/logo.jpg"/>
```

#########:

```
<table>
   <tr
><td
>First name:</td
><td
>Gavin</td
></tr>
   <tr
><td
>Last name:</td
><td
>King</td
></tr>
</table
>
```

######################!

iText PDF

Seam now includes a component set for generating documents using iText. The primary focus of Seam's iText document support is for the generation of PDF doucuments, but Seam also offers basic support for RTF document generation.

18.1. PDF

iText support is provided by `jboss-seam-pdf.jar`. This JAR contains the iText JSF controls, which are used to construct views that can render to PDF, and the DocumentStore component, which serves the rendered documents to the user. To include PDF support in your application, included `jboss-seam-pdf.jar` in your `WEB-INF/lib` directory along with the iText JAR file. There is no further configuration needed to use Seam's iText supportfon.

Seam iText ################### Facelets ############## ############### JSP ################## ### seam-ui #################

`examples/itext` ################ PDF ################## ################ ########## PDF ################################

18.1.1.

`<p:document>`	## ####### `http://jboss.com/products/seam/pdf` ########### facelet XHTML ######## ################ `document` ########## `document` ### Seam ######## DocumentStore ############## HTML ########################## ## • `type` — ################## ##### `PDF`# `RTF`# `HTML` ########## Seam # PDF ################### PDF #################### • `pageSize` — ############### ############ `LETTER` # `A4` ##### ############ `com.lowagie.text.PageSize` ######### #### pageSize ####################### ##### #612 792## LETTER ############### • `orientation` — ######### ##### `portrait` # `landscape` ### landscape ########################## • `margins` — ## ## ## ######### • `marginMirroring` — ########################

- disposition — ######## PDF ###############
  HTTP Content-Disposition #######
  ## inline
  ########################## attachment ###### #######
  inline ###
- fileName — ###### ########################

########

- title
- subject
- keywords
- author
- creator

###

```
<p:document xmlns:p="http://jboss.com/products/seam/pdf"
>
  The document goes here.

</p:document
>
```

18.1.2.

Useful documents will need to contain more than just text; however, the standard UI components are geared towards HTML generation and are not useful for generating PDF content. Instead, Seam provides a special UI components for generating suitable PDF content. Tags like `<p:image>` and `<p:paragraph>` are the basic foundations of simple documents. Tags like `<p:font>` provide style information to all the content surrounging them.

`<p:paragraph>`	## ############ ## ## • firstLineIndent

	• extraParagraphSpace • leading • multipliedLeading • spacingBefore — ###################### • spacingAfter — ###################### • indentationLeft • indentationRight • keepTogether ### <p:paragraph alignment="justify"> This is a simple document. It isn't very fancy. </p:paragraph >
<p:text>	## text ######## JSF ## HTML ####################### outputText ######### ## • value — ######### #################### ### <p:paragraph> The item costs <p:text value="#{product.price}"> <f:convertNumber type="currency" currencySymbol="$"/> </p:text> </p:paragraph >
<p:html>	## html ### HTML ###### PDF ##########

	## • value — ############ ### ``` <p:html value="This is HTML with <b >some markup." /> <p:html> <h1 >This is more complex HTML</h1> one two three </p:html> <p:html> <s:formattedText value="*This* is |Seam Text| as HTML. It's very^cool^." /> </p:html > ```
<p:font>	## ## ## • name — ######## ##### COURIER# HELVETICA# TIMES-ROMAN# SYMBOL# ZAPFDINGBATS ##### • size — ############### • style — ############ ################## NORMAL# BOLD# ITALIC# OBLIQUE# UNDERLINE# LINE-THROUGH • encoding — ################

	### <p:font name="courier" style="bold" size="24"> <p:paragraph >My Title</p:paragraph> </p:font >
`<p:newPage>`	## `p:newPage` ############ ### <p:newPage />
`<p:image>`	## `p:image` inserts an image into the document. Images can be be loaded from the classpath or from the web application context using the `value` attribute. ################################## `imageData` ######################### #### `java.awt.Image` ############ ## • `value` — ## • `rotation` — ############## • `height` — ########## • `width` — ######### • `alignment`— ########## (#########*18.1.7.2. ########* ###) • `alt` — ################## • `indentationLeft` • `indentationRight` • `spacingBefore` — ###################### • `spacingAfter` — ######################

	• `widthPercentage`
	• `initialRotation`
	• `dpi`
	• `scalePercent` — ############ (#######)# x # y ################### 2 ###################
	• `wrap`
	• `underlying`
	###
	
	`<p:image value="/jboss.jpg" />`
	
	`<p:image value="#{images.chart}" />`

`<p:anchor>`	##
	`p:anchor` ########################## ###############
	##
	
	• `name` — ###################
	• `reference` — The destination the link refers to. Links to other points in the document should begin with a "#". For example, "#link1" to refer to an anchor postion with a `name` of `link1`. Links may also be a full URL to point to a resource outside of the document.
	###
	
	`<p:listItem`
	`><p:anchor reference="#reason1"`
	`>Reason 1</p:anchor`
	`></p:listItem`
	`>`
	...
	`<p:paragraph>`
	`<p:anchor name="reason1"`
	`>It's the quickest way to get "rich"</p:anchor`
	`>`

```
    ...
</p:paragraph
>
```

18.1.3.

`<p:header>`
 	
`<p:footer>`
	##
	
	The `p:header` and `p:footer` components provide the ability to place header and footer text on each page of a generated document, with the exception of the first page. Header and footer declarations should appear near the top of a document.
	
	##
	
	• `alignment` — ########################## (######### *#18.1.7.2. ########* ###)#
	
	• `backgroundColor` — ##################### (######## *#18.1.7.1. #Color Values#* ###)#
	
	• `borderColor` — ####################### `borderColorLeft#` `borderColorRight#` `borderColorTop#` `borderColorBottom` ################## (######## *#18.1.7.1. #Color Values#* ###)#
	
	• `borderWidth` — The width of the border. Inidvidual border sides can be specified using `borderWidthLeft`, `borderWidthRight`, `borderWidthTop` and `borderWidthBottom`.
	
	###

```
<p:facet name="header">
  <p:font size="12">
    <p:footer borderWidthTop="1" borderColorTop="blue"
            borderWidthBottom="0" alignment="center">
       Why Seam? [<p:pageNumber />]
    </p:footer>
  </p:font>
</f:facet
>
```

`<p:pageNumber>`	## ######### `p:pageNumber` ################################ ############################## 1 ###############

###

```
<p:footer borderWidthTop="1" borderColorTop="blue"
        borderWidthBottom="0" alignment="center">
    Why Seam? [<p:pageNumber />]
</p:footer>
```

18.1.4.

`<p:chapter>`
 	
`<p:section>`
	##
	
	############################ `p:chapter` # `p:section`
	############################## ###################### ###
	############## ##### PDF
	##
	
	##
	
	• `alignment` — ######################## (######### *#18.1.7.2. ########* ###)#
	
	• `number` — ###### ###################
	
	• `numberDepth` — The depth of numbering for section. All sections are numbered relative to their surrounding chapter/sections. The fourth section of of the first section of chapter three would be section 3.1.4, if displayed at the default number depth of three. To omit the chapter number, a number depth of 2 should be used. In that case, the section number would be displayed as 1.4.
	
	###

```
<p:document xmlns:p="http://jboss.com/products/seam/pdf"
          title="Hello">

  <p:chapter number="1">
    <p:title
><p:paragraph
>Hello</p:paragraph
></p:title>
    <p:paragraph
>Hello #{user.name}!</p:paragraph>
  </p:chapter>
```

```
  <p:chapter number="2">
    <p:title
><p:paragraph
>Goodbye</p:paragraph
></p:title>
    <p:paragraph
>Goodbye #{user.name}.</p:paragraph>
  </p:chapter>

</p:document
>
```

`<p:header>`	## ############ p:title ########### ######/ ################### ########## ############### p:paragraph ###########

18.1.5.

List structures can be displayed using the `p:list` and `p:listItem` tags. Lists may contain arbitrarily-nested sublists. List items may not be used outside of a list. he following document uses the `ui:repeat` tag to to display a list of values retrieved from a Seam component.

```
<p:document xmlns:p="http://jboss.com/products/seam/pdf"
        xmlns:ui="http://java.sun.com/jsf/facelets"
        title="Hello">
  <p:list style="numbered">
    <ui:repeat value="#{documents}" var="doc">
      <p:listItem
>#{doc.name}</p:listItem>
    </ui:repeat>
  </p:list>
</p:document
>
```

`<p:list>`	## • style — ###################### NUMBERED# LETTERED# GREEK# ROMAN# ZAPFDINGBATS# ZAPFDINGBATS_NUMBER ########## ######################

	• `listSymbol` — ########## ##########
	• `indent` — ##############
	• `lowerCase` — letters ################ ######################
	• `charNumber` — ZAPFDINGBATS #### ######################
	• `numberType` — ZAPFDINGBATS_NUMBER #### ################
	###
	
	``<p:list style="numbered">
	  <ui:repeat value="#{documents}" var="doc">
	   <p:listItem
	>#{doc.name}</p:listItem>
	  </ui:repeat>
	</p:list
	>
	``

`<p:listItem>`	## `p:listItem` ################ ## • `alignment` — ######################### (######### *#18.1.7.2. ########* ###)# • `alignment` — ############ (######### *#18.1.7.2. ########* ###)# • `indentationLeft` — ########## • `indentationRight` — ########## • `listSymbol` — ############################## ### ``` ... ```

18.1.6.

p:table # p:cell ################## ######################### ###### 3 ####### 3 ################## ################

<p:table>	## p:table ################ ## • columns — ########### (##) ##### • widths — ########### ########## 1 ####### ##### widths="2 1 1" ####### 3 ### 1 ####### 2 ### 3 ####### 2 ################## • headerRows — ############################ ######################## • footerRows — ################## #### headerRows ########### ########### 2 ############ 1 ########### headerRows # 3 # footerRows # 1 ######### • widthPercentage — ################ • horizontalAlignment — ######## (######### *#18.1.7.2. ######## ###*)# • skipFirstHeader • runDirection • lockedWidth • splitRows • spacingBefore — #################### • spacingAfter — #################### • extendLastRow • headersInEvent • splitLate • keepTogether ###

```
<p:table columns="3" headerRows="1">
  <p:cell
>name</p:cell>
  <p:cell
>owner</p:cell>
  <p:cell
>size</p:cell>
  <ui:repeat value="#{documents}" var="doc">
    <p:cell
>#{doc.name}</p:cell>
    <p:cell
>#{doc.user.name}</p:cell>
    <p:cell
>#{doc.size}</p:cell>
  </ui:repeat>
</p:table
>
```

`<p:cell>`	## `p:cell` ################ ## • `colspan` — `colspan` # 1 ##################################### ########################## • `horizontalAlignment` — ######### (##### *#18.1.7.2. ########* ###)# • `verticalAlignment` — ######### (##### *#18.1.7.2. ########* ###)# • `padding` — `paddingLeft`# `paddingRight`# `paddingTop`# `paddingBottom` ########################## • `useBorderPadding` • `leading` • `multipliedLeading` • `indent` • `verticalAlignment`

- extraParagraphSpace
- fixedHeight
- noWrap
- minimumHeight
- followingIndent
- rightIndent
- spaceCharRatio
- runDirection
- arabicOptions
- useAscender
- grayFill
- rotation

###

```
<p:cell
>...</p:cell
>
```

18.1.7.

####################################

18.1.7.1. Color Values

Seam ############################## ### ################## white# gray# lightgray# darkgray# black# red# pink# yellow# green# magenta# cyan# blue ###

18.1.7.2.

################ Seam PDF ############ left# right# center# justify# justifyall ########## ###### top# middle# bottom# baseline ###

18.2.

######### jboss-seam-pdf.jar ######## #### PDF ############## ### ####### HTML ############ ######## JFreeChart ##### (jfreechart.jar # jcommon.jar) # WEB-INF/lib ################### ##### ##### ####### 3 ################

<p:barchart>	## ########### ## • borderVisible — ############################ • borderPaint — ################### • borderBackgroundPaint — ############### • borderStroke — • domainAxisLabel — ############## • domainAxisPaint — ########### • domainGridlinesVisible— ############################## • domainGridlinePaint— #################### • domainGridlineStroke — The stroke style of the domain gridleines, if visible. • height — ######### • width — ######## • is3D — #### 2D #### 3D ########## boolean #### • legend — ################### boolean #### • legendItemPaint— ###################### • legendItemBackgoundPaint— ############################ • orientation — ####### vertical (#####) ### horizontal ###### • plotBackgroundPaint— #########

	• `plotBackgroundAlpha`— ######### (###) ###### 0 (#####) ## 1 (######) ########### • `plotForegroundAlpha`— ####### (###) ###### 0 (#####) ## 1 (######) ########### • `plotOutlinePaint`— ######################## • `plotOutlineStroke` — The stroke style of the range gridleines, if visible. • `rangeAxisLabel` — ################ • `rangeAxisPaint` — ############ • `rangeGridlinesVisible`— ################################ • `rangeGridlinePaint`— #################### • `rangeGridlineStroke` — The stroke style of the range gridleines, if visible. • `title` — ################ • `titlePaint`— ################# • `titleBackgroundPaint`— ################# • `width` — ######## ### `<p:barchart title="Bar Chart" legend="true" width="500" height="500"> <p:series key="Last Year"> <p:data columnKey="Joe" value="100" /> <p:data columnKey="Bob" value="120" /> </p:series > <p:series key="This Year"> <p:data columnKey="Joe" value="125" /> <p:data columnKey="Bob" value="115" /> </p:series> </p:barchart >`
`<p:linechart>`	##

	############ ## • borderVisible — ############################ • borderPaint — ################### • borderBackgroundPaint — ################ • borderStroke — • domainAxisLabel — ############### • domainAxisPaint — ############ • domainGridlinesVisible— ################################ • domainGridlinePaint— #################### • domainGridlineStroke — The stroke style of the domain gridleines, if visible. • height — ######### • width — ######## • is3D — #### 2D #### 3D ########## boolean #### • legend — ################### boolean #### • legendItemPaint— ###################### • legendItemBackgoundPaint— ############################## • orientation — ####### vertical (#####) ### horizontal ###### • plotBackgroundPaint— ######### • plotBackgroundAlpha— ######### (###) ###### 0 (#####) ## 1 (######) ########### • plotForegroundAlpha— ####### (###) ###### 0 (#####) ## 1 (######) ########### • plotOutlinePaint— ########################

	• `plotOutlineStroke` — The stroke style of the range gridleines, if visible.
	• `rangeAxisLabel` — ###############
	• `rangeAxisPaint` — ###########
	• `rangeGridlinesVisible`— ##############################
	• `rangeGridlinePaint`— ####################
	• `rangeGridlineStroke` — The stroke style of the range gridleines, if visible.
	• `title` — ###############
	• `titlePaint`— ################
	• `titleBackgroundPaint`— ################
	• `width` — ########
	###
	
	`<p:linechart title="Line Chart"`
	`width="500" height="500">`
	`<p:series key="Prices">`
	`<p:data columnKey="2003" value="7.36" />`
	`<p:data columnKey="2004" value="11.50" />`
	`<p:data columnKey="2005" value="34.625" />`
	`<p:data columnKey="2006" value="76.30" />`
	`<p:data columnKey="2007" value="85.05" />`
	`</p:series>`
	`</p:linechart`
	`>`

`<p:piechart>`	## ########### ## • `title`— The chart title text. • `label`— The default label text for pie sections.

- `legend`— A boolean value indicating whether or not the chart should include a legend. Default value is true
- `is3D`—A boolean value indicating that the chart should be rendered in 3D instead of 2D.
- `labelLinkMargin`— The link margin for labels.
- `labelLinkPaint`— The paint used for the label linking lines.
- `labelLinkStroke`— he stroke used for the label linking lines.
- `labelLinksVisible`— A flag that controls whether or not the label links are drawn.
- `labelOutlinePaint`— The paint used to draw the outline of the section labels.
- `labelOutlineStroke`— The stroke used to draw the outline of the section labels.
- `labelShadowPaint`— The paint used to draw the shadow for the section labels.
- `labelPaint`— The color used to draw the section labels
- `labelGap`— The gap between the labels and the plot as a percentage of the plot width.
- `labelBackgroundPaint`— The color used to draw the background of the section labels. If this is null, the background is not filled.
- `startAngle`— The starting angle of the first section.
- `circular`— A boolean value indicating that the chart should be drawn as a circle. If false, the chart is drawn as an ellipse. The default is true.
- `direction`— The direction the pie section are drawn. One of: `clockwise` or `anticlockwise`. The default is `clockwise`.
- `sectionOutlinePaint`— The outline paint for all sections.
- `sectionOutlineStroke`— The outline stroke for all sections
- `sectionOutlinesVisible`— Indicates whether an outline is drawn for each section in the plot.
- `baseSectionOutlinePaint`— The base section outline paint.
- `baseSectionPaint`— The base section paint.

	• `baseSectionOutlineStroke`— The base section outline stroke. ###

```
<p:piechart title="Pie Chart" circular="false" direction="anticlockwise"
   startAngle="30" labelGap="0.1" labelLinkPaint="red"
>
   <p:series key="Prices"
>
      <p:data key="2003" columnKey="2003" value="7.36" />
      <p:data key="2004" columnKey="2004" value="11.50" />
      <p:data key="2005" columnKey="2005" value="34.625" />
      <p:data key="2006" columnKey="2006" value="76.30" />
      <p:data key="2007" columnKey="2007" value="85.05" />
   </p:series
>
</p:piechart
>
```

`<p:series>`	## #################### ## ## • `key` — ######## • `seriesPaint` — ################ • `seriesOutlinePaint` — ################## • `seriesOutlineStroke` — ######################## • `seriesVisible` — ################ boolean ### • `seriesVisibleInLegend` — A boolean indiciating if the series should be listed in the legend. ###

```
<p:series key="data1">
   <ui:repeat value="#{data.pieData1}" var="item">
      <p:data columnKey="#{item.name}" value="#{item.value}" />
   </ui:repeat>
```

</p:series
>

<p:data>

##

##########

##

- key — ##########
- series — <p:series> ##########
- value — ########
- explodedPercent — ######## explodedPercent ##########
- sectionOutlinePaint — ##########
- sectionOutlineStroke — ##########
- sectionPaint — ##########

###

```
<p:data key="foo" value="20" sectionPaint="#111111"
      explodedPercent=".2" />
<p:data key="bar" value="30" sectionPaint="#333333" />
<p:data key="baz" value="40" sectionPaint="#555555"
      sectionOutlineStroke="my-dot-style" />
```

<p:color>

##

##########

##

- color — ###### ########## *#18.1.7.1. #Color Values#*
- color2 — ##########
- point — ##########
- point2 — ##########

###

```
<p:color id="foo" color="#0ff00f"/>
<p:color id="bar" color="#ff00ff" color2="#00ff00"
                point="50 50" point2="300 300"/>
```

`<p:stroke>`	## ######################## ## • `width` — ###### • `cap` — ######### ##### `butt`# `round`# `square` ### • `join` — ########### ##### `miter`# `round`# `bevel` ### • `miterLimit` — ############################ • `dash` — ############################ ###################################### • `dashPhase` — The dash phase indicates the offset into the dash pattern that the the line should be drawn with. ###

```
<p:stroke id="dot2" width="2" cap="round" join="bevel" dash="2 3" />
```

18.3.

Seam # iText ################################ ########## PDF ############## Web ############################ HTML ############## ######################################

`<p:barCode>`	## ################ ## • `type` — iText ######################## `EAN13`# `EAN8`# `UPCA`# `UPCE`# `SUPP2`# `SUPP5`# `POSTNET`# `PLANET`# `CODE128`# `CODE128_UCC`# `CODE128_RAW`# `CODABAR` ######### • `code`— The value to be encoded by the barcode.

- `xpos`— For PDFs, the absolute y position of the barcode on the page.
- `ypos`— For PDFs, the absolute y position of the barcode on the page.
- `rotDegrees` — PDF ######################
- `barHeight` — barCode ##########
- `minBarWidth` — #########
- `barMultiplier` — ############### ### `POSTNET` # `PLANET` ################
- `barColor` — #########
- `textColor` — ################
- `textSize` — ######################
- `altText` — HTML ######## `alt` #######

###

```
<p:barCode type="code128"
        barHeight="80"
        textSize="20"
        code="(10)45566(17)040301"
        codeType="code128_ucc"
        altText="My BarCode" />
```

18.4. Swing/AWT

Seam # Swing ######## PDF ################################## ############ ######################################

`<p:swing>`	## Swing ######## PDF ################# ## • `width` — ###################### • `height` — ..The height of the component to be rendered. • `component` — Swing ### AWT ################

###

```
<p:swing width="310" height="120" component="#{aButton}" />
```

18.5. iText

########################## ################ ####
##################################

########## URL `/seam-doc.seam` ## PDF ########### ######## `/myDocument.pdf`
######### PDF ####### URL ########## ############### ####################
PDF ############### `*.pdf` ##### DocumentStoreServlet #################

```
<servlet>
   <servlet-name
>Document Store Servlet</servlet-name>
   <servlet-class
>org.jboss.seam.document.DocumentStoreServlet</servlet-class>
</servlet>

<servlet-mapping>
   <servlet-name
>Document Store Servlet</servlet-name>
   <url-pattern
>*.pdf</url-pattern>
</servlet-mapping
>
```

#################### `use-extensions`
URL

```
<components xmlns="http://jboss.com/products/seam/document"
        xmlns:pdf="http://jboss.com/products/seam/document">
   <document:document-store use-extensions="true" />
</components
>
```

########################### ################### ######################
`documentStore` # `error-page`
###

```
<document:document-store use-extensions="true" error-page="/documentMissing.seam" />
```

18.6.

iText ######## ############

- *iText ######* [http://www.lowagie.com/iText/]
- *iText in Action (########)* [http://www.manning.com/lowagie/]

Microsoft® Excel®

Seam#######*JExcelAPI* [http://jexcelapi.sourceforge.net/]#########Microsoft® Excel® ##the Microsoft® Excel® spreadsheet application#95#97#2

19.1. Microsoft® Excel®

The Microsoft® Excel® spreadsheet application `jboss-seam-excel.jar`. This JAR contains the the Microsoft® Excel® spreadsheet application JSF controls, which are used to construct views that can render the document, and the DocumentStore component, which serves the rendered document to the user. To include the Microsoft® Excel® spreadsheet application support in your application, included `jboss-seam-excel.jar` in your `WEB-INF/lib` directory along with the `jxl.jar` JAR file. Furthermore, you need to configure the DocumentStore servlet in your web.xml

Microsoft® Excel® #################Seam################## Facelets ################ seam-ui #################

`examples/excel` ############Microsoft® Excel® ########################## ######################################

Microsoft® Excel® ######################API##`ExcelWorkbook`#############

```
<excel:excelFactory>
  <property name="implementations">
    <key
>myExcelExporter</key>
    <value
>my.excel.exporter.ExcelExport</value>
  </property>
</excel:excelFactory
>
```

####excel#####components##########

```
xmlns:excel="http://jboss.com/products/seam/excel"
```

####`myExcelExporter`#######UIWorkbook#################################"jxl"####"csv"#########

########.xls#################################*#18.5. #iText* ################

###IE####https##*http://www.nwnetworks.com/iezones.htm/*#####web.xml###################################

19.2.

##############################<h:dataTable>######List#Set#Map#Array#DataModel##############

```
<e:workbook xmlns:e="http://jboss.com/products/seam/excel">
  <e:worksheet>
    <e:cell column="0" row="0" value="Hello world!"/>
  </e:worksheet>
</e:workbook>
```

####################################

```
<e:workbook xmlns:e="http://jboss.com/products/seam/excel">
  <e:worksheet value="#{data}" var="item">
    <e:column>
      <e:cell value="#{item.value}"/>
    </e:column>
  </e:worksheet>
</e:workbook>
```

############workbook##worksheet########worksheet#######

##############################

19.3. workbook##

workbook################worksheet################link###########

`<e:workbook>`	## • `type` —Defines which export module to be used. The value is a string and can be either "jxl" or "csv". The default is "jxl". • `templateURI` —A template that should be used as a basis for the workbook. The value is a string (URI).

- `arrayGrowSize` —The amount of memory by which to increase the amount of memory allocated to storing the workbook data. For processeses reading many small workbooks inside a WAS it might be necessary to reduce the default size Default value is 1 megabyte. The value is a number (bytes).
- `autoFilterDisabled` —Should autofiltering be disabled?. The value is a boolean.
- `cellValidationDisabled` —Shoule cell validation be ignored? The value is a boolean.
- `characterSet` —The character set. This is only used when the spreadsheet is read, and has no effect when the spreadsheet is written. The value is a string (character set encoding).
- `drawingsDisabled` —Should drawings be disabled? The value is a boolean.
- `excelDisplayLanguage` —The language in which the generated file will display. The value is a string (two character ISO 3166 country code).
- `excelRegionalSettings` —The regional settings for the generated excel file. The value is a string (two character ISO 3166 country code).
- `formulaAdjust` —Should formulas be adjusted? The value is a boolean.
- `gcDisabled` —Should garbage collection be disabled? The value is a boolean.
- `ignoreBlanks` —Should blanks be ignored? The value is a boolean.
- `initialFileSize` —The initial amount of memory allocated to store the workbook data when reading a worksheet. For processeses reading many small workbooks inside a WAS it might be necessary to reduce the default size Default value is 5 megabytes. The value is a number (bytes).
- `locale` —The locale used by JExcelApi to generate the spreadsheet. Setting this value has no effect on the language or region of the generated excel file. The value is a string.
- `mergedCellCheckingDisabled` —Should merged cell checking be disabled? The value is a boolean.

- `namesDisabled` —Should handling of names be disabled? The value is a boolean.
- `propertySets` —Should any property sets be enabled (such as macros) to be copied along with the workbook? Leaving this feature enabled will result in the JXL process using more memory. The value is a boolean.
- `rationalization` —Should the cell formats be rationalized before writing out the sheet? The value is a boolean. Default is true.
- `supressWarnings` —Should warnings be suppressed?. Due to the change in logging in version 2.4, this will now set the warning behaviour across the JVM (depending on the type of logger used). The value is a boolean.
- `temporaryFileDuringWriteDirectory` —Used in conjunction with the `useTemporaryFileDuringWrite` setting to set the target directory for the temporary files. This value can be NULL, in which case the normal system default temporary directory is used instead. The value is a string (the directory to which temporary files should be written).
- `useTemporaryFileDuringWrite` —Should a temporary file is used during the generation of the workbook. If not set, the workbook will take place entirely in memory. Setting this flag involves an assessment of the trade-offs between memory usage and performance. The value is a boolean.
- `workbookProtected` —Should the workbook be protected? The value is a boolean.
- `filename` —The filename to use for the download. The value is a string. Please not that if you map the DocumentServlet to some pattern, this file extension must also match.
- `exportKey` —A key under which to store the resulting data in a DocumentData object under the event scope. If used, there is no redirection.

###

- `<e:link/>` —Zero or more stylesheet links (see *#19.14.1. ##########*).
- `<e:worksheet/>` —Zero or more worksheets (see *#19.4. #worksheet###*).

	##### • ##

```
<e:workbook>
  <e:worksheet>
    <e:cell value="Hello World" row="0" column="0"/>
  </e:worksheet>
<e:workbook>
```

################A1####################

19.4. worksheet##

Worksheets are the children of workbooks and the parent of columns and worksheet commands They can also contain explicitly placed cells, formulas, images and hyperlinks. They are the pages that make up the workbook.

`<e:worksheet>`	• `value` —An EL-expression to the backing data. The value is a string. • `var` —The current row iterator variable name that can later be referenced in cell value attributes. The value is a string • `name` —The name of the worksheet. The valus is a string. Defaults to Sheet# where # is the worksheet index. If the given worksheet name exists, that sheet is selected. This can be used for merging several data sets into a single worksheet, just define the same name for them (using `startRow` and `startCol` to make sure that they don't occupy the same space). • `startRow` —Defines the starting row for the data. The value is a number. Used for placing the data in other places than the upper-left corner (especially useful if having multiple data sets for a single worksheet). The defaults is 0. • `startColumn` —Defines the starting column for the data. The value is a number. Used for placing the data in other places than the upper-left corner (especially useful if having multiple data sets for a single worksheet). The default is 0.

- `automaticFormulaCalculation` —Should formulas be automatically calculated? The value is a boolean.
- `bottomMargin` —The bottom margin. The value is a number (inches)
- `copies` —The number of copies. The value is a number.
- `defaultColumnWidth` —The default column width. The value is a number (characters * 256).
- `defaultRowHeight` —The default row height. The value is a number (1/20ths of a point).
- `displayZeroValues` —Should zero-values be displayed? The value is a boolean.
- `fitHeight` —The number of pages vertically that this sheet will be printed into. The value is a number.
- `fitToPages` —Should printing be fit to pages? The value is a boolean.
- `fitWidth` —The number of pages widthwise which this sheet should be printed into. The value is a number.
- `footerMargin` —The margin for any page footer. The value is a number (inches).
- `headerMargin` —The margin for any page headers. The value is a number (inches).
- `hidden` —Should the worksheet be hidden? The value is a boolean.
- `horizontalCentre` —Should the worksheet be centered horizontally? The value is a boolean.
- `horizontalFreeze` —The row at which the pane is frozen vertically. The value is a number.
- `horizontalPrintResolution` —The horizontal print resolution. The value is a number.
- `leftMargin` —The left margin. The value is a number (inches).
- `normalMagnification` —The normal magnificaton factor (not zoom or scale factor). The value is a number (percentage).
- `orientation` —The paper orientation for printing this sheet. The value is a string that can be either "landscape" or "portrait".

- `pageBreakPreviewMagnification` —The page break preview magnificaton factor (not zoom or scale factors). the value is a number (percentage).
- `pageBreakPreviewMode` —Show page in preview mode? The value is a boolean.
- `pageStart` —The page number at which to commence printing. The value is a number.
- `paperSize` —The paper size to be used when printing this sheet. The value is a string that can be one of "a4", "a3", "letter", "legal" etc (see *jxl.format.PaperSize* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/PaperSize.html]).
- `password` —The password for this sheet. The value is a string.
- `passwordHash` —The password hash - used only when copying sheets. The value is a string.
- `printGridLines` —Should grid lines be printed? The value is a boolean.
- `printHeaders` —Should headers be printed? The value is a boolean.
- `sheetProtected` —Should the sheet be protected (read-only)? The value is a boolean.
- `recalculateFormulasBeforeSave` —Should the formulas be re-calculated when the sheet is saved? The value is a boolean. false
- `rightMargin` —The right margin. The value is a number (inches).
- `scaleFactor` —The scale factor for this sheet to be used when printing. The value is a number (percent).
- `selected` —Should the sheet be selected when the workbook opens? The value is a boolean.
- `showGridLines` —Should gridlines be shown? The value is a boolean.
- `topMargin` —The top margin. The value is a number (inches).
- `verticalCentre` —Center verically? The value is a boolean.
- `verticalFreeze` —The row at which the pane is frozen vertically. The value is a number.

- `verticalPrintResolution` —The vertical print resolution. The value is a number.
- `zoomFactor` —T zoom factor. Do not confuse zoom factor (which relates to the on screen view) with scale factor (which refers to the scale factor when printing). The value is a number (percentage.

###

- `<e:printArea/>` —Zero or more print area definitions (see *#19.11. #printArea###printTitle###*).
- `<e:printTitle/>` —Zero or more print title definitions (see *#19.11. #printArea###printTitle###*).
- `<e:headerFooter/>` —Zero or more header/footer definitions ((see *#19.10. #header###footer###*)).
- 0##################*#19.12. ##############*##########

#####

- `header`—Contents that will be placed at the top of the data block, above the column headers (if any)
- `footer`—Contents that will be placed at the bottom of the data block, below the column footers (if any)

```
<e:workbook>
  <e:worksheet name="foo" startColumn="1" startRow="1">
      <e:column value="#{personList}" var="person">
        <f:facet name="header">
          <e:cell value="Last name"/>
        </f:facet>
      <e:cell value="#{person.lastName}"/>
    </e:column>
  </e:worksheet>
<e:workbook>
```

###B2##########"foo"##################

19.5. column##

column####worksheet########cell###image###formula###hyperlink##################################
######

`<e:column>`	## • ## ### • `<e:cell/>` —Zero or more cells (see *#19.6. #cell###*). • `<e:formula/>` —Zero or more formulas (see *#19.7. #formula###*). • `<e:image/>` —Zero or more images (see *#19.8. #image###*). • `<e:hyperLink/>` —Zero or more hyperlinks (see *#19.9. #hyperlink###*). ##### • `header` —This facet can/will contain one `<e:cell>` , `<e:formula>` , `<e:image>` or `<e:hyperLink>` that will be used as header for the column. • `footer` —This facet can/will contain one `<e:cell>` , `<e:formula>` , `<e:image>` or `<e:hyperLink>` that will be used as footer for the column.

```
<e:workbook>
    <e:worksheet>
      <e:column value="#{personList}" var="person">
        <f:facet name="header">
          <e:cell value="Last name"/>
        </f:facet>
        <e:cell value="#{person.lastName}"/>
      </e:column>
    </e:worksheet>
<e:workbook>
```

##########

19.6. cell##

Cells are nested within columns (for iteration) or inside worksheets (for direct placement using the `column` and `row` attributes) and are responsible for outputting the value (usually though en EL-expression involving the `var`-attribute of the datatable. See *???*

`<e:cell>`	## • `column` —The column where to place the cell. The default is the internal counter. The value is a number. Note that the value is 0-based. • `row` —The row where to place the cell. The default is the internal counter. The value is number. Note that the value is 0-based. • `value` —The value to display. Usually an EL-expression referencing the var-attribute of the containing datatable. The value is a string. • `comment` —A comment to add to the cell. The value is a string. • `commentHeight` —The height of the comment. The value is a number (in pixels). • `commentWidth` —A width of the comment. The value is a number (in pixels). ### • `<e:font/>` —Zero or more font definitions (see *???*). • `<e:border/>` —Zero or more border definitions (see *???*). • `<e:background/>` —Zero or more background definitions (see *???*). • 0#################*#19.6.1. #validation*########### ###### • ##

```
        <e:workbook>
          <e:worksheet
>
```

```
            <e:column value="#{personList}" var="person">
              <f:facet name="header">
                  <e:cell value="Last name"/>
                </f:facet>
                <e:cell value="#{person.lastName}"/>
              </e:column>
          </e:worksheet>
        </e:workbook
>
```

##########

19.6.1. validation##

Validations are nested inside cells, formulas or cell templates. They add constrains for the cell data.

`<e:numericValidation` ##	• `value` —The limit (or lower limit where applicable) of the validation. The value is a number.
	• `value2` —The upper limit (where applicable) of the validation. The value is a number.
	• `condition` —The validation condition. The value is a string.
	  • "equal" - #####value#####################
	  • "greater_equal" - #####value###############################
	  • "less_equal" - #####value################################
	  • "less_than" - #####value######################
	  • "not_equal" - #####value########################
	  • "between" - #####value##########value2######################
	  • "not_between" - #####value##########value2######################
	###

	• ## ##### • ##

```
<e:workbook>
  <e:worksheet>
    <e:column value="#{personList}" var="person"
>
      <e:cell value="#{person.age">
        <e:numericValidation condition="between" value="4"
          value2="18"/>
      </e:cell>
    </e:column>
  </e:worksheet>
</e:workbook
>
```

######4#18###################################

`<e:rangeValidation>`	## • `startColumn` —The starting column of the range of values to validate against. The value is a number. • `startRow` —The starting row of the range of values to validate against. The value is a number. • `endColumn` —The ending column of the range of values to validate against. The value is a number. • `endRow` —The ending row of the range of values to validate against. The value is a number. ### • ## #####

	• ##

```
        <e:workbook>
          <e:worksheet>
            <e:column value="#{personList}" var="person"
>
                <e:cell value="#{person.position">
                <e:rangeValidation startColumn="0" startRow="0"
                  endColumn="0" endRow="10"/>
              </e:cell>
            </e:column>
          </e:worksheet>
        </e:workbook
>
```

######A1:A10##

`<e:listValidation>`	## • ## ### • 0####listValidationItem## ##### • ##

e:listValidation#######e:listValidationItem####################

`<e:listValidationIte`	## • `value` —A values to validate against. ### • ##

	##### • ##

```
<e:workbook>
  <e:worksheet>
    <e:column value="#{personList}" var="person"
>
      <e:cell value="#{person.position">
        <e:listValidation>
          <e:listValidationItem value="manager"/>
          <e:listValidationItem value="employee"/>
        </e:listValidation>
      </e:cell>
    </e:column>
  </e:worksheet>
</e:workbook
>
```

#########"manager"####"employee"################################

19.6.2.

Format masks are defined in the mask attribute in cell templates, cells or formulas. *Note that when using templates, the format mask must be placed in the first template* to be cascaded since the constructor hierarchy in `JExcelAPI` used for copying cell formats makes it hard to change the format mask at a later stage. There are two types of format masks, one for numbers and one for dates

19.6.2.1.

##"format1"#"accounting_float"#########
jxl.write.NumberFormats [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/write/NumberFormats.html]##########

################################## *java.text.DecimalFormat* [http://java.sun.com/javase/6/docs/api/java/text/DecimalFormat.html]###########"0.00"################################

19.6.2.2.

##"format1"#"format2"#########
jxl.write.DecimalFormats [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/write/DecimalFormats.html]##########

################################## *java.text.DateFormat* [http://java.sun.com/javase/6/docs/api/java/text/DateFormat.html]#############"dd.MM.yyyy"################################

19.7. formula##

formula####column##################worksheet#####`column`###`row`################################
#cell###########formula###

The formula of the cell in placed in the `value` -attribute as a normal the Microsoft® Excel® spreadsheet application notation. Note that when doing cross-sheet formulas, the worksheets must exist before referencing a formula against them. The value is a string.

```
        <e:workbook>
          <e:cellTemplate name="fooTemplate">
            <e:font color="red"/>
          </e:cellTemplate>
          <e:worksheet name="fooSheet">
            <e:cell column="0" row="0" value="1"/>
          </e:worksheet>
          <e:worksheet name="barSheet">
            <e:cell column="0" row="0" value="2"/>
            <e:formula column="0" row="1"
              value="fooSheet!A1+barSheet1!A1"
              templates="fooTemplate">
              <e:font fontSize="12"/>
            </e:formula>
          </e:worksheet>
        </e:workbook
>
```

####BarSheet#B1####FooSheet#BarSheet#A1#################

19.8. image##

image####column##################worksheet#####`startColumn/startRow`###`rowSpan/columnSpan`######################span####################################

`<e:image>`	## • `startColumn` —The starting column of the image. The default is the internal counter. The value is a number. Note that the value is 0-based. • `startRow` —The starting row of the image. The default is the internal counter. The value is a number. Note that the value is 0-based. • `columnSpan` —The column span of the image. The default is one resulting in the default width of the image. The value is a float. • `rowSpan` —The row span of the image. The default is the one resulting in the default height of the image. The value is a float. • `URI` —The URI to the image. The value is a string. ### • ## ##### • ##

```
<e:workbook>
  <e:worksheet>
    <e:image startRow="0" startColumn="0" rowSpan="4"
      columnSpan="4" URI="http://foo.org/logo.jpg"/>
  </e:worksheet>
</e:workbook
>
```

##########URI####A1:E5##########

19.9. hyperlink##

hyperlink####column##################worksheet#####`startColumn/startRow###endColumn/endRow`##############################URI###############

`<e:hyperlink>`	## • `startColumn` —The starting column of the hyperlink. The default is the internal counter. The value is a number. Note that the value is 0-based. • `startRow` —The starting row of the hyperlink. The default is the internal counter. The value is a number. Note that the value is 0-based. • `endColumn` —The ending column of the hyperlink. The default is the internal counter. The value is a number. Note that the value is 0-based. • `endRow` —The ending row of the hyperlink. The default is the internal counter. The value is a number. Note that the value is 0-based. • `URL` —The URL to link. The value is a string. • `description` —The description of the link. The value is a string. ### • ## ##### • ##

```
        <e:workbook>
          <e:worksheet>
            <e:hyperLink startRow="0" startColumn="0" endRow="4"
              endColumn="4" URL="http://seamframework.org"
              description="The Seam Framework"/>
          </e:worksheet>
        </e:workbook
>
```

####seamframework.org###################A1:E5##########

19.10. header###footer##

header###footer###worksheet##########facet######facet##

`<e:header>`	## • ## ### • ## ##### • `left` —The contents of the left header/footer part. • `center` —The contents of the center header/footer part. • `right` —The contents of the right header/footer part.

`<e:footer>`	## • ## ### • ## ##### • `left` —The contents of the left header/footer part. • `center` —The contents of the center header/footer part. • `right` —The contents of the right header/footer part.

facet##

#date#	############
#page_number#	############

#time#	############
#total_pages#	############
#worksheet_name#	###########
#workbook_name#	###########
#bold#	################bold###########
#italics#	################italic###########
#underline#	###########underline###########
#double_underline#	#############double_underline###########
#outline#	######################outline###########
#shadow#	################shadow###########
#strikethrough#	###############strikethrough###########
#subscript#	################subscript###########
#superscript#	################superscript###########
#superscript#	#############font_name=Verdana###########
#font_size#	################font_size=12###########

```
        <e:workbook>
          <e:worksheet
>
            <e:header>
              <f:facet name="left">
                This document was made on #date# and has #total_pages# pages
              </f:facet>
              <f:facet name="right">
                #time#
              </f:facet>
            </e:header>
          <e:worksheet>
        </e:workbook>
```

19.11. printArea###printTitle##

printArea###printTitle##

`<e:printArea>`	##

	• `firstColumn` —The column of the top-left corner of the area. The parameter is a number. Note that the value is 0-based. • `firstRow` —The row of the top-left corner of the area. The parameter is a number. Note that the value is 0-based. • `lastColumn` —The column of the bottom-right corner of the area. The parameter is a number. Note that the value is 0-based. • `lastRow` —The row of the bottom-right corner of the area. The parameter is a number. Note that the value is 0-based. ### • ## ##### • ##

```
        <e:workbook>
          <e:worksheet
>
            <e:printTitles firstRow="0" firstColumn="0"
              lastRow="0" lastColumn="9"/>
            <e:printArea firstRow="1" firstColumn="0"
              lastRow="9" lastColumn="9"/>
          </e:worksheet>
        </e:workbook>
```

####A1:A10##############B2:J10##############

19.12.

##############workbook#########################

19.12.1.

#################

`<e:groupRows>`	##

	• `startRow` —The row to start the grouping at. The value is a number. Note that the value is 0-based. • `endRow` —The row to end the grouping at. The value is a number. Note that the value is 0-based. • `collapse` —Should the grouping be collapsed initially? The value is a boolean. ### • ## ##### • ##
`<e:groupColumns>`	## • `startColumn` —The column to start the grouping at. The value is a number. Note that the value is 0-based. • `endColumn` —The column to end the grouping at. The value is a number. Note that the value is 0-based. • `collapse` —Should the grouping be collapsed initially? The value is a boolean. ### • ## ##### • ##

```
        <e:workbook>
          <e:worksheet
>
            <e:groupRows startRow="4" endRow="9" collapse="true"/>
            <e:groupColumns startColumn="0" endColumn="9" collapse="false"/>
          </e:worksheet>
        </e:workbook>
```

groups rows 5 trough 10 and columns 5 through 10 so that the rows are initially collapsed (but not the columns).

19.12.2.

##########

`<e:rowPageBreak>`	## • `row` —The row to break at. The value is a number. Note that the value is 0-based. ### • ## ##### • ##

```
        <e:workbook>
          <e:worksheet
>
            <e:rowPageBreak row="4"/>
          </e:worksheet>
        </e:workbook
>
```

####5#############

19.12.3.

#########

`<e:mergeCells>`	##

	• `startRow` —The row to start the merging from. The value is a number. Note that the value is 0-based. • `startColumn` —The column to start the merging from. The value is a number. Note that the value is 0-based. • `endRow` —The row to end the merging at. The value is a number. Note that the value is 0-based. • `endColumn` —The column to end the merging at. The value is a number. Note that the value is 0-based. ###
	• ## ##### • ##

```
        <e:workbook>
          <e:worksheet>
            <e:mergeCells startRow="0" startColumn="0" endRow="9" endColumn="9"/>
          </e:worksheet>
        </e:workbook
>
```

####A1:J10##########

19.13.

######XHML##################JSF#################org.jboss.seam.excel.excelExporter.export##

```
      <h:form id="theForm">
        <h:dataTable id="theDataTable" value="#{personList.personList}"
          var="person">
          ...
        </h:dataTable>
```

```
        </h:form>
```

###Microsoft® Excel®#####################

```
        <h:commandLink
          value="Export"
          action="#{excelExporter.export('theForm:theDataTable')}"
        />
```

##############################s:link###

##############*19.14. ############*#########

19.14.

CSS###font#border#background####CSS############

The CSS attributes cascade down from parent to children and within one tag cascades over the CSS classes referenced in the `styleClass` attributes and finally over the CSS attributes defined in the `style`attribute. You can place them pretty much anywhere but e.g. placing a column width setting in a cell nested within that column makes little sense.

19.14.1.

##########e:link##############e:link####workbook############

`<e:link>`	## • `URL` —The URL to the stylesheet ### • ## ##### • ##

```
        <e:workbook>
          <e:link URL="/css/excel.css"/>
        </e:workbook
>
```

####"/css/excel.css"####################

19.14.2.

###XLS-CSS#########################

xls-font-family	##############OS#########################
xls-font-size	##################
xls-font-color	######### *jxl.format.Colour* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/Colour.html]##########
xls-font-bold	########################"true"####"false"#########
xls-font-italic	########################"true"####"false"#########
xls-font-script-style	################### *jxl.format.ScriptStyle* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/ScriptStyle.html]##########
xls-font-underline-style	############## *jxl.format.UnderlineStyle* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/UnderlineStyle.html]##########
xls-font-struck-out	########################"true"####"false"#########
xls-font	########################'Times New Roman'############################"italic"#"bold"#"struckout"############### Example style="xls-font: red bold italic 22 Verdana"

19.14.3.

This group of XLS-CSS attributes define the borders of the cell

xls-border-left-color	############ *jxl.format.Colour* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/Colour.html]##########
xls-border-left-line-style	################ *jxl.format.LineStyle* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/LineStyle.html]##########

xls-border-left	A shorthand for setting color and line style of the left edge of the cell, e.g style="xls-border-left: red thick"
xls-border-top-color	############## *jxl.format.Colour* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/Colour.html]##########
xls-border-top-line-style	################ *jxl.format.LineStyle* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/LineStyle.html]##########
xls-border-top	A shorthand for setting color and line style of the top edge of the cell, e.g style="xls-border-left: red thick"
xls-border-right-color	############## *jxl.format.Colour* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/Colour.html]##########
xls-border-right-line-style	################ *jxl.format.LineStyle* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/LineStyle.html]##########
xls-border-right	A shorthand for setting color and line style of the right edge of the cell, e.g style="xls-border-right: red thick"
xls-border-bottom-color	############## *jxl.format.Colour* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/Colour.html]##########
xls-border-bottom-line-style	################ *jxl.format.LineStyle* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/LineStyle.html]##########
xls-border-bottom	A shorthand for setting color and line style of the bottom edge of the cell, e.g style="xls-border-bottom: red thick"
xls-border	A shorthand for setting color and line style all edges of the cell, e.g style="xls-border: red thick"

19.14.4.

This group of XLS-CSS attributes define the background of the cell

xls-background-color	####### *jxl.format.LineStyle* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/LineStyle.html]##########
xls-background-pattern	########## *jxl.format.Pattern* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/Pattern.html]##########
xls-background	###

19.14.5.

This group of XLS-CSS attributes define the column widths etc.

xls-column-width	###############5000###########XHTML#########e:column##########

xls-column-widths	##############5000### Example style="xls-column-widths: 5000, 5000, *, 10000"
xls-column-autosize	####################"true"####"false"#########
xls-column-hidden	####################"true"####"false"#########

19.14.6.

This group of XLS-CSS attributes define the cell properties

xls-alignment	################## *jxl.format.Alignment* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/Alignment.html]##########
xls-force-type	####################"general"#"number"#"text"#"date"#"formula"#"bool"##########
xls-format-mask	###############*#19.6.2. ######*########## *#19.6.2. #######*
xls-indentation	#########################
xls-locked	##"true"####"false"#########
xls-orientation	############## *jxl.format.Orientation* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/Orientation.html]##########
xls-vertical-alignment	################## *jxl.format.VerticalAlignment* [http://jexcelapi.sourceforge.net/resources/javadocs/current/docs/jxl/format/VerticalAlignment.html]##########
xls-shrink-to-fit	############################"true"####"false"#########
xls-wrap	####################"true"####"false"#########

19.14.7.

###############XHTML#########XLS-CSS##############################`xls-column-widths`##########UIColumn#style#styleClass###############

19.14.8.

TODO

19.14.9.

###########CSS####################

- When using .xhtml documents, stylesheets must be referenced through the `<e:link> tag`
- ###############CSS#XLS-CSS##

19.15.

The core of the the Microsoft® Excel® spreadsheet application functionality is based on the excellent JExcelAPI library which can be found on http://jexcelapi.sourceforge.net/ and most features and possible limitations are inherited from here.

################################Seam###JBoss Seam JIRA#"excel"#####################################

RSS####

YARFRAW [http://yarfraw.sourceforge.net/]#########Seam#RSS#######################RSS###################"##### #####"#########

20.1.

RSS#############################`WEB-INF/lib`#######`jboss-seam-rss.jar`#############RSS###RSS#########################
#Seam RSS ##############

Seam RSS######### ########Facelets###########

20.2.

`examples/rss` ################ RSS ##RSS###################

################################xhtml######

```
<r:feed
  xmlns="http://www.w3.org/1999/xhtml"
  xmlns:ui="http://java.sun.com/jsf/facelets"
  xmlns:r="http://jboss.com/products/seam/rss"
  title="#{rss.feed.title}"
  uid="#{rss.feed.uid}"
  subtitle="#{rss.feed.subtitle}"
  updated="#{rss.feed.updated}"
  link="#{rss.feed.link}">
  <ui:repeat value="#{rss.feed.entries}" var="entry">
    <r:entry
      uid="#{entry.uid}"
      title="#{entry.title}"
      link="#{entry.link}"
      author="#{entry.author}"
      summary="#{entry.summary}"
      published="#{entry.published}"
      updated="#{entry.updated}"
        />
   </ui:repeat>
</r:feed>
```

20.3.

####################################0####################

`<r:feed>`	## • `uid` —An optional unique feed id. The value is a string. • `title` —The title of the feed. The value is a string. • `subtitle` —The subtitle of the feed. The value is a string. • `updated` —When was the feed updated? The value is a date. • `link` —The link to the source of the information. The value is a string. • `feedFormat` —The feed format. The value is a string and defaults to ATOM1. Valid values are RSS10, RSS20, ATOM03 and ATOM10. ### • `0##############` ##### • `##`

20.4.

###########"headlines"#######

`<r:feed>`	## • `uid` —An optional unique entry id. The value is a string. • `title` —The title of the entry. The value is a string. • `link` —A link to the item. The value is a string. • `author` —The author of the story. The value is a string. • `summary` —The body of the story. The value is a string. • `textFormat` —The format of the body and title of the story. The value is a string and valid values are "text" and "html". Defaults to "html".

	• `published` —When was the story first published? The value is a date. • `updated` —When was the story updated? The value is a date. ### • ## ##### • ##

20.5.

RSS########YARFRAW##############YARFRAW######http://yarfraw.sourceforge.net/ ##

ATOM 1.0############*ATOM1.0##* [http://atompub.org/2005/07/11/draft-ietf-atompub-format-10.html]#######

RSS 2.0############*RSS 2.0##* [http://cyber.law.harvard.edu/rss/rss.html]#######

#####

Seam ## ##

########## `jboss-seam-mail.jar` ########## ## JAR ################## JSF ######### `mailSession` #################

examples/mail ### ################## ##

Seam################################ *#34.3.4. #Seam##########*##

21.1.

Seam#########Facelets##

```
<m:message xmlns="http://www.w3.org/1999/xhtml"
    xmlns:m="http://jboss.com/products/seam/mail"
    xmlns:h="http://java.sun.com/jsf/html">

    <m:from name="Peter" address="peter@example.com" />
    <m:to name="#{person.firstname} #{person.lastname}"
>#{person.address}</m:to>
    <m:subject
>Try out Seam!</m:subject>

    <m:body>
        <p
><h:outputText value="Dear #{person.firstname}" />,</p>
        <p
>You can try out Seam by visiting
        <a href="http://labs.jboss.com/jbossseam"
>http://labs.jboss.com/jbossseam</a
>.</p>
        <p
>Regards,</p>
        <p
>Pete</p>
    </m:body>

</m:message
>
```

<m:message> ############## Seam # email ################### <m:message> ###### ############ <m:from> ### ####### <m:to> ## (###Facelets ########### EL ##############)# ## <m:subject> #########

<m:body> # email ########## HTML ########## JSF ####################

######################## ########### m:message ########### mailSession # email ################ ########### Seam ##########################

```
@In(create=true)
private Renderer renderer;

public void send() {
   try {
      renderer.render("/simple.xhtml");
      facesMessages.add("Email sent successfully");
  }
  catch (Exception e) {
      facesMessages.add("Email sending failed: " + e.getMessage());
  }
}
```

########################

21.1.1.

Seam ########################## ################## java #################

jboss-seam-mail.jar ###### #########

```
<m:attachment value="/WEB-INF/lib/jboss-seam-mail.jar"/>
```

Seam ################## ################## ######## jboss-seam-mail.jar ############## ########### fileName ############

```
<m:attachment value="/WEB-INF/lib/jboss-seam-mail.jar" fileName="this-is-so-cool.jar"/>
```

java.io.File, java.net.URL ##############

```
<m:attachment value="#{numbers}"/>
```

byte[] #### java.io.InputStream

```
<m:attachment value="#{person.photo}" contentType="image/png"/>
```

#######byte[]#java.io.InputStream###############MIME#########################

########## ############# <m:attachment> ###### Seam ## PDF ### JSF ### ##############

```
<m:attachment fileName="tiny.pdf">
   <p:document
>
      A very tiny PDF
   </p:document>
</m:attachment
>
```

#################### (## ##################)# <ui:repeat> ##############

```
<ui:repeat value="#{people}" var="person">
                        <m:attachment       value="#{person.photo}"       contentType="image/jpeg"
 fileName="#{person.firstname}_#{person.lastname}.jpg"/>
</ui:repeat
>
```

################################

```
<m:attachment
   value="#{person.photo}"
   contentType="image/jpeg"
   fileName="#{person.firstname}_#{person.lastname}.jpg"
   status="personPhoto"
   disposition="inline" />
<img src="cid:#{personPhoto.contentId}" />
```

cid:#{...}######################IETF###
ID####################

"status"##

21.1.2. HTML/Text

##################HTML###

```
<m:body>
   <f:facet name="alternative"
>Sorry, your email reader can't show our fancy email,
please go to http://labs.jboss.com/jbossseam to explore Seam.</f:facet>
</m:body
>
```

21.1.3.

##<ui:repeat>##############

```
<ui:repeat value="#{allUsers} var="user">
   <m:to name="#{user.firstname} #{user.lastname}" address="#{user.emailAddress}" />
</ui:repeat
>
```

21.1.4.

(#############)# ########## ######## <ui:repeat>

```
<ui:repeat value="#{people}" var="p">
   <m:message>
      <m:from name="#{person.firstname} #{person.lastname}"
>#{person.address}</m:from>
      <m:to name="#{p.firstname}"
>#{p.address}</m:to>
         ...
   </m:message>
</ui:repeat
>
```

21.1.5.

The mail templating example shows that facelets templating Just Works with the Seam mail tags.

jboss.org # `template.xhtml` ###############

```
<m:message>
  <m:from name="Seam" address="do-not-reply@jboss.com" />
  <m:to name="#{person.firstname} #{person.lastname}"
>#{person.address}</m:to>
  <m:subject
>#{subject}</m:subject>
  <m:body>
    <html>
      <body>
        <ui:insert name="body"
>This is the default body, specified by the template.</ui:insert>
      </body>
    </html>
  </m:body>
</m:message
>
```

jboss.org # `templating.xhtml` ###############

```
<ui:param name="subject" value="Templating with Seam Mail"/>
<ui:define name="body">
   <p
>This example demonstrates that you can easily use <i
>facelets templating</i
> in email!</p>
</ui:define
>
```

`WEB-INF/lib`#jar##############Facelets#####################
Seam######`web.xml`##`.taglib.xml`####################################Seam####JSF################
`web.xml`################

#######Facelets#JSF###

21.1.6.

Seam ###################### ######## JSF ######################### ####################

```
<m:message charset="UTF-8">
  ...
</m:message
```

```
>
```

########################
######################Facelets###

```
<?xml version="1.0" encoding="UTF-8"?>
```

21.1.7.

#####################################Seam####################*21.5.* ####### ##

```
<m:message xmlns:m="http://jboss.com/products/seam/mail"
   importance="low"
   requestReadReceipt="true"/>
```

Otherise you can add any header to the message using the `<m:header>` tag:

```
<m:header name="X-Sent-From" value="JBoss Seam"/>
```

21.2.

If you are using EJB then you can use a MDB (Message Driven Bean) to receive email. JBoss provides a JCA adaptor — `mail-ra.rar` — but the version distributed with JBoss AS has a number of limitations (and isn't bundled in some versions) therefore we recommend using the `mail-ra.rar` distributed with Seam is recommended (it's in the `extras/` directory in the Seam bundle). `mail-ra.rar` should be placed in `$JBOSS_HOME/server/default/deploy`; if the version of JBoss AS you use already has this file, replace it.

#################

```
@MessageDriven(activationConfig={
   @ActivationConfigProperty(propertyName="mailServer", propertyValue="localhost"),
   @ActivationConfigProperty(propertyName="mailFolder", propertyValue="INBOX"),
   @ActivationConfigProperty(propertyName="storeProtocol", propertyValue="pop3"),
   @ActivationConfigProperty(propertyName="userName", propertyValue="seam"),
   @ActivationConfigProperty(propertyName="password", propertyValue="seam")
})
@ResourceAdapter("mail-ra.rar")
```

```
@Name("mailListener")
public class MailListenerMDB implements MailListener {

   @In(create=true)
   private OrderProcessor orderProcessor;

   public void onMessage(Message message) {
     // Process the message
     orderProcessor.process(message.getSubject());
   }

}
```

##########onMessage(Message message)#########
MDB#########Seam#################MDB###persistence context##############

You can find more information on`mail-ra.rar` at *http://wiki.jboss.org/wiki/Wiki.jsp?page=InboundJavaMail*.

JBoss AS############################`mail-ra.rar`##

21.3.

Seam#########################`jboss-seam-mail.jar`#`WEB-INF/lib`########## JBoss AS############################Seam############################## JBoss AS##############JavaMailAPI#############JBoss AS######API#Impl#`lib/mail.jar`###Seam##################Java Activation Framework#####`lib/activation.jar`###Seam################################

##

The Seam Email module requires the use of Facelets as the view technology. Future versions of the library may also support the use of JSP. Additionally, it requires the use of the seam-ui package.

`mailSession`########SMTP###########JavaMail#########

21.3.1. `mailSession`

JEE ########## ### Seam ###Session############### JNDI ########javaMail#Session##############

mailSession##################*#31.8. ################*##########

21.3.1.1. JBoss AS # JNDI

JBossAS `deploy/mail-service.xml` # JNDI ####### JavaMail#Session########## ## ############ *http://wiki.jboss.org/wiki/Wiki.jsp?page=JavaMail* ##########

```
<components xmlns="http://jboss.com/products/seam/components"
   xmlns:core="http://jboss.com/products/seam/core"
   xmlns:mail="http://jboss.com/products/seam/mail">

   <mail:mail-session session-jndi-name="java:/Mail"/>

</components
>
```

Seam # JNDI ## `java:/Mail` #####mailSession##############

21.3.1.2. Seam ###Session

mailSession#`components.xml`############
#####`smtp.example.com`###Seam#smtp####################

```
<components xmlns="http://jboss.com/products/seam/components"
   xmlns:core="http://jboss.com/products/seam/core"
   xmlns:mail="http://jboss.com/products/seam/mail">

   <mail:mail-session host="smtp.example.com"/>

</components
>
```

21.4. Meldware

Meldware###############Seam#########*buni.org* [http://buni.org]#### Meldware#`SMTP`, `POP3`, `IMAP`#webmail####################################JEE####################Seam###########JBoss AS##############

##

Seam##########Meldware###
###Meldware##########buni.org [http://buni.org]#################################

21.5.

`http://jboss.com/products/seam/mail` ##################### ###################### `message` ########## ######## Seam

Facelets############################
#############JSF#########################Javascript#######################`urlBase`##########

<m:message>
###############

- `importance` —##########(low,normal,high)#######normal##
- `precedence` —######################
- `requestReadReceipt` —######false########## true#################`From:` ##################
- `urlBase` — #######`urlBase`#`requestContextPath`########### `<h:graphicImage>`#########################
- `messageId` — #####ID###########

<m:from>
############From:)######################

- `name` —#########
- `address` — ###############

<m:replyTo>
############(Reply-to:)#### ##############################

- `address` — ###############

<m:to>
<m:to> ######### ##### <ui:repeat>.

- `name` — ######
- `address` — ###########

<m:cc>

email # CC ########## CC ########## <m:cc> ######### ##### <ui:repeat> ######################

- `name` — ######
- `address` — ###########

<m:bcc>

email # BCC ########## BCC ########## <m:bcc> ######### ##### <ui:repeat> ######################

- `name` — ######
- `address` — ###########

<m:header>

#################`X-Sent-From: JBoss Seam`)

- `name` — ########## (e.g. `X-Sent-From`).
- `value` —#############`JBoss Seam`#

<m:attachment>

##########

- `value` — ######:
  - `String` —`String`########################
  - `java.io.File` —EL##`File` ##################
  - `java.net.URL` — EL##`URL`#################
  - `java.io.InputStream` — EL##`InputStream`#################`fileName`#`contentType`################
  - `byte[]`— EL## `byte[]`.#################`fileName`#`contentType`################

  ############

  - If this tag contains a `<p:document>` tag, the document described will be generated and attached to the email. A `fileName` should be specfied.
  - If this tag contains other JSF tags a HTML document will be generated from them and attached to the email. A `fileName` should be specfied.
- `fileName` — ###############
- `contentType` —#######MIME######

<m:subject>
    ###########

<m:body>
    ##########
    alternative########HTML##########html##

    - type — plain####################################HTML##########

##########

Seam makes it very easy to perform work asynchronously from a web request. When most people think of asynchronicity in Java EE, they think of using JMS. This is certainly one way to approach the problem in Seam, and is the right way when you have strict and well-defined quality of service requirements. Seam makes it easy to send and recieve JMS messages using Seam components.

But for many usecases, JMS is overkill. Seam layers a simple asynchronous method and event facility over your choice of *dispatchers*:

- `java.util.concurrent.ScheduledThreadPoolExecutor` (#####)
- EJB ######## (EJB 3.0 ####)
- Quartz

22.1.

##
`ScheduledThreadPoolExecutor` ##################################
EJB 3.0
`components.xml` #######

```
<async:timer-service-dispatcher/>
```

################## EJB ########################
################################## Seam
EJB 3.0
###################### ############################

######### ######## Quartz ############################## EAR # Quartz #####
JAR (`lib` #########) ####### `application.xml` # Java ###################
Quartz ############## Quartz ######################### `seam.quartz.properties`
############# ### #### `components.xml` ##### Quartz ########################

```
<async:quartz-dispatcher/>
```

`ScheduledThreadPoolExecutor` # Seam API# EJB3 `Timer`# Quartz `Scheduler`
############# `components.xml` # 1 ######################

22.1.1.

(########)
###
###AJAX#########################

EJB###

```
@Local
public interface PaymentHandler
{
   @Asynchronous
   public void processPayment(Payment payment);
}
```

(JavaBean ########## ##################################)

########bean###########

```
@Stateless
@Name("paymentHandler")
public class PaymentHandlerBean implements PaymentHandler
{
   public void processPayment(Payment payment)
   {
      //do some work!
   }
}
```

####################

```
@Stateful
@Name("paymentAction")
public class CreatePaymentAction
{
   @In(create=true) PaymentHandler paymentHandler;
   @In Bill bill;

   public String pay()
   {
      paymentHandler.processPayment( new Payment(bill) );
      return "success";
```

```
   }
}
```

```
##############################          ######################################
#########################

#############@Duration#@Expiration#                @IntervalDuration############
######################
```

```
@Local
public interface PaymentHandler
{
   @Asynchronous
   public void processScheduledPayment(Payment payment, @Expiration Date date);

   @Asynchronous
   public void processRecurringPayment(Payment payment,
                                       @Expiration Date date,
                                       @IntervalDuration Long interval)'
}
```

```
@Stateful
@Name("paymentAction")
public class CreatePaymentAction
{
   @In(create=true) PaymentHandler paymentHandler;
   @In Bill bill;

   public String schedulePayment()
   {
      paymentHandler.processScheduledPayment( new Payment(bill), bill.getDueDate() );
      return "success";
   }

   public String scheduleRecurringPayment()
   {
      paymentHandler.processRecurringPayment( new Payment(bill), bill.getDueDate(),
                                       ONE_MONTH );
      return "success";
   }
}
```

####### ################## Timer ###################### ##### Timer ####### EJB3 ################ EJB 3 ########### ###### ScheduledThreadPoolExecutor #### ########### JDK ### Future ###### Quartz ########### QuartzTriggerHandle ###### ########################

```
@Local
public interface PaymentHandler
{
   @Asynchronous
   public Timer processScheduledPayment(Payment payment, @Expiration Date date);
}
```

```
@Stateless
@Name("paymentHandler")
public class PaymentHandlerBean implements PaymentHandler
{
   @In Timer timer;

   public Timer processScheduledPayment(Payment payment, @Expiration Date date)
   {
      //do some work!

      return timer; //note that return value is completely ignored
   }

}
```

```
@Stateful
@Name("paymentAction")
public class CreatePaymentAction
{
   @In(create=true) PaymentHandler paymentHandler;
   @In Bill bill;

   public String schedulePayment()
   {
      Timer timer = paymentHandler.processScheduledPayment( new Payment(bill),
                                                bill.getDueDate() );
      return "success";
   }
```

```
}
```

################################

22.1.2. Quartz

Quartz ####### (######################) ######## @Asynchronous# @Duration# @Expiration# @IntervalDuration ################ #### ############ Quartz ######## 3 ####################

@FinalExpiration ######################## QuartzTriggerHandle ######################

```
    @In QuartzTriggerHandle timer;

  // Defines the method in the "processor" component
  @Asynchronous
  public QuartzTriggerHandle schedulePayment(@Expiration Date when,
                      @IntervalDuration Long interval,
                      @FinalExpiration Date endDate,
                      Payment payment)
  {
     // do the repeating or long running task until endDate
  }

  ... ...

  // Schedule the task in the business logic processing code
  // Starts now, repeats every hour, and ends on May 10th, 2010
  Calendar cal = Calendar.getInstance ();
  cal.set (2010, Calendar.MAY, 10);
  processor.schedulePayment(new Date(), 60*60*1000, cal.getTime(), payment);
```

####### QuartzTriggerHandle ############## ################### ##### ############### QuartzTriggerHandle ###################### ##

```
QuartzTriggerHandle handle =
       processor.schedulePayment(payment.getPaymentDate(),
                          payment.getPaymentCron(),
                          payment);
     payment.setQuartzTriggerHandle( handle );
```

```
    // Save payment to DB

    // later ...

    // Retrieve payment from DB
    // Cancel the remaining scheduled tasks
    payment.getQuartzTriggerHandle().cancel();
```

`@IntervalCron` ######################## Unix cron ############## ##### ########## 3 ####### 2:10pm # 2:44pm ########

```
// Define the method
@Asynchronous
public QuartzTriggerHandle schedulePayment(@Expiration Date when,
                    @IntervalCron String cron,
                    Payment payment)
{
   // do the repeating or long running task
}

... ...

// Schedule the task in the business logic processing code
QuartzTriggerHandle handle =
  processor.schedulePayment(new Date(), "0 10,44 14 ? 3 WED", payment);
```

`@IntervalBusinessDay` ##########X######################## ##### ##############2#### 14:00 ######## ######## 2010 ###################################

```
// Define the method
@Asynchronous
public QuartzTriggerHandle schedulePayment(@Expiration Date when,
                    @IntervalBusinessDay NthBusinessDay nth,
                    Payment payment)
{
   // do the repeating or long running task
}

... ...
```

```
    // Schedule the task in the business logic processing code
    QuartzTriggerHandle handle =
      processor.schedulePayment(new Date(),
         new NthBusinessDay(2, "14:00", WEEKLY), payment);
```

NthBusinessDay ########################## additionalHolidays
######################### (## ######## ##############)#

```
public class NthBusinessDay implements Serializable
{
    int n;
    String fireAtTime;
    List <Date
> additionalHolidays;
    BusinessDayIntervalType interval;
    boolean excludeWeekends;
    boolean excludeUsFederalHolidays;

    public enum BusinessDayIntervalType { WEEKLY, MONTHLY, YEARLY }

    public NthBusinessDay ()
    {
      n = 1;
      fireAtTime = "12:00";
      additionalHolidays = new ArrayList <Date
> ();
      interval = BusinessDayIntervalType.WEEKLY;
      excludeWeekends = true;
      excludeUsFederalHolidays = true;
    }
    ... ...
}
```

@IntervalDuration# @IntervalCron# @IntervalNthBusinessDay ##################
############## RuntimeException #########

22.1.3.

############################## ################## Events #
raiseAsynchronousEvent() ############## ######################
raiseTimedEvent() ######### *schedule* ##########
(################################### TimerSchedule #####)#

##################################
###

22.1.4.

java.util.concurrent
###################################### EJB3 ####################
############################## Seam ######################

######## ##
org.jboss.seam.async.asynchronousExceptionHandler
##

```
@Scope(ScopeType.STATELESS)
@Name("org.jboss.seam.async.asynchronousExceptionHandler")
public class MyAsynchronousExceptionHandler extends AsynchronousExceptionHandler {

  @Logger Log log;

  @In Future timer;

  @Override
  public void handleException(Exception exception) {
    log.debug(exception);
    timer.cancel(false);
  }

}
```

Here, for example, using `java.util.concurrent` dispatcher, we inject it's control object and cancel all future invocations when an exception is encountered

`public void handleAsynchronousException(Exception exception);`
################################### #####

```
  public void handleAsynchronousException(Exception exception) {
    log.fatal(exception);
  }
```

22.2. Seam

Seam # Seam ######## JMS ##################

22.2.1.

JMS ########### Seam ################### Seam # ################################## ## QueueConnectionFactory # TopicConnectionFactory ############################

Seam ########JBossMQ ################ UIL2ConnectionFactory ######## ######## JMS ################ seam.properties#web.xml #####components.xml ## queueConnection.queueConnectionFactoryJndiName# topicConnection.topicConnectionFactoryJndiName ######################

Seam ### TopicPublisher #### QueueSender ############## components.xml ## topic ### queue ##############

```
<jms:managed-topic-publisher name="stockTickerPublisher"
                     auto-create="true"
                     topic-jndi-name="topic/stockTickerTopic"/>

<jms:managed-queue-sender name="paymentQueueSender"
                    auto-create="true"
                    queue-jndi-name="queue/paymentQueue"/>
```

22.2.2.

JMS TopicPublisher ## TopicSession ############################

```
@In
private TopicPublisher stockTickerPublisher;
@In
private TopicSession topicSession;

public void publish(StockPrice price) {
    try
    {
      stockTickerPublisher.publish( topicSession.createObjectMessage(price) );
    }
    catch (Exception ex)
    {
      throw new RuntimeException(ex);
    }
}
```

#####Queue #############

```
@In
private QueueSender paymentQueueSender;
@In
private QueueSession queueSession;

public void publish(Payment payment) {
    try
    {
      paymentQueueSender.send( queueSession.createObjectMessage(payment) );
    }
    catch (Exception ex)
    {
      throw new RuntimeException(ex);
    }
}
```

22.2.3. ######## Bean

EJB3 ######## Bean ################### ######## Bean # Seam ################### ############################ Seam ####################

22.2.4.

Seam Remoting ############ JavaScript ## JMS ######################## ######## # 25. ######## ###########

#####

In almost all enterprise applications, the database is the primary bottleneck, and the least scalable tier of the runtime environment. People from a PHP/Ruby environment will try to tell you that so-called "shared nothing" architectures scale well. While that may be literally true, I don't know of many interesting multi-user applications which can be implemented with no sharing of resources between different nodes of the cluster. What these silly people are really thinking of is a "share nothing except for the database" architecture. Of course, sharing the database is the primary problem with scaling a multi-user application—so the claim that this architecture is highly scalable is absurd, and tells you a lot about the kind of applications that these folks spend most of their time working on.

##

##################1##########
Seam###

- ###
- ORM########Hibernate#####JPA##################2#############
  ##################################
  ##
  ##################################
  ######################2##
  ##Seam##########
- Seam#########################
  ##
- ###Seam#######################################Bean########EJB#################################
- ##################Seam##################################
  ##
- #############JBossCache#JBoss POJO
  Cache#EHCache#######Seam#cacheProvider##################
  ##
- #############JSF######################
  ORM########2##
  ##

2################################ORM##########################cacheProvider########<s:cache>

23.1. Seam###########

#####cacheProvider#######################

JBoss Cache 1.x #JBoss 4.2.x##################

```
org.jboss.cache.TreeCache
```

JBoss Cache 2.x #JBoss 5..x##################

```
org.jboss.cache.Cache
```

JBoss POJO Cache 1.x #JBoss 4.2.x##################

```
org.jboss.cache.aop.PojoCache
```

EHCache ####################

```
net.sf.ehcache.CacheManager
```

###Java###

`cacheProvider`######################jar####################

JBoss Cache 1.x

- `jboss-cache.jar` - JBoss Cache 1.4.1
- `jgroups.jar` - JGroups 2.4.1

JBoss Cache 2.x

- `jboss-cache.jar` - JBoss Cache 2.2.0
- `jgroups.jar` - JGroups 2.6.2

JBoss POJO Cache 1.x

- `jboss-cache.jar` - JBoss Cache 1.4.1
- `jgroups.jar` - JGroups 2.4.1
- `jboss-aop.jar` - JBoss AOP 1.5.0

EHCache

- `ehcache.jar` - EHCache 1.2.3

####

JBoss####################JBossCache#########################JBossCac wiki [http://wiki.jboss.org/wiki/JBossCache]##############

Seam#EAR##################jar#############EAR#################

JBossCache####################`treecache.xml`################################EJB JAR#####`WEB-INF/classes`####JBossCache##JBossCache#############

`treecache.xml`######`examples/blog/resources/treecache.xml`######

EHCache############################

##############components.xml##################

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:cache="http://jboss.com/products/seam/cache">
  <cache:jboss-cache-provider configuration="META-INF/cache/treecache.xml" />
</components
>
```

Seam####################################

```
@Name("chatroom")
public class Chatroom {
  @In CacheProvider cacheProvider;

  public void join(String username) {
    Set<String
> userList = (Set<String
>) pojoCache.get("chatroom", "userList");
    if (userList==null) {
      userList = new HashSet<String
>();
      cacheProvider.put("chatroom", "userList", userList);
    }
    userList.put(username);
  }
}
```

################components.xml##########

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:cache="http://jboss.com/products/seam/cache">
  <cache:jboss-cache-provider name="myCache" configuration="myown/cache.xml"/>
  <cache:jboss-cache-provider name="myOtherCache" configuration="myother/cache.xml"/>
</components
>
```

23.2.

Seam####################JSF####################<s:cache>#####<s:cache>#####pojoCache#####

`<s:cache>`##################################
########blog#########blog############

```
<s:cache key="recentEntries-#{blog.id}" region="welcomePageFragments">
  <h:dataTable value="#{blog.recentEntries}" var="blogEntry">
    <h:column>
      <h3
>#{blogEntry.title}</h3>
      <div>
        <s:formattedText value="#{blogEntry.body}"/>
      </div>
    </h:column>
  </h:dataTable>
</s:cache
>
```

`key`###blog#########################`region`#####

`<s:cache>` ######## ################ (###### ### blog #########)
########################

```
public void post() {
   ...
   entityManager.persist(blogEntry);
   cacheProvider.remove("welcomePageFragments", "recentEntries-" + blog.getId() );
}
```

################################JBossCache#######################

Web####

Seam#JBossWS###########JEE
#Web##############Web##########Seam#####################################Seam###Web#########

24.1.

Web#######Seam#################Seam#####################################SOAP##############

############`standard-jaxws-endpoint-config.xml`##Web##########jar#####`META-INF`#################################SOAP################

```
<jaxws-config xmlns="urn:jboss:jaxws-config:2.0"
              xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
              xmlns:javaee="http://java.sun.com/xml/ns/javaee"
              xsi:schemaLocation="urn:jboss:jaxws-config:2.0 jaxws-config_2_0.xsd">
  <endpoint-config>
    <config-name
>Seam WebService Endpoint</config-name>
    <pre-handler-chains>
      <javaee:handler-chain>
        <javaee:protocol-bindings
>##SOAP11_HTTP</javaee:protocol-bindings>
          <javaee:handler>
            <javaee:handler-name
>SOAP Request Handler</javaee:handler-name>
            <javaee:handler-class
>org.jboss.seam.webservice.SOAPRequestHandler</javaee:handler-class>
          </javaee:handler>
        </javaee:handler-chain>
    </pre-handler-chains>
  </endpoint-config>
</jaxws-config
>
```

24.2. ###Web####

###Web#############################
Seam###SOAP##############SOAP############conversation ID##conversation ID###Web##############

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
```

```
   xmlns:seam="http://seambay.example.seam.jboss.org/">
  <soapenv:Header>
    <seam:conversationId xmlns:seam='http://www.jboss.org/seam/webservice'
>2</seam:conversationId>
  </soapenv:Header>
  <soapenv:Body>
    <seam:confirmAuction/>
  </soapenv:Body>
</soapenv:Envelope
>
```

###SOAP###############SOAP###############conversation ID#####2####conversationId###############Web## ID###################Web###############

######### conversationId#######http://www.jboss.org/seam/webservice################################Seam#######conversation ID##

```
<env:Envelope xmlns:env='http://schemas.xmlsoap.org/soap/envelope/'>
  <env:Header>
    <seam:conversationId xmlns:seam='http://www.jboss.org/seam/webservice'
>2</seam:conversationId>
  </env:Header>
  <env:Body>
    <confirmAuctionResponse xmlns="http://seambay.example.seam.jboss.org/"/>
  </env:Body>
</env:Envelope
>
```

########################conversationId###########

24.2.1.

Web##################Bean####POJO########################Web##########Seam#################

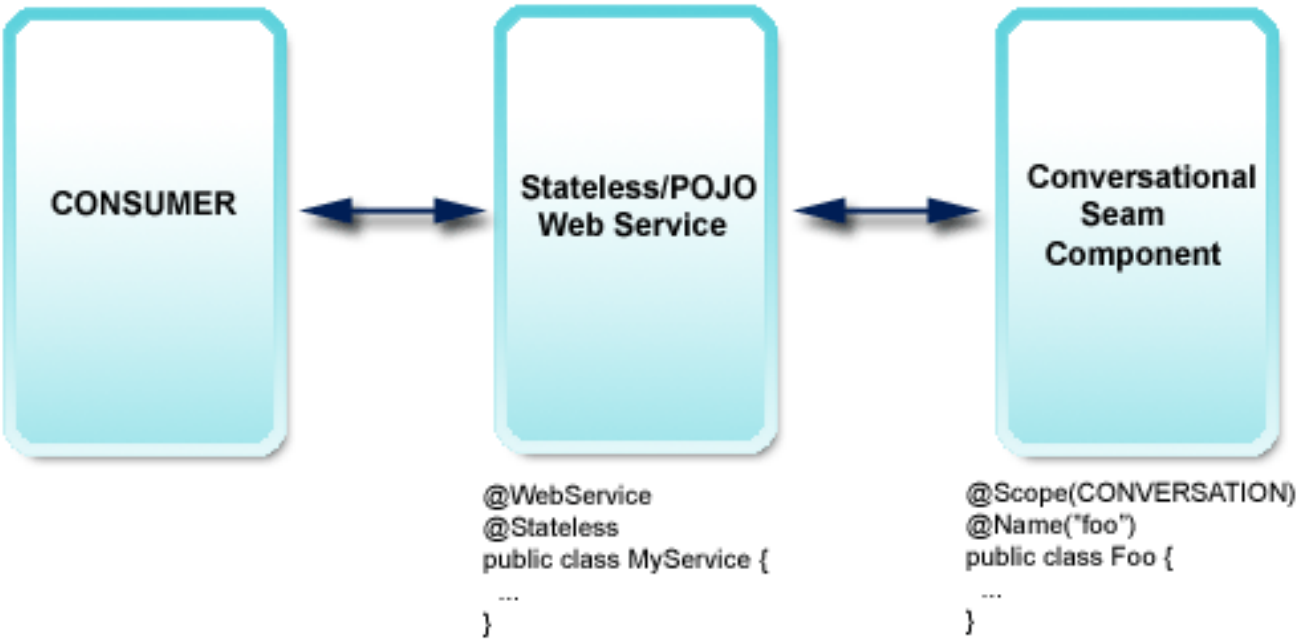

###########Bean######Web########@Name#####Seam##########################Seam##############

24.3. Web######

Web#################################Seam#/examples#########seamBay#####################################Web#########################

```
@Stateless
@WebService(name = "AuctionService", serviceName = "AuctionService")
public class AuctionService implements AuctionServiceRemote
{
  @WebMethod
  public boolean login(String username, String password)
  {
    Identity.instance().setUsername(username);
    Identity.instance().setPassword(password);
    Identity.instance().login();
    return Identity.instance().isLoggedIn();
  }

  // snip
}
```

####Web#################Bean##JSR-181###########javax.jws######JWS#######################@WebService###############Web########login()#####@WebMethod########Web#####################@WebService########name#serviceName###

#########Web##########################Web#####################################Web########
#######AuctionServiceRemote########@WebMethod################login()#################

#############Web#########login()######Seam#####Identity#####################################

#################Web##########AuctionAction.createAuction()#########################

```
@WebMethod
public void createAuction(String title, String description, int categoryId)
{
   AuctionAction action = (AuctionAction) Component.getInstance(AuctionAction.class, true);
   action.createAuction();
   action.setDetails(title, description, categoryId);
}
```

####AuctionAction#########

```
@Begin
public void createAuction()
{
   auction = new Auction();
   auction.setAccount(authenticatedAccount);
   auction.setStatus(Auction.STATUS_UNLISTED);
   durationDays = DEFAULT_AUCTION_DURATION;
}
```

######Web#####################Seam#################################

24.4. RESTEasy ###RESTful HTTP Web####

Seam#JAX-RS ##(JSR 311)###RESTEasy################Seam#############”##”#############################

- RESTEasy ######################################
- SeamResourceServlet ###HTTP/REST ################web.xml ########
- Seam ######################Seam#######################################

24.4.1. RESTEasy

######RESTEasy###### jaxrs-api.jar###jboss-seam-resteasy.jar#########

######@javax.ws.rs.Path#########################HTTP##############Seam#######SeamResourceServ

- ################URI#SeamResourceServlet####web.xml##################/seam/resource##################RESTful ##Seam#########s:graphicImage###############
- ##Seam#RESTEasy ################################### / rest#################################/seam/resource/ rest#####################################REST API ################################/seam/resource/ restv1#######################################URI##########
- #### #############@Path#####################@Path("/customer")############/seam/resource/rest/customer##########

##################http://your.hostname/seam/resource/rest/customer/123###URI#########GET#######################

```
@Path("/customer")
public class MyCustomerResource {

   @GET
   @Path("/{customerId}")
   @ProduceMime("text/plain")
   public String getCustomer(@PathParam("customerId") int id) {
       return ...;
   }

}
```

##web.xml############################Seam##########RESTEa

```
<components
  xmlns="http://jboss.com/products/seam/components"
  xmlns:resteasy="http://jboss.com/products/seam/resteasy"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation=
    http://jboss.com/products/seam/resteasy
       http://jboss.com/products/seam/resteasy-2.1.xsd
    http://jboss.com/products/seam/components
       http://jboss.com/products/seam/components-2.1.xsd"
>
```

###########/rest###############

```
<resteasy:application-config resource-path-prefix="/restv1"/>
```

###################/seam/resource/restv1/
{resource}#########@Path#####################HTTP
API#################################

###

```
<resteasy:application-config strip-seam-resource-path="false"/>
```

###################@Path("/seam/resource/rest/
customer")###

###########@javax.ws.rs.Path#######@javax.ws.rs.ext.Provider#######Seam#####################

```
<resteasy:application-config
    scan-providers="false"
    scan-resources="false"
    use-builtin-providers="true">

    <resteasy:resource-class-names>
        <value
>org.foo.MyCustomerResource</value>
        <value
>org.foo.MyOrderResource</value>
    </resteasy:resource-class-names>

    <resteasy:provider-class-names>
        <value
>org.foo.MyFancyProvider</value>
    </resteasy:provider-class-names>

 </resteasy:application-config
>
```

use-built-in-providers##RESTEasy#################################
#########JSON#JAXB#####################################

###############URI###########

```
<resteasy:application-config>

   <resteasy:media-type-mappings>
      <key
>txt</key
><value
>text/plain</value>
   </resteasy:media-type-mappings>

   <resteasy:language-mappings>
      <key
>deutsch</key
><value
>de-DE</value>
   </resteasy:language-mappings>

</resteasy:application-config
>
```

`#########.txt.deutsch` ###URI############`Accept`###`Accept-Language`########`text/plain#de-DE`##############

24.4.2. Seam

############################RESTEasy##########################RESTEasy#########################RS###

############Seam##############################Seam###

```
@Name("customerResource")
@Path("/customer")
public class MyCustomerResource {

   @In
   CustomerDAO customerDAO;

   @GET
   @Path("/{customerId}")
   @ProduceMime("text/plain")
   public String getCustomer(@PathParam("customerId") int id) {
       return customerDAO.find(id).getName();
   }
```

```
}
```

###############customerResource########Seam#################EVENT-#####Seam JavaBean#################JAX-RS############################Sema#############Seam#####################################SESSION APPLICATION#### STATELESS###HTTP#####################

###

#############Seam###################APPLICATION-scoped####STATELESS###########

##############Seam##########EJB#JavaBeans#############

#######

Seam ## Web ##### AJAX (Asynchronous Javascript and XML) ################################## ######### Seam ### ##################### - ############### AJAX ################################ ###### AJAX ### Web ######################## ###Seam Remoting ########################

25.1.

####################web.xml######Seam Resource###################

```
<servlet>
  <servlet-name
>Seam Resource Servlet</servlet-name>
  <servlet-class
>org.jboss.seam.servlet.SeamResourceServlet</servlet-class>
</servlet>

<servlet-mapping>
  <servlet-name
>Seam Resource Servlet</servlet-name>
  <url-pattern
>/seam/resource/*</url-pattern>
</servlet-mapping
>
```

########Web#######JavaScript###

```
<script type="text/javascript" src="seam/resource/remoting/resource/remote.js"
></script
>
```

########### ################################
#####################################
###
############################ #### @Name("customerAction")
######################### Bean ###### ###################

```
<script type="text/javascript"
        src="seam/resource/remoting/interface.js?customerAction"
></script
```

```
>
```

##

```
<script type="text/javascript"
      src="seam/resource/remoting/interface.js?customerAction&accountAction"
></script
>
```

Javascript ####### s:remote
#####################################

```
 <s:remote include="customerAction,accountAction"/>
```

25.2. "Seam"######

########################## ### Seam Javascript ############### ######### remote.js
###################
Seam.Component ###################### Seam.Remoting ### ######################
#################

25.2.1. Hello World

Seam ######################## ######################## ######helloAction
######## Seam ################

```
@Stateless
@Name("helloAction")
public class HelloAction implements HelloLocal {
   public String sayHello(String name) {
      return "Hello, " + name;
   }
}
```

#################################### @WebRemote ###################
################################

```
@Local
public interface HelloLocal {
  @WebRemote
  public String sayHello(String name);
}
```

########################## #####WEB ####### - ############ `helloAction` ##################

```
<s:remote include="helloAction"/>
```

##

```
<button onclick="javascript:sayHello()"
>Say Hello</button
>
```

##

```
<script type="text/javascript">
  //<![CDATA[

  function sayHello() {
    var name = prompt("What is your name?");
    Seam.Component.getInstance("helloAction").sayHello(name, sayHelloCallback);
  }

  function sayHelloCallback(result) {
    alert(result);
  }

   // ]]>
</script
>
```

######! ############################ ################################ ############### hello ######################### ################ Seam # `/examples/remoting/helloworld` ######### Hello World ##################

############################## ################################ Javascript ############## ## ##############

```
Seam.Component.getInstance("helloAction").sayHello(name, sayHelloCallback);
```

######### Seam.Component.getInstance("helloAction") ## helloAction ##################"###"###### ################################ ################ sayHello(name, sayHelloCallback); ######

########################sayHello########## ########name######## #########sayHelloCallback## ########## sayHello################## ######Seam Remoting ###################### ### sayHelloCallback Javascript ################## ########################## ### void ############# ################### ################

sayHelloCallback############################## ################################

25.2.2. Seam.Component

Seam.Component Javascript ######## Seam ################################ ##########newInstance()# getInstance()## ################ ##########newInstance() ####################################getInstance()######################

25.2.2.1. Seam.Component.newInstance()

################JavaBean ################################## ###################### ################ getter/setter ######### ## ######## Seam ###### ###############

```
@Name("customer")
@Entity
public class Customer implements Serializable
{
  private Integer customerId;
  private String firstName;
  private String lastName;

  @Column public Integer getCustomerId() {
    return customerId;
  }

  public void setCustomerId(Integer customerId} {
    this.customerId = customerId;
```

```
  }

  @Column public String getFirstName() {
    return firstName;
  }

  public void setFirstName(String firstName) {
    this.firstName = firstName;
  }

  @Column public String getLastName() {
    return lastName;
  }

  public void setLastName(String lastName) {
    this.lastName = lastName;
  }
}
```

######### Customer ######################

```
var customer = Seam.Component.newInstance("customer");
```

######### customer ######################

```
customer.setFirstName("John");
// Or you can set the fields directly
customer.lastName = "Smith";
```

25.2.2.2. Seam.Component.getInstance()

`getInstance()######` Seam ##### Bean ##############################
################################## ##############################
##

##############
###customer###############customerAction########saveCustomer()#############

```
Seam.Component.getInstance("customerAction").saveCustomer(customer);
```

25.2.2.3. Seam.Component.getComponentName()

###################################### ############### `null` ######

```
if (Seam.Component.getComponentName(instance) == "customer")
  alert("Customer");
else if (Seam.Component.getComponentName(instance) == "staff")
  alert("Staff member");
```

25.2.3. Seam.Remoting

Seam Remoting ###################`Seam.Remoting`############# ######################## ####################

25.2.3.1. Seam.Remoting.createType()

######### Seam ########### JavaBean ################# ## ################## `createType()` ############## ############## Java #############

```
var widget = Seam.Remoting.createType("com.acme.widgets.MyWidget");
```

25.2.3.2. Seam.Remoting.getTypeName()

######################### `Seam.Component.getComponentName()` ###### ######################### ################ `null` ###### ########## Java ###########

25.3. EL

Seam Remoting # EL ############ ################################ `Seam.Remoting.eval()` ######## EL ## ##################### ########## ######## EL ##### ## #########

```
function customersCallback(customers) {
  for (var i = 0; i < customers.length; i++) {
    alert("Got customer: " + customers[i].getName());
  }
}

Seam.Remoting.eval("#{customers}", customersCallback);
```

#{customers} ### Seam ######### ##### (#### Customer #########) #customersCallback() ########## ################## Javascript ################################### (s:remote)# ###### customer ################## customer

```
<s:remote include="customer"/>
```

25.4.

############## ######################### seam/resource/remoting/interface.js ################ s:remote ##############

```
<script type="text/javascript"
      src="seam/resource/remoting/interface.js?customerAction"
></script
>
```

```
<s:remote include="customerAction"/>
```

#########################
##

Bean ########################### ### ##############

################### Seam ################### ############# Bean #### ############### ##### ####### JavaBean ###################### ################ ######## JavaBean (######### Bean # ###### Bean ######) #### ############ @WebRemote ############# ########################## ###### ##### Bean ########## EJB ### JavaBean ##

25.5.

Seam ############ ########## / ############################### ####### ID ##############################

25.5.1. ## ID

########################## Seam Remoting############ID
################################ ID
##########Seam.Remoting.getContext().getConversationId()######## #######ID
##########Seam.Remoting.getContext().setConversationId()########

##ID ##### Seam.Remoting.getContext().setConversationId()##########
##########################ID ############## ##########ID
########################ID###################### ################
#################

25.5.2.

ID
#################### ##### JavaScript ################## ID ########## ID
#########

```
Seam.Remoting.getContext().setConversationId( #{conversation.id} );
```

25.6.

Seam ##
########################## ######################

Seam.Remoting.startBatch()#### ## ############ ########################
########################
###################################Seam.Remoting.executeBatch()######
############
################ ################### (##########) ###############

startBatch()################################
Seam.Remoting.cancelBatch()##

####################/examples/remoting/chatroom########

25.7.

25.7.1. ####### /

############################
##

25.7.1.1. String

String ############### ### Javascript String ################

25.7.1.2. Number

Java ################################ ############## String ############## ######################### ############################ Byte# Double# Float# Integer# Long# Short ##################

25.7.1.3. Boolean

Boolean ############## Javascript# Boolean ################ Java boolean ########

25.7.2. JavaBeans

JavaBeans # Seam ####### JavaBean ######## ### non-component ############## ## (Seam ######### Seam.Component.newInstance()# ##### Seam.Remoting.createType())#

##
##########
##

```
@Name("myAction")
public class MyAction implements MyActionLocal {
  public void doSomethingWithObject(Object obj) {
    // code
  }
}
```

myWidget ############################ myAction ################################## myWidget ####### ########## MyWidget

```
<s:remote include="myAction,myWidget"/>
```

myWidget ####### Seam.Component.newInstance("myWidget") ############ myAction.doSomethingWithObject()

25.7.3.

String ############## ######### Javascript Date ###################### ###### java.util.Date ###### (### java.sql.Date # java.sql.Timestamp ########)#

25.7.4. Enum

########## Enum # String ########## Enum ################## enum # String ######## ########################

```
@Name("paintAction")
public class paintAction implements paintLocal {
  public enum Color {red, green, blue, yellow, orange, purple};

  public void paint(Color color) {
    // code
  }
}
```

`paint()` ##### `red` ############## String #################

```
Seam.Component.getInstance("paintAction").paint("red");
```

############## #### ############ enum ########## (###################### enum ##########)# ######### String ##########

25.7.5.

25.7.5.1. Bag

Bag #### ####### #### ################### (### Map #### #################)# Javascript ################### ### ########## Javascript ######## ################################ #### Javascript ######## ################## ##### bag ##

25.7.5.2. Map

Javascript ### Map ################### ##### Map ### Seam Remoting ############### ######################## Map ######## ### `Seam.Remoting.Map` ##############

```
var map = new Seam.Remoting.Map();
```

Javascript #### Map ###################### `size()`# `isEmpty()`# `keySet()`# `values()`# `get(key)`# `put(key,  value)`# `remove(key)`# `contains(key)` ####### ########## Java ############ ##### `keySet()` ### `values()` ########## ################ Javascript Array

25.8.

##############
##
################ ############ Javascript ## `setDebug()` ###################

```
Seam.Remoting.setDebug(true);
```

components.xml ######################

```
<remoting:remoting debug="true"/>
```

`################ setDebug(false) ######## ############################ Seam.Remoting.log(message) ########`

25.9.

################################## ### ############## ################

25.9.1.

`######` "Please Wait..." `########################## Seam.Remoting.loadingMessage #########`

```
Seam.Remoting.loadingMessage = "Loading...";
```

25.9.2.

`############################## displayLoadingMessage() ### hideLoadingMessage() #################`

```
// don't display the loading indicator
Seam.Remoting.displayLoadingMessage = function() {};
Seam.Remoting.hideLoadingMessage = function() {};
```

25.9.3.

`############################## ################### displayLoadingMessage() # hideLoadingMessage() ############################`

```
Seam.Remoting.displayLoadingMessage = function() {
    // Write code here to display the indicator
 };

 Seam.Remoting.hideLoadingMessage = function() {
    // Write code here to hide the indicator
 };
```

25.10.

################ ################ XML ################ ################ Javascript ################## ######################## (Javabeans ##)# ## ############################## ### ################ ### ######### (##############)# ##

Seam Remoting ## ######### `@WebRemote` ######## `exclude` ## ########### (#.#) ######################### String ########## ################ ##

######## `Widget` ##########

```
@Name("widget")
public class Widget
{
  private String value;
  private String secret;
  private Widget child;
  private Map<String,Widget> widgetMap;
  private List<Widget> widgetList;

  // getters and setters for all fields
}
```

25.10.1.

######### `Widget` ############## `secret` ############################## ###########

```
@WebRemote(exclude = {"secret"})
```

```
public Widget getWidget();
```

#secret############### secret ############ ####
Widget ### child
Widget ###### #### child # secret
##

```
@WebRemote(exclude = {"child.secret"})
public Widget getWidget();
```

25.10.2. Map

############################## Map# ################### (List# Set# Array ##)#
####### ################## ##### Widget # widgetList ######### Widget ##########
Widget # secret ################

```
@WebRemote(exclude = {"widgetList.secret"})
public Widget getWidget();
```

Map ########################## Map ########### [key] ####### Map
############### [value] ################## ##### widgetMap ############# secret
####################

```
@WebRemote(exclude = {"widgetMap[value].secret"})
public Widget getWidget();
```

25.10.3.

###
############## (######## Seam ############) ############ (######## Seam
################) ########################

```
@WebRemote(exclude = {"[widget].secret"})
public Widget getWidget();
```

25.10.4.

###

```
@WebRemote(exclude = {"widgetList.secret", "widgetMap[value].secret"})
public Widget getWidget();
```

25.11. JMS

Seam Remoting # JMS ############################ ################ JMS ################## ### ###################### ### ##############################

25.11.1.

JMS ################ ## Seam Remoting ###################################### seam.properties# web.xml ### components.xml # org.jboss.seam.remoting.messaging.subscriptionRegistry.allowedTopics ####################

```
<remoting:remoting poll-timeout="5" poll-interval="1"/>
```

25.11.2. JMS Topic

JMS Topic

```
function subscriptionCallback(message)
{
  if (message instanceof Seam.Remoting.TextMessage)
    alert("Received message: " + message.getText());
}

Seam.Remoting.subscribe("topicName", subscriptionCallback);
```

Seam.Remoting.subscribe() ###################### ############ JMS Topic ##### ###################################

#################### ######################## ################################### instanceof ############ Seam.Remoting.TextMessage ### Seam.Remoting.ObjectMessage ################## TextMessage ### text ############## (####### getText() #####)# ObjectMessage ### value ################## (##### getValue() #########)#

25.11.3.

################### Seam.Remoting.unsubscribe() ################

```
Seam.Remoting.unsubscribe("topicName");
```

25.11.4.

```
#####################################  ####  Seam.Remoting.pollInterval  ##
################################## ########## ######## 10 ######
```

```
##########  Seam.Remoting.pollTimeout  ##  ###################
#####################################################  ######  0###
##########################################
```

```
pollTimeout  ###################  ############################
############################################################  ###################
######################
```

```
##########  components.xml  #################  ######  Javascript  ##############
########################################
#####################################
```

components.xml:

```
<remoting:remoting poll-timeout="5" poll-interval="1"/>
```

JavaScript:

```
// Only wait 1 second between receiving a poll response and sending the next poll request.
Seam.Remoting.pollInterval = 1;

// Wait up to 5 seconds on the server for new messages
Seam.Remoting.pollTimeout = 5;
```

Seam#Google Web Toolkit

########Ajax#########Google Web Toolkit (GWT)################Seam#GWT#########Seam############################

GWT#####GWT tools#################################### *http://code.google.com/webtoolkit/*##############GWT####################################

26.1.

Seam#########GWT##########################Seam#############################28.3.1. ######## Seam #### Seam ##########################

26.2.

GWT#######Seam###GW

```
public interface MyService extends RemoteService {
   public String askIt(String question);
 }
```

######################AsyncCallback ##########################

```
public interface MyServiceAsync extends RemoteService {
  public void askIt(String question, AsyncCallback callback);
}
```

##MyServiceAsync####################GWT#####################

######################Seam##############

```
@Name("org.jboss.seam.example.remoting.gwt.client.MyService")
public class ServiceImpl implements MyService {

  @WebRemote
  public String askIt(String question) {

    if (!validate(question)) {
      throw new IllegalStateException("Hey, this shouldn't happen, I checked on the client, " +
      "but its always good to double check.");
    }
    return "42. Its the real question that you seek now.";
```

```
  }

  public boolean validate(String q) {
    ValidationUtility util = new ValidationUtility();
    return util.isValid(q);
  }
}
```

The methods that should be made accessible via GWT need to be annotated with the `@WebRemote` annotation, which is required for all web-remoteable methods.

26.3. GWT####### Seam

##

```
private MyServiceAsync getService() {
  String endpointURL = GWT.getModuleBaseURL() + "seam/resource/gwt";

  MyServiceAsync svc = (MyServiceAsync) GWT.create(MyService.class);
  ((ServiceDefTarget) svc).setServiceEntryPoint(endpointURL);
  return svc;
}
```

##

```
public class AskQuestionWidget extends Composite {
  private AbsolutePanel panel = new AbsolutePanel();

  public AskQuestionWidget() {
    Label lbl = new Label("OK, what do you want to know?");
    panel.add(lbl);
    final TextBox box = new TextBox();
    box.setText("What is the meaning of life?");
    panel.add(box);
    Button ok = new Button("Ask");
    ok.addClickListener(new ClickListener() {
      public void onClick(Widget w) {
        ValidationUtility valid = new ValidationUtility();
        if (!valid.isValid(box.getText())) {
          Window.alert("A question has to end with a '?'");
        } else {
```

```
            askServer(box.getText());
          }
        }
      });
      panel.add(ok);

      initWidget(panel);
    }

    private void askServer(String text) {
      getService().askIt(text, new AsyncCallback() {
        public void onFailure(Throwable t) {
          Window.alert(t.getMessage());
        }

        public void onSuccess(Object data) {
          Window.alert((String) data);
        }
      });
    }

    ...
```

###########askServer()###askServer()##(####################)####################

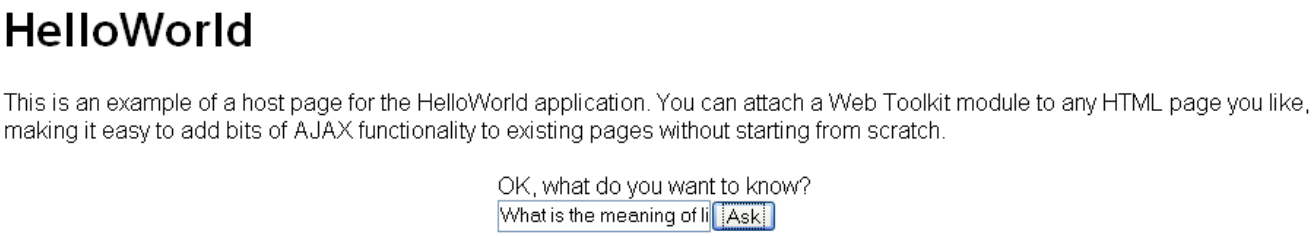

###############Seam############### examples/remoting/gwt############

26.4. GWT#Ant#####

GWT################-Javascript####(##ant########GWT###GUI################task#jar###########GWT(#####################################

######ant################

```
<taskdef uri="antlib:de.samaflost.gwttasks"
```

```
  resource="de/samaflost/gwttasks/antlib.xml"
  classpath="./lib/gwttasks.jar"/>

  <property file="build.properties"/>
```

########build.properties###########

```
gwt.home=/gwt_home_dir
```

########GWT#####################################

```
<!-- GWT#zg#)j#####gY.
  GWT##F4#oS6gYLGWT##%k&####Y##LB#~Y -->
  <target name="gwt-compile">
    <!-- Sn4## GWT#### "re homing" WfD~Yng
    GWT####`Q#cfD~Y - URL#####kY#_#kLjcfD~Y -->
    <delete>
      <fileset dir="view"/>
    </delete>
    <gwt:compile outDir="build/gwt"
      gwtHome="${gwt.home}"
      classBase="${gwt.module.name}"
      sourceclasspath="src"/>
    <copy todir="view">
      <fileset dir="build/gwt/${gwt.module.name}"/>
    </copy>
  </target
>
```

################GWT###war#webapp###.
GWT#HTML#Javascript##########################gwt-compile
########################GWT#####################

GWT#############################GWT###

Spring Framework

Spring ########## Seam ## Spring ######################## Spring ############ Seam ################## Seam ##########################

##! Spring ###### jboss-seam-ioc ############## ###################### seam-spring ##############

Spring # Seam ###################

- Seam ############## Spring Bean #########
- Spring Bean # Seam #################
- Spring Bean # Seam ############
- Spring Bean # Seam #################
- Seam ####### # Spring Web ##############
- Spring PlatformTransactionManagement #####
- Spring # `OpenEntityManagerInViewFilter` ### `OpenSessionInViewFilter` ###### Seam #########
- `@Asynchronous` ######## Spring `TaskExecutors` #####

27.1. Seam ######## Spring Bean

Seam ############## Spring Bean ############ `<seam:instance/>` ################## Seam ################## Seam ##### Spring Bean ####################

```
<beans xmlns="http://www.springframework.org/schema/beans"
   xmlns:seam="http://jboss.com/products/seam/spring-seam"
   xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
   xsi:schemaLocation="http://www.springframework.org/schema/beans
                  http://www.springframework.org/schema/beans/spring-beans-2.0.xsd
                  http://jboss.com/products/seam/spring-seam
                  http://jboss.com/products/seam/spring-seam-2.1.xsd"
>
```

Seam ############ Spring Bean

```
<bean id="someSpringBean" class="SomeSpringBeanClass" scope="prototype">
```

```
   <property name="someProperty">
      <seam:instance name="someComponent"/>
   </property>
</bean
>
```

############## EL #########

```
<bean id="someSpringBean" class="SomeSpringBeanClass" scope="prototype">
   <property name="someProperty">
      <seam:instance name="#{someExpression}"/>
   </property>
</bean
>
```

Seam ################ Spring Bean id # Spring Bean ########################

```
<seam:instance name="someComponent" id="someSeamComponentInstance"/>

<bean id="someSpringBean" class="SomeSpringBeanClass" scope="prototype">
   <property name="someProperty" ref="someSeamComponentInstance">
</bean>
```

##!

Seam## Spring ############ Seam ############## Spring ############################## ###### Spring Bean ################# ############### #### Bean ############################ Bean############ Bean ################### #### Seam ## ################### ### ### Spring Bean ############ ##### Spring Bean ###################################### ##### ########## *(scope impedance)* ######## ################### Seam ### Spring ### Seam ##

`<seam:instance/>` ####### Seam ########################

```
<seam:instance id="seamManagedEM" name="someManagedEMComponent" proxy="true"/>

<bean id="someSpringBean" class="SomeSpringBeanClass">
   <property name="entityManager" ref="seamManagedEM">
</bean
```

```
>
```

Spring Bean ## Seam ############################## (Spring `OpenEntityManagerInView` ########## Seam ############################## *Spring # Seam ################ #################*)

27.2. Spring Bean # Seam

Spring Bean # Seam ################################ ### ###### 2 ######

- EL ###### Spring Bean #########
- Spring Bean # Seam ##########

######### 2 ################ ########## EL #### Spring Bean #########

Spring # `DelegatingVariableResolver` # Spring # JSF ######## Spring ##################### ## `VariableResolver` ### Bean ID #### EL ##### Spring Bean ################## `DelegatingVariableResolver` # `faces-config.xml` ##############

```
<application>
   <variable-resolver>
      org.springframework.web.jsf.DelegatingVariableResolver
   </variable-resolver>
</application
>
```

`@In` #### Spring Bean

```
@In("#{bookingService}")
private BookingService bookingService;
```

EL ################ Spring Bean ################# Seam # EL ################ Spring Bean ############## ############## #################

27.3. Spring Bean # Seam

`<seam:component/>` ################ ### Spring Bean ## Seam ################## Seam ########### Bean ##### `<seam:component/>` ############

```
<bean id="someSpringBean" class="SomeSpringBeanClass" scope="prototype">
   <seam:component/>
</bean
```

```
>
```

######## <seam:component/># Bean ################## STATELESS############## #####FactoryBean ########### Spring Bean #### # Bean ###################### ######## class ################## ################ Seam ########################

Spring Bean #### Seam ############# <seam:component/> # scope ############### ##### Seam ##### STATELESS ####### Spring Bean # prototype ################ #### Spring Bean ########################## ##################

27.4. Seam ##### Spring Bean

Seam ########## Seam ######## Spring 2.0 ################################## ######### Seam ############ Spring Bean ################## #### Spring ### ###################### ### ############# Spring Bean ################## ####### Bean ################ Bean ####################

Spring Bean factory ###<seam:configure-scopes/> ######### #### Seam ################ Spring Bean ########### Spring Bean #### Seam ############ Bean ### scope ### Seam ##############

```
<!-- Only needs to be specified once per bean factory-->
<seam:configure-scopes/>

...

<bean id="someSpringBean" class="SomeSpringBeanClass"
 scope="seam.CONVERSATION"/>
```

configure-scopes #### prefix ############# ########################## (############## seam. ###)

################ Spring ############### @In ######################### ############################## @In(create=true) ############## Bean ####### configure-scopes # default-auto-create ###### Seam ######### Spring Bean ##################

########## Seam ##### Spring Bean ## <seam:instance/> ########### Spring Bean ########### #### ################################ Spring ############## Bean ##### <aop:scoped-proxy/> ###### #### Seam##### Spring Bean # <aop:scoped-proxy/> ########### ###### ### Bean # Seam #### Spring Bean################## <seam:instance/>##############

```
<bean                    id="someSpringBean"                    class="SomeSpringBeanClass"
 scope="seam.CONVERSATION"/>

...

<bean id="someSingleton">
   <property name="someSeamScopedSpringBean">
      <seam:instance name="someSpringBean" proxy="true"/>
   </property>
</bean
>
```

27.5. Spring # PlatformTransactionManagement

Spring ######################## ########### API (JPA# Hibernate# JDO# JTA ##) ######## ### Spring # Websphere # Weblogic ################### TransactionManagers ############### Spring ## REQUIRES_NEW # NOT_SUPPORTED ###### Java EE ###################### ######## Spring ######## ## [http://static.springframework.org/spring/docs/2.0.x/reference/transaction.html] ##########

Seam # Spring ######################## SpringTransaction ######################

```
<spring:spring-transaction platform-transaction-manager="#{transactionManager}"/>
```

`spring:spring-transaction` ################### Spring ######################

27.6. Spring # Seam

Seam ################################ EntityManager ################## ################################### ### `LazyInitializationException` ################ Spring # Web ###################################### (`OpenEntityManagerInViewFilter`)# ##### Spring # JPA ######################## Seam ################### Spring ###################### (`PersistenceAnnotationBeanPostProcessor`# `JpaTemplate` ##)#

Seam ###### JPA ######## Spring # Seam ########################### ##### Spring ####################################

########################

- Spring ######### Seam ####################
- Web ###### Seam ##################### (#### quartz #####)

- Seam ########## Spring ################# (#######################)

Spring ############### EntityManagerFactory ##### EntityManager ############ Seam ### EntityManagerFactory # Seam ########################

```
<bean                                                    id="seamEntityManagerFactory"
 class="org.jboss.seam.ioc.spring.SeamManagedEntityManagerFactoryBean">
        <property name="persistenceContextName" value="entityManager"/>
</bean
>
```

#persistenceContextName## Seam ########################## ######### EntityManagerFactory ## Seam ############ unitName #### ######entityManager####### ## unitName ############### persistenceUnitName ############

```
<bean                                                    id="seamEntityManagerFactory"
 class="org.jboss.seam.ioc.spring.SeamManagedEntityManagerFactoryBean">
        <property name="persistenceContextName" value="entityManager"/>
      <property name="persistenceUnitName" value="bookingDatabase:extended"/>
</bean
>
```

EntityManagerFactory ##### Spring ########################## ##### Spring # `PersistenceAnnotationBeanPostProcessor`

```
<bean
 class="org.springframework.orm.jpa.support.PersistenceAnnotationBeanPostProcessor"/>
```

Spring ##### EntityManagerFactory ###### Seam ################### `defaultPersistenceUnitName` ##################### persistenctUnitName # `PersistenceAnnotationBeanPostProcessor` ############

`applicationContext.xml` ################

```
<bean                                                    id="entityManagerFactory"
 class="org.springframework.orm.jpa.LocalEntityManagerFactoryBean">
      <property name="persistenceUnitName" value="bookingDatabase"/>
</bean>
<bean                                                    id="seamEntityManagerFactory"
 class="org.jboss.seam.ioc.spring.SeamManagedEntityManagerFactoryBean">
        <property name="persistenceContextName" value="entityManager"/>
```

```
    <property name="persistenceUnitName" value="bookingDatabase:extended"/>
</bean>
<bean
 class="org.springframework.orm.jpa.support.PersistenceAnnotationBeanPostProcessor">
    <property name="defaultPersistenceUnitName" value="bookingDatabase:extended"/>
</bean
>
```

`component.xml` ################

```
<persistence:managed-persistence-context name="entityManager"
    auto-create="true" entity-manager-factory="#{entityManagerFactory}"/>
```

`JpaTemplate` ### `JpaDaoSupport` # Seam ################# Seam ##########################

```
<bean id="bookingService" class="org.jboss.seam.example.spring.BookingService">
    <property name="entityManagerFactory" ref="seamEntityManagerFactory"/>
</bean
>
```

27.7. Spring # Seam ### Hibernate

Seam Spring ##### Spring ######## Seam ## Hibernate ########################## ##### *JPA ##* ##########

Spring # JPA ###### Spring ##################EntityManagerFactory ###### EntityManager ## Spring ######################### ##### Seam Session ### proxy SessionFactory # Seam ### Hibernate ############################

```
<bean                                                    id="seamSessionFactory"
 class="org.jboss.seam.ioc.spring.SeamManagedSessionFactoryBean">
    <property name="sessionName" value="hibernateSession"/>
</bean
>
```

#sessionName## `persistence:managed-hibernate-session` ################ ##### SessionFactory ##### Spring ########################## ##### `SeamManagedSessionFactory` # getCurrentInstance() ############## `SessionFactory.getCurrentInstance()` ################

27.8. Seam ########### Spring Application Context

########## Spring # ApplicationContext ######## Spring # `ContextLoaderListener` ############## ###########

- Spring ApplicationContext ## `SeamListener`#################
- Seam ###################### Spring ApplicationContext ###############

2 ############ Spring #### Spring ApplicationContext ##### Seam ################ ## Seam ############### `<spring:context-loader/>` #### `components.xml` ######## `config-locations` ######## Spring ################### ################ ###### `<spring:config-locations/>` ################## ######## `components.xml`

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:spring="http://jboss.com/products/seam/spring"
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:schemaLocation="http://jboss.com/products/seam/components
                    http://jboss.com/products/seam/components-2.1.xsd
                    http://jboss.com/products/seam/spring
                    http://jboss.com/products/seam/spring-2.1.xsd">

    <spring:context-loader config-locations="/WEB-INF/applicationContext.xml"/>

</components
>
```

27.9. @Asynchronous # Spring # TaskExecutor

Spring ################ `TaskExecutor` ############## Spring Seam #### `@Asynchronous` ################## Spring # `TaskExecutor` ######## ########### `SpringTaskExecutorDispatchor` ################ Spring Bean ### taskExecutor ######

```
<spring:task-executor-dispatcher task-executor="#{springThreadPoolTaskExecutor}"/>
```

Spring # `TaskExecutor` ########################## ##### Seam `Dispatcher` ######################################

```
<!-- Install a ThreadPoolDispatcher to handle scheduled asynchronous event -->
<core:thread-pool-dispatcher name="threadPoolDispatcher"/>
```

```
<!-- Install the SpringDispatcher as default -->
<spring:task-executor-dispatcher                task-executor="#{springThreadPoolTaskExecutor}"
 schedule-dispatcher="#{threadPoolDispatcher}"/>
```

Hibernate Search

28.1.

Apache Lucene™ ## Apache Lucene ####### Hibernate Search##

Hibernate Search ################## JPA # Hibernate ########################JBoss Seam # Hibernate ###########

Hibernate Search ################## *Hibernate Seach###* [http://www.hibernate.org/hib_docs/search/reference/en/html_single/] ##########

28.2.

Hibernate Search ##`META-INF/persistence.xml` ### `hibernate.cfg.xml` #################

Hibernate Search ##

```
<persistence-unit name="sample">
  <jta-data-source>java:/DefaultDS</jta-data-source>
  <properties>
    [...]
    <!-- use a file system based index -->
    <property name="hibernate.search.default.directory_provider"
      value="org.hibernate.search.store.FSDirectoryProvider"/>
    <!-- directory where the indexes will be stored -->
    <property name="hibernate.search.default.indexBase"
      value="/Users/prod/apps/dvdstore/dvdindexes"/>
  </properties>
</persistence-unit>
```

Hibernate #########EntityManager 3.2.x (JBoss AS 4.2.GA ############)#####################################

```
<persistence-unit name="sample">
  <jta-data-source>java:/DefaultDS</jta-data-source>
  <properties>
    [...]
    <!-- use a file system based index -->
```

```
    <property name="hibernate.search.default.directory_provider"
            value="org.hibernate.search.store.FSDirectoryProvider"/>
    <!-- directory where the indexes will be stored -->
    <property name="hibernate.search.default.indexBase"
            value="/Users/prod/apps/dvdstore/dvdindexes"/>

    <property name="hibernate.ejb.event.post-insert"
            value="org.hibernate.search.event.FullTextIndexEventListener"/>
    <property name="hibernate.ejb.event.post-update"
            value="org.hibernate.search.event.FullTextIndexEventListener"/>
    <property name="hibernate.ejb.event.post-delete"
            value="org.hibernate.search.event.FullTextIndexEventListener"/>

  </properties>
</persistence-unit>
```

##

Hibernate #########EntityManager # 3.3.x ##########################

################ jar ##############:

- hibernate-search.jar
- hibernate-commons-annotations.jar
- lucene-core.jar

##

EAR ################`application.xml`

28.3.

Hibernate Search ######### Lucence ##[http://www.hibernate.org/hib_docs/search/reference/en/html_single/] ##########

Hibernate Search ##API # JPA/Hibernate ########################HQL ## API ##`FullTextSession` API ###(Hibernate # `Session` ########)#

Hibernate Search #########JBoss Seam # FullTextSession #######

```
@Stateful
@Name("search")
public class FullTextSearchAction implements FullTextSearch, Serializable {

   @In FullTextSession session;

   public void search(String searchString) {
      org.apache.lucene.search.Query luceneQuery = getLuceneQuery();
      org.hibernate.Query query session.createFullTextQuery(luceneQuery, Product.class);
      searchResults = query
            .setMaxResults(pageSize + 1)
            .setFirstResult(pageSize * currentPage)
            .list();
   }
   [...]
}
```

##

`FullTextSession` # `org.hibernate.Session` ############ Hibernate Session #################

Java Persistance API ############################

```
@Stateful
@Name("search")
public class FullTextSearchAction implements FullTextSearch, Serializable {

   @In FullTextEntityManager em;

   public void search(String searchString) {
      org.apache.lucene.search.Query luceneQuery = getLuceneQuery();
      javax.persistence.Query query = em.createFullTextQuery(luceneQuery, Product.class);
      searchResults = query
            .setMaxResults(pageSize + 1)
            .setFirstResult(pageSize * currentPage)
            .getResultList();
   }
   [...]
}
```

Hibernate Search #########JBoss Seam # `FullTextEntityManager` #######`FullTextEntityManager` ################ `EntityManager` ################`FullTextSession` # `Session` #######

EJB 3.0 Session ###########Bean(Message Driven Bean) ###########(#####@PersistenceContext ##########)###### `EntityManager` ######## `FullTextEntityManager` ## `FullTextEntityManager` ##########################

```
@Stateful
@Name("search")
public class FullTextSearchAction implements FullTextSearch, Serializable {

  @PersistenceContext EntityManager em;

  public void search(String searchString) {
    org.apache.lucene.search.Query luceneQuery = getLuceneQuery();
    FullTextEntityManager ftEm = (FullTextEntityManager) em;
    javax.persistence.Query query = ftEm.createFullTextQuery(luceneQuery, Product.class);
    searchResults = query
        .setMaxResults(pageSize + 1)
        .setFirstResult(pageSize * currentPage)
        .getResultList();
  }
  [...]
}
```

##

Seam ### Hibernate Search #########`Search.createFullTextSession` ##########################

DVDStore # JBoss Seam ####### blog ############Hibernate Search ##################

Seam #### Seam

Configuration is a very boring topic and an extremely tedious pastime. Unfortunately, several lines of XML are required to integrate Seam into your JSF implementation and servlet container. There's no need to be too put off by the following sections; you'll never need to type any of this stuff yourself, since you can just copy and paste from the example applications!

29.1. Seam

JSF # Seam

29.1.1. Seam # JSF#

faces

```
<servlet>
   <servlet-name
>Faces Servlet</servlet-name>
   <servlet-class
>javax.faces.webapp.FacesServlet</servlet-class>
   <load-on-startup
>1</load-on-startup>
</servlet>

<servlet-mapping>
   <servlet-name
>Faces Servlet</servlet-name>
   <url-pattern
>*.seam</url-pattern>
</servlet-mapping
>
```

(## URL ################)

Seam ## `web.xml`##################

```
<listener>
   <listener-class
>org.jboss.seam.servlet.SeamListener</listener-class>
</listener
>
```

######## Seam ##

JSF ###### Seam ######################################
web.xml

```
<context-param>
   <param-name
>javax.faces.STATE_SAVING_METHOD</param-name>
   <param-value
>client</param-value>
</context-param
>
```

############### JSF ################# Seam # JSF ############
PAGE ############ ################### JSF-RI ############## PAGE
Bean
######## ##################### PAGE ############################
################################ (######## [https://javaserverfaces-spec-public.dev.java.net/issues/show_bug.cgi?id=295] ###)# #####
JSF######################## ####################

```
<context-param>
      <param-name
>com.sun.faces.serializeServerState</param-name>
      <param-value
>true</param-value>
</context-param
>
```

29.1.2. Using facelets

If you want follow our advice and use facelets instead of JSP, add the following lines to `faces-config.xml`:

```
<application>
   <view-handler
>com.sun.facelets.FaceletViewHandler</view-handler>
</application
>
```

`web.xml`###########

```
<context-param>
   <param-name
>javax.faces.DEFAULT_SUFFIX</param-name>
   <param-value
>.xhtml</param-value>
</context-param
>
```

If you are using facelets in JBoss AS, you'll find that facelets logging is broken. Seam provides a bridge to fix this, to use it copy `lib/interop/jboss-seam-jul.jar` to `$JBOSS_HOME/server/default/deploy/jboss-web.deployer/jsf-libs/` and include the `jboss-seam-ui.jar` in the `WEB-INF/lib` of your application.

29.1.3. Seam

Seam ########## Seam Remoting ###### (##########) # JSF # UI ######################## Seam ############### `web.xml` ############

```
<servlet>
  <servlet-name
>Seam Resource Servlet</servlet-name>
  <servlet-class
>org.jboss.seam.servlet.SeamResourceServlet</servlet-class>
</servlet>

<servlet-mapping>
  <servlet-name
>Seam Resource Servlet</servlet-name>
  <url-pattern
>/seam/resource/*</url-pattern>
</servlet-mapping
>
```

29.1.4. Seam##########

Seam ############################## #### ######################## Seam ################ Seam ## ############ `web.xml` ##########################

```
<filter>
   <filter-name
```

```
>Seam Filter</filter-name>
   <filter-class
>org.jboss.seam.servlet.SeamFilter</filter-class>
</filter>

<filter-mapping>
   <filter-name
>Seam Filter</filter-name>
   <url-pattern
>/*</url-pattern>
</filter-mapping
>
```

Seam ######### `web.xml` ###### ################## ################################

Seam ###################### ###################### `components.xml` #############

- `url-pattern` — ###################### ############ `url-pattern` ################## Tomcat ###############
- `regex-url-pattern` — ###################### ############ `regex-url-pattern` ####################
- `disabled` — ####################

######## URI ################# (`HttpServletRequest.getURIPath()` ###)# ##

##

29.1.4.1.

####### `pages.xml` ################# (############################)# ### ## (Java EE ######### Web ######################## ## ### Tomcat ##############################)

`components.xml#<web:exception-filter>`######

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:web="http://jboss.com/products/seam/web">
```

```
    <web:exception-filter url-pattern="*.seam"/>

</components
>
```

29.1.4.2.

#######Seam#################################### ################### Seam ### ID ##########################

################################## components.xml#########################

```
<web:redirect-filter url-pattern="*.seam"/>
```

29.1.4.3. URL

######### Seam # pages.xml ################## URL ######################## ############################### components.xml ############################

```
<web:rewrite-filter view-mapping="*.seam"/>
```

view-mapping ###### web.xml ######## Faces ## ################### *.seam ##########

29.1.4.4.

Seam ########### JSF ###################### ################### RFC-2388 (multipart/form-data ##) ########### ###################### components.xml#############

```
<web:multipart-filter create-temp-files="true"
                      max-request-size="1000000"
                      url-pattern="*.seam"/>
```

- create-temp-files — true ### ## ######### false ###
- max-request-size — ########################## (#### Content-Length ###############) ############ ######## 0 ## (########)#

29.1.4.5.

##################################

################################components.xml ############

```
<web:character-encoding-filter encoding="UTF-16"
                               override-client="true"
                               url-pattern="*.seam"/>
```

- encoding — ###############
- override-client — true ## encoding ################### false ## ######## false ###

29.1.4.6. RichFaces

RichFaces ############# Seam # RichFaces Ajax ## web.xml ##### RichFaces Ajax ##################

RichFaces Ajax ##### RichFaces jar ############################

####################### components.xml ####### ###### RichFaces Developer Guide ################

```
<web:ajax4jsf-filter force-parser="true"
                     enable-cache="true"
                     log4j-init-file="custom-log4j.xml"
                     url-pattern="*.seam"/>
```

- force-parser — JSF ###### Richfaces # XML ########################## false ## AJAX ############## XML ######## force-parser # false ################### AJAX ########################
- enable-cache — ############################ (javascript# CSS# ######)# ##### javascript # CSS ########## true ################################
- log4j-init-file — ############################ log4j.xml ##

29.1.4.7.

################## log4j ################## ##### %X{username} ##

############################ ########## <web:logging-filter> ###### components.xml ####################

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:web="http://jboss.com/products/seam/web">
   <web:logging-filter url-pattern="*.seam"/>
</components
>
```

29.1.4.8.

JSF ##########################JSF################## ####Seam# Seam#################### ##################################

############################## Seam########################## #########Seam## JSF# FacesServlet ###################### Seam #JSF############## phase listener#######

################################components.xml ############

```
<web:context-filter url-pattern="/media/*"/>
```

###########conversationId################# ID ###################### ID###############

######## ID######################## Seam############ conversation########### ID#########

29.1.4.9.

Seam ######################### ############### ## ####### (############### web.xml ####################)# @Filter ######## Seam ####### (javax.servlet.Filter ##############) ##########

```
@Startup
@Scope(APPLICATION)
@Name("org.jboss.seam.web.multipartFilter")
@BypassInterceptors
@Filter(within="org.jboss.seam.web.ajax4jsfFilter")
```

```
public class MultipartFilter extends AbstractFilter {
```

`@Startup` ############# Seam ###################### ###################
(`@BypassInterceptors`)# ##### RichFaces ##################
(`@Filter(within="org.jboss.seam.web.ajax4jsfFilter")`)#

29.1.5. EJB ##### Seam

We need to apply the `SeamInterceptor` to our Seam components. The simplest way to do this across an entire application is to add the following interceptor configuration in `ejb-jar.xml`:

```
<interceptors>
   <interceptor>
      <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
   </interceptor>
</interceptors>

<assembly-descriptor>
   <interceptor-binding>
      <ejb-name
>*</ejb-name>
      <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
   </interceptor-binding>
</assembly-descriptor>
```

Seam needs to know where to go to find session beans in JNDI. One way to do this is specify the `@JndiName` annotation on every session bean Seam component. However, this is quite tedious. A better approach is to specify a pattern that Seam can use to calculate the JNDI name from the EJB name. Unfortunately, there is no standard mapping to global JNDI defined in the EJB3 specification, so this mapping is vendor-specific. We usually specify this option in `components.xml`.

JBoss############################

```
<core:init jndi-name="myEarName/#{ejbName}/local" />
```

Where `myEarName` is the name of the EAR in which the bean is deployed.

Outside the context of an EAR (when using the JBoss Embeddable EJB3 container), the following pattern is the one to use:

```
<core:init jndi-name="#{ejbName}/local" />
```

You'll have to experiment to find the right setting for other application servers. Note that some servers (such as GlassFish) require you to specify JNDI names for all EJB components explicitly (and tediously). In this case, you can pick your own pattern ;-)

In an EJB3 environment, we recommend the use of a special built-in component for transaction management, that is fully aware of container transactions, and can correctly process transaction success events registered with the `Events` component. If you don't add this line to your `components.xml` file, Seam won't know when container-managed transactions end:

```
<transaction:ejb-transaction/>
```

29.1.6.

###################### Seam############################ `seam.properties#META-INF/seam.properties` #### `META-INF/components.xml`############## (#################)# Seam##### Seam########################`seam.properties`#########

Seam###############web##### (WAR) `#WEB-INF/classes`###### `seam.properties`################

Seam ######## `seam.properties` ################

You might think this is silly and what kind of idiot framework designers would make an empty file affect the behavior of their software?? Well, this is a workaround for a limitation of the JVM—if we didn't use this mechanism, our next best option would be to force you to list every component explicitly in `components.xml`, just like some other competing frameworks do! I think you'll like our way better.

29.2. ### JPA

Seam ######## JPA ######## Hibernate ################### ## JPA ################### `seam` ##############

###########

JPA ###################### ##

Seam #### JPA ########## 2 ####################

######### components.xml ####### ####### PersistenceProvider # hibernate ############### ##################

```
<component name="org.jboss.seam.persistence.persistenceProvider"
        class="org.jboss.seam.persistence.PersistenceProvider"
        scope="stateless">
</component
>
```

JPA ###################### PersistenceProvider ################# HibernatePersistenceProvider ########### (########################)# ######### seam ####################

```
<component name="org.jboss.seam.persistence.persistenceProvider"
        class="org.your.package.YourPersistenceProvider">
</component
>
```

###################################### persistence.xml ########## ######### jar ##

29.3. Java EE 5 # Seam

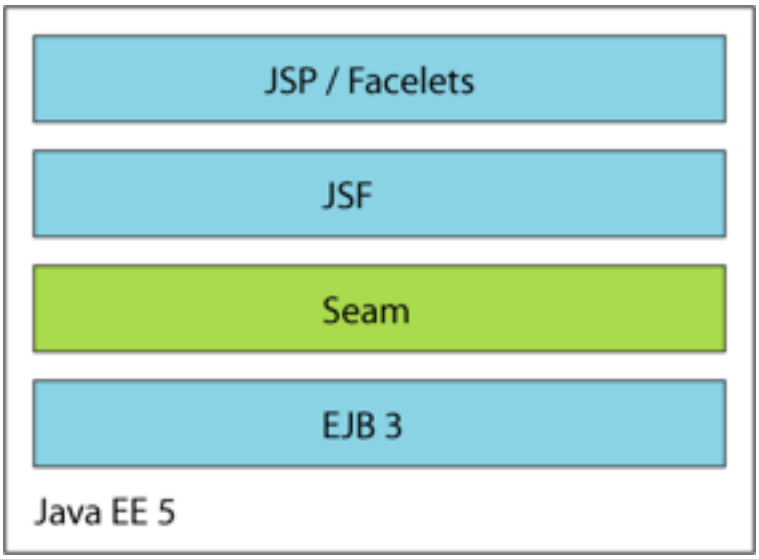

Java EE 5 ############ Seam ######################

29.3.1.

EAR ####################################

```
my-application.ear/
    jboss-seam.jar
    lib/
        jboss-el.jar
    META-INF/
        MANIFEST.MF
        application.xml
    my-application.war/
        META-INF/
            MANIFEST.MF
        WEB-INF/
            web.xml
            components.xml
            faces-config.xml
            lib/
                jsf-facelets.jar
                jboss-seam-ui.jar
        login.jsp
        register.jsp
        ...
    my-application.jar/
        META-INF/
            MANIFEST.MF
            persistence.xml
        seam.properties
        org/
            jboss/
                myapplication/
                    User.class
                    Login.class
                    LoginBean.class
                    Register.class
                    RegisterBean.class
                    ...
```

`jboss-seam.jar` # ejb ######## `META-INF/application.xml` ############## `jboss-el.jar` # EAR # lib ################# (EAR ###########)#

jBPM ### Drools ########## EAR # lib ########## jar ################

facelets ######## (##) # WAR#`WEB-INF/lib`######## `jsf-facelets.jar`############

Seam ################## (##### Seam ###############)# WAR ##### `WEB-INF/lib` ####### `jboss-seam-ui.jar` ############ PDF# email ################## `WEB-INF/lib` # `jboss-seam-pdf.jar` ### `jboss-seam-mail.jar` ############

Seam ############ (facelets ###############) #### WAR# `WEB-INF/lib#######jboss-seam-debug.jar######`

############## EJB 3.0######## Java EE################## Seam ##################

################################## ####3 ############## ##

29.4. J2EE## Seam

Seam # EJB 3.0 ###################### ######### EJB 3.0 ####### Hibernate3 # JPA ##### ##### Bean ######### JavaBean ############## ##### Bean ##################### ######### EJB 3.0 ################## ####### Seam ################################

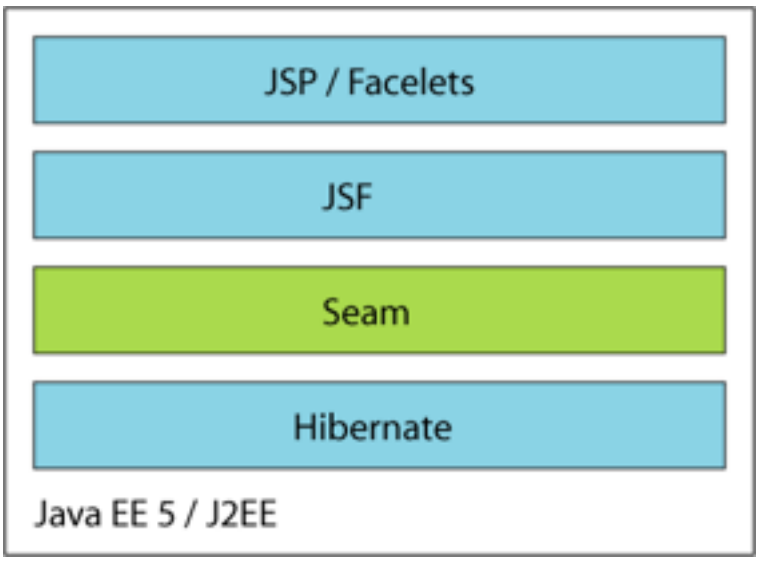

Seam JavaBean ############## Bean ########################### #### JTA `UserTransaction` ####### #### Seam # `@Transactional` ################## ##### ### JavaBean # Hibernate ###################### Seam ##################

Seam ##############EJB3 ##### Hibernate # JavaBean ##### ###################### ##################J2EE############## ############

29.4.1. Seam ## Hibernate#########

Seam ########################## `hibernate.cfg.xml` ###### Hibernate # `SessionFactory` #############

```
<persistence:hibernate-session-factory name="hibernateSessionFactory"/>
```

##################Seam##### Hibernate#Session########### *managed session##############*

```
<persistence:managed-hibernate-session name="hibernateSession"
                        session-factory="#{hibernateSessionFactory}"/>
```

29.4.2. Seam ## JPA#########

Seam ##############################persistence.xml ##EntityManagerFactory JPA##############

```
<persistence:entity-manager-factory name="entityManagerFactory"/>
```

######### Seam ###JPA EntityManager ############ ########## ##############

```
<persistence:managed-persistence-context name="entityManager"
                        entity-manager-factory="#{entityManagerFactory}"/>
```

29.4.3.

######### WAR#################################

```
my-application.war/
   META-INF/
      MANIFEST.MF
   WEB-INF/
      web.xml
      components.xml
      faces-config.xml
      lib/
         jboss-seam.jar
         jboss-seam-ui.jar
         jboss-el.jar
         jsf-facelets.jar
         hibernate3.jar
         hibernate-annotations.jar
         hibernate-validator.jar
         ...
         my-application.jar/
            META-INF/
```

```
        MANIFEST.MF
      seam.properties
      hibernate.cfg.xml
      org/
        jboss/
          myapplication/
            User.class
            Login.class
            Register.class
            ...
  login.jsp
  register.jsp
  ...
```

Hibernate # Tomcat # TestNG #### EE ################################

29.5. JBoss Embedded ### Java SE # Seam

Seam #### EE ################## ##### ##### JTA ##### Seam ################################## JPA ########## Seam # JPA ################## `EntityTransaction` ####################

```
<transaction:entity-transaction entity-manager="#{entityManager}"/>
```

Hibernate ########## Seam ###### Hibernate ######## API ###################

```
<transaction:hibernate-transaction session="#{session}"/>
```

###################

########## JBoss Embedded ##### EE # API #########

29.6. JBoss Embedded #### Java SE # Seam

JBoss Embedded ### Java EE 5 ###################### EJB 3 ############################ ############ ############

Seam ################ TestNG ############## `SeamTest` #### JBoss Embedded #######

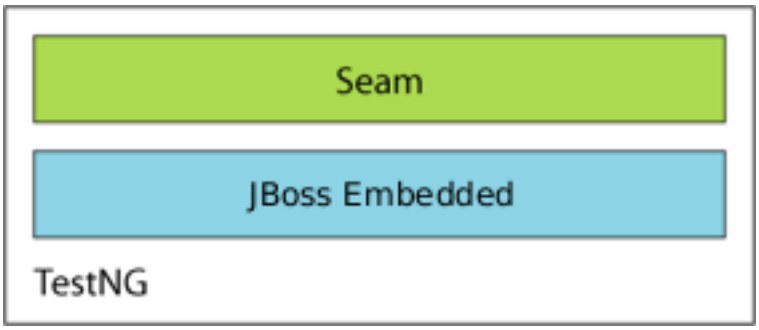

################## Tomcat ###########

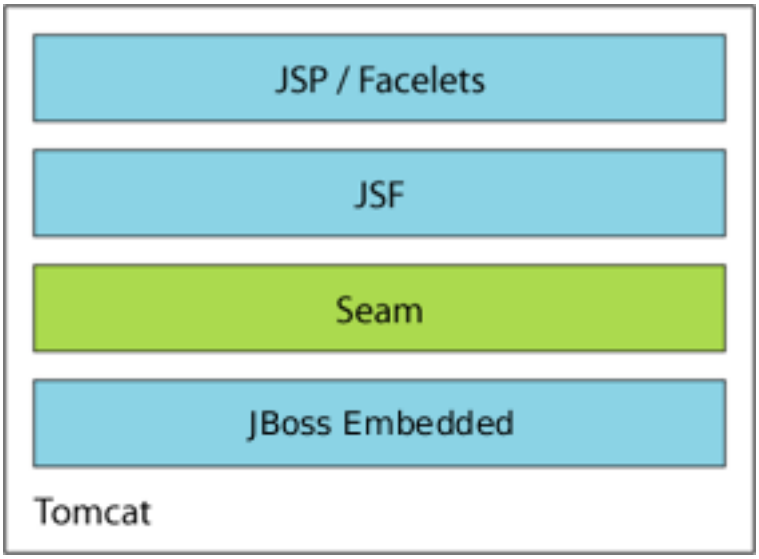

29.6.1. Embedded JBoss

Embedded JBoss ########### Seam ########## Tomcat ################## Embedded JBoss # JDK 5 ### JDK 6 ###### (JDK 6 ######### *#40.1. #JDK #####* ###)# Embedded JBoss # ## [http://sourceforge.net/project/showfiles.php?group_id=22866&package_id=228977] ############ Embedded JBoss # Tomcat 6 ##################### ### Embedded JBoss JAR ########## Tomcat ########

- `jndi.properties` ######## Embedded JBoss # `bootstrap` ####### `lib` ########################## Tomcat # `lib` ##############
- Tomcat # `lib` ######## `annotations-api.jar` ###########

Embedded JBoss ############ 2

- Embedded JBoss #### `EmbeddedJBossBootstrapListener` # `conf/server.xml` ####### ###################################

```
<Server port="8005" shutdown="SHUTDOWN">
```

```
  <!-- Comment these entries out to disable JMX MBeans support used for the
       administration web application -->
  <Listener className="org.apache.catalina.core.AprLifecycleListener" />
  <Listener className="org.apache.catalina.mbeans.ServerLifecycleListener" />
  <Listener className="org.apache.catalina.mbeans.GlobalResourcesLifecycleListener" />
  <Listener className="org.apache.catalina.storeconfig.StoreConfigLifecycleListener"/>
```

```
<!-- Add this listener -->
  <Listener className="org.jboss.embedded.tomcat.EmbeddedJBossBootstrapListener"/>
```

- WAR ########## `WebinfScanner` ##### `conf/context.xml` ##################

```
<Context>
    <!-- Default set of monitored resources -->
    <WatchedResource
>WEB-INF/web.xml</WatchedResource>

    <!-- Uncomment this to disable session persistence across Tomcat restarts -->
    <!--
    <Manager pathname="" />
    -->
```

```
<!-- Add this listener -->
  <Listener className="org.jboss.embedded.tomcat.WebinfScanner"/>
```

```
</Context
>
```

- If you are using JDK 6, you must set the Java option `sun.lang.ClassLoader.allowArraySyntax` to `true` in Tomcat's startup script (either catalina.bat or catalina.sh):

```
set JAVA_OPTS=%JAVA_OPTS% -
Djava.util.logging.manager=org.apache.juli.ClassLoaderLogManager -
Djava.util.logging.config.file="%CATALINA_BASE%\conf\logging.properties" -
Dsun.lang.ClassLoader.allowArraySyntax=true
```

################ Embedded JBoss Tomcat ## *wiki* #### [http://wiki.jboss.org/wiki/Wiki.jsp?page=EmbeddedAndTomcat] ##########

29.6.2.

Tomcat #### ############ WAR ##################################

```
my-application.war/
   META-INF/
      MANIFEST.MF
   WEB-INF/
      web.xml
      components.xml
      faces-config.xml
      lib/
         jboss-seam.jar
         jboss-seam-ui.jar
         jboss-el.jar
         jsf-facelets.jar
         jsf-api.jar
         jsf-impl.jar
         ...
         my-application.jar/
            META-INF/
               MANIFEST.MF
               persistence.xml
            seam.properties
            org/
               jboss/
                  myapplication/
                     User.class
                     Login.class
                     LoginBean.class
                     Register.class
                     RegisterBean.class
                     ...
   login.jsp
   register.jsp
   ...
```

Seam ##############`ant deploy.tomcat` ############ Tomcat

29.7. Seam##jBPM##

Seam # jBPM ## jBPM ############## ### ################## `components.xml` ################

```
<bpm:jbpm>
   <bpm:pageflow-definitions>
      <value
>createDocument.jpdl.xml</value>
      <value
>editDocument.jpdl.xml</value>
      <value
>approveDocument.jpdl.xml</value>
   </bpm:pageflow-definitions>
   <bpm:process-definitions>
      <value
>documentLifecycle.jpdl.xml</value>
   </bpm:process-definitions>
</bpm:jbpm
>
```

jBPM ##### jBPM ## Hibernate ###############Seam DVD Store demo# Seam ##### `jbpm.cfg.xml#hibernate.cfg.xml#### #######`

```
<jbpm-configuration>

 <jbpm-context>
   <service name="persistence">
     <factory>
       <bean class="org.jbpm.persistence.db.DbPersistenceServiceFactory">
         <field name="isTransactionEnabled"
><false/></field>
       </bean>
     </factory>
   </service>
   <service name="tx" factory="org.jbpm.tx.TxServiceFactory" />
   <service name="message" factory="org.jbpm.msg.db.DbMessageServiceFactory" />
   <service name="scheduler" factory="org.jbpm.scheduler.db.DbSchedulerServiceFactory" />
   <service name="logging" factory="org.jbpm.logging.db.DbLoggingServiceFactory" />
   <service name="authentication"
         factory="org.jbpm.security.authentication.DefaultAuthenticationServiceFactory" />
```

```
  </jbpm-context>

</jbpm-configuration
>
```

################jBPM############################
Seam#####EJB3#JTA###################

29.7.1.

jBPM ## Seam
###################### EAR ####################
EAR

```
my-application.ear/
    jboss-seam.jar
    lib/
       jboss-el.jar
       jbpm-3.1.jar
    META-INF/
        MANIFEST.MF
        application.xml
    my-application.war/
        META-INF/
            MANIFEST.MF
        WEB-INF/
            web.xml
            components.xml
            faces-config.xml
            lib/
                jsf-facelets.jar
                jboss-seam-ui.jar
        login.jsp
        register.jsp
        ...
    my-application.jar/
        META-INF/
            MANIFEST.MF
            persistence.xml
        seam.properties
        org/
            jboss/
                myapplication/
                    User.class
```

```
            Login.class
            LoginBean.class
            Register.class
            RegisterBean.class
            ...
   jbpm.cfg.xml
   hibernate.cfg.xml
   createDocument.jpdl.xml
   editDocument.jpdl.xml
   approveDocument.jpdl.xml
   documentLifecycle.jpdl.xml
```

29.8. JBoss AS## SFSB################

########### Bean ######## HTTP ################################## ####### SFSB ###### HTTP ############################## JBoss Application Server ###### Bean ############## 30 ##### server/default/conf/standardjboss.xml (default ####################) ##########

SFSB ####### `LRUStatefulContextCachePolicy` ######### `max-bean-life`

```
<container-cache-conf>
   <cache-policy
>org.jboss.ejb.plugins.LRUStatefulContextCachePolicy</cache-policy>
   <cache-policy-conf>
      <min-capacity
>50</min-capacity>
      <max-capacity
>1000000</max-capacity>
      <remover-period
>1800</remover-period>

      <!-- SFSB timeout in seconds; 1800 seconds == 30 minutes -->
      <max-bean-life
>1800</max-bean-life
>

      <overager-period
>300</overager-period>
      <max-bean-age
>600</max-bean-age>
      <resizer-period
```

```
>400</resizer-period>
      <max-cache-miss-period
>60</max-cache-miss-period>
      <min-cache-miss-period
>1</min-cache-miss-period>
      <cache-load-factor
>0.75</cache-load-factor>
   </cache-policy-conf>
</container-cache-conf
>
```

HTTP ############ JBoss 4.0.x ## server/default/deploy/jbossweb-tomcat55.sar/conf/web.xml ## JBoss 4.2.x ## server/default/deploy/jboss-web.deployer/conf/web.xml ################ ###############

```
<session-config>
   <!-- HTTP Session timeout, in minutes -->
   <session-timeout
>30</session-timeout>
</session-config
>
```

web.xml

29.9. Portlet # Seam

Seam ######### porlet ########## Seam ### RichFaces ####### portlet ## JSF ####### JSR-301 ### JBoss Portlet Bridge ########## ### *http://labs.jboss.com/portletbridge* ##########

29.10.

Seam ########## /seam.properties# /META-INF/components.xml# ### /META-INF/seam.properties ####### jar ######### ##### @Name ################### Seam ########## Seam ########

Seam ######################### ############################## Seam ##################### ## Seam # /META-INF/seam-deployment.properties

```
# A colon-separated list of annotation types to handle
```

```
org.jboss.seam.deployment.annotationTypes=com.acme.Foo:com.acme.Bar
```

################ `@Foo` ################################

```
@Name("fooStartup")
@Scope(APPLICATION)
@Startup
public class FooStartup {

   @In("#{deploymentStrategy.annotatedClasses['com.acme.Foo']}")
   private Set<Class<Object
>
> fooClasses;

   @In("#{hotDeploymentStrategy.annotatedClasses['com.acme.Foo']}")
   private Set<Class<Object
>
> hotFooClasses;

   @Create
   public void create() {
      for (Class clazz : fooClasses) {
         handleClass(clazz);
      }
      for (Class clazz : hotFooClasses) {
         handleClass(clazz);
      }
   }

}
```

`.foo.xml` ######################

```
public class FooDeploymentHandler implements DeploymentHandler {

   private Set<InputStream
> files = new HashSet<InputStream
>();

   public String getName() {
      return "fooDeploymentHandler";
```

```
  }

  public Set<InputStream
> getFiles() {
    return files;
  }

  public void handle(String name, ClassLoader classLoader) {
    if (name.endsWith(".foo.xml")) {
      files.add(classLoader.getResourceAsStream(name));
    }
  }
}
```

########## `.foo.xml` ##########################

################ Seam ############## `/META-INF/seam-deployment.properties` ######

```
# For standard deployment
org.jboss.seam.deployment.deploymentHandlers=com.acme.FooDeploymentHandler
# For hot deployment
org.jboss.seam.deployment.hotDeploymentHandlers=com.acme.FooDeploymentHandler
```

##

Seam ## handle() # Seam ## #### `APPLICATION` ##

```
@Name("fooStartup")
@Scope(APPLICATION)
@Startup
public class FooStartup {

  @In("#{deploymentStrategy['fooDeploymentHandler']}")
  private MyDeploymentHandler myDeploymentHandler;

  @In("#{hotDeploymentStrategy['fooDeploymentHandler']}")
  private MyDeploymentHandler myHotDeploymentHandler;

  @Create
  public void create() {
    for (InputStream is : myDeploymentHandler.getFiles()) {
```

```
        handleFooXml(is);
      }
      for (InputStream is : myHotDeploymentHandler.getFiles()) {
        handleFooXml(is);
      }
    }

}
```

Seam

Seam ## Seam ## EJB 3.0 ############################ Hibernate Validator ################### Seam # Seam ####################################

#################### `org.jboss.seam.annotations` ########

30.1.

################## Seam ##

`@Name`

```
@Name("componentName")
```

####### Seam ######################### # Seam ##################

`@Scope`

```
@Scope(ScopeType.CONVERSATION)
```

########################### ##### `ScopeType` ######### `EVENT, PAGE, CONVERSATION, SESSION, BUSINESS_PROCESS, APPLICATION, STATELESS` ########

#################### ########################### ########### Bean ###### ###### `STATELESS` ###### ###### bean ############### Bean ### ###### `CONVERSATION` #### JavaBeans ######## `EVENT` ######

`@Role`

```
@Role(name="roleName", scope=ScopeType.SESSION)
```

Seam ################################## `@Name`/`@Scope` ########################## # `@Role` ####################

- `name` — ############
- `scope` — ################ ################## ##############################

`@Roles`

```
@Roles({
      @Role(name="user", scope=ScopeType.CONVERSATION),
      @Role(name="currentUser", scope=ScopeType.SESSION)
  })
```

##########################

`@BypassInterceptors`

```
@BypassInterceptors
```

##

`@JndiName`

```
@JndiName("my/jndi/name")
```

Seam # EJB ################### JNDI ######## JNDI ############### Seam # `org.jboss.seam.core.init.jndiPattern` ###### JNDI ###########

`@Conversational`

```
@Conversational
```

###

`@PerNestedConversation`

```
@PerNestedConversation
```

###

###

`@Startup`

```
@Scope(APPLICATION) @Startup(depends="org.jboss.seam.bpm.jbpm")
```

########## ### JNDI# ##########

```
@Scope(SESSION) @Startup
```

##########

- `depends` — ##########

`@Install`

```
@Install(false)
```

########## `@Install` ##########

```
@Install(dependencies="org.jboss.seam.bpm.jbpm")
```

##########

```
@Install(genericDependencies=ManagedQueueSender.class)
```

########## ##########

```
@Install(classDependencies="org.hibernate.Session")
```

##########

```
@Install(precedence=BUILT_IN)
```

########## ########## ########## ########## (##) :

- `BUILT_IN` — ########Seam###########
- `FRAMEWORK` — Seam##########
- `APPLICATION` — Predence of application components (the default precedence)

- `DEPLOYMENT` — ##
- `MOCK` — ######################

`@Synchronized`

```
@Synchronized(timeout=1000)
```

################################## Seam ###################### ##

`@ReadOnly`

```
@ReadOnly
```

JavaBean ##

`@AutoCreate`

```
@AutoCreate
```

################################ `create=true` ################

30.2.

############################ ##

`@In`

```
@In
```

null #########

```
@In(required=false)
```

null

```
@In(create=true)
```

null ################### Seam

```
@In(value="contextVariableName")
```

############################## ####################

```
@In(value="#{customer.addresses['shipping']}")
```

############################ JSF EL ############################

- `value` — ### `#{...}` ##### JSF EL ########
- `create` — ######################## (null) #### Seam ## false ###
- `required` — ############################ Seam ################

`@Out`

```
@Out
```

Seam ## ### null #### #########

```
@Out(required=false)
```

Seam ## ### null ########

```
@Out(scope=ScopeType.SESSION)
```

Seam ##

#################### #### `@Out` ########################## (#################### `EVENT`) #

```
@Out(value="contextVariableName")
```

############################ ####################

- `value` — ######################################
- `required` — ##################### null ###### Seam #################

###################### #:

```
@In(create=true) @Out private User currentUser;
```

The next annotation supports the *manager component* pattern, where a Seam component that manages the lifecycle of an instance of some other class that is to be injected. It appears on a component getter method.

`@Unwrap`

```
@Unwrap
```

############### getter ##

The next annotation supports the *factory component* pattern, where a Seam component is responsible for initializing the value of a context variable. This is especially useful for initializing any state needed for rendering the response to a non-faces request. It appears on a component method.

`@Factory`

```
@Factory("processInstance") public void createProcessInstance() { ... }
```

################ ## ####### `void` ##############

```
@Factory("processInstance", scope=CONVERSATION) public ProcessInstance createProcessInstance() { ... }
```

################ Seam ### ###################### ################### `@Factory`

############################ (########################
##################EVENT ############) #

- `value` — ######################## getter ######## JavaBeans
  ####################
- `scope` — Seam###
- `autoCreate` — ##@In # `create=true`
  ##################

`Log` ################:

`@Logger`

```
@Logger("categoryName")
```

############ `org.jboss.seam.log.Log` ################## ###### Bean ####
######## static #################

- `value` — ####################################

################################:

`@RequestParameter`

```
@RequestParameter("parameterName")
```

############################## ##################

- `value` — ####################################

30.3.

############### ##
#####################################

`@Create`

```
@Create
```

################ Seam ################################## create ##### JavaBeans ############### Bean ##########################

`@Destroy`

```
@Destroy
```

destroy ##### JavaBeans ############### Bean

Destroy ############################## *Seam # destroy* ######################################

`@Observer`

```
@Observer("somethingChanged")
```

##

```
@Observer(value="somethingChanged",create=false)
```

###
create # false ##################create ######## true ###

30.4.

############################ #### Seam ######################################

Web ############################ ######################## ####################@Begin ################## #### *(long-running conversation)*

`@Begin`

```
@Begin
```

############ null ##### (outcome) ########################

```
@Begin(join=true)
```

################## ########################

```
@Begin(nested=true)
```

################## ################################ ## @End
##

```
@Begin(pageflow="process definition name")
```

################## jBPM ################

```
@Begin(flushMode=FlushModeType.MANUAL)
```

Seam ########################## `flushMode=FlushModeType.MANUAL` # ########
(atomic conversation) ######### ##### `flush()` (### ############)
################ ################################

- `join` — ##########################`true` ################## `false`
  ###################### `false` ###`nested=true` ########################
- `nested` — ##
- `flushMode` — ########## Seam ### Hibernate ######### JPA
  ##########################
- `pageflow` — `org.jboss.seam.bpm.jbpm.pageflowDefinitions` ########### jBPM
  ################

`@End`

```
@End
```

############ null ##### (outcome) ###### ################

- `beforeRedirect` —
  ####################################`beforeRedirect=true`
  ##
- `root` — ##`root=true`
  #########
  ##

`@StartTask`

```
@StartTask
```

jBPM ############ ############ null ##### (outcome) ###### ################## ###################### jBPM ############ ############## ############################## ######################

- The jBPM `TaskInstance` will be available in a request context variable named `taskInstance`. The jPBM `ProcessInstance` will be available in a request context variable named `processInstance`. (Of course, these objects are available for injection via `@In`.)
- `taskIdParameter` — ####ID###################### `"taskId"` ###### Seam `taskList` JSF ##########################
- `flushMode` — ########## Seam ### Hibernate ######### JPA ##########################

`@BeginTask`

```
@BeginTask
```

####### jBPM ############# ############ null ##### (outcome) ###### ################## ###################### jBPM ############ ############## ############################## ######################

- The jBPM `org.jbpm.taskmgmt.exe.TaskInstance` will be available in a request context variable named `taskInstance`. The jPBM `org.jbpm.graph.exe.ProcessInstance` will be available in a request context variable named `processInstance`.
- `taskIdParameter` — ####ID###################### `"taskId"` ###### Seam `taskList` JSF ##########################
- `flushMode` — ########## Seam ### Hibernate ######### JPA ##########################

`@EndTask`

```
@EndTask
```

jBPM ############ ####### null ##### (outcome) ###### ######### ################### jBPM ########### ######### `transition` ################ `Transition.setName ()` ########## ############################

```
@EndTask(transition="transitionName")
```

jBPM

- `transition` — ################## jBPM ######## ####################
- `beforeRedirect` — ######################################`beforeRedirect=true` ##

`@CreateProcess`

```
@CreateProcess(definition="process definition name")
```

########## null ##### (outcome) ###### ### jBPM ################ `ProcessInstance` ####### `processInstance` ####################

- `definition` — `org.jboss.seam.bpm.jbpm.processDefinitions` ########## jBPM ############

`@ResumeProcess`

```
@ResumeProcess(processIdParameter="processId")
```

########## null ##### (outcome) ###### ### jBPM ###################### `ProcessInstance` ####### `processInstance` ##################

- `processIdParameter` — #### ID ################### `"processId"` ###

`@Transition`

```
@Transition("cancel")
```

null ################## jBPM

30.5. J2EE ### Seam JavaBean

Seam ################ (outcome) #### JTA ################################

`@Transactional`

```
@Transactional
```

JavaBean ############# Bean ##
################################
############################ ###################################

EJB 3.0 ######################### `@TransactionAttribute` #########

`@ApplicationException`

```
@ApplicationException
```

javax.ejb.ApplicationException #####Java EE 5
###(#########)#######################

EJB 3.0 ##########################`@javax.ejb.ApplicationException`
##############

- `rollback` — ####### `false` ###`true` ################### rollback only ########
- `end` — ####### `false` ###`true` ########################

`@Interceptors`

```
@Interceptors({DVDInterceptor, CDInterceptor})
```

javax.interceptors.Interceptors #####Java EE 5
###

EJB 3.0 ##########################`@javax.interceptor.Interceptors`
##############

############### JavaBean Seam ################EJB 3.0 ################ Java EE5
################

30.6.

############### Seam ####################################

`@Redirect`

```
@Redirect(viewId="error.jsp")
```

########################## ID ################

- `viewId` — ######## JSF ### ID ###### EL ########
- `message` — ############ ##################
- `end` — ################ ###### `false` ###

`@HttpError`

```
@HttpError(errorCode=404)
```

################## HTTP ###########

- `errorCode` — HTTP ######### ###### `500` ###
- `message` — HTTP ################ ##################
- `end` — ################ ###### `false` ###

30.7. Seam Remoting#########

Seam Remoting################ ##### Bean ################

`@WebRemote`

```
@WebRemote(exclude="path.to.exclude")
```

Indicates that the annotated method may be called from client-side JavaScript. The `exclude` property is optional and allows objects to be excluded from the result's object graph (see the Remoting chapter for more details).

30.8. Seam

############Seam ################

EJB ########################## EJB 3.0 ##################

`@Interceptor`

```
@Interceptor(stateless=true)
```

############################## Seam ####################

```
@Interceptor(type=CLIENT)
```

######### EJB ##

```
@Interceptor(around={SomeInterceptor.class, OtherInterceptor.class})
```

##

```
@Interceptor(within={SomeInterceptor.class, OtherInterceptor.class})
```

##

30.9.

############################## #:

```
@Asynchronous public void scheduleAlert(Alert alert, @Expiration Date date) { ... }
```

```
@Asynchronous public Timer scheduleAlerts(Alert alert,
  @Expiration Date date,
  @IntervalDuration long interval) { ... }
```

`@Asynchronous`

```
@Asynchronous
```

############################

`@Duration`

```
@Duration
```

################ ############################## (############################) #

`@Expiration`

```
@Expiration
```

################ ############ (########################) ##################

`@IntervalDuration`

```
@IntervalDuration
```

######################

30.10. JSF

########## JSF #################

`@Converter`

Seam ######## JSF ###################################### Seam ################### `javax.faces.convert.Converter` ##############

- `id` — JSF #####ID###################
- `forClass` — ##

`@Validator`

Seam ######## JSF ###################################### Seam ################### `javax.faces.validator.Validator` ##############

- `id` — JSF #####ID###################

30.10.1. `dataTable`

####################### Bean ######################### ######################

`@DataModel`

```
@DataModel("variableName")
```

List, Map, Set ### Object[] ######## JSF DataModel ##################################(############### STATELESS #### EVENT ####)#Map ####DataModel #### Map.Entry ###

- value — ##############################
- scope — scope=ScopeType.PAGE ###############DataModel # PAGE ##############

@DataModelSelection

```
@DataModelSelection
```

JSF DataModel ###################(### DataModel # Collection ####### Map ####)############### @DataModel ################ DataModel ############################## @DataModel ############ @DataModelSelection # value ################

####### @DataModel # PAGE ################ DataModel Selection ######################## DataModel ##################@DataModel ##################### getter ################ setter ##### Seam ############API###########

- value — ############################ @DataModel ############

@DataModelSelectionIndex

```
@DataModelSelectionIndex
```

JSF DataModel ################################(### DataModel # Collection ######## Map #####)############### @DataModel ################ DataModel ############################## @DataModel ############ @DataModelSelectionIndex # value ################

- value — ############################ @DataModel ############

30.11.

############################## @DataModel # @DataModelSelection ##################

@DataBinderClass

```
@DataBinderClass(DataModelBinder.class)
```

##

`@DataSelectorClass`

```
@DataSelectorClass(DataModelSelector.class)
```

##################################

30.12.

########## ## ## Java ################

`@Namespace`

```
@Namespace(value="http://jboss.com/products/seam/example/seampay")
```

`components.xml` ###### XML

```
@Namespace(value="http://jboss.com/products/seam/core", prefix="org.jboss.seam.core")
```

############################ ### XML ## ##### ############## `init` ### XML ####### `org.jboss.seam.core.init` ########################

30.13.

############ Seam ################################

`@Filter`

`@Filter` ############## Seam ####### (`javax.servlet.Filter` #######) ####################Seam ################

```
@Filter(around={"seamComponent", "otherSeamComponent"})
```

##

```
@Filter(within={"seamComponent", "otherSeamComponent"})
```

##

Seam

Seam ############ ###################### ############ components.xml ################### ########################## 1 ######################## components.xml

@Name ################################ ##################################

31.1.

################### ### ##### ############################ Seam ############################

```
@In private Context sessionContext;
```

org.jboss.seam.core.contexts
Seam ########################## ##### org.jboss.seam.core.contexts.sessionContext['user'] ###

org.jboss.seam.faces.facesContext
FacesContext ############ (#### Seam ##########) ##########

############################

31.2.

############################

org.jboss.seam.faces.facesMessages
################## faces ####################

- add(FacesMessage facesMessage) — faces ############ ##################################
- add(String messageTemplate) — faces ############ EL ####################################
- add(Severity severity, String messageTemplate) — faces ############ EL ####################################
- addFromResourceBundle(String key) — faces ############ EL ########## Seam ####################################
- addFromResourceBundle(Severity severity, String key) — faces ############ EL ########## Seam ####################################
- clear() — #############

`org.jboss.seam.faces.redirect`
######################## API ## (#########################)#

- `redirect.viewId` — ########## JSF ### ID ###
- `redirect.conversationPropagationEnabled` — ############################
- `redirect.parameters` — ################# ###############
- `execute()` — ################
- `captureCurrentRequest()` — ### GET ## (#########) ############ ID ####### `execute()` ##############

`org.jboss.seam.faces.httpError`
HTTP ############## API ###

`org.jboss.seam.core.events`
`@Observer` ######## `components.xml` ################################ API ###

- `raiseEvent(String type)` — ###############################
- `raiseAsynchronousEvent(String type)` — EJB3 ###############################
- `raiseTimedEvent(String type, ....)` — EJB3 ###################################
- `addListener(String type, String methodBinding)` — ####################

`org.jboss.seam.core.interpolator`
Strings # JFS EL ############ API ###

- `interpolate(String template)` — `#{...}` ### JSF EL ############################

`org.jboss.seam.core.expressions`
###################### API ###

- `createValueBinding(String expression)` — ####################
- `createMethodBinding(String expression)` — ########################

`org.jboss.seam.core.pojoCache`
JBoss Cache `PojoCache` ###################

- `pojoCache.cfgResourceName` — ########## ####### `treecache.xml` ########

############################

31.3.

############## Seam ################################

`org.jboss.seam.core.locale`
Seam #######

`org.jboss.seam.international.timezone`
Seam ########## ####################

`org.jboss.seam.core.resourceBundle`
Seam ########## ###################### Seam ######### Java ############################

`org.jboss.seam.core.resourceLoader`
##

- `resourceLoader.bundleNames` — Seam ##################### Java ############ ###### `messages` ######

`org.jboss.seam.international.localeSelector`
#######################################

- `select()` — ################
- `localeSelector.locale` — ### `java.util.Locale` ###
- `localeSelector.localeString` — #############
- `localeSelector.language` — ###############
- `localeSelector.country` — ##############
- `localeSelector.variant` — ##################
- `localeSelector.supportedLocales` — `jsf-config.xml` ################## `SelectItem` #####
- `localeSelector.cookieEnabled` — ############################

`org.jboss.seam.international.timezoneSelector`
#######################################

- `select()` — ################
- `timezoneSelector.timezone` — ### `java.util.TimeZone` ###
- `timezoneSelector.timeZoneId` — ###############
- `timezoneSelector.cookieEnabled` — ################################

`org.jboss.seam.international.messages`
Seam ##

`org.jboss.seam.theme.themeSelector`
#####################################

- select() — ###############
- theme.availableThemes — ##############
- themeSelector.theme — ###########
- themeSelector.themes — ############## SelectItem ######
- themeSelector.cookieEnabled — ##########################

org.jboss.seam.theme.theme
###################

##########################

31.4.

###

org.jboss.seam.core.conversation
Seam ##################### API

- getId() — ##### ID ######
- isNested() — ###################?
- isLongRunning() — #################?
- getId() — ##### ID ######
- getParentId() — #### ID ######
- getRootId() — ###### ID ######
- setTimeout(int timeout) — ####################
- setViewId(String outcome) — ######### ###################################### ### ID ########
- setDescription(String description) — ######### ######################################
- redirect() — ################### ID ########## (##############)#
- leave() — ############################
- begin() — ############## (@Begin ###)#
- beginPageflow(String pageflowName) — ######################## (@Begin(pageflow="...") ###)#
- end() — ############## (@End ###)#

- `pop()` — ####################
- `root()` — ##################
- `changeFlushMode(FlushModeType flushMode)` — ##################

`org.jboss.seam.core.conversationList`
##################

`org.jboss.seam.core.conversationStack`
################## (breadcrumbs)#

`org.jboss.seam.faces.switcher`
conversation switcher ###

############################

31.5. jBPM

jBPM ##################

`org.jboss.seam.pageflow.pageflow`
Seam ####### API #####

- `isInProcess()` — ##################### `true` ######
- `getProcessInstance()` — ########## jBPM `ProcessInstance` ######
- `begin(String pageflowName)` — ############################
- `reposition(String nodeName)` — ########################

`org.jboss.seam.bpm.actor`
############ jBPM actor ################## API ###

- `setId(String actorId)` — ######## jBPM #### ID ########
- `getGroupActorIds()` — ############### jBPM #### ID ######### `Set` ######

`org.jboss.seam.bpm.transition`
########## jBPM ################## API ###

- `setName(String transitionName)` — ####### `@EndTask` ############# jBPM ##########

`org.jboss.seam.bpm.businessProcess`
############################## API ###

- `businessProcess.taskId` — ################ ID ###
- `businessProcess.processId` — ################## ID ###

- businessProcess.hasCurrentTask() — ##########################?
- businessProcess.hasCurrentProcess() — ##########################
- createProcess(String name) — ################################
- startTask() — ######################
- endTask(String transitionName) — ######################
- resumeTask(Long id) — ### ID ###################
- resumeProcess(Long id) — ### ID ###################
- transition(String transitionName) — ##########

org.jboss.seam.bpm.taskInstance
jBPM TaskInstance #############

org.jboss.seam.bpm.processInstance
jBPM ProcessInstance #############

org.jboss.seam.bpm.jbpmContext
######## JbpmContext #############

org.jboss.seam.bpm.taskInstanceList
jBPM task list #############

org.jboss.seam.bpm.pooledTaskInstanceList
jBPM pooled task list #############

org.jboss.seam.bpm.taskInstanceListForType
jBPM ###################

org.jboss.seam.bpm.pooledTask
pooled task #################

org.jboss.seam.bpm.processInstanceFinder
######################

org.jboss.seam.bpm.processInstanceList
##################

org.jboss.seam.bpm.jbpm ##

31.6.

################################

org.jboss.seam.web.userPrincipal
####### Principal #############

`org.jboss.seam.web.isUserInRole`
`######################` JSF `################################` `<h:commandButton value="edit" rendered="#{isUserInRole['admin']}"/>`

31.7. JMS

`##################` `TopicPublisher` `###` `QueueSender` `##############` (####)#

`org.jboss.seam.jms.queueSession`
JMS `QueueSession` `#############`

`org.jboss.seam.jms.topicSession`
JMS `TopicSession` `#############`

31.8.

Seam Email `######################`

`org.jboss.seam.mail.mailSession`
JavaMail `Session` `#############` `######` JNDI `###############` (`sessionJndiName` `########`)`######################` `######` `host` `#########`

- `org.jboss.seam.mail.mailSession.host` — #### SMTP `############`
- `org.jboss.seam.mail.mailSession.port` — #### SMTP `############`
- `org.jboss.seam.mail.mailSession.username` — SMTP `######################`
- `org.jboss.seam.mail.mailSession.password` — SMTP `######################`
- `org.jboss.seam.mail.mailSession.debug` — JavaMail `###############` (#####)#
- `org.jboss.seam.mail.mailSession.ssl` — SMTP ## SSL `#########` (#########465)#

  `org.jboss.seam.mail.mailSession.tls` — `#######` true `###` `#########` TLS `############`
- `org.jboss.seam.mail.mailSession.sessionJndiName` — JNDI `########` javax.mail.Session `########` `##########################`

31.9.

`####################################` `##########################` `components.xml` `############` `install="true"` `######################`

`org.jboss.seam.core.init`
Seam `#########` `#############`

- org.jboss.seam.core.init.jndiPattern — ##### Bean ############ JNDI #######
- org.jboss.seam.core.init.debug — Seam ############## ##### false ########## ##
- org.jboss.seam.core.init.clientSideConversations — true ####### Seam ############ HttpSession ########################
- org.jboss.seam.core.init.userTransactionName — JTA UserTransaction ###################### JNDI ####

org.jboss.seam.core.manager

Seam ############################## ############

- org.jboss.seam.core.manager.conversationTimeout — ############################
- org.jboss.seam.core.manager.concurrentRequestTimeout — ##
- org.jboss.seam.core.manager.conversationIdParameter — ## ID ################# ###### conversationId ###
- org.jboss.seam.core.manager.conversationIsLongRunningParameter — ###################################### ###### conversationIsLongRunning ###
- org.jboss.seam.core.manager.defaultFlushMode — #### Seam ## ###### AUTO ###

org.jboss.seam.navigation.pages

Seam ######################## ############

- org.jboss.seam.navigation.pages.noConversationViewId — ######################## ID #################
- org.jboss.seam.navigation.pages.loginViewId — ################################### ID #################
- org.jboss.seam.navigation.pages.httpPort — http ###############################
- org.jboss.seam.navigation.pages.httpsPort — https ###############################
- org.jboss.seam.navigation.pages.resources — pages.xml ###################### ###### WEB-INF/pages.xml ###

org.jboss.seam.bpm.jbpm

JbpmConfiguration ############ ### org.jboss.seam.bpm.Jbpm ############

- `org.jboss.seam.bpm.jbpm.processDefinitions` — ################ jPDL ###############
- `org.jboss.seam.bpm.jbpm.pageflowDefinitions` — ################ jPDL ###############

`org.jboss.seam.core.conversationEntries`
##

`org.jboss.seam.faces.facesPage`
##

`org.jboss.seam.persistence.persistenceContexts`
####################################

`org.jboss.seam.jms.queueConnection`
Manages a JMS `QueueConnection`. Installed whenever managed managed `QueueSender` is installed.

- `org.jboss.seam.jms.queueConnection.queueConnectionFactoryJndiName` — JMS `QueueConnectionFactory` # JNDI #### ###### `UIL2ConnectionFactory` ###

`org.jboss.seam.jms.topicConnection`
Manages a JMS `TopicConnection`. Installed whenever managed managed `TopicPublisher` is installed.

- `org.jboss.seam.jms.topicConnection.topicConnectionFactoryJndiName` — JMS `TopicConnectionFactory` # JNDI #### ###### `UIL2ConnectionFactory` ###

`org.jboss.seam.persistence.persistenceProvider`
JPA ##########################

`org.jboss.seam.core.validators`
Hibernate Validator `ClassValidator` ################

`org.jboss.seam.faces.validation`
####################################

`org.jboss.seam.debug.introspector`
Seam Debug Page ########

`org.jboss.seam.debug.contexts`
Seam Debug Page ########

`org.jboss.seam.exception.exceptions`
##################

`org.jboss.seam.transaction.transaction`
############ JTA ## API ###

`org.jboss.seam.faces.safeActions`
URL ######################

31.10.

`org.jboss.seam.async.dispatcher`
############################ Bean

`org.jboss.seam.core.image`
##############

`org.jboss.seam.core.pojoCache`
PojoCache ################

`org.jboss.seam.core.uiComponent`
####### ID ######### UIComponents ###########

31.11.

Seam ########## Seam ######### name ################### #### `components.xml` ###### Seam ######## 2

```
<component name="bookingDatabase"
        class="org.jboss.seam.persistence.ManagedPersistenceContext">
   <property name="persistenceUnitJndiName"
>java:/comp/emf/bookingPersistence</property>
</component>

<component name="userDatabase"
        class="org.jboss.seam.persistence.ManagedPersistenceContext">
   <property name="persistenceUnitJndiName"
>java:/comp/emf/userPersistence</property>
</component
>
```

Seam ######### `bookingDatabase` # `userDatabase` ###

<entityManager>, `org.jboss.seam.persistence.ManagedPersistenceContext`
######################### `EntityManager` #############

- *<entityManager>*.entityManagerFactory — `EntityManagerFactory` ########################

<*entityManager*>.persistenceUnitJndiName — ################ JNDI #### ###### java:/<*managedPersistenceContext*> ###

<*entityManagerFactory*>, `org.jboss.seam.persistence.EntityManagerFactory`
JPA `EntityManagerFactory` ####### EJB 3.0 ######### JPA ################

- `entityManagerFactory.persistenceUnitName` — ##########

################ API JavaDoc ########

<*session*>, `org.jboss.seam.persistence.ManagedSession`
############ Hibernate `Session` #############

- <*session*>.sessionFactory — `SessionFactory` ############################

  <*session*>.sessionFactoryJndiName — ########### JNDI #### ###### java:/<*managedSession*> ###

<*sessionFactory*>, `org.jboss.seam.persistence.HibernateSessionFactory`
Hibernate `SessionFactory` #######

- `<sessionFactory>.cfgResourceName` — ################## `hibernate.cfg.xml` ###

################ API JavaDoc ########

<*managedQueueSender*>, `org.jboss.seam.jms.ManagedQueueSender`
############## JMS `QueueSender` #############

- <*managedQueueSender*>.queueJndiName — JMS #### JNDI ####

<*managedTopicPublisher*>, `org.jboss.seam.jms.ManagedTopicPublisher`
############## JMS `TopicPublisher` #############

- <*managedTopicPublisher*>.topicJndiName — JMS ##### JMDI ####

<*managedWorkingMemory*>, `org.jboss.seam.drools.ManagedWorkingMemory`
############ Drools `WorkingMemory` #############

- <*managedWorkingMemory*>.ruleBase — `RuleBase` ####################

<*ruleBase*>, `org.jboss.seam.drools.RuleBase`
############# Drools `RuleBase` ############# ############################ ############################

- <*ruleBase*>.ruleFiles — Drools ################

  <*ruleBase*>.dslFile — Drools DSL #####

<*entityHome*>, `org.jboss.seam.framework.EntityHome`

<*hibernateEntityHome*>, `org.jboss.seam.framework.HibernateEntityHome`

<*entityQuery*>, `org.jboss.seam.framework.EntityQuery`

<*hibernateEntityQuery*>, `org.jboss.seam.framework.HibernateEntityQuery`

Seam JSF

Seam ## Seam ######## JSF ########################## JSF ## Seam ########JBoss RichFaces#Apache MyFaces Trinidad ################## Tomahawk ####################

32.1.

############## ############## "s" ########## (facelets ##)#

```
<html xmlns="http://www.w3.org/1999/xhtml"
    xmlns:s="http://jboss.com/products/seam/taglib"
>
```

UI####(examples/ui)####################

32.1.1. #######

32.1.1.1. `<s:button>`

##

################################ ###############

##

- `value` — ####
- `action` — ########################
- `view` — ##### JSF view id #
- `fragment` — ########## ID #
- `disabled` — ##########
- `propagation` — ########## : `begin`, `join`, `nest`, `none` ### `end` #
- `pageflow` — ############ (`propagation="begin"` ### `propagation="join"` #######)#

###

```
<s:button id="cancel"
        value="Cancel"
        action="#{hotelBooking.cancel}"/>
```

<s:link /> ### view # action ########## ##

<s:button />##########(######JSF##########)##############

32.1.1.2. <s:conversationId>

##

JSF ############ ID ###### (# <h:commandLink />#<s:button />)#

##

##

32.1.1.3. <s:taskId>

##

#####{task}##########(######JSF######)####ID#######

##

##

32.1.1.4. <s:link>

##

################################ ###############

<s:link />##########(######JSF##########)##############

##

- value — ####
- action — ########################
- view — ##### JSF view id #
- fragment — ########## ID #
- disabled — ##########
- propagation — ########## : begin, join, nest, none ### end #
- pageflow — ########## (propagation="begin" ### propagation="join" #######)

###

```
<s:link id="register" view="/register.xhtml"
```

```
    value="Register New User"/>
```

`<s:link />` ### view # action ########## ##

32.1.1.5. `<s:conversationPropagation>`

##

########## (###### JSF ######) ################### *Facelets* #####

##

- ############## : `begin#join#nest#none` ### `end`
- `pageflow` — ############ (`propagation="begin"` ### `propagation="join"` #######)

###

```
<h:commandButton value="Apply" action="#{personHome.update}">
  <s:conversationPropagation type="join" />
</h:commandButton
>
```

32.1.1.6. `<s:defaultAction>`

##

enter##

######### (###`<h:commandButton />`#`<a:commandButton />` ### `<tr:commandButton />`)################

############ID##

##

##

###

```
<h:commandButton id="foo" value="Foo" action="#{manager.foo}">
  <s:defaultAction />
</h:commandButton
>
```

32.1.2.

32.1.2.1. `<s:convertDateTime>`

##

Seam ##########################

##

##

###

```
<h:outputText value="#{item.orderDate}">
  <s:convertDateTime type="both" dateStyle="full"/>
</h:outputText
>
```

32.1.2.2. `<s:convertEntity>`

##

################################ ####################################

##JSF################

##

##

##

`<s:convertEntity />` # *Seam########## (Seam managed transaction)* (*#9.2. #Seam ##########* ##) ###############

############ (Managed Persistence Context) # `entityManager` ############ components.xml#############:

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:ui="http://jboss.com/products/seam/ui">

  <ui:jpa-entity-loader entity-manager="#{em}" />
```

Hibernate ##### #########components.xml#############:

```
<components xmlns="http://jboss.com/products/seam/components"
```

```
        xmlns:ui="http://jboss.com/products/seam/ui">

  <ui:hibernate-entity-loader />
```

Hibernate ##### (Managed Hibernate Session) # session #############components.xml#############:

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:ui="http://jboss.com/products/seam/ui">

  <ui:hibernate-entity-loader session="#{hibernateSession}" />
```

##components.xml
##

```
<components xmlns="http://jboss.com/products/seam/components"
        xmlns:ui="http://jboss.com/products/seam/ui">

   <ui:entity-converter name="standardEntityConverter" entity-loader="#{standardEntityLoader}"
 />

                        <ui:jpa-entity-loader name="standardEntityLoader" entity-
manager="#{standardEntityManager}" />

  <ui:entity-converter name="restrictedEntityConverter" entity-loader="#{restrictedEntityLoader}"
 />

                        <ui:jpa-entity-loader name="restrictedEntityLoader" entity-
manager="#{restrictedEntityManager}" />
```

```
<h:selectOneMenu value="#{person.continent}">
  <s:selectItems value="#{continents.resultList}" var="continent"
            label="#{continent.name}" />
   <f:converter converterId="standardEntityConverter" />
</h:selectOneMenu
>
```

###

```
<h:selectOneMenu value="#{person.continent}" required="true">
  <s:selectItems value="#{continents.resultList}" var="continent"
                 label="#{continent.name}"
                 noSelectionLabel="Please Select..."/>
  <s:convertEntity />
</h:selectOneMenu
>
```

32.1.2.3. `<s:convertEnum>`

##

enum ######################## ##

##

##

###

```
<h:selectOneMenu value="#{person.honorific}">
  <s:selectItems value="#{honorifics}" var="honorific"
                 label="#{honorific.label}"
                 noSelectionLabel="Please select" />
  <s:convertEnum />
</h:selectOneMenu
>
```

32.1.2.4. `<s:convertAtomicBoolean>`

##

`java.util.concurrent.atomic.AtomicBoolean` #### `javax.faces.convert.Converter` ###

##

##

###

```
<h:outputText value="#{item.valid}">
  <s:convertAtomicBoolean />
</h:outputText
>
```

32.1.2.5. `<s:convertAtomicInteger>`

##

`java.util.concurrent.atomic.AtomicInteger` #### `javax.faces.convert.Converter` ###

##

##

###

```
<h:outputText value="#{item.id}">
  <s:convertAtomicInteger />
</h:outputText
>
```

32.1.2.6. `<s:convertAtomicLong>`

##

`java.util.concurrent.atomic.AtomicLong` #### `javax.faces.convert.Converter` ###

##

##

###

```
<h:outputText value="#{item.id}">
  <s:convertAtomicLong />
</h:outputText
>
```

32.1.2.7. `<s:validateEquality>`

##

Tag to nest inside an input control to validate that its parent's value is the same as the referenced control's value.

##

- `for` — ################ID
- `message` — ###############

- `messageId` — ##########ID

###

```
<h:inputText id="name" value="#{bean.name}"/>
<h:inputText id="nameVerification" >
  <s:validateEquality for="name" />
</h:inputText
>
```

32.1.2.8. `<s:validate>`

##

############## Hibernate Validator ################## JSF ##############

##

##

###

```
<h:inputText id="userName" required="true"
            value="#{customer.userName}">
  <s:validate />
</h:inputText>
<h:message for="userName" styleClass="error" />
```

32.1.2.9. `<s:validateAll>`

##

############## Hibernate Validator ######################## JSF ##############

##

##

###

```
<s:validateAll>
  <div class="entry">
    <h:outputLabel for="username"
>Username:</h:outputLabel>
    <h:inputText id="username" value="#{user.username}"
```

```
            required="true"/>
    <h:message for="username" styleClass="error" />
  </div>
  <div class="entry">
    <h:outputLabel for="password"
>Password:</h:outputLabel>
    <h:inputSecret id="password" value="#{user.password}"
                required="true"/>
    <h:message for="password" styleClass="error" />
  </div>
  <div class="entry">
    <h:outputLabel for="verify"
>Verify Password:</h:outputLabel>
    <h:inputSecret id="verify" value="#{register.verify}"
                required="true"/>
    <h:message for="verify" styleClass="error" />
  </div>
</s:validateAll
>
```

32.1.3.

32.1.3.1. `<s:decorate>`

##

############ `required="true"` ########### JSF ######## "##" ####

##

- `template` — ################facelet######

`#{invalid}` # `#{required}` # `s:decorate` ##########; ##########################`#{required}` # `true` ######################### `#{invalid}` # `true` ########

###

```
<s:decorate template="edit.xhtml">
  <ui:define name="label"
>Country:</ui:define>
    <h:inputText value="#{location.country}" required="true"/>
  </s:decorate
>
```

```
<ui:composition xmlns="http://www.w3.org/1999/xhtml"
  xmlns:ui="http://java.sun.com/jsf/facelets"
  xmlns:h="http://java.sun.com/jsf/html"
  xmlns:f="http://java.sun.com/jsf/core"
  xmlns:s="http://jboss.com/products/seam/taglib">

  <div
>

    <s:label styleClass="#{invalid?'error':''}">
      <ui:insert name="label"/>
      <s:span styleClass="required" rendered="#{required}"
>*</s:span>
    </s:label>

    <span class="#{invalid?'error':''}">
      <s:validateAll>
        <ui:insert/>
      </s:validateAll>
    </span>

    <s:message styleClass="error"/>

  </div
>

</ui:composition
>
```

32.1.3.2. `<s:div>`

##

HTML `<div>` ###########

##

##

###

```
<s:div rendered="#{selectedMember == null}">
  Sorry, but this member does not exist.
</s:div
```

```
>
```

32.1.3.3. <s:span>

##

HTML ##########

##

- title — span #####

###

```
<s:span styleClass="required" rendered="#{required}" title="Small tooltip"
>*</s:span
>
```

32.1.3.4. <s:fragment>

##

##/############

##

##

###

```
<s:fragment rendered="#{auction.highBidder ne null}">
  Current bid:
</s:fragment
>
```

32.1.3.5. <s:label>

##

JSF########## "##" ########HTML## <label> ##########JSF##################
<s:decorate>

##

- `style` — ############
- `styleClass` — ################

###

```
<s:label styleClass="label">
  Country:
</s:label>
<h:inputText value="#{location.country}" required="true"/>
```

32.1.3.6. `<s:message>`

##

############ JSF ######## "##" ####

##

##

###

```
<f:facet name="afterInvalidField">
  <s:span>
     Error: 
    <s:message/>
  </s:span>
</f:facet
>
```

32.1.4. Seam Text

32.1.4.1. `<s:validateFormattedText>`

##

##############Seam Text###############

##

##

32.1.4.2. `<s:formattedText>`

##

Seam *Text* #######Seam Text #####wiki ## Seam Text ############

##

- `value` — ############################EL#

###

```
<s:formattedText value="#{blog.text}"/>
```

#

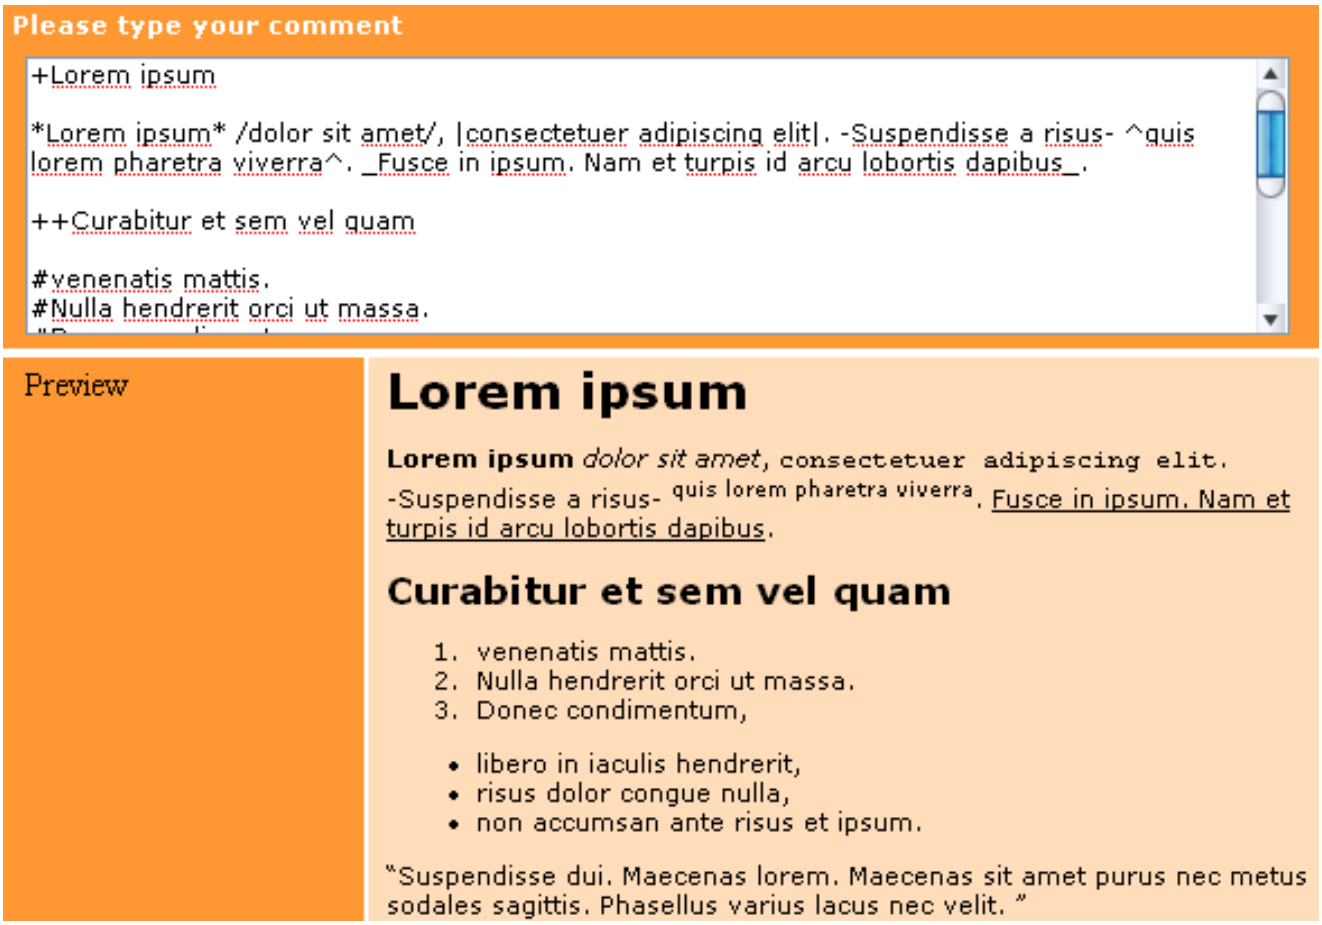

32.1.5.

32.1.5.1. `<s:enumItem>`

##

enum #### `SelectItem` #######

##

- `enumValue` — #########
- `label` — `SelectItem` ##################

###

```
<h:selectOneRadio id="radioList"
                  layout="lineDirection"
                  value="#{newPayment.paymentFrequency}">
  <s:convertEnum />
  <s:enumItem enumValue="ONCE"         label="Only Once" />
  <s:enumItem enumValue="EVERY_MINUTE" label="Every Minute" />
  <s:enumItem enumValue="HOURLY"       label="Every Hour" />
  <s:enumItem enumValue="DAILY"        label="Every Day" />
  <s:enumItem enumValue="WEEKLY"       label="Every Week" />
</h:selectOneRadio
>
```

32.1.5.2. `<s:selectItems>`

##

List# Set# DataModel ### Array ## `List<SelectItem>` #######

##

- `value` — `List<SelectItem>` ###############EL##
- `var`— ####################################
- `label` — `SelectItem` ################### `var` ##########
- `itemValue` — ## `var` ###############`var` ##########
- `disabled` — true #### `SelectItem` #############`var` ##########
- `noSelectionLabel` — ############ (######) ######### (`required="true"` ################################) #
- `hideNoSelectionLabel` — true ################ `noSelectionLabel` #######

###

```
<h:selectOneMenu value="#{person.age}"
```

```
            converter="ageConverter">
  <s:selectItems value="#{ages}" var="age" label="#{age}" />
</h:selectOneMenu
>
```

32.1.6.

32.1.6.1. `<s:cache>`

##

JBoss Cache ########################## Cache ### `<s:cache>` ########## `pojoCache` ############## JBoss Cache ##########################

##

- `key` — ###
  `key="Document-#{document.id}"#########`
- `enabled` — ######################
- `region` — #### JBoss Cache ####(############################)#

###

```
<s:cache key="entry-#{blogEntry.id}" region="pageFragments">
  <div class="blogEntry">
    <h3
>#{blogEntry.title}</h3>
    <div>
      <s:formattedText value="#{blogEntry.body}"/>
    </div>
    <p>
      [Posted on 
      <h:outputText value="#{blogEntry.date}">
        <f:convertDateTime timezone="#{blog.timeZone}" locale="#{blog.locale}"
                           type="both"/>
      </h:outputText
>]
    </p>
  </div>
</s:cache
>
```

32.1.6.2. `<s:fileUpload>`

##

############################ ################### `multipart/form-data` ########################

```
<h:form enctype="multipart/form-data"
>
```

############ Seam Multipart ########### `web.xml` ###############

```
<filter>
  <filter-name
>Seam Filter</filter-name>
  <filter-class
>org.jboss.seam.servlet.SeamFilter</filter-class>
</filter>

<filter-mapping>
  <filter-name
>Seam Filter</filter-name>
  <url-pattern
>/*</url-pattern>
</filter-mapping
>
```

##

components.xml ### ##############################

- `createTempFiles` — true ##
- `maxRequestSize` — ##############################

#:

```
<component class="org.jboss.seam.web.MultipartFilter">
  <property name="createTempFiles"
>true</property>
  <property name="maxRequestSize"
>1000000</property>
</component
```

```
>
```

##

- data — ## byte[] ### InputStream ##################(##)#
- contentType — ################################ (#####)#
- fileName — ####################### (#####)#
- fileSize — ######################### (#####)#
- accept — ## ## "images/png,images/jpg"# "images/*"#
- style — ############
- styleClass — ###############

###

```
<s:fileUpload id="picture" data="#{register.picture}"
        accept="image/png"
        contentType="#{register.pictureContentType}" />
```

32.1.6.3. <s:graphicImage>

##

<h:graphicImage> ##Seam##########################

<h:graphicImage> ################### ##############

##

- value — ############## String (###############)#byte[]#java.io.File#java.io.InputStream ### java.net.URL ########################## image/png#image/jpeg # image/gif ###
- fileName — ##

##

############### ###################### Seam #### ##################

<s:transformImageSize>

- width — ###########
- height — ############
- maintainRatio — true ######## width # height # ## ##
- factor — ###################

<s:transformImageBlur>

- radius — ############################

<s:transformImageType>

- contentType — ####### image/jpeg ### image/png #######

############ - org.jboss.seam.ui.graphicImage.ImageTransform ##### UIComponent ####### applyTransform()###### image.getBufferedImage() ##############image.setBufferedImage() ######################################

###

```
<s:graphicImage rendered="#{auction.image ne null}"
            value="#{auction.image.data}">
  <s:transformImageSize width="200" maintainRatio="true"/>
</s:graphicImage
>
```

32.1.6.4. <s:remote>

##

Seam Remoting ######## Javascript ###########

##

- include — ######## (############)################### Seam Remoting # Javascript ############### # 25. ######## ###########

###

```
<s:remote include="customerAction,accountAction,com.acme.MyBean"/>
```

32.2.

Seam#####Seam########JSF#####################################:

`@Converter`

```
@Name("itemConverter")
@BypassInterceptors
@Converter
public class ItemConverter implements Converter {

  @Transactional
  public Object getAsObject(FacesContext context, UIComponent cmp, String value) {
                                  EntityManager entityManager = (EntityManager)
 Component.getInstance("entityManager");
    entityManager.joinTransaction();
    // Do the conversion
  }

  public String getAsString(FacesContext context, UIComponent cmp, Object value) {
    // Do the conversion
  }

}
```

```
<h:inputText value="#{shop.item}" converter="itemConverter" />
```

Seam########JSF##JTA##########JPA##########

`@Validator`

```
@Name("itemValidator")
@BypassInterceptors
@org.jboss.seam.annotations.faces.Validator
public class ItemValidator implements javax.faces.validator.Validator {

  public void validate(FacesContext context, UIComponent cmp, Object value)
      throws ValidatorException {
   ItemController ItemController = (ItemController) Component.getInstance("itemController");
    boolean valid = itemController.validate(value);
    if (!valid) {
```

```
            throw ValidatorException("Invalid value " + value);
        }
    }
}
```

```
<h:inputText value="#{shop.item}" validator="itemValidator" />
```

Seam########JSF############################Seam##

JBoss EL

Seam # ### Unified Expression Language (EL) ######## JBoss EL ####### JBoss EL # EL ##################################

33.1.

EL ################################## ### JSF ######### (`valueChangeListener`) # JSF

JBoss EL ############### #######

```
<h:commandButton action="#{hotelBooking.bookHotel(hotel)}" value="Book Hotel"/>
```

```
@Name("hotelBooking")
public class HotelBooking {

  public String bookHotel(Hotel hotel) {
    // Book the hotel
  }
}
```

33.1.1.

Java ## ################

```
<h:commandButton action="#{hotelBooking.bookHotel(hotel, user)}" value="Book Hotel"/>
```

`hotel` # `user` ################## `bookHotel()`

################################

```
<h:commandButton
  action="#{hotelBooking.bookHotel(hotel.id, user.username)}"
  value="Book Hotel"/>
```

EL ###################################### ################### ## ##### (## `hotel.id` # `user.username`)# ######################

##
################################### `null` ##############

##########################

```
<h:commandLink action="#{printer.println('Hello world!')}" value="Hello"/>
```

Unified EL ######### ########### Bean ################## ### JavaBean ######### getter # setter ############# JSF ########## (get) ######################## (`rendered` ##)# ######## ###################################### ################################

JBoss EL ################################## #######

```
<h:outputText value="#{person.name}" rendered="#{person.name.length()
> 5}" />
```

1

```
#{searchResults.size()}
```

#{obj.property} ###### #{obj.getProperty()}

################ ################## `productsByColorMethod` ##########

```
#{controller.productsByColor('blue')}
```

33.1.2.

JBoss EL ####################

- *JSP 2.1* ###### — JBoss EL ### JSP 2.1 ########## ######################### JSF 1.2 ############## Facelets ############# ##### JSP 2.0 ##########
- ############## — `<c:forEach />` # `<ui:repeat />` ############ List ### `<h:commandButton />` # `<h:commandLink />` ######################

```
@Factory("items")
public List<Item
```

```
> getItems() {
  return entityManager.createQuery("select ...").getResultList();
}
```

```
<h:dataTable value="#{items}" var="item">
  <h:column>
    <h:commandLink value="Select #{item.name}" action="#{itemSelector.select(item})" />
  </h:column>
</h:dataTable
>
```

```
####  <s:link  />  #  <s:button  />  ##############
DataModel  #######  <dataTable  />  (###  <rich:dataTable  /
>  ####################)  ###  ###########  <s:link  />  ####
<s:button  />  ##################  (####################)
#########################################################  DataModel
##############################################
```

- *Java ##### `MethodExpression` ##### —* ### `MethodExpression` ################ JSF ########## ################ JSF ################### ####### ###################################### ############### 2 ###############
  - Java#### `MethodExpression` ######### ######################## ######################
  - ### `methodExpression.getMethodInfo().getParamTypes()` ################## ############## ## `MethodExpression` ######### `getParamTypes()` ###############

  ################## Java #### `MethodExpression` ##########################

33.2.

JBoss EL ###################### ################### (#### #####) ############### #######

```
#{company.departments}
```

############### ## JBoss EL ########################

```
#{company.departments.{d|d.name}}
```

################ ########## d.name ####### d ############################ ####################

###################################### ############### (###) ############################

```
#{company.departments.{d|d.size()}}
```

######################## ##############################

```
#{company.departments.{d|d.employees.{emp|emp.lastName}}}
```

############################ ########################

```
#{company.departments.{d|d.employees}}
```

################################ ############################

```
#{company.departments.{d|d.employees.{e|e}}}
```

Facelets # JSP ######### xhtml ### JSP ######################## ########## JBoss EL

Seam############

Seam####################2############### ###Seam##########################
##############Java# (#############) ####################

######################

34.1. Seam################

####Seam########POJO##################################Seam###

############################Seam#################

```
@Stateless
@Scope(EVENT)
@Name("statementOfAccount")
public class StatementOfAccount {

  @In(create=true) EntityManager entityManager

  private double statementTotal;

  @In
  private Customer customer;

  @Create
  public void create() {
    List<Invoice
> invoices = entityManager
      .createQuery("select invoice from Invoice invoice where invoice.customer = :customer")
      .setParameter("customer", customer)
      .getResultList();
    statementTotal = calculateTotal(invoices);
  }

  public double calculateTotal(List<Invoice
> invoices) {
    double total = 0.0;
    for (Invoice invoice: invoices)
    {
      double += invoice.getTotal();
    }
    return total;
  }
```

```
  // getter and setter for statementTotal

}
```

calculateTotal###

```
public class StatementOfAccountTest {

   @Test
   public testCalculateTotal {
     List<Invoice
> invoices = generateTestInvoices(); // A test data generator
     double statementTotal = new StatementOfAccount().calculateTotal(invoices);
     assert statementTotal = 123.45;
   }
}
```

You'll notice we aren't testing retrieving data from or persisting data to the database; nor are we testing any functionality provided by Seam. We are just testing the logic of our POJOs. Seam components don't usually depend directly upon container infrastructure, so most unit testing as as easy as that!

###################################

34.2. Seam##############

###

Seam###Seam#JBoss############*#29.6.1. #Embedded JBoss ##########*#################

```
public class RegisterTest extends SeamTest
{

  @Test
  public void testRegisterComponent() throws Exception
  {

    new ComponentTest() {

      protected void testComponents() throws Exception
      {
```

```
            setValue("#{user.username}", "1ovthafew");
            setValue("#{user.name}", "Gavin King");
            setValue("#{user.password}", "secret");
            assert invokeMethod("#{register.register}").equals("success");
            assert getValue("#{user.username}").equals("1ovthafew");
            assert getValue("#{user.name}").equals("Gavin King");
            assert getValue("#{user.password}").equals("secret");
        }

    }.run();

  }

  ...

}
```

34.2.1.

########################Seam################## ##############################
########################Seam##########

```
@Name("paymentProcessor")
public class PaymentProcessor {
   public boolean processPayment(Payment payment) { .... }
}
```

####################################

```
@Name("paymentProcessor")
@Install(precedence=MOCK)
public class MockPaymentProcessor extends PaymentProcessor {
   public boolean processPayment(Payment payment) {
      return true;
   }
}
```

MOCK###################### ################################Seam# ############
#####################################

34.3.

##W

SeamTest########JSF####################################Seam################################JS

#################################

######################JSF##############

```
<html>
 <head>
  <title
>Register New User</title>
 </head>
 <body>
  <f:view>
   <h:form>
    <table border="0">
     <tr>
      <td
>Username</td>
      <td
><h:inputText value="#{user.username}"/></td>
     </tr>
     <tr>
      <td
>Real Name</td>
      <td
><h:inputText value="#{user.name}"/></td>
     </tr>
     <tr>
      <td
>Password</td>
      <td
><h:inputSecret value="#{user.password}"/></td>
     </tr>
    </table>
    <h:messages/>
    <h:commandButton type="submit" value="Register" action="#{register.register}"/>
   </h:form>
  </f:view>
 </body>
</html
```

```
>
```

####################Register########################TestNG#######JSF####################

```
public class RegisterTest extends SeamTest
{

  @Test
  public void testRegister() throws Exception
  {

    new FacesRequest() {

      @Override
      protected void processValidations() throws Exception
      {
        validateValue("#{user.username}", "1ovthafew");
        validateValue("#{user.name}", "Gavin King");
        validateValue("#{user.password}", "secret");
        assert !isValidationFailure();
      }

      @Override
      protected void updateModelValues() throws Exception
      {
        setValue("#{user.username}", "1ovthafew");
        setValue("#{user.name}", "Gavin King");
        setValue("#{user.password}", "secret");
      }

      @Override
      protected void invokeApplication()
      {
        assert invokeMethod("#{register.register}").equals("success");
      }

      @Override
      protected void renderResponse()
      {
        assert getValue("#{user.username}").equals("1ovthafew");
        assert getValue("#{user.name}").equals("Gavin King");
        assert getValue("#{user.password}").equals("secret");
      }
```

```
    }.run();

  }

  ...

}
```

########Seam#######SeamTest#####JSF###################SeamTest.FacesRequest#################

Seam##Ant#################Eclipse#TestNG##############

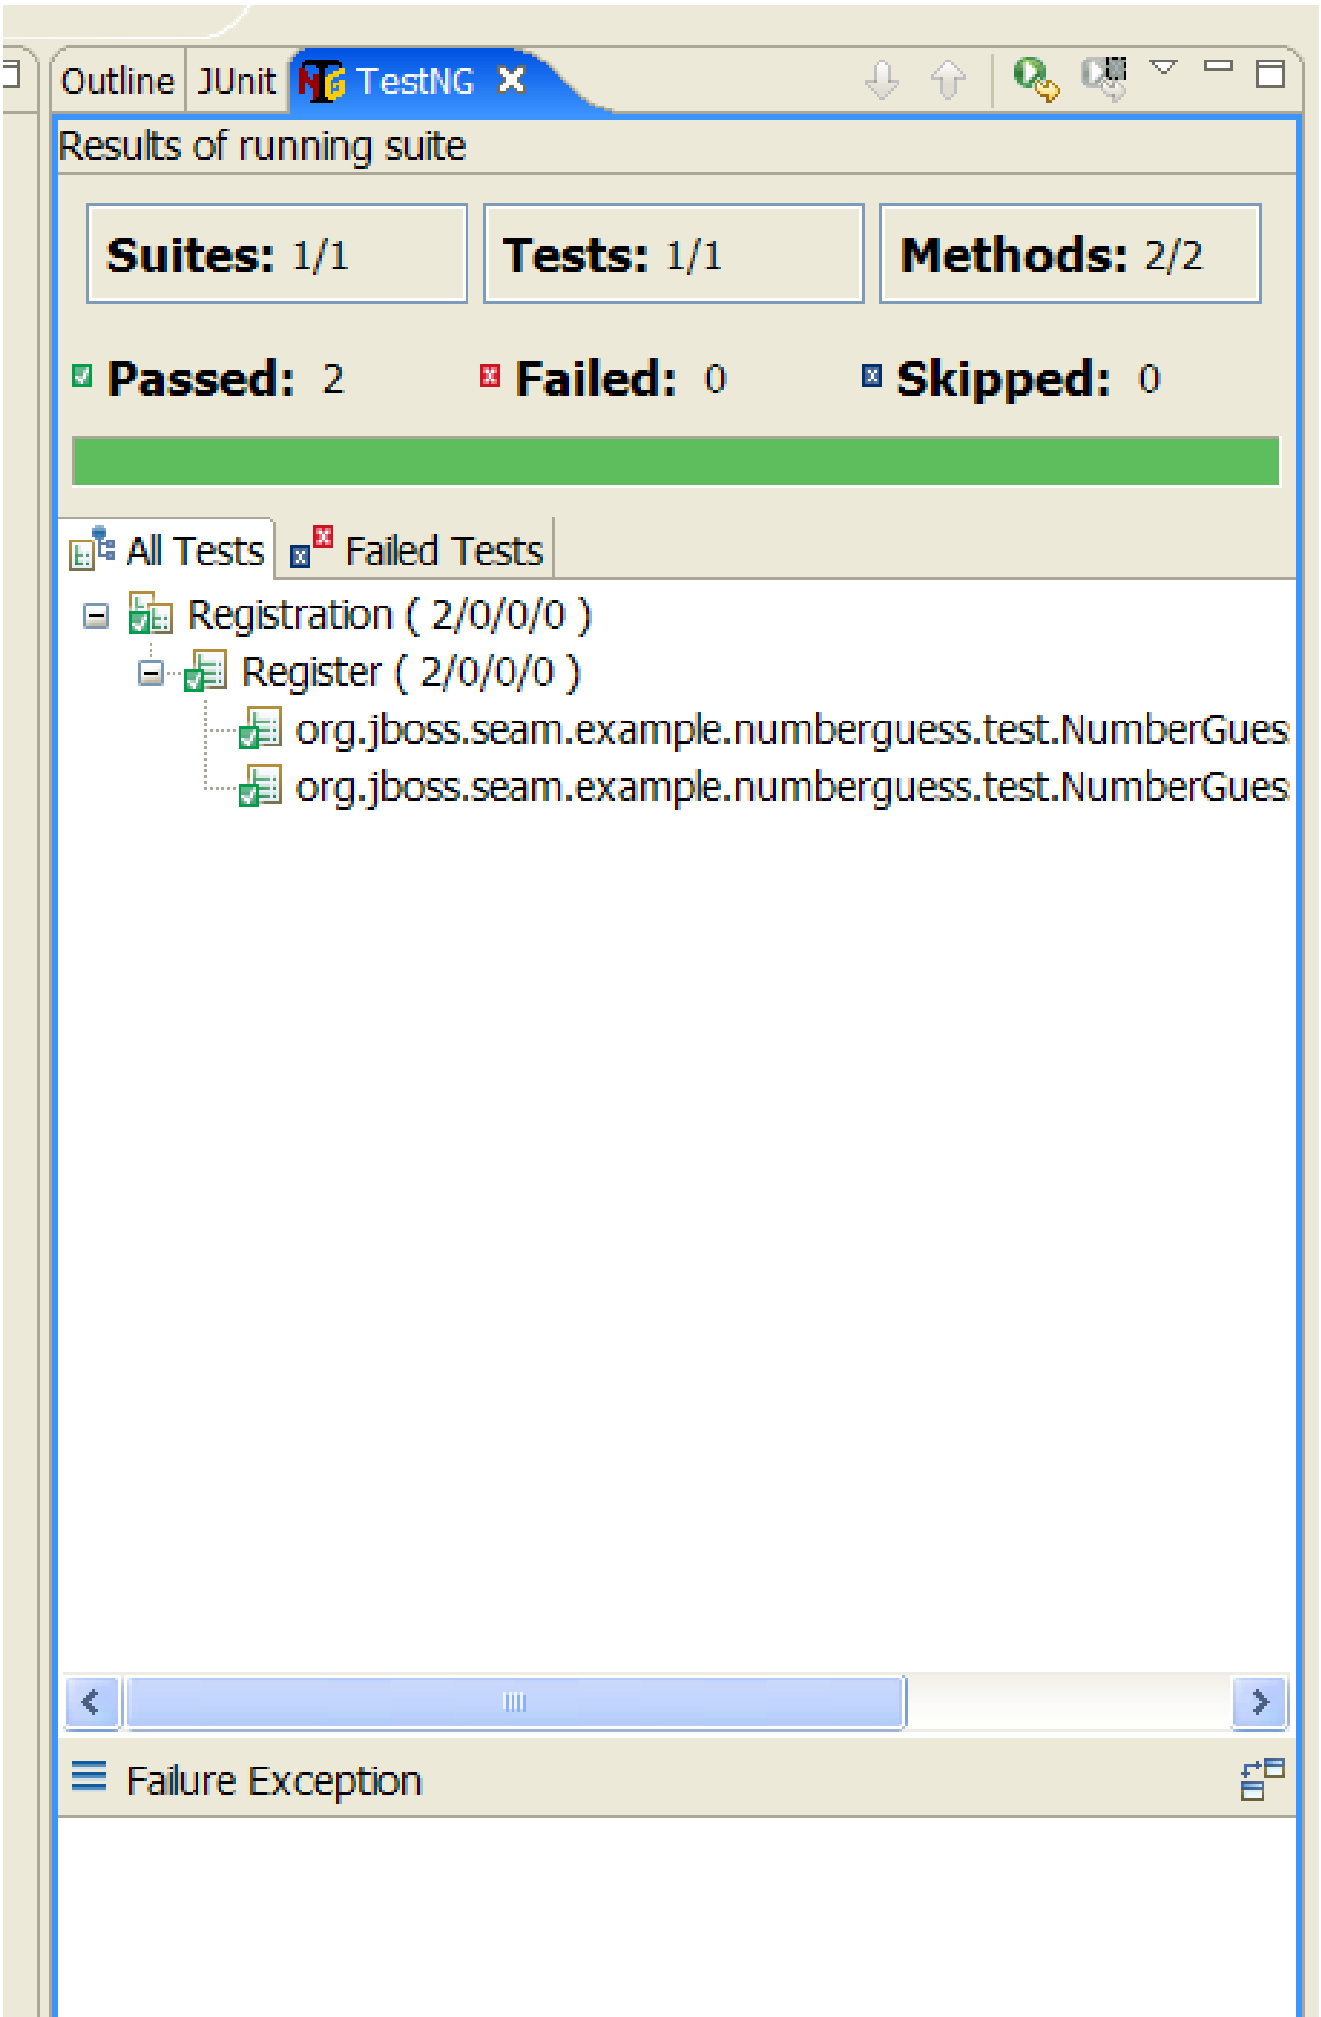
Outline
JUnit
TestNG
Results of running suite
Suites: 1/1
Tests: 1/1
Methods: 2/2
Passed: 2
Failed: 0
Skipped: 0
All Tests
Failed Tests
Registration (2/0/0/0)
Register (2/0/0/0)
org.jboss.seam.example.numberguess.test.NumberGues
org.jboss.seam.example.numberguess.test.NumberGues
Failure Exception

34.3.1.

seam-gen###ant, maven, Eclipse######################

######################

34.1.

####ID	########ID	Seam ####
org.jboss.seam.embedded	hibernate-all	lib/test/hibernate-all.jar
org.jboss.seam.embedded	jboss-embedded-all	lib/test/jboss-embedded-all.jar
org.jboss.seam.embedded	thirdparty-all	lib/test/thirdparty-all.jar
org.jboss.seam.embedded	jboss-embedded-api	lib/jboss-embedded-api.jar
org.jboss.seam	jboss-seam	lib/jboss-seam.jar
org.jboss.el	jboss-el	lib/jboss-el.jar
javax.faces	jsf-api	lib/jsf-api.jar
javax.el	el-api	lib/el-api.jar
javax.activation	javax.activation	lib/activation.jar

#####JBoss####################JBoss AS############jboss-system.jar##lib/ ################################Drools#jBPM#############

#####JBoss######bootstrap/######################

############jar###JPA#Seam###

####################java:/ DefaultDS######JBoss######HSQL####################################foo-ds.xml#bootstrap/deploy###############

34.3.2. ##########SeamTest###

Seam##TestNG###############JUnit############################

######AbstractSeamTest##########

- ##############super.begin()####
- ##############super.end()####

- ################super.setupClass()#####################################
- ############super.cleanupClass()####
- ##########super.startSeam()####Seam######
- ##########super.stopSeam()####Seam######

34.3.3.

####################################DBUnit#######SeamTest#####DBUnitSeamTest##########

DBUnit##############

##
DBUnit####XML#2#########################Seam#DBUnitSeamTest####################

```
<dataset>

  <ARTIST
    id="1"
    dtype="Band"
    name="Pink Floyd" />

  <DISC
    id="1"
    name="Dark Side of the Moon"
    artist_id="1" />

</dataset
>
```

prepareDBUnitOperations()##########Seam#######

```
protected void prepareDBUnitOperations() {
   beforeTestOperations.add(
     new DataSetOperation("my/datasets/BaseData.xml")
   );
 }
```

DataSetOperation####################################DatabaseOperation.CLEAN_INSERT#############

############################afterTestOperations#####################

TestNG#########datasourceJndiName##############DBUnit###############

```
<parameter name="datasourceJndiName" value="java:/seamdiscsDatasource"/>
```

DBUnitSeamTest#MySQL#HSQL#################################

```
<parameter name="database" value="HSQL" />
```

################################Windows###

```
<parameter name="binaryDir" value="images/" />
```

testng.xml#######################

DBUnitSeamTest##AbstractDBUnitSeamTest#javadoc######

34.3.4. Seam#########

##
################

Seam##################

```
public class MailTest extends SeamTest {

  @Test
  public void testSimpleMessage() throws Exception {

    new FacesRequest() {

      @Override
      protected void updateModelValues() throws Exception {
        setValue("#{person.firstname}", "Pete");
        setValue("#{person.lastname}", "Muir");
        setValue("#{person.address}", "test@example.com");
      }
```

```
        @Override
        protected void invokeApplication() throws Exception {
            MimeMessage renderedMessage = getRenderedMailMessage("/simple.xhtml");
            assert renderedMessage.getAllRecipients().length == 1;
            InternetAddress to = (InternetAddress) renderedMessage.getAllRecipients()[0];
            assert to.getAddress().equals("test@example.com");
        }

    }.run();
  }
}
```

#####FacesRequest#######invokeApplication######viewId##################getRenderedMailMessage(vie

##JSF###

Seam

35.1. jBPM

jBPM ## JBoss Eclipse IDE ########### jBPM ######## (http://docs.jboss.com/jbpm/v3/gpd/) ######

35.1.1.

##

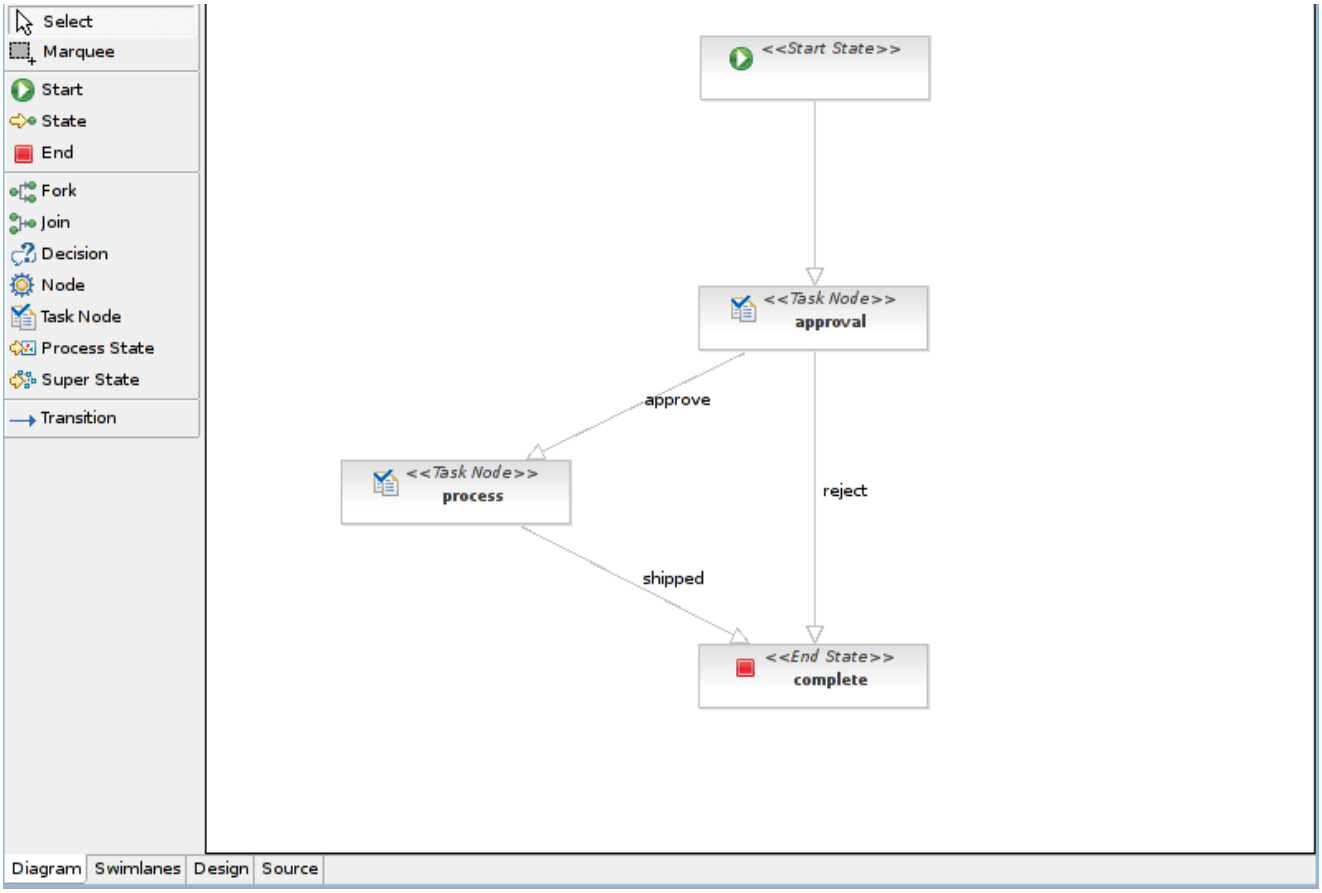

35.1.2.

########################## ##########################
##

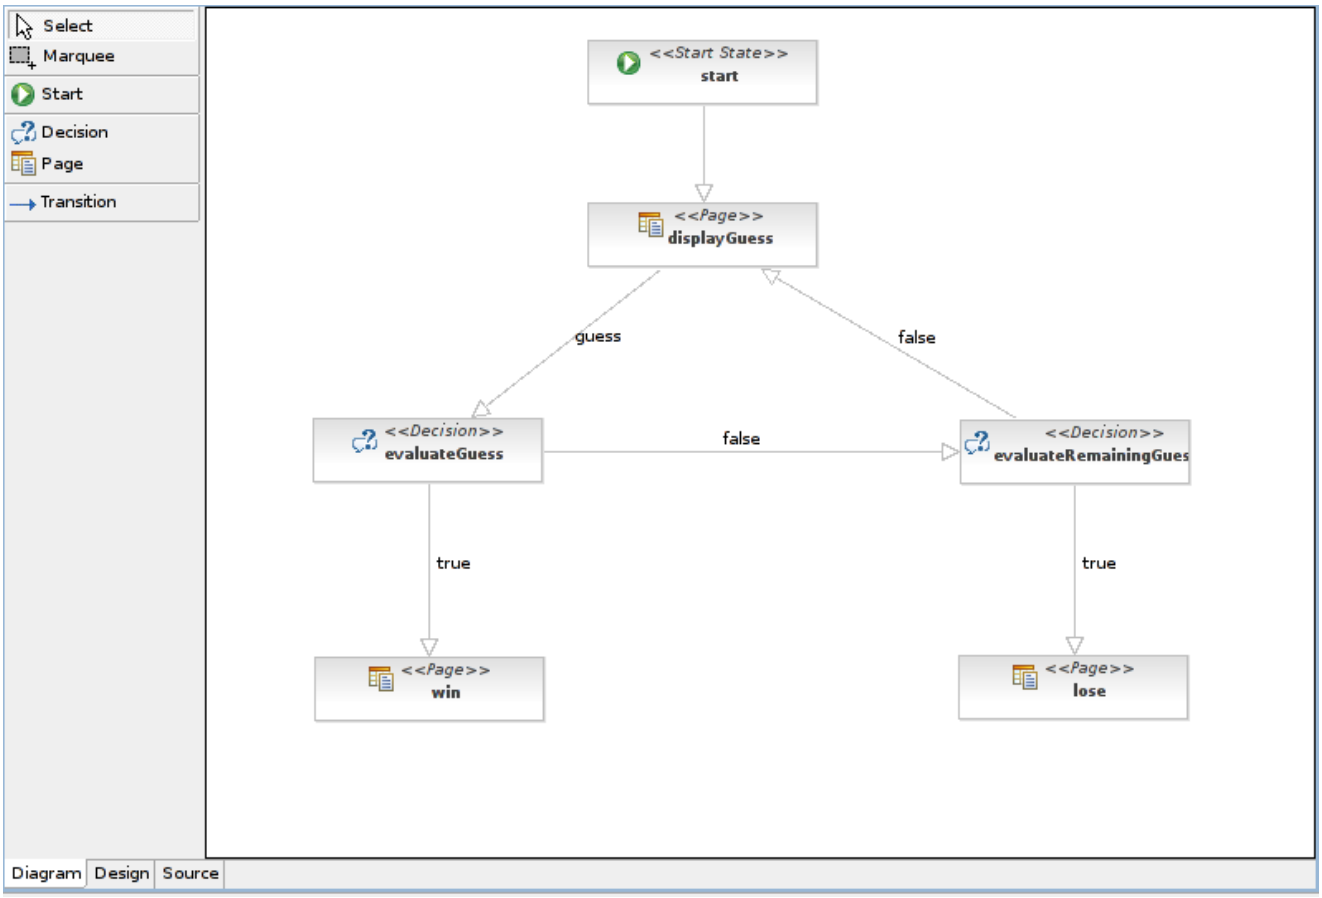
Select
Marquee
Start
Decision
Page
Transition
<<Start State>>
start
<<Page>>
displayGuess
guess
false
<<Decision>>
evaluateGuess
false
<<Decision>>
evaluateRemainingGues
true
true
<<Page>>
win
<<Page>>
lose
Diagram
Design
Source

OC4J ## Seam

OC4J (Oracle Containers for Java) 11g (##### "Technology Preview" ####) ##Oracle # JEE5 ###############Seam ##########OC4J ##Seam ######## JEE5 ##`seam-gen` ######################### ######RichFaces # ajax ######## facelets ######### `seam-gen` ################################Drools ##### Seam #######Hibernate ########JPA#MySQL ########################## CRUD ####################

36.1. OC4J

############ - OC4J ############# ######OC4J 11g Technology Preview (OC4J 10g #######) #########OC4J 11g # *http://www.oracle.com/technology/tech/java/oc4j/11/* [http://www.oracle.com/technology/tech/java/oc4j/11/] ##################OC4J 11g ##########################OC4J ##########################OC4J ########## `readme.txt` ##OC4J ######### (installation guide) ######## (release notes)##########

1. OC4J ###################
2. ####### `$JAVA_HOME` # `$ORACLE_HOME` ################### (`$ORACLE_HOME` # OC4J #############)# OC4J #################OC4J ######### `readme.txt` ##########
3. `$ORACLE_HOME/j2ee/home/applications` ############### (ear/war) ############

   OC4J ## ##
4. OC4J ########## `$ORACLE_HOME/j2ee/home/java -jar -XX:MaxPermSize=256M oc4j.jar`

   ################### PermGen ######################### *OC4J #######* [http://www.oracle.com/technology/tech/java/oc4j/11/oc4j-relnotes.html] ##########

   OC4J ################################
5. ############`http://localhost:8888/<your-app-path>` ########################
6. ############################ `CTRL-C` ######

36.2. `jee5/booking`

`jee5/booking` ######(JBoss AS ######) ###################### GlassFish ####################OC4J ########################## `$SEAM_DIST/examples/jee5/booking` ######

36.2.1.

################################## OC4J ###################

########################## *#36.2.3. `#jee5/booking` ######## #* ########

36.2.1.1. Seam

- `jboss-seam.jar` — EJB3 ############## (Seam ################################### EJB3 ########### Bean ###########)
- `jboss-el.jar`
- `jboss-seam-ui.jar` — Seam # JSF ####### Apache # commons-beanutils ########
- `jboss-seam-debug.jar`
- `jsf-facelets.jar`
- `richfaces-api.jar` # `richfaces-impl.jar` # `richfaces-ui.jar` — #### Apache commons-digester # commons-beanutils #######

36.2.1.2.

- Hibernate — #### JPA ######## (OC4J ########### TopLink Essentials ####) Hibernate #######

  Hibernate # JPA ##################### jar ######

  - `hibernate.jar`
  - `hibernate-annotations.jar`
  - `hibernate-entitymanager.jar`
  - `hibernate-validator.jar`
  - `jboss-common-core.jar`
  - `commons-logging.jar`
  - `commons-collections.jar`
- ######## jar — Seam ################### jar #########
  - `javaasist.jar`
  - `dom4j.jar`
  - `cglib.jar`
  - `asm.jar`
  - `commons-beanutils.jar`
  - `commons-digester.jar`

  - `concurrent.jar`
  - `log4j.jar` — log4j ##OC4J ############
- ### OC4J jar — ################ (### JBoss AS # Glassfish) # Seam ################# Seam ################## (### Seam ############# ANTLR ##########)#### OC4J ### "###" ###################################
  - `hibernate-search.jar`
  - `hibernate-common-annotations.jar` — Hibernate search ###
  - `lucene-core.jar` — Hibernate search ###
  - `antlr.jar` — Seam #######
  - `jbpm-jpdl.jar` — Seam JBPM ###
  - `quartz.jar`
  - `dbunit.jar` — ##########
  - `jboss-embedded-api.jar` — ##########
  - Drools — Seam ################Drools ### Seam ############################Drools # 6 ## jar #######
    - `drools-core.jar`
    - `drools-compiler.jar`
    - `janino.jar`
    - `mvel141.jar`
    - `core.jar`
    - `antlr-runtime.jar`

    Drools ###################

36.2.2.

################

`web.xml`

`web.xml` ##### EJB ############# ###### JEE5 ############ - ### OC4J # GlassFish - ################

###################### web.xml #######

```
<ejb-local-ref>
  <ejb-ref-name>
    jboss-seam-jee5/AuthenticatorAction/local
  </ejb-ref-name>
  <ejb-ref-type
>Session</ejb-ref-type>
  <local>
    org.jboss.seam.example.booking.Authenticator
  </local>
  <ejb-link
>AuthenticatorAction</ejb-link>
</ejb-local-ref>
```

`persistence.xml`

JPA ######################Hibernate #######OC4J ### ANTLR ####################################OC4J ####################

######## `resources/META-INF/persistence.xml` ###############Glassfish ############### OC4J ########################

```
<property name="hibernate.dialect"
  value="org.hibernate.dialect.HSQLDialect"/>
<property name="hibernate.query.factory_class"
  value="org.hibernate.hql.classic.ClassicQueryTranslatorFactory"/>
<property name="hibernate.transaction.manager_lookup_class"
  value="org.hibernate.transaction.OrionTransactionManagerLookup"/>
```

36.2.3. `jee5/booking`

1. ##### `build.xml` ###############

   - OC4J ##

     ############

```
<!-- add libs for oc4j (eager classloading) -->
<property name="jbpm.lib" value="true"/>
<property name="drools.lib" value="true"/>
<property name="quartz.lib" value="true" />
<property name="search.lib" value="true" />
<property name="dbunit.lib" value="true" />
<property name="jboss-embedded-api.lib" value="true" />
```

2. examples/jee5/booking #######ant ################################## dist/jboss-seam-jee5.ear ###

3. ######### dist/jboss-seam-jee5.ear ###########

36.3. OC4J ## Seam

###############JEE 5 ######### OC4J ############ (######) #########*#36.1. #OC4J* ########### ########## OC4J ############################## #### hsqldb ########### jee5/booking ##

1. OC4J ############### hsqldb.jar ########### cp $SEAM_HOME/lib/hsqldb.jar $ORACLE_HOME/j2ee/home/applib/ (OC4J ######################## HSQLDB ###########)

2. OC4J ########## $ORACLE_HOME/j2ee/home/config/data-sources.xml ######<data-sources> ################

```
<managed-data-source
  connection-pool-name="jee5-connection-pool"
  jndi-name="jdbc/__default"
  name="jee5-managed-data-source" />
<connection-pool name="jee5-connection-pool">
  <connection-factory
    factory-class="org.hsqldb.jdbcDriver"
    user="sa"
    password=""
    url="jdbc:hsqldb:." />
</connection-pool>
```

jndi-name # persistence.xml # jta-data-source ##########

3. $ORACLE_HOME/j2ee/home/config/server.xml ######<application-server> ################

```
<application name="jboss-seam-jee5"
 path="../../home/applications/jboss-seam-jee5.ear"
 parent="default"
 start="true" />
```

####################################

4. $ORACLE_HOME/j2ee/home/config/default-web-site.xml ######<web-site> ###############

```
<web-app application="jboss-seam-jee5"
 name="jboss-seam-jee5"
 load-on-startup="true"
 root="/seam-jee5" />
```

root ##################### Web ####################

5. ######### OC4J ########### cp dist/jboss-seam-jee5.ear $ORACLE_HOME/j2ee/home/applications/

6. ### *#36.1. #OC4J ###########* ########OC4J ### / #########

7. http://localhost:8888/seam-jee5 ##########################

36.4. seam-gen ################## OC4J

seam-gen############ Seam ##JBoss AS ######################### OC4J ##
IDE #############seam-gen ######## Eclipse # Netbeans ##################

seam-gen ##seam-gen # Hibernate Tools ## CRUD ################################seam-gen ## JPA ###### Bean # Seam ######################### JSF ###########Drools ##### Seam ##############

########## MySQL ###### (######## SQL ################################); MySQL ##JDBC ######## mysql-connector-java-X.jar ################################ Seam ###############username # password ###### User ##

36.4.1. seam-gen

seam-gen ##################Seam ################## ./seam setup ## (### oc4jexample ##########################)#

```
> ./seam setup
Buildfile: build.xml

init:

setup:
     [echo] Welcome to seam-gen :-)
    [input] Enter your Java project workspace (the directory that contains your
Seam projects) [C:/Projects] [C:/Projects]
/home/jbalunas/workspace
    [input] Enter your JBoss home directory [C:/Program Files/jboss-4.2.3.GA]
[C:/Program Files/jboss-4.2.3.GA]
/home/jbalunas/jboss/jboss-4.2.3.GA
    [input] Enter the project name [myproject] [myproject]
oc4j_example
     [echo] Accepted project name as: oc4j_example
    [input] Select a RichFaces skin (not applicable if using ICEFaces) [blueSky]
 ([blueSky], classic, ruby, wine, deepMarine, emeraldTown, sakura, DEFAULT)

    [input] Is this project deployed as an EAR (with EJB components) or a WAR
(with no EJB support) [ear]  ([ear], war, )

    [input] Enter the Java package name for your session beans [com.mydomain.
oc4j_example] [com.mydomain.oc4j_example]
org.jboss.seam.tutorial.oc4j.action
    [input] Enter the Java package name for your entity beans [org.jboss.seam.
tutorial.oc4j.action] [org.jboss.seam.tutorial.oc4j.action]
org.jboss.seam.tutorial.oc4j.model
    [input] Enter the Java package name for your test cases [org.jboss.seam.
tutorial.oc4j.action.test] [org.jboss.seam.tutorial.oc4j.action.test]
org.jboss.seam.tutorial.oc4j.test
    [input] What kind of database are you using? [hsql]  ([hsql], mysql, oracle,
 postgres, mssql, db2, sybase, enterprisedb, h2)
mysql
    [input] Enter the Hibernate dialect for your database [org.hibernate.
dialect.MySQLDialect] [org.hibernate.dialect.MySQLDialect]

    [input] Enter the filesystem path to the JDBC driver jar [/tmp/seam/lib/hsqldb.jar]
[/tmp/seam/lib/hsqldb.jar]
lib/mysql-connector.jar
    [input] Enter JDBC driver class for your database [com.mysql.jdbc.Driver]
[com.mysql.jdbc.Driver]

    [input] Enter the JDBC URL for your database [jdbc:mysql:///test]
```

```
[jdbc:mysql:///test]
jdbc:mysql:///oc4jexample
    [input] Enter database username [sa] [sa]
username
    [input] Enter database password [] []
password
    [input] skipping input as property hibernate.default_schema.new has already
been set.
    [input] Enter the database catalog name (it is OK to leave this blank) [] []

    [input] Are you working with tables that already exist in the database? [n]
 (y, [n], )
y
    [input] Do you want to drop and recreate the database tables and data in
import.sql each time you deploy? [n]  (y, [n], )
n
    [input] Enter your ICEfaces home directory (leave blank to omit ICEfaces) [] []

[propertyfile] Creating new property file:
/home/jbalunas/workspace/jboss-seam/seam-gen/build.properties
     [echo] Installing JDBC driver jar to JBoss server
     [copy] Copying 1 file to /home/jbalunas/jboss/jboss-4.2.3.GA/server/default/lib
     [echo] Type 'seam create-project' to create the new project

BUILD SUCCESSFUL
```

################$ ./seam new-project ############# cd /home/jbalunas/workspace/oc4j_example ##############################

36.4.2. OC4J

##########################

36.4.2.1.

##################:

build.xml

- ############ archive ###### (OC4J #################)#

```
<project name="oc4j_example" default="archive" basedir=".">
```

- OC4J ##ear ############ war ######### drools # /security.drl ############################## build.xml ##################### <target name="war" depends="compile" description="Build the distribution .war file"> ######################

```
<copy todir="${war.dir}">
 <fileset dir="${basedir}/resources" >
   <include name="*.drl" />
 </fileset>
 </copy>
```

resources/META-INF/persistence-dev.xml

- jta-data-source # jdbc/__oc4jexample ######### (######### data-sources.xml ##################jndi-name ###############)#
- ############### (jee5/booking ##############)#

```
<property name="hibernate.query.factory_class"
  value="org.hibernate.hql.classic.ClassicQueryTranslatorFactory" />
<property name="hibernate.transaction.manager_lookup_class"
  value="org.hibernate.transaction.OrionTransactionManagerLookup" />
<property name="hibernate.transaction.flush_before_completion"
  value="true"/>
<property name="hibernate.cache.provider_class"
  value="org.hibernate.cache.HashtableCacheProvider"/>
```

- EntityManagerFactory ##### JBoss AS ##################

```
<property
 name="jboss.entity.manager.factory.jndi.name"
 value="java:/oc4j_exampleEntityManagerFactory">
```

- prod ############ OC4J ############persistence-prod.xml ################

resources/META-INF/jboss-app.xml

JBoss AS ######################### (JBoss AS ## jboss-app.xml ##########################)

resources/*-ds.xml

JBoss AS ######################### (##########JBoss AS ###################OC4J ###### data-sources.xml #################)

resources/WEB-INF/components.xml

- ######################## - <transaction:ejb-transaction /> ################ xmlns:transaction="http://jboss.com/products/seam/transaction" #########
- jndi-pattern # java:comp/env/oc4j_example/#{ejbName}/local ######
- ######### Seam ############################## OC4J # JNDI # EntityManagerFactory #########Seam ##

```
<persistence:entity-manager-factory
 auto-create="true"
 name="oc4jEntityManagerFactory"
 persistence-unit-name="oc4j_example" />
```

Seam ##managed-persistence-context ############# EntityManagerFactory #######

```
<persistence:managed-persistence-context
 name="entityManager"
 auto-create="true"
 entity-manager-factory="#{oc4jEntityManagerFactory}" />
```

resources/WEB-INF/web.xml

Seam ################ EJB ################## OC4J ######################EJB

```
<ejb-local-ref>
  <ejb-ref-name>
    oc4j_example/EjbSynchronizations/local
  </ejb-ref-name>
  <ejb-ref-type
>Session</ejb-ref-type>
  <local>
    org.jboss.seam.transaction.LocalEjbSynchronizations
  </local>
  <ejb-link
>EjbSynchronizations</ejb-link>
</ejb-local-ref>
```

resources/META-INF/orion-application.xml

- ####OC4J # RichFaces # Ajax4Jsf ## OC4J ############ URL ##################

```
<?xml version = '1.0' encoding = 'utf-8'?>
<orion-application
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xsi:noNamespaceSchemaLocation="http://xmlns.oracle.com/oracleas/schema/
                                     orion-application-10_0.xsd"
      schema-major-version="10"
      schema-minor-version="0"
      component-classification="internal">

   <imported-shared-libraries>
     <remove-inherited name="oracle.xml"/>
   </imported-shared-libraries>
</orion-application>
```

- ear ######################build.xml ################## <target name="ear" description="Build the EAR"> ########### <copy todir="${ear.dir}/META-INF"> ###################

```
<copy todir="${ear.dir}/META-INF">
   <fileset dir="${basedir}/resources/META-INF">
     <include name="application.xml" />
     <include name="orion-application.xml"/>
     <include name="jboss-app.xml" />
   </fileset>
 </copy>
```

36.4.2.2. ### jar

############jee5/booking ###################

build.xml ######################### jar ######################### <fileset dir="${basedir}"> ########## ##############################

```
<target name="ear" description="Build the EAR">
    <copy todir="${ear.dir}">
        <fileset dir="${basedir}/resources">
            <include name="*jpdl.xml" />
```

```
                <include name="*hibernate.cfg.xml" />
                <include name="jbpm.cfg.xml" />
                <include name="*.drl" />
            </fileset>
            <fileset dir="${lib.dir}">
                <include name="jboss-seam.jar" />
            </fileset>
            <fileset dir="${basedir}">
                <include name="lib/jbpm*.jar" />
                <include name="lib/jboss-el.jar" />
                <include name="lib/drools-*.jar"/>
                <include name="lib/janino*.jar"/>
                <include name="lib/antlr-*.jar"/>
                <include name="lib/mvel*.jar"/>
                <include name="lib/richfaces-api*.jar" />
            </fileset>
        </copy>
        <copy todir="${ear.dir}/META-INF">
            <fileset dir="${basedir}/resources/META-INF">
                <include name="application.xml" />
                <include name="jboss-app.xml" />
            </fileset>
        </copy>
</target>
```

- Hibernate ####

```
<include name="lib/hibernate.jar"/>
<include name="lib/hibernate-annotations.jar"/>
<include name="lib/hibernate-commons-annotations.jar"/>
<include name="lib/hibernate-entitymanager.jar"/>
<include name="lib/hibernate-search.jar"/>
<include name="lib/hibernate-validator.jar"/>
<include name="lib/commons-logging.jar"/>
<include name="lib/commons-collections.jar"/>
<include name="lib/jboss-common-core.jar"/>
```

- Drools — Seam ############## Drools ########Eclipse JDT ################## (### JBoss AS #########; ### OC4J ####################)#

```
<include name="lib/core.jar"/>
```

- ######## jar — ######## OC4J ######################

```
<include name="lib/javassist.jar"/>
<include name="lib/quartz.jar"/>
<include name="lib/dbunit.jar"/>
<include name="lib/jboss-embedded-api.jar"/>
<include name="lib/dom4j.jar"/>
<include name="lib/lucene-core.jar"/>
<include name="lib/cglib.jar"/>
<include name="lib/asm.jar"/>
<include name="lib/commons-beanutils.jar"/>
<include name="lib/commons-digester.jar"/>
<include name="lib/concurrent.jar"/>
<include name="lib/antlr.jar"/>
```

################

```
<fileset dir="${basedir}">
    <include name="lib/jbpm*.jar" />
    <include name="lib/jboss-el.jar" />
    <include name="lib/drools-*.jar"/>
    <include name="lib/janino*.jar"/>
    <include name="lib/antlr-*.jar"/>
    <include name="lib/mvel*.jar"/>
    <include name="lib/richfaces-api*.jar" />
    <include name="lib/hibernate.jar"/>
    <include name="lib/hibernate-annotations.jar"/>
    <include name="lib/hibernate-commons-annotations.jar"/>
    <include name="lib/hibernate-entitymanager.jar"/>
    <include name="lib/hibernate-search.jar"/>
    <include name="lib/hibernate-validator.jar"/>
    <include name="lib/commons-logging.jar"/>
    <include name="lib/commons-collections.jar"/>
    <include name="lib/jboss-common-core.jar"/>
    <include name="lib/core.jar"/>
    <include name="lib/javassist.jar"/>
    <include name="lib/quartz.jar"/>
    <include name="lib/dbunit.jar"/>
    <include name="lib/jboss-embedded-api.jar"/>
    <include name="lib/dom4j.jar"/>
    <include name="lib/lucene-core.jar"/>
    <include name="lib/cglib.jar"/>
    <include name="lib/asm.jar"/>
```

```
    <include name="lib/commons-beanutils.jar"/>
    <include name="lib/commons-digester.jar"/>
    <include name="lib/concurrent.jar"/>
    <include name="lib/antlr.jar"/>
</fileset>
```

36.4.3. seam-gen ################ OC4J

####### *#36.3. #OC4J ## Seam ##############* ################oc4j_example ##############################

- ################ (### /home/jbalunas/workspace/oc4j_example) # ant ## dist/oc4j_example.ear ###
- mysql-connector.jar ##### $ORACLE_HOME/j2ee/home/applib #############JDBC ####################
- $ORACLE_HOME/j2ee/home/config/data-sources.xml

```
<managed-data-source
  connection-pool-name="oc4j-example-connection-pool"
  jndi-name="jdbc/__oc4jexample"
  name="oc4j-example-managed-data-source" />
<connection-pool
  name="oc4j-example-connection-pool">
  <connection-factory
    factory-class="com.mysql.jdbc.Driver"
    user="username"
    password="password"
    url="jdbc:mysql:///oc4j" />
</connection-pool>
```

- $ORACLE_HOME/j2ee/home/config/server.xml

```
<application name="oc4j_example"
 path="../../home/applications/oc4j_example.ear"
 parent="default"
 start="true" />
```

- $ORACLE_HOME/j2ee/home/config/default-web-site.xml

```
<web-app application="oc4j_example"
```

```
name="oc4j_example"
load-on-startup="true"
root="/oc4j_example" />
```

- ### *#36.1. #OC4J ###########* ########OC4J ### / #########
- `http://localhost:8888/oc4j_example` ##########################

36.4.4. ################## CRUD # Drools

######### `seam-gen` ############################## CRUD ################## `Drools` ##################

36.4.4.1. `seam-gen` ### CRUD

Seam ######################## `./seam generate-entities` ######################## Seam ####################CRUD ##########################

######...###...######## ################################

36.4.4.2. ####CRUD ########## Drools

############### `username` # `password` ####### `User` ## `authenticate` ##################

authenticator ################ Bean ##########`User` ######## Seam ############## (OC4J ##### EJB3 ######!)#

1. • `@Stateless` ######## `Authenticator` ##########
   - ##### `AuthenticatorAction` #######
   - `AuthenticatorAction` ##### `Authenticator` ######################## (EJB3 ####### Bean ################)######### `@Local` ############`AuthenticatorAction` # `authenticate` ##########################

```
@Name("authenticator")
@Stateless
public class AuthenticatorAction implements Authenticator {
```

```
@Local
public interface Authenticator {
  public boolean authenticate();
}
```

2. `AuthenticatorAction` ################## EntityManager ###########`@PersistenceContext` ##########

```
@PersistenceContext private EntityManager entityManager;
```

3. authenticate ##############

```
public boolean authenticate() {
  List <User
> users = entityManager .createQuery("select u from User u where
  u.username = #{identity.username} and
  u.password = #{identity.password}") .getResultList();
  if (users.size() == 1) {
    identity.addRole("admin");
    return true;
  } else {
    return false;
  }
}
```

4. `web.xml` # EJB3 ############

```
<ejb-local-ref>
  <ejb-ref-name>
    oc4j_example/AuthenticatorAction/local
  </ejb-ref-name>
  <ejb-ref-type
>Session</ejb-ref-type>
  <local>
    org.jboss.seam.tutorial.oc4j.action.Authenticator
  </local>
  <ejb-link
>AuthenticatorAction</ejb-link>
</ejb-local-ref>
```

##

36.5.

########OC4J ######## Seam ################################

BEA Weblogic #### Seam

WebLogic 10.3
#BEA###############J2EE######Seam#########WebLogic#################################WebLog

###WebLogic##########################Seam#JEE5####################JPA#####################
`seam-gen` ##

37.1. WebLogic##########

##10.3###################BEA#####################

- `Weblogic 10.0.MP1` — ###### ### [http://www.oracle.com/technology/software/products/ias/htdocs/wls_main.html]

  10.0.MP1##EJB###`varargs`##########`transie`
  #Weblogic##EJB3####

- `Weblogic 10.3` — ######### [http://www.oracle.com/technology/software/products/ias/htdocs/wls_main.html]

  ###WebLogic###10.0.MP1#######EJB#########
  ###############*#37.2.1. #Weblogic##EJB3####*
  ######################WebLogic##jar###################

Weblogic EJB ######### `jboss-seam.jar`

Seam 2.0.2.CR2
##########WebLogic####jar#################`TimerServiceDispatcher`
#############EJB################EJB##2################BEA#############`jee5/booking` ##########jar#################

37.1.1. 10.3#######

####Weblogic
10.3##BEA################# *Weblogic 10.3 #########* [http://edocs.bea.com/wls/docs103/] . ###################### RHEL #####5
###########

1. 10.3
   ##

2. #####`server103_XX.bin` ######################

```
chmod a+x server103_XX.bin############
```

3. ##############

```
./server103_XX.bin
```

4. ####################BEA##################################BEA##############################
   $BEA_HOME ############

```
/jboss/apps/bea
```

5. ##############Complete###struts#beehive####################

6. ##

37.1.2. Weblogic############

WebLogic######JBoss###

1. Weblogic############

```
$BEA_HOME/wlserver_10.3/common/bin/config.sh
```

2. ####################Weblogic
   Server###

3. ################################

4. ##################Development Mode#######JDK###########

5. ################################ No###########

6. #########seam_examples ###################################

37.1.3. ##### ##/##/####

##

- #######

  ############ $BEA_HOME/user_projects/domains/seam_examples/bin ######### ./
  startWeblogic.sh################

- ############

  #########http://127.0.0.1:7001/
  console###

- #######

  ####2#3############

  - ##########################

    1. ###########seam_examples##########
    2. ##########seam_examples############
    3. ##########AdminServer##################
    4. ############## Shutdown################ When work completes #Force shutdown now#########

  - ###############Ctrl-C####

    ##

-

  Weblogic###############

  ###############/autodeploy
  ####################NoClassDefFound##########################Weblogic############ deployed EAR/WAR files###

37.1.4. Weblogic#JSF#######

#################Weblogic#JSF 1.2###################################Weblogic######JSF#####################
Weblogic 10.3 Configuring JSF and JSTL Libraries [http://edocs.bea.com/wls/docs103/webapp/configurejsfandjtsl.html]##########

1. ########################Deployments #########
2. ####################Install#########
3. ###############$BEA_HOME/wlserver_10.3/common/deployable-libraries ############ jsf-1.2.war############Next #############
4. Install this deployment as a library ####################Install Application Assistant ###### Next ###############

5. Optional Settings######Next###############

6. Yes, take me to the deployment's configuration screen.###################
   Review your choices and click Finish###### Finish###############

7. ######################################Settings for jsf(1.2,1.2.3.1)####
   Deployment Order# 99############### Save ###############

JSF## jsf-api.jar
##jsf-1.2.war## javax.jsf_1.2.0.0.jar (jsf-api.jar)############################

37.2. jee5/booking####

Weblogic#EJB####Seam######################################BEA#############################booking###################################

37.2.1. Weblogic##EJB3###

Weblogic####################Weblogic#########################EJB##############################W9.X#10.0.MP1####################10.3#####################################

37.2.1.1. varargs###

#######Weblogic#EJB######transient#########varargs################################BEA########TimerServiceDispatcher)##10.0.MP1#####################

```
java.io.IOException: Compiler failed executable.exec:
/jboss/apps/bea/wlserver_10.0/user_projects/domains/seam_examples/servers/AdminServer
/cache/EJBCompilerCache/5yo5dk9ti3yo/org/jboss/seam/async/
TimerServiceDispatcher_qzt5w2_LocalTimerServiceDispatcherImpl.java:194: modifier transient
not allowed here
  public transient javax.ejb.Timer scheduleAsynchronousEvent(java.lang.String arg0,
  java.lang.Object[] arg1)
                       ^
/jboss/apps/bea/wlserver_10.0/user_projects/domains/seam_examples/servers/AdminServer
/cache/EJBCompilerCache/5yo5dk9ti3yo/org/jboss/seam/async/
TimerServiceDispatcher_qzt5w2_LocalTimerServiceDispatcherImpl.java:275: modifier transient
not allowed here
  public transient javax.ejb.Timer scheduleTimedEvent(java.lang.String arg0,
  org.jboss.seam.async.TimerSchedule arg1, java.lang.Object[] arg2)
```

######Weblogic 10.3##############BEA##############Weblogic 10.0.MP1#########(CR327275)########BEA###############

##########BEA###############

37.2.1.2. ######EJB#######

#####10.0.MP1######CR327275##########################BEA#########BEA#10.0.MP1###############

#####Weblogic#########################EJB##

```
<<Error
> <EJB
> <BEA-012036
> <Compiling generated EJB classes produced the following Java compiler error message:
<Compilation Error
> TimerServiceDispatcher_qzt5w2_Impl.java: The type TimerServiceDispatcher_qzt5w2_Impl
must implement the inherited abstract method
TimerServiceDispatcher_qzt5w2_Intf.scheduleTimedEvent(String, Schedule, Object[])
<Compilation Error
> TimerServiceDispatcher_qzt5w2_LocalTimerServiceDispatcherImpl.java: Type mismatch:
cannot convert from Object to Timer
<Compilation Error
> TimerServiceDispatcher_qzt5w2_LocalTimerServiceDispatcherImpl.java: Type mismatch:
cannot convert from Object to Timer
>
<Error
> <Deployer
> <BEA-149265
> <Failure occurred in the execution of deployment request with ID '1223409267344' for task '0'.
Error is: 'weblogic.application.ModuleException: Exception preparing module: EJBModule(jboss-
seam.jar)
```

##############Weblogic 10.3#################################Weblogic 10.0.MP1############10.3##########Seam#jar###BEA###JBoss###############

Seam 2.0.2.CR2#########Seam######EJB#########Weblogic############Weblogic#jar###############jar#######lib/interop###########jar#####jboss-seam-wls-compatible.jar###########jar#####jboss-seam.jar#######TimerServiceDispatcher EJB###########jar#################jboss-seam-wls-compatible.jar# jboss-seam.jar#################################jee5/booking################################jar#####TimerServiceDispatcher#################

37.2.2. jee5/booking

jee5/booking#########################

37.2.2.1. hsql##########

##

1. Weblogic##############hsqldb.jar############### `cp $SEAM_HOME/lib/hsqldb.jar $BEA_HOME/user_projects/domains/seam_examples/lib`
2. ############################## *#37.1.3. ###### ##/##/#### ###*
3. #########seam_examples - Services- JDBC - Data Sources#########
4. ##################New##############
5. ###############
   a. Name: `seam-jee5-ds`
   b. JNDI Name: `seam-jee5-ds`
   c. Database Type and Driver: `other`
   d. `Next` ##############
6. `Transaction Options` ######Next##############
7. `Connection Properties` ################
   a. Database Name: `hsqldb`
   b. Host Name: `127.0.0.1`
   c. Port: `9001`
   d. Username:`sa` #################
   e. Password: ###
   f. `Next` ##############
8. `Connection Properties` ################
   a. Driver Class Name: `org.hsqldb.jdbcDriver`
   b. URL: `jdbc:hsqldb:.`
   c. Username: `sa`
   d. Password: ###
   e. ########################
   f. `Next` ##############
9. #####AdminServer###############################

37.2.2.2.

###Weblogic##############Seam#############################

`resources/META-INF/persistence.xml`

- `jta-data-source#####################`

```
        <jta-data-source
>seam-jee5-ds</jta-data-source
>
```

- ####glassfish############################
- weblogic############################

```
<property name="hibernate.dialect"
        value="org.hibernate.dialect.HSQLDialect"/>
<property name="hibernate.transaction.manager_lookup_class"
        value="org.hibernate.transaction.WeblogicTransactionManagerLookup"/>
```

`resources/META-INF/weblogic-application.xml`

- ######################

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<weblogic-application>
   <library-ref>
      <library-name
>jsf</library-name>
      <specification-version
>1.2</specification-version>
      <implementation-version
>1.2</implementation-version>
      <exact-match
>false</exact-match>
   </library-ref>
   <prefer-application-packages>
      <package-name
>antlr.*</package-name>
```

```
    </prefer-application-packages>
</weblogic-application>
```

- ############################## `library-ref`#weblogic##########JSF## `prefer-application-packages` weblogic#`antlr`#jar#####################hibernate################

`resources/META-INF/ejb-jar.xml`

- ##########Weblogic######`sessionBeanInterceptor`################Bean#####################

  `assembly-descriptor` #################

```
<assembly-descriptor>
  <interceptor-binding
>
    <ejb-name
>AuthenticatorAction</ejb-name>
    <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
  </interceptor-binding>
  <interceptor-binding
>
    <ejb-name
>BookingListAction</ejb-name>
    <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
  </interceptor-binding>
  <interceptor-binding
>
    <ejb-name
>RegisterAction</ejb-name>
    <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
  </interceptor-binding>
  <interceptor-binding
>
    <ejb-name
>ChangePasswordAction</ejb-name>
    <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
  </interceptor-binding>
  <interceptor-binding
```

```
>
    <ejb-name
>HotelBookingAction</ejb-name>
    <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
  </interceptor-binding>
  <interceptor-binding
>
    <ejb-name
>HotelSearchingAction</ejb-name>
    <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
  </interceptor-binding>
  <interceptor-binding
>
    <ejb-name
>EjbSynchronizations</ejb-name>
    <interceptor-class
>org.jboss.seam.ejb.SeamInterceptor</interceptor-class>
  </interceptor-binding>
</assembly-descriptor
>
```

resources/WEB-INF/weblogic.xml

- ##########################

```
<?xml version="1.0" encoding="UTF-8"?>

<weblogic-web-app
>
<library-ref>
   <library-name
>jsf</library-name>
   <specification-version
>1.2</specification-version>
   <implementation-version
>1.2</implementation-version>
   <exact-match
>false</exact-match>
 </library-ref>
</weblogic-web-app>
```

- #########library-ref
  #######Weblogic#####################JSF#########################
  weblogic-application.xml
  ##

37.2.2.3.

##############################jboss-seam.jar#######################

build.xml

- ###### weblogic-application.xml ##############

```
<!-- Resources to go in the ear -->
<fileset id="ear.resources" dir="${resources.dir}">
   <include name="META-INF/application.xml" />
   <include name="META-INF/weblogic-application.xml" />
   <include name="META-INF/*-service.xml" />
   <include name="META-INF/*-xmbean.xml" />
   <include name="treecache.xml" />
   <include name="*.jpdl.xml" />
   <exclude name=".gpd.*" />
   <include name="*.cfg.xml" />
   <include name="*.xsd" />
</fileset>
>
```

$SEAM/lib/interop/jboss-seam-wls-compatible.jar

- *#37.2.1. #Weblogic##EJB3####* ######################
- ##jar#################### $SEAM/lib/jboss-seam.jar
  ##############################EAR##############################jboss-seam.jar################
- ###############EAR########## jboss-seam.jar####################################jar###

jboss-seam-wls-compatible.jar########################## jee5/booking###############ant archive#####################

########Weblogic##EAR###############################

```
cp ./dist/jboss-seam-jee5.ear
        $BEA_HOME/user_projects/domains/seam_examples/autodeploy
```

```
```

http://localhost:7001/seam-jee5/########################

37.3. jpa

####Seam POJO#Hibernate JPA##EJB3####################Weblogic 10.X###

########Weblogic 10.x#######################################Weblogic##############JBoss AS#########

#######Weblogic#JSF######*#37.1.4. #Weblogic#JSF########*################################

37.3.1. jpa

##

37.3.1.1.

#########Weblogic 10.X #######PointBase#####################hsql##############PointBase#################PointBase####### #hibernate#### PointBase#####################jpa/weblogic92######PointBase##################

##########jee5 *#37.2.2.1. #hsql###########*###

- DataSource Name: `seam-jpa-ds`
- JNDI Name: `seam-jpa-ds`

37.3.1.2.

Building it only requires running the correct ant command:

```
ant weblogic10.xml
```

This will create a container specific distribution and exploded archive directories.

37.3.1.3.

#37.1.2. #Weblogic################Weblogic###

```
cp ./dist-weblogic10/jboss-seam-jpa.war
$BEA_HOME/user_projects/domains/seam_examples/autodeploy
```

`http://localhost:7001/jboss-seam-jpa/############################`

37.3.2. Weblogic 10.x####

- Weblogic#10.x#9.2#####################
  - `META-INF/persistence.xml` — 9.2#######`PointBase`##10.x#######`hsql`###########
  - `WEB-INF/weblogic.xml` — #######Weblogic 10.x##########`ANTLR`##############################OC4J ##

```
<?xml version="1.0" encoding="UTF-8"?>
<weblogic-web-app
xmlns="http://www.bea.com/ns/weblogic/90"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://www.bea.com/ns/weblogic/90
              http://www.bea.com/ns/weblogic/90/weblogic-web-app.xsd">
  <library-ref>
    <library-name
>jsf</library-name>
    <specification-version
>1.2</specification-version>
    <implementation-version
>1.2</implementation-version>
    <exact-match
>false</exact-match>
  </library-ref>
  <container-descriptor>
    <prefer-web-inf-classes
>true</prefer-web-inf-classes>
  </container-descriptor>
</weblogic-web-app
>
```

####Weblogic#####################Web##hibernate##M`INF/persistence.xml`##

```
<property name="hibernate.query.factory_class"
    value="org.hibernate.hql.classic.ClassicQueryTranslatorFactory"/>
```

- `WEB-INF/components.xml` — Weblogic 10.x######JPA##################################

```
<transaction:entity-transaction entity-manager="#{em}"/>
```

- `WEB-INF/web.xml` — `jsf-impl.jar`# `WAR`############################

```
<listener>
  <listener-class
>com.sun.faces.config.ConfigureListener</listener-class>
 </listener
>
```

- Weblogic#10.x######JBoss###################################

  - `META-INF/persistence.xml` — ############Weblogic##############

```
<property name="hibernate.transaction.manager_lookup_class"
  value="org.hibernate.transaction.WeblogicTransactionManagerLookup"/>
```

  - `WEB-INF/lib` — Weblogic################################JBoss AS#########################hibernate################

    - JPA#########Hibernate########jar##########

      - `hibernate.jar`
      - `hibernate-annotations.jar`
      - `hibernate-entitymanager.jar`
      - `hibernate-validator.jar`

- jboss-common-core.jar
- commons-logging.jar
- commons-collections.jar
- jboss-common-core.jar

- ##############jar#####Weblogic#######
  - antlr.jar
  - cglib.jar
  - asm.jar
  - dom4j.jar
  - el-ri.jar
  - javassist.jar
  - concurrent.jar

37.4. Weblogic 10.x #seam-gen#########################

seam-gen ##seam-gen#######JBoss AS#############################

seam-gen#######################seam-gen################ Weblogic 10.x##Weblogic 10.x ##############jar###############

###########seam-gen WAR###################Seam POJO########Hibernate JPA, Facelets, Drools security, RichFaces, ###################################

37.4.1. seam-gen#p##########

################ ################seam-gen#############Seam########################./seam setup###

```
./seam setup
Buildfile: build.xml

init:
```

```
setup:
     [echo] Welcome to seam-gen :-)
    [input] Enter your Java project workspace (the directory that contains your
Seam projects) [C:/Projects] [C:/Projects]
/home/jbalunas/workspace
    [input] Enter your JBoss home directory [C:/Program Files/jboss-4.2.3.GA]
[C:/Program Files/jboss-4.2.3.GA]
/jboss/apps/jboss-4.2.3.GA
    [input] Enter the project name [myproject] [myproject]
weblogic-example
     [echo] Accepted project name as: weblogic_example
    [input] Select a RichFaces skin (not applicable if using ICEFaces) [blueSky]
 ([blueSky], classic, ruby, wine, deepMarine, emeraldTown, sakura, DEFAULT)

    [input] Is this project deployed as an EAR (with EJB components) or a WAR
(with no EJB support) [ear]  ([ear], war, )
war
    [input] Enter the Java package name for your session beans [org.jboss.seam.
tutorial.weblogic.action] [org.jboss.seam.tutorial.weblogic.action]
org.jboss.seam.tutorial.weblogic.action
    [input] Enter the Java package name for your entity beans [org.jboss.seam.
tutorial.weblogic.model] [org.jboss.seam.tutorial.weblogic.model]
org.jboss.seam.tutorial.weblogic.model
    [input] Enter the Java package name for your test cases [org.jboss.seam.
tutorial.weblogic.action.test] [org.jboss.seam.tutorial.weblogic.action.test]
org.jboss.seam.tutorial.weblogic.test
    [input] What kind of database are you using? [hsql]  ([hsql], mysql, oracle,
 postgres, mssql, db2, sybase, enterprisedb, h2)

    [input] Enter the Hibernate dialect for your database [org.hibernate.
dialect.HSQLDialect] [org.hibernate.dialect.HSQLDialect]

    [input] Enter the filesystem path to the JDBC driver jar [/tmp/seamlib/hsqldb.jar]
[/tmp/seam/lib/hsqldb.jar]

    [input] Enter JDBC driver class for your database [org.hsqldb.jdbcDriver]
 [org.hsqldb.jdbcDriver]

    [input] Enter the JDBC URL for your database [jdbc:hsqldb:.] [jdbc:hsqldb:.]

    [input] Enter database username [sa] [sa]

    [input] Enter database password [] []
```

```
    [input] Enter the database schema name (it is OK to leave this blank) [] []

    [input] Enter the database catalog name (it is OK to leave this blank) [] []

    [input] Are you working with tables that already exist in the database? [n]
 (y, [n], )

    [input] Do you want to drop and recreate the database tables and data in
import.sql each time you deploy? [n]  (y, [n], )

    [input] Enter your ICEfaces home directory (leave blank to omit ICEfaces) [] []

[propertyfile] Creating new property file:
/rhdev/projects/jboss-seam/cvs-head/jboss-seam/seam-gen/build.properties
     [echo] Installing JDBC driver jar to JBoss server
     [copy] Copying 1 file to /jboss/apps/jboss-4.2.3.GA/server/default/lib
     [echo] Type 'seam create-project' to create the new project

BUILD SUCCESSFUL
```

`./seam new-project#################### cd /home/jbalunas/workspace/weblogic_example######################`

37.4.2. Weblogic 10.X#######

`##########################################################################`

37.4.2.1.

`build.xml`

- `############archive##########`

```
<project name="weblogic_example" default="archive" basedir="."
>
```

`resources/META-INF/persistence-dev.xml`

- `jta-data-source#seam-gen-ds##########Weblogic############################jndi-name##############`
- JPA############################RESOURCE_LOCAL##########

```
<persistence-unit name="weblogic_example" transaction-type="RESOURCE_LOCAL"
>
```

- Weblogic################################

```
<property name="hibernate.cache.provider_class"
   value="org.hibernate.cache.HashtableCacheProvider"/>
<property name="hibernate.transaction.manager_lookup_class"
   value="org.hibernate.transaction.WeblogicTransactionManagerLookup"/>
```

- ##################Weblogic###########`persistence-prod.xml`##############

`resource/WEB-INF/weblogic.xml`

########### *description of WEB-INF/weblogic.xml [542]*#################

`resource/WEB-INF/components.xml`

JPA################Seam#########################

```
<transaction:entity-transaction entity-manager="#{entityManager}"/>
```

##

```
xmlns:transaction="http://jboss.com/products/seam/transaction"
```

```
http://jboss.com/products/seam/transaction      http://jboss.com/products/seam/transaction-
2.1.xsd
```

`resource/WEB-INF/web.xml`

`WEB-INF/web.xml` —— `jsf-impl.jar`# `WAR`############################

```
 <listener>
   <listener-class
>com.sun.faces.config.ConfigureListener</listener-class>
 </listener
```

```
  >
```

`resources/WEB-INF/jboss-web.xml`
JBoss AS#################################`jboss-app.xml`#JBoss AS############################

`resources/*-ds.xml`
JBoss AS###JBoss AS####################Weblogic################

37.4.2.2.

`seam-gen`#############`jpa`################################*#37.3.2. #Weblogic 10.x#####*###

- build.xml — ####`build.xml`#############`war`############################

```
    <copy todir="${war.dir}/WEB-INF/lib">
      <fileset dir="${lib.dir}">
        <!-- Misc 3rd party -->
        <include name="commons-logging.jar" />
        <include name="dom4j.jar" />
        <include name="javassist.jar" />
        <include name="cglib.jar" />
        <include name="antlr.jar" />

        <!-- Hibernate -->
        <include name="hibernate.jar" />
        <include name="hibernate-commons-annotations.jar" />
        <include name="hibernate-annotations.jar" />
        <include name="hibernate-entitymanager.jar" />
        <include name="hibernate-validator.jar" />
        <include name="jboss-common-core.jar" />
        <include name="concurrent.jar" />
      </fileset>
    </copy>
  >
```

37.4.3.

###

37.4.3.1.

##########jee5 *#37.2.2.1. #hsql##########*#####################################

- DataSource Name: `seam-gen-ds`
- JNDI Name: `seam-gen-ds`

37.4.3.2.

##################ant#################

37.4.3.3.

#37.1.2. #Weblogic################Weblogic###

```
cp ./dist/weblogic_example.war /jboss/apps/bea/user_projects/domains/seam_examples/autodeploy
```

`http://localhost:7001/weblogic_example/`############################

Seam on IBM's Websphere

Websphere 6.1.x is IBM's application server offering. The latest release is 6.1.0.19 which does not have EJB3 or JEE5 support. There is a recently released (Nov 07) EJB3 feature pack which provides some support for EJB3 and JPA. Currently there is no true JEE5 offering from IBM. This causes some issues with Seam integration with applications that use EJB3.

First we will go over some basic information about the Websphere environment that we used for these examples. After a good deal of research and work we were able to get EJB3 applications to function correctly. We will go over the details of those steps with the jee5 example. We will also deploy the JPA example application.

38.1. Websphere environment and deployment information

Websphere is a commercial product and so we will not discuss the details of its installation other than to say follow the directions provided by your particular installation type and license. This section will detail the exact server versions used, installation tips, and some custom properties that are needed for all of the examples.

38.1.1. Installation versions and tips

All of the examples and information in this chapter are based on the version 6.1 of Websphere at the time of this writing.

- *Websphere Application Server 6.1* [http://www-01.ibm.com/software/webservers/appserv/was/]
- *Feature Pack for EJB 3.0 for Websphere Application Server V6.1 (6.1.0.13)* [http://www-01.ibm.com/support/docview.wss?rs=177&uid=swg21287579]
- *Fix Pack for Websphere Application Server V6.1 (6.1.0.19)* [http://www-01.ibm.com/support/docview.wss?rs=0&uid=swg24020063]

The EJB3 feature pack that we installed came with the 6.1.0.13 patch version of Websphere. Installing the feature pack does not ensure that your server will have the proper environment for EJB3 applications. Be sure that as part of the installation of the feature pack you follow the instructions to create a new server profile with the EJB3 feature pack enabled, or augment one of your existing ones. This can also be done after the installation by running the profile management tool.

It is highly recommended to patch Websphere by latest fix pack, at the time of this writing it is 6.1.0.19

A note about restarting the server

There are times that restarting the server will be required after deploying or changes the examples in this chapter. Its does not seem like every change requires

a restart. If you get errors or exceptions after modifying a property or deploying an application try to restart the server.

38.1.2. Required custom properties

There are a couple of Websphere custom properties that are required for Seam integration. These properties are not needed specifically for Seam, but work around some issues with Websphere. These are set following the instructions here : *Setting web container custom properties* [http://www-1.ibm.com/support/docview.wss?rss=180&uid=swg21284395]

- `prependSlashToResource = "true"` — This solves a fairly common issue with Websphere where applications are not using a leading "/" when attempting to access resources. If this is not set then a `java.net.MalformedURLException` will be thrown. With this property set you will still see warnings, but the resources will be retrieved as expected.

Detailed can be found at:

SRVE0238E: Resource paths must have a leading slash [http://www-1.ibm.com/support/docview.wss?uid=swg21190234]

- `com.ibm.ws.webcontainer.invokefilterscompatibility = "true"` — This solves an issue with Websphere where it throws a `FileNotFoundException` when a web application attempts to access a file resource that does not actually exist on disk. This is a common practice in modern web applications where filters or servlets are used to process resource requests like these. This issue manifests itself as failures to retrieve JavaScript, CSS, images, etc... when requesting a web page.

Detailed can be found at:

PK33090; 6.1: A filter that serves a file does not pop-up an alert message [http://www-1.ibm.com/support/docview.wss?uid=swg24014758]

38.2. `jee5/booking`

`jee5/booking` ######(JBoss AS ######) ######################## GlassFish ########################## Websphere ######################## `$SEAM_DIST/examples/jee5/booking` ######

As stated before the `EJB3` feature pack does not provide a full `jee5` implementation. This means that there are some tricks to getting an application deployed and functioning.

38.2.1.

###################################

`resources/WEB-INF/components.xml`

We need to change the way that we look up EJBs for Websphere. We need to remove the `/local` from the end of the `jndi-pattern` attribute. It should look like this:

```
<core:init jndi-pattern="java:comp/env/jboss-seam-jee5/#{ejbName}" debug="true"/>
```

`resources/WEB-INF/web.xml`

This is the first place that we notice an unexpected change because this is not full `jee5` implementation.

Websphere does not support `Servlet 2.5`, it requires `Servlet 2.4`. For this change we need to adjust the top of the `web.xml` file to look like the following:

```
<xml version="1.0" encoding="UTF-8"?>
<web-app version="2.4"
        xmlns="http://java.sun.com/xml/ns/j2ee"
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:schemaLocation="http://java.sun.com/xml/ns/j2ee
                        http://java.sun.com/xml/ns/j2ee/web-app_2_4.xsd">
```

Next, we have to make some changes to the EJB references in the `web.xml`. These changes are what will allow Websphere to bind the EJB2 references in the web module to the the actual EJB3 beans in the EAR module. Replace all of the `ejb-local-refs` when the values below.

```
 <!-- JEE5 EJB3 names -->
 <ejb-local-ref
>
   <ejb-ref-name
>jboss-seam-jee5/AuthenticatorAction</ejb-ref-name
>
   <ejb-ref-type
>Session</ejb-ref-type
>
   <local-home
></local-home>
   <local
>org.jboss.seam.example.booking.Authenticator</local
```

```
>
  </ejb-local-ref
>

  <ejb-local-ref
>
    <ejb-ref-name
>jboss-seam-jee5/BookingListAction</ejb-ref-name
>
    <ejb-ref-type
>Session</ejb-ref-type
>
     <local-home
></local-home>
    <local
>org.jboss.seam.example.booking.BookingList</local
>
  </ejb-local-ref
>

  <ejb-local-ref
>
    <ejb-ref-name
>jboss-seam-jee5/RegisterAction</ejb-ref-name
>
    <ejb-ref-type
>Session</ejb-ref-type
>
     <local-home
></local-home>
    <local
>org.jboss.seam.example.booking.Register</local
>
  </ejb-local-ref
>

  <ejb-local-ref
>
    <ejb-ref-name
>jboss-seam-jee5/ChangePasswordAction</ejb-ref-name
>
    <ejb-ref-type
>Session</ejb-ref-type
>
```

```
    <local-home
></local-home
>
   <local
>org.jboss.seam.example.booking.ChangePassword</local
>
  </ejb-local-ref
>

  <ejb-local-ref
>
   <ejb-ref-name
>jboss-seam-jee5/HotelBookingAction</ejb-ref-name
>
   <ejb-ref-type
>Session</ejb-ref-type
>
    <local-home
></local-home>
   <local
>org.jboss.seam.example.booking.HotelBooking</local
>
  </ejb-local-ref
>

  <ejb-local-ref
>
   <ejb-ref-name
>jboss-seam-jee5/HotelSearchingAction</ejb-ref-name
>
   <ejb-ref-type
>Session</ejb-ref-type
>
    <local-home
></local-home
>
   <local
>org.jboss.seam.example.booking.HotelSearching</local
>
  </ejb-local-ref
>

  <ejb-local-ref>
   <ejb-ref-name
```

```
>jboss-seam-jee5/EjbSynchronizations</ejb-ref-name
>
   <ejb-ref-type
>Session</ejb-ref-type>
   <local-home
></local-home>
   <local
>org.jboss.seam.transaction.LocalEjbSynchronizations</local>
 </ejb-local-ref
>
```

The important change is that there is an empty `local-home` element for each EJB. This tells Websphere to make the correct bindings between the web module and the EJB3 beans. The `ejb-link` element is simply not used.

Note also that `EjbSynchronizations` is a built-in Seam EJB and not part of the Hotel Booking example. This means that if your application's `components.xml` specifies `transaction:ejb-transaction` , then you must include:

```
 <ejb-local-ref>
   <ejb-ref-name
>myapp/EjbSynchronizations</ejb-ref-name>
   <ejb-ref-type
>Session</ejb-ref-type>
   <local-home
></local-home>
   <local
>org.jboss.seam.transaction.LocalEjbSynchronizations</local>
 </ejb-local-ref>
```

web.xml ##############################

```
Name comp/env/myapp/EjbSynchronizations not found in context java:
```

`resources/META-INF/persistence.xml`

For this example we will be using the default datasource that comes with Websphere. To do this change the `jta-data-source` element:

```
<jta-data-source
```

```
>DefaultDatasource</jta-data-source>
```

Hibernate ######################## GlassFish ##

```
<!--<property name="hibernate.transaction.flush_before_completion" value="true"/>-->
<property name="hibernate.cache.provider_class"
        value="org.hibernate.cache.HashtableCacheProvider"/>
<property name="hibernate.dialect" value="GlassfishDerbyDialect"/>
<property name="hibernate.transaction.manager_lookup_class"
        value="org.hibernate.transaction.WebSphereExtendedJTATransactionLookup"/>
```

- `hibernate.transaction.manager_lookup_class` — Standard Hibernate transaction manager property for Websphere 6.X
- `hibernate.transaction.flush_before_completion` — This is commented out because we want the container to manage the transactions. Also if this is set to `true` an exception will be thrown by Websphere when the EJBContext is looked up.

```
com.ibm.wsspi.injectionengine.InjectionException:
        EJBContext may only be looked up by or injected into an EJB
```

- `hibernate.dialect` — From WAS 6.1.0.9 on the embedded DB was switched to the same Derby DB in Glassfish.

`resources/GlassfishDerbyDialect.class`

You will need to get the `GlassfishDerbyDialect.class` and copy it into the `/resources` directory. The class exists in the JPA example and can be copied using the command below assuming you are in `jee5/booking` directory:

```
cp ../../jpa/resources-websphere61/WEB-INF/classes/GlassfishDerbyDialect.class
  ./resources
```

This class will be put into the `jboss-seam-jee5.jar` file using changes to the build.xml discussed later.

`resources/import.sql`

Derby DB ############ `ID` ##################JPA ####################################ID ############### ######################

```
cp ../../jpa/resources-websphere61/import.sql ./resources
```

38.2.2. `jee5/booking`

In order to get the changes we have made into our application we need to make some changes to the `build.xml`. There are also some additional jars that are required by our application in order to work with Websphere. This section will cover what changes are needed to the `build.xml`.

38.2.2.1. New libraries dependencies

- JSF libraries — Websphere 6.1 comes with its own version of JSF 1.1 (Seam requires JSF 1.2). So we must add these jars to our application:
  - `jsf-api.jar`
  - `jsf-impl.jar`
- Since Websphere is not a fully compliant `JEE5` implementation we need to add these EL libraries:
  - `el-api.jar`
  - `el-ri.jar`
- `jboss-seam.jar` — for some reason when deploying the application through the Websphere administration console it can not find the `jboss-seam.jar` at the base of the EAR archive. This means that we need to add it to the `/lib` of the EAR.
- Finally we remove the `log4j.jar` so that all of the log output from our application will be added to the Websphere log. Additional steps are required to fully configure log4j and those are outside of the scope of this document.

38.2.2.2. `build.xml`

Add the following entry to the bottom of the `build.xml` file. This overrides the default fileset that is used to populate the `jboss-seam-jee5.jar`. The primary change is the addition of the `GlassfishDerbyDialect.class`:

```
<fileset id="jar.resources" dir="${resources.dir}">
  <include name="import.sql" />
  <include name="seam.properties" />
  <include name="GlassfishDerbyDialect.class" />
  <include name="META-INF/persistence.xml" />
  <include name="META-INF/ejb-jar.xml" />
```

```
  </fileset
>
```

Next we need to add the library dependencies discussed above. For this add the following to bottom of the `ear.lib.extras` fileset entry:

```
  <!--<include name="lib/log4j.jar" />-->
  <include name="lib/el-api.jar" />
  <include name="lib/el-ri.jar" />
  <include name="lib/jsf-api.jar" />
  <include name="lib/jsf-impl.jar" />
  <include name="lib/jboss-seam.jar" />
</fileset
>
```

We also need to add richfaces-api.jar, jsf-impl.jar and el-ri.jar into WEB-INF/lib of the war file. Add the following fileset after `ear.lib.extras` fileset.

```
   <fileset id="war.lib.extras" dir="${seam.dir}"
>
      <include name="lib/richfaces-api.jar" />
      <include name="lib/jsf-impl.jar" />
      <include name="lib/el-ri.jar" />
   </fileset
>
```

A note about copying JSF and EL jars

There is a class loading issue with WebSphere, which causes the jars from ear lib directory to not be available when the web module is initialized.

`###########  ant  archive  ########################jee5/booking/dist ###############`

38.2.3. Websphere

`######################################## - ################`

#######WebSphere ##

The steps below are for the Websphere version stated above, yours may be slightly different.

1. Log in to the administration console

```
https://localhost:9043/ibm/console
```

2. Access the `Enterprise Application` menu option under the `Applications` top menu.
3. At the top of the `Enterprise Application` table select `Install`. Below are installation wizard pages and what needs to done on each:
   - `#################`
     - `############################## examples/jee5/booking/dist/jboss-seam-jee5.ear ###############`
     - `Next ##############`
   - `###############`
     - Select the `Deploy enterprise beans` check box. This is needed unless you used a Websphere tool to package the application.
     - `Next ##############`
   - `##############`
     - `############################Next ##############`
   - `Map EJB references to beans` This page will list all of the beans that we entered in the web.xml.
     - Make sure that `Allow EJB reference targets to resolve automatically` check box is selected. This will tell Websphere to bind our EJB3 beans to the EJB references in the web module.
     - `Next ##############`
   - `Map virtual hosts for Web modules`
     - No changes needed here. Select the `Next` button.
   - `Summary (##)`
     - `################Finish ##############`
   - `Installation (######)`
     - `############################`

- When if finishes select the `Save` link and you will be returned to the `Enterprise Applications` table.

4. ##

- `Enterprise Applications (################) ##### Seam Booking ######################`
- `Manage Modules` ##############
- Select the `jboss-seam-jee5.war` link.
- Change the `Class loader order` combo box to `Classes loaded with application class loader first`.
- `Apply (##)` #####`Save (##)` ################
- Return the `Seam Booking` page.
- ###### `Class loading and update detection` ##############
- ####### `Classes loaded with application class loader first` ##########
- Even though we are not enabling class reload you must also enter a valid number in the `Polling interval for updated files` text area (zero works fine).
- `Apply (##)` #####`Save (##)` ################
- You should verify that the change you just made has been remembered. We have had problems with the last class loader change not taking effect - even after a restart. If the change did not take you will need to do it manually, following these directions:
  - Open the following file in a text editor of your choice:

```
$WebSphereInstall/$yourServerName/profiles/$yourProfileName/config/cells/
                $yourCellName/applications/Seam Booking.ear/deployments/
                Seam Booking/deployment.xml
```

  - Modify the following line so that `PARENT_FIRST` is now `PARENT_LAST`:

```
<classloader xmi:id="Classloader_#######" mode="PARENT_FIRST"/>
```

  - Save the file and now when go to the `Class loading and update detection` page you should see `Classes loaded with application class loader first` selected.

5. ################ Enterprise Applications (###############) ## Start #############

6. You can now access the application at `http://localhost:9080/seam-jee5/` .

A note about Websphere Stateful bean timeouts

The default timeout period for a Websphere 6.1 Stateful EJB is 10 minutes. This means that you may see some EJB timeout exceptions after some idle time. It is possible to adjust the timeout of the Stateful EJBs on an individual basis, but that is beyond the scope of this document. See the Websphere documentation for details.

38.3. jpa booking

Thankfully getting the `jpa` example to work is much easier than the `jee5` example. This is the Hotel Booking example implemented in Seam POJOs and using Hibernate JPA with JPA transactions. It does not require EJB3 support to run.

#######Websphere ####################################

##

38.3.1. jpa

Building it only requires running the correct ant command:

```
ant websphere61
```

This will create container specific distribution and exploded archive directories with the `websphere61` label.

38.3.2. jpa

`jee5` ##### *#38.2.3. #Websphere ################*

- Enterprise Applications (################) ###### Install (######) ##############
  - #################
    - Browse to the `examples/jpa/dist-websphere61/jboss-seam-jpa.war` file using the file upload widget.
    - Context root ######### jboss-seam-jpa##########
    - Next #############

- Next #########3 ##############################
- Summary (##) ###
  - #############Finish (##) ##
    Save (##) ######### Enterprise Applications (################)##########

- As with the jee5 example there are some class loader changes needed before we start the application. Follow the instructions at *installation adjustments for jee5 example* but exchange jboss-seam-jpa for Seam Booking.
- ####################Enterprise Applications (################)
  ################## Start (##) ################
- http://localhost:9080/jboss-seam-jpa/index.html ####################

38.3.3. Whats different for Websphere 6.1

The differences between the JPA examples that deploys to JBoss 4.2 and Websphere 6.1 are mostly expected; library and configuration file changes.

- #########
  - WEB-INF/web.xml — the only significant change is that Websphere 6.1 only support Servlet 2.4 so the top of this file was changed.
  - META-INF/persistence.xml — the main changes here are for the datasource JNDI path, switching to the Websphere 6.1 transaction manager look up class, and changing the hibernate dialect to be GlassfishDerbyDialect .
  - WEB-INF/classes/GlassfishDerbyDialect.class — this class is needed for the hibernate dialect change to GlassfishDerbyDialect
  - import.sql — ######## Derby DB ###### ID ##############################
- ##########

  WEB-INF/lib — The Websphere version requires several library packages because they are not included as they are with JBoss AS. These are primarily for hibernate, JSF-RI support and their dependencies. Below are listed only the additional jars needed above and beyond the JBoss JPA example.

  - Hibernate # JPA provider ##################### jar ######
    - hibernate.jar
    - hibernate-annotations.jar
    - hibernate-commons-annotations.jar

- `hibernate-entitymanager.jar`
- `hibernate-validator.jar`
- `commons-collections.jar`
- `jboss-common-core.jar`

- Seam requires JSF 1.2 and these are the jars needed for that. Websphere 6.1 ships with its own implementation of JSF 1.1.
  - `jsf-api.jar`
  - `jsf-impl.jar`
  - `el-ri.jar`
  - `el-api.jar`
- WebSphere ################## jar#
  - `antlr.jar`
  - `cglib.jar`
  - `asm.jar`
  - `dom4j.jar`
  - `javassist.jar`
  - `concurrent.jar`

38.4. Deploying an application created using `seam-gen` on Websphere 6.1.0.13

`seam-gen` ##seam-gen ###### JBoss AS ######################################Websphere ########################*38.2. `jee5/booking` #### # ########*EJB3 ##

38.4.1. `seam-gen`

############################ `seam-gen` ## Hibernate ##############################

```
./seam setup
Buildfile: build.xml

init:

setup:
     [echo] Welcome to seam-gen :-)
    [input] Enter your Java project workspace (the directory that contains your
Seam projects) [C:/Projects] [C:/Projects]
/home/jbalunas/workspace
    [input] Enter your JBoss home directory [C:/Program Files/jboss-4.2.3.GA]
[C:/Program Files/jboss-4.2.3.GA]
/home/jbalunas/jboss/jboss-4.2.3.GA
    [input] Enter the project name [myproject] [myproject]
websphere_example
     [echo] Accepted project name as: websphere_example
    [input] Do you want to use ICEFaces instead of RichFaces [n] (y, [n], )

    [input] skipping input as property icefaces.home.new has already been set.
    [input] Select a RichFaces skin [blueSky] ([blueSky], classic, ruby, wine,
deepMarine, emeraldTown, sakura, DEFAULT)

    [input] Is this project deployed as an EAR (with EJB components) or a WAR
(with no EJB support) [ear]  ([ear], war, )

    [input] Enter the Java package name for your session beans [org.jboss.seam.
tutorial.websphere.action] [org.jboss.seam.tutorial.websphere.action]
org.jboss.seam.tutorial.websphere.action
    [input] Enter the Java package name for your entity beans [org.jboss.seam.
tutorial.websphere.model] [org.jboss.seam.tutorial.websphere.model]
org.jboss.seam.tutorial.websphere.model
    [input] Enter the Java package name for your test cases [org.jboss.seam.
tutorial.websphere.action.test] [org.jboss.seam.tutorial.websphere.action.test]
org.jboss.seam.tutorial.websphere.test
    [input] What kind of database are you using? [hsql]  ([hsql], mysql, oracle,
 postgres, mssql, db2, sybase, enterprisedb, h2)

    [input] Enter the Hibernate dialect for your database [org.hibernate.
dialect.HSQLDialect] [org.hibernate.dialect.HSQLDialect]

    [input] Enter the filesystem path to the JDBC driver jar [/tmp/seam/lib/hsqldb.jar]
[/tmp/seam/lib/hsqldb.jar]

    [input] Enter JDBC driver class for your database [org.hsqldb.jdbcDriver]
```

```
[org.hsqldb.jdbcDriver]

    [input] Enter the JDBC URL for your database [jdbc:hsqldb:.]
[jdbc:hsqldb:.]

    [input] Enter database username [sa] [sa]

    [input] Enter database password [] []

    [input] Enter the database schema name (it is OK to leave this blank) [] []

    [input] Enter the database catalog name (it is OK to leave this blank) [] []

    [input] Are you working with tables that already exist in the database? [n]
  (y, [n], )

    [input] Do you want to drop and recreate the database tables and data in
import.sql each time you deploy? [n]  (y, [n], )

[propertyfile] Creating new property file:
/rhdev/projects/jboss-seam/svn-seam_2_0/jboss-seam-2_0/seam-gen/build.properties
     [echo] Installing JDBC driver jar to JBoss server
     [copy] Copying 1 file to /home/jbalunas/jboss/jboss-4.2.3.GA/server/default/lib
     [echo] Type 'seam create-project' to create the new project

BUILD SUCCESSFUL
Total time: 3 minutes 5 seconds
```

################$ ./seam new-project ############# cd /home/jbalunas/workspace/websphere_example ##############################

38.4.2. Websphere

##########################

38.4.2.1.

resources/META-INF/persistence-dev.xml

- jta-data-source # DefaultDatasource ################ Websphere DB #######
- ####################*38.2. jee5/booking #### #* ##############

```

```

```
<property name="hibernate.dialect" value="GlassfishDerbyDialect"/>
<property name="hibernate.hbm2ddl.auto" value="update"/>
<property name="hibernate.show_sql" value="true"/>
<property name="hibernate.format_sql" value="true"/>
<property name="hibernate.cache.provider_class"
      value="org.hibernate.cache.HashtableCacheProvider"/>
<property name="hibernate.transaction.manager_lookup_class"
      value="org.hibernate.transaction.WebSphereExtendedJTATransactionLookup"/>
```

- EntityManagerFactory ##### JBoss AS ##################

```
<property
 name="jboss.entity.manager.factory.jndi.name"
 value="java:/websphere_exampleEntityManagerFactory">
```

- prod ########### Websphere ###########`persistence-prod.xml` ################

`resources/GlassfishDerbyDialect.class`

As with other examples we need to include this class for DB support. It can be copied from the `jpa` example into the `websphere_example/resources` directory.

```
cp $SEAM/examples/jpa/resources-websphere61/WEB-INF/classes/
GlassfishDerbyDialect.class
  ./resources
```

`resources/META-INF/jboss-app.xml`

JBoss AS ######################### (JBoss AS ## `jboss-app.xml` ##########################)

`resources/*-ds.xml`

JBoss AS ######################### (###########JBoss AS ###################Websphere ######################)

`resources/WEB-INF/components.xml`

- ######################### - `<transaction:ejb-transaction />` ################## `xmlns:transaction="http://jboss.com/products/seam/transaction"` #########
- `jndi-pattern` # `java:comp/env/websphere_example/#{ejbName}` ######
- #########`managed-persistence-context` ######################

```
<persistence:managed-persistence-context name="entityManager"
        auto-create="true"
      persistence-unit-jndi-name="java:/websphere_exampleEntityManagerFactory"/>
```

`resources/WEB-INF/web.xml`

Websphere does not support `Servlet 2.5`, it required `Servlet 2.4`. For this change we need to adjust the top of the `web.xml` file to look like the following:

```
<?xml version="1.0" encoding="UTF-8"?>
<web-app version="2.4"
    xmlns="http://java.sun.com/xml/ns/j2ee"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://java.sun.com/xml/ns/j2ee
                http://java.sun.com/xml/ns/j2ee/web-app_2_4.xsd">
```

As with the `jee5/booking` example we need to add EJB references to the web.xml. These references require the empty `local-home` to flag them for Websphere to perform the proper binding.

```
 <ejb-local-ref
>
   <ejb-ref-name
>websphere_example/AuthenticatorAction</ejb-ref-name
>
   <ejb-ref-type
>Session</ejb-ref-type
>
   <local-home
></local-home>
   <local
>org.jboss.seam.tutorial.websphere.action.Authenticator</local
>
 </ejb-local-ref>

 <ejb-local-ref>
   <ejb-ref-name
```

```
>websphere_example/EjbSynchronizations</ejb-ref-name
>
   <ejb-ref-type
>Session</ejb-ref-type>
   <local-home
></local-home>
   <local
>org.jboss.seam.transaction.LocalEjbSynchronizations</local>
  </ejb-local-ref
>
```

38.4.2.2. `AuthenticatorAction` EJB

`Authenticator` Seam POJO ##############EJB3

1. • ##### `AuthenticatorAction` ######

   • `@Stateless` ########### `AuthenticatorAction` ##########

   • `AuthenticatorAction` ##### `Authenticator` ######################## (EJB3 ####### Bean ################)######### `@Local` ############`AuthenticatorAction` # `authenticate` ##########################

```
@Name("authenticator")
@Stateless
public class AuthenticatorAction implements Authenticator {
```

```
@Local
public interface Authenticator {
  public boolean authenticate();
}
```

2. ### `web.xml` ###### EJB ##################

38.4.2.3. `build.xml` ## jar

############`jee5/booking` ###################

• ############ `archive` ###### (Websphere #################)#

```
<project name="websphere_example" default="archive" basedir=".">
```

- Websphere ##websphere_example.jar ######## war ######### drools # /security.drl ################################ build.xml ##################### <target name="war" depends="compile" description="Build the distribution .war file"> ######################

```
<copy todir="${war.dir}">
  <fileset dir="${basedir}/resources" >
    <include name="*.drl" />
  </fileset>
</copy>
```

- We need to ge the `GlassfishDerbyDialect.class` into our application jar. To do that find the `jar` task and modify the top of it so that it looks like this:

```
<target name="jar" depends="compile,copyclasses"
  description="Build the distribution .jar file">
  <copy todir="${jar.dir}">
    <fileset dir="${basedir}/resources">
      <include name="seam.properties" />
      <include name="*.drl" />
      <include name="GlassfishDerbyDialect.class" />
    </fileset>
  </copy>
...
```

- Next we need to get the `jboss-seam.jar` into the base of the `EAR` file. For deployment Websphere requires this jar to be in both the `/lib` directory and at the base of the `EAR`. You must add the following to the `archive` task:

```
<fileset dir="${lib.dir}">
  <include name="jboss-seam.jar" />
</fileset
>
```

So that the whole `archive` task looks like:

```
<target name="archive" depends="jar,war,ear"
        description="Package the archives">
   <jar jarfile="${dist.dir}/${project.name}.jar" basedir="${jar.dir}"/>
   <jar jarfile="${dist.dir}/${project.name}.war" basedir="${war.dir}"/>
   <jar jarfile="${dist.dir}/${project.name}.ear">
      <fileset dir="${ear.dir}"/>
      <fileset dir="${dist.dir}">
         <include name="${project.name}.jar"/>
         <include name="${project.name}.war"/>
      </fileset>
      <fileset dir="${lib.dir}">
        <include name="jboss-seam.jar" />
      </fileset>
    </jar>
</target
>
```

- ### jar # `build.xml` ##################### `<fileset dir="${basedir}">` ################fileset ######## include ##########

```
<target name="ear" description="Build the EAR">
    <copy todir="${ear.dir}">
          <fileset dir="${basedir}/resources">
                <include name="*jpdl.xml" />
                <include name="*hibernate.cfg.xml" />
                <include name="jbpm.cfg.xml" />
          </fileset>
        <fileset dir="${lib.dir}">
            <include name="jboss-seam.jar" />
        </fileset>
          <fileset dir="${basedir}">
                <include name="lib/jbpm*.jar" />
                <include name="lib/jboss-el.jar" />
                <include name="lib/drools-*.jar"/>
                <include name="lib/core.jar"/>
                <include name="lib/janino*.jar"/>
                <include name="lib/antlr-*.jar"/>
                <include name="lib/mvel*.jar"/>
```

```
            <include name="lib/richfaces-api*.jar" />
        </fileset>
    </copy>
    <copy todir="${ear.dir}/META-INF">
        <fileset dir="${basedir}/resources/META-INF">
            <include name="application.xml" />
            <include name="jboss-app.xml" />
        </fileset>
    </copy>
</target
>
```

- Hibernate ###############

```
    <!-- Hibernate and deps -->
    <include name="lib/hibernate.jar"/>
    <include name="lib/hibernate-commons-annotations.jar"/>
    <include name="lib/hibernate-annotations.jar"/>
    <include name="lib/hibernate-entitymanager.jar"/>
    <include name="lib/hibernate-validator.jar"/>
    <include name="lib/jboss-common-core.jar" />
```

- JSF dependencies. You will need to copy the `el-ri.jar` from the `$SEAM/examples/jpa/lib` directory.

```
    <!-- jsf libs -->
    <include name="lib/jsf-api.jar" />
    <include name="lib/jsf-impl.jar" />
    <include name="lib/el-api.jar" />
    <include name="lib/el-ri.jar"/>
```

- ######################

```
    <!-- 3rd party and supporting jars -->
    <!--<include name="lib/log4j.jar" />-->
    <include name="lib/javassist.jar"/>
    <include name="lib/dom4j.jar" />
    <include name="lib/concurrent.jar" />
```

```
    <include name="lib/cglib.jar"/>
    <include name="lib/asm.jar"/>
    <include name="lib/antlr.jar" />
    <include name="lib/commons-logging.jar" />
    <include name="lib/commons-collections.jar" />
```

- `jboss-seam.jar` - this is needed in both the `ear` base and `/lib` directory.

```
    <!-- seam jar -->
    <include name="lib/jboss-seam.jar" />
```

################

```
<fileset dir="${basedir}">

  <include name="lib/jbpm*.jar" />
  <include name="lib/jboss-el.jar" />
  <include name="lib/drools-*.jar"/>
  <include name="lib/core.jar"/>
  <include name="lib/janino*.jar"/>
  <include name="lib/antlr-*.jar"/>
  <include name="lib/mvel*.jar"/>
  <include name="lib/richfaces-api*.jar" />

  <!-- Hibernate and deps -->
  <include name="lib/hibernate.jar"/>
  <include name="lib/hibernate-commons-annotations.jar"/>
  <include name="lib/hibernate-annotations.jar"/>
  <include name="lib/hibernate-entitymanager.jar"/>
  <include name="lib/hibernate-validator.jar"/>
  <include name="lib/jboss-common-core.jar" />

  <!-- jsf libs -->
  <include name="lib/jsf-api.jar" />
  <include name="lib/jsf-impl.jar" />
  <include name="lib/el-api.jar" />
  <include name="lib/el-ri.jar"/>

  <!-- 3rd party and supporting jars -->
  <include name="lib/javassist.jar"/>
  <include name="lib/dom4j.jar" />
```

```
    <include name="lib/concurrent.jar" />
    <include name="lib/cglib.jar"/>
    <include name="lib/asm.jar"/>
    <include name="lib/antlr.jar" />
    <include name="lib/commons-logging.jar" />
    <include name="lib/commons-collections.jar" />

    <!-- seam jar -->
    <include name="lib/jboss-seam.jar" />

</fileset
>
```

The last step is to add `jsf-impl.jar` and `el-ri.jar` to the war target. Look for `copy todir="${war.dir}/WEB-INF/lib"` and add the following:

```
<copy todir="${war.dir}/WEB-INF/lib">
                <fileset dir="${lib.dir}">
                    <includesfile name="deployed-jars-war.list" />
                    <include name="jsf-impl.jar" />
                    <include name="el-ri.jar" />
                    <exclude name="jboss-seam-gen.jar" />
                </fileset>
</copy
>
```

38.4.2.4. seam-gen ################ WebSphere

- ################ (### /home/jbalunas/workspace/websphere_example) # ant ### dist/websphere_example.ear ###
- ################## *#38.2.3. #Websphere ################* ########## ####jboss-seam-jee5 ############ websphere_example ###############
- http://localhost:9080/websphere_example/index.html ##########################

GlassFish ############### Seam

GlassFish ##Java EE 5 ## v2 UR2 ###

GlassFish ################ jee5 ############################jpa ############################seam-gen ######################### GlassFish

39.1. GlassFish

39.1.1.

##################### GlassFish ##################

- *GlassFish v2 UR2 - #########* [https://glassfish.dev.java.net/downloads/v2ur2-b04.html]

GlassFish ########################

```
$ java -Xmx256m -jar glassfish-installer-v2ur2-b04-linux.jar
```

############GlassFish ###############

```
$ cd glassfish; ant -f setup.xml
```

##############`domain1` ###

######## JavaDB ###########

```
$ bin/asadmin start-database
```

##

JavaDB ##HSQLDB # JBoss AS ##############GlassFish ###############

####GlassFish #############

```
$ bin/asadmin start-domain domain1
```

The web adminstration console is available at `http://localhost:4848/`. You can access the web admin console with the default username (`admin`) and password (`adminadmin`). Alternatively, you could copy EAR/WAR file to `glassfish/domains/domain1/autodeploy` to deploy it.

################################

```
$ bin/asadmin stop-domain domain1; bin/asadmin stop-database
```

39.2. `jee5/booking`

`jee5/booking` ######(JBoss AS ######) ######################## GlassFish ########################## `$SEAM_DIST/examples/jee5/booking` ######

39.2.1. GlassFish

GlassFish ############ GlassFish ###################

1. `http://localhost:4848` ###################
2. ########## `Applications` (########) ################ `Enterprise Applications` (################) ############
3. `Enterprise Application` (################) ######### `Deploy` (##) ##
   - ##################
     - ##### `examples/jee5/booking/dist/jboss-seam-jee5.ear` ##########
     - `OK` #############
4. `http://localhost:8081/seam-jee5/` ####################

39.3. `jpa` booking

####Hibernate JPA # JPA ############# Seam POJO ##EJB3 #############

#######GlassFish ####################################

39.3.1. `jpa`

################`glassfish` ############

```
$ ant glassfish
```

############## `dist-glassfish` ####### `exploded-archives-glassfish` ##############

39.3.2. jpa

This is very similar to the jee5 example at *#39.2.1. #GlassFish ###############*.

- ##################

```
http://localhost:4848
```

- ########## Applications (########) ################ Web Applications (Web ########) #############
  - ##################
    - ##### examples/jpa/dist-glassfish/jboss-seam-jpa.war ##########
    - OK ##############
  - http://localhost:8081/jboss-seam-jpa/ ####################

Hypersonic SQL DB ##### Derby ###

In order for the app to work out of the box with GlassFish, we have used the Derby (aka JavaDB) database in GlassFish. However, we strongly recommend that you use another database (e.g. HSQL). examples/jpa/resources-glassfish/WEB-INF/classes/GlassFishDerbyDialect.class is a hack to get around a Derby bug in GlassFish server. You must use it as your Hibernate dialect if you use Derby with GlassFish.

39.3.3. GlassFish v2 UR2

- #########
  - META-INF/persistence.xml — the main changes needed are the datasource JNDI, switching to the GlassFish transaction manager lookup class, and changing the hibernate dialect to be GlassFishDerbyDialect.
  - WEB-INF/classes/GlassFishDerbyDialect.class — this class is needed for the Hibernate dialect change to GlassFishDerbyDialect
  - import.sql — ######## Derby DB ###### ID ##############################

39.4. seam-gen ################## GlassFish v2 UR2

seam-gen is a very useful tool for developers to quickly get an application up and running, and provides a foundation to add your own functionality. Out of box seam-gen will produce applications

configured to run on JBoss AS. These instructions will show the steps needed to get it to run on GlassFish. As stated above in *#39.2. `#jee5/booking` #####* it's easy to deploy either an EJB3 or a Seam POJOs application on Glassfish.

39.4.1. `seam-gen`

############################## `seam-gen`
Hibernate
################################

```
$ ./seam setup
Buildfile: build.xml

init:

setup:
[echo] Welcome to seam-gen :-)
[input] Enter your Java project workspace (the directory that contains your
Seam projects) [C:/Projects] [C:/Projects]
/projects
[input] Enter your JBoss home directory [C:/Program Files/jboss-4.2.3.GA]
[C:/Program Files/jboss-4.2.3.GA]

[input] Enter the project name [myproject] [myproject]
seamgen_example
[echo] Accepted project name as: seamgen_example
[input] Do you want to use ICEfaces instead of RichFaces [n] (y, [n])

[input] skipping input as property icefaces.home.new has already
been set.
[input] Select a RichFaces skin [blueSky] ([blueSky], classic, ruby, wine,
deepMarine, emeraldTown, japanCherry, DEFAULT)

[input] Is this project deployed as an EAR (with EJB components) or a WAR
(with no EJB support) [ear] ([ear], war)

[input] Enter the Java package name for your session beans
[com.mydomain.seamgen_example] [com.mydomain.seamgen_example]
org.jboss.seam.tutorial.glassfish.action
[input] Enter the Java package name for your entity beans
[org.jboss.seam.tutorial.glassfish.action]
[org.jboss.seam.tutorial.glassfish.action]
org.jboss.seam.tutorial.glassfish.model
[input] Enter the Java package name for your test cases
```

```
[org.jboss.seam.tutorial.glassfish.action.test]
[org.jboss.seam.tutorial.glassfish.action.test]
org.jboss.seam.tutorial.glassfish.test
[input] What kind of database are you using? [hsql] ([hsql], mysql, oracle,
postgres, mssql, db2, sybase, enterprisedb, h2)

[input] Enter the Hibernate dialect for your database
[org.hibernate.dialect.HSQLDialect]
[org.hibernate.dialect.HSQLDialect]

[input] Enter the filesystem path to the JDBC driver jar
[/tmp/seam/lib/hsqldb.jar] [/tmp/seam/lib/hsqldb.jar]

[input] Enter JDBC driver class for your database [org.hsqldb.jdbcDriver]
[org.hsqldb.jdbcDriver]

[input] Enter the JDBC URL for your database [jdbc:hsqldb:.]
[jdbc:hsqldb:.]

[input] Enter database username [sa] [sa]

[input] Enter database password [] []

[input] Enter the database schema name (it is OK to leave this blank) [] []

[input] Enter the database catalog name (it is OK to leave this
blank) [] []

[input] Are you working with tables that already exist in the database? [n]
(y, [n])

[input] Do you want to drop and recreate the database tables and data in
import.sql each time you deploy? [n] (y, [n])

[propertyfile] Creating new property file:
/home/mnovotny/workspaces/jboss/jboss-seam/seam-gen/build.properties
[echo] Installing JDBC driver jar to JBoss server
[copy] Copying 1 file to
/home/mnovotny/workspaces/jboss/jboss-seam/seam-gen/C:/Program
Files/jboss-4.2.3.GA/server/default/lib
[echo] Type 'seam create-project' to create the new project

BUILD SUCCESSFUL
```

```
Total time: 4 minutes 5 seconds
```

################$ ./seam new-project ############# cd /projects/seamgen_example
##############################

39.4.2. GlassFish

#########################

39.4.2.1.

resources/META-INF/persistence-dev.xml

- jta-data-source # jdbc/__default ################ GlassFish Derby DB #######
- Add or change the properties below. These are described in detail at *#39.2. #jee5/booking #####*:

```
<property name="hibernate.dialect" value="GlassFishDerbyDialect"/>
<property name="hibernate.hbm2ddl.auto" value="update"/>
<property name="hibernate.show_sql" value="true"/>
<property name="hibernate.format_sql" value="true"/>
<property name="hibernate.cache.provider_class"
 value="org.hibernate.cache.HashtableCacheProvider"/>
<property name="hibernate.transaction.manager_lookup_class"
 value="org.hibernate.transaction.SunONETransactionManagerLookup"/>
```

- prod ############ GlassFish ############persistence-prod.xml ################

resources/GlassFishDerbyDialect.class
###jpa ###### seamgen_example/resources ##################

```
$ cp \
$SEAM_DIST/examples/jpa/resources-glassfish/WEB-INF/classes/
GlassFishDerbyDialect.class \
./resources
```

resources/META-INF/jboss-app.xml
JBoss AS ######################### (JBoss AS ## jboss-app.xml #########################)

`resources/*-ds.xml`

JBoss AS ########################## (##########JBoss AS ###################GlassFish ######################)

`resources/WEB-INF/components.xml`

- ######################## - `<transaction:ejb-transaction/>` ################ `xmlns:transaction="http://jboss.com/products/seam/transaction"` #########
- Alter the `jndi-pattern` to `java:comp/env/seamgen_example/#{ejbName}/local`

`resources/WEB-INF/web.xml`

As with the `jee5/booking` example we need to add EJB references to the web.xml. These references require the empty `local-home` to flag them for GlassFish to perform the proper binding.

```
<ejb-local-ref
>
   <ejb-ref-name
>seamgen_example/AuthenticatorAction</ejb-ref-name
>
   <ejb-ref-type
>Session</ejb-ref-type
>
   <local-home
></local-home>
   <local
>org.jboss.seam.tutorial.glassfish.action.Authenticator</local
>
 </ejb-local-ref>

 <ejb-local-ref>
   <ejb-ref-name
>seamgen_example/EjbSynchronizations</ejb-ref-name
>
   <ejb-ref-type
>Session</ejb-ref-type>
   <local-home
></local-home>
   <local
>org.jboss.seam.transaction.LocalEjbSynchronizations</local>
 </ejb-local-ref
>
```

39.4.2.2. `AuthenticatorAction` EJB

`Authenticator` Seam POJO ##############EJB3

1. • ##### `AuthenticatorAction` #######

   • `@Stateless` ########### `AuthenticatorAction` ##########

   • `AuthenticatorAction` ##### `Authenticator` ######################## (EJB3 ####### Bean ###############)######### `@Local` ############`AuthenticatorAction` # `authenticate` ##########################

```
@Name("authenticator")
@Stateless
public class AuthenticatorAction implements Authenticator {
```

```
@Local
public interface Authenticator {

  public boolean authenticate();
}
```

2. ### `web.xml` ###### EJB ##################

39.4.2.3. `build.xml` ## jar

############`jee5/booking` ###################

• ############ `archive` ###### (GlassFish ################)#

```
<project name="seamgen_example" default="archive" basedir=".">
```

• Websphere looks for the drools `/security.drl` file in the root of the `war` file instead of the root of the `seamgen_example.jar` so we need to have the `build.xml` move it to the correct location at build time. The following must be added at the top of the `<target name="war" depends="compile" description="Build the distribution .war file" >` target.

```
<copy todir="${war.dir}">
  <fileset dir="${basedir}/resources">
    <include name="*.drl" />
  </fileset
```

```
>
</copy
>
```

- We need to get the `GlassFishDerbyDialect.class` into our application jar. To do that find the `jar` task and modify the top of it so that it looks like this:

```
<target name="jar" depends="compile,copyclasses" description="Build the distribution .jar
 file">
  <copy todir="${jar.dir}">
    <fileset dir="${basedir}/resources">
      <include name="seam.properties" />
      <include name="*.drl" />
      <include name="GlassFishDerbyDialect.class" />
    </fileset
>
  </copy>
  ...
```

- Next we need to get the `jboss-seam.jar` into the base of the `EAR` file. For deployment GlassFish requires this jar to be in both the `/lib` directory and at the base of the `EAR`. You must add the following to the `archive` task:

```
<fileset dir="${lib.dir}">
  <include name="jboss-seam.jar" >
</fileset
>
```

So that the whole `archive` task looks like:

```
<target name="archive" depends="jar,war,ear" description="Package the archives">
  <jar jarfile="${dist.dir}/${project.name}.jar" basedir="${jar.dir}"/>
  <jar jarfile="${dist.dir}/${project.name}.war" basedir="${war.dir}"/>
  <jar jarfile="${dist.dir}/${project.name}.ear">
    <fileset dir="${ear.dir}"/>
    <fileset dir="${dist.dir}">
      <include name="${project.name}.jar"/>
      <include name="${project.name}.war"/>
    </fileset>
    <fileset dir="${lib.dir}">
      <include name="jboss-seam.jar" />
```

```
    </fileset>
  </jar>
</target
>
```

- Now we need to get extra jars into the `build.xml`. Look for the `<fileset dir="${basedir}" >` section of the task below. Add the new includes at the bottom of the fileset.

```
<target name="ear" description="Build the EAR">
  <copy todir="${ear.dir}">
    <fileset dir="${basedir}/resources">
      <include name="*jpdl.xml" />
      <include name="*hibernate.cfg.xml" />
      <include name="jbpm.cfg.xml" />
    </fileset>
    <fileset dir="${lib.dir}">
      <include name="jboss-seam.jar" />
    </fileset>
    <fileset dir="${basedir}">
      <include name="lib/jbpm*.jar" />
      <include name="lib/jboss-el.jar" />
      <include name="lib/drools-*.jar"/>
      <include name="lib/core.jar"/>
      <include name="lib/janino*.jar"/>
      <include name="lib/antlr-*.jar"/>
      <include name="lib/mvel*.jar"/>
      <include name="lib/richfaces-api*.jar" />
    </fileset>
  </copy>
  <copy todir="${ear.dir}/META-INF">
    <fileset dir="${basedir}/resources/META-INF">
      <include name="application.xml" />
      <include name="jboss-app.xml" />
    </fileset>
  </copy>
</target
>
```

- Hibernate ###############

```
  <!-- Hibernate and deps -->
  <include name="lib/hibernate.jar"/>
```

```
<include name="lib/hibernate-commons-annotations.jar"/>
<include name="lib/hibernate-annotations.jar"/>
<include name="lib/hibernate-entitymanager.jar"/>
<include name="lib/hibernate-validator.jar"/>
<include name="lib/jboss-common-core.jar"/>
```

- Add JSF dependencies. You will need to copy the `el-ri.jar` from the `$SEAM_DIST/lib` directory.

```
<!-- jsf libs -->
<include name="lib/jsf-api.jar" />
<include name="lib/jsf-impl.jar" />
<include name="lib/el-api.jar" />
<include  name="lib/el-ri.jar"/>
```

- ######################

```
<!-- 3rd party and supporting jars -->
<include name="lib/javassist.jar"/>
<include name="lib/dom4j.jar"/>
<include name="lib/concurrent.jar" />
<include name="lib/cglib.jar"/>
<include name="lib/asm.jar"/>
<include name="lib/antlr.jar" />
<include name="lib/commons-logging.jar" />
<include name="lib/commons-collections.jar" />
```

################

```
<fileset dir="${basedir}">
  <include name="lib/jbpm*.jar" />
  <include name="lib/jboss-el.jar" />
  <include name="lib/drools-*.jar"/>
  <include name="lib/core.jar"/>
  <include name="lib/janino*.jar"/>
  <include name="lib/antlr-*.jar"/>
  <include name="lib/mvel*.jar"/>
  <include name="lib/richfaces-api*.jar" />

  <!-- Hibernate and deps -->
  <include name="lib/hibernate.jar"/>
```

```
    <include name="lib/hibernate-commons-annotations.jar"/>
    <include name="lib/hibernate-annotations.jar"/>
    <include name="lib/hibernate-entitymanager.jar"/>
    <include name="lib/hibernate-validator.jar"/>
    <include name="lib/jboss-common-core.jar" />

    <!-- jsf libs -->
    <include name="lib/jsf-api.jar" />
    <include name="lib/jsf-impl.jar" />
    <include name="lib/el-api.jar" />
    <include name="lib/el-ri.jar"/>

    <!-- 3rd party and supporting jars -->
    <include name="lib/javassist.jar" />
    <include name="lib/dom4j.jar" />
    <include name="lib/concurrent.jar" />
    <include name="lib/cglib.jar" />
    <include name="lib/asm.jar" />
    <include name="lib/antlr.jar" />
    <include name="lib/commons-logging.jar" />
    <include name="lib/commons-collections.jar" />

  </fileset
  >
```

39.4.2.4. seam-gen ################ GlassFish

- ##################(### /projects/seamgen-example)# ant ## dist/seamgen-example.ear ###
- ################## *#39.2.1. #GlassFish ################* ########## ####jboss-seam-jee5 ############## seamgen-example ################
- http://localhost:8081/seamgen_example/ ##########################

###

40.1. JDK

Seam # JDK 1.4 ########## ########## JDK 5 ####### JDK 5 ################# Seam # Sun # JDK ################### #### ## JDK ### Seam ###############

40.1.1. Sun # JDK 6

Sun # JDK 6 ######### JAXB ################### "endorsed" ######################### Sun # JDK 6 Update 4 ##### JAXB 2.1 ############################ #### #### ##

Seam ################# JBoss Embedded ########## JDK 6 ########################## JBoss Embedded # JDK 6 ######## ## JVM #################

```
-Dsun.lang.ClassLoader.allowArraySyntax=true
```

Seam ################ Seam ############################ #### #### JBoss Embedded ########################

40.2.

######## Seam ############################### #### `ear` ########## ################ ear ##### /lib ######################### #### `war` ########## ################ war ##### `/WEB-INF/lib` ################### ######### all# runtime# #### provided (JBoss AS 4.2 ###) ###########

`/dependency-report.txt` ########## ### `/build` ###### Maven POM ######## `ant dependencyReport`

40.2.1. Core

 # 40.1.

##	##	###	##
`jboss-seam.jar`	all	ear	### Seam ####### ##########
`jboss-seam-debug.jar`	runtime	war	Seam #########################
`jboss-seam-ioc.jar`	runtime	war	Spring # Seam ################

##	##	###	##
jboss-seam-pdf.jar	runtime	war	Seam # PDF ##################
jboss-seam-excel.jar	runtime	war	Seam # Microsoft® Excel® ##################
jboss-seam-rss.jar	runtime	war	Seam # RSS ##################
jboss-seam-remoting.jar	runtime	war	Seam Remoting ################
jboss-seam-ui.jar	runtime	war	Seam JSF ################
jsf-api.jar	provided		JSF API
jsf-impl.jar	provided		JSF ########
jsf-facelets.jar	runtime	war	Facelets ###
urlrewrite.jar	runtime	war	URL Rewrite ########
quartz.jar	runtime	ear	Seam ####### Quartz ################

40.2.2. RichFaces

40.2. RichFaces

##	##	###	##
richfaces-api.jar	all	ear	###RichFaces################ API ##########
richfaces-impl.jar	runtime	war	RichFaces ##########
richfaces-ui.jar	runtime	war	RichFaces ########## all # UI ##############

40.2.3. Seam Mail

40.3. Seam Mail

##	##	###	##
activation.jar	runtime	ear	################
mail.jar	runtime	ear	##################
mail-ra.jar	compile		################## mail-ra.rar ##################################

##	##	###	##
jboss-seam-mail.jar	runtime	war	Seam Mail ##############

40.2.4. Seam PDF

40.4. Seam PDF

##	###	##	##
itext.jar	runtime	war	PDF #####
jfreechart.jar	runtime	war	#########
jcommon.jar	runtime	war	JFreeChart #########
jboss-seam-pdf.jar	runtime	war	Seam PDF ##############

40.2.5. Seam Microsoft® Excel®

40.5. Seam Microsoft® Excel®

##	###	##	##
jxl.jar	runtime	war	JExcelAPI ########
jboss-seam-excel.jar	runtime	war	Seam Microsoft® Excel® ##############

40.2.6. Seam RSS

40.6. Seam RSS

##	###	##	##
yarfraw.jar	runtime	war	YARFRAW RSS ########
JAXB	runtime	war	JAXB XML ##########
http-client.jar	runtime	war	Apache HTTP Client #########
commons-io	runtime	war	Apache commons IO ########
commons-lang	runtime	war	Apache commons ##########
commons-codec	runtime	war	Apache commons codec ########
commons-collections	runtime	war	Apache commons collections ########
jboss-seam-rss.jar	runtime	war	Seam RSS ###########

40.2.7. JBoss Rules

JBoss Rules ####### Seam # drools/lib ############

40.7. JBoss Rules

##	##	###	##
antlr-runtime.jar	runtime	ear	ANTLR #######
core.jar	runtime	ear	Eclipse JDT #####
drools-compiler.jar	runtime	ear	
drools-core.jar	runtime	ear	
janino.jar	runtime	ear	
mvel.jar	runtime	ear	

40.2.8. JBPM

40.8. JBPM

##	##	###	##
jbpm-jpdl.jar	runtime	ear	

40.2.9. GWT

########## Seam ######### Google Web Toolkit (GWT) ##################

40.9. GWT

##	##	###	##
gwt-servlet.jar	runtime	war	GWT Servlet ########

40.2.10. Spring

########## Seam ######### Spring Framework ##################

40.10. Spring Framework

##	##	###	##
spring.jar	runtime	ear	Spring Framework ########

40.2.11. Groovy

########## Seam ######### Groovy ##################

40.11. Groovy

##	##	###	##
groovy-all.jar	runtime	ear	Groovy #########

40.3. Maven

Maven ######################### Seam ######################### Maven Ant Tasks #### Maven # Ant ########## Maven ################################

Maven ######################### POM

Released versions of Seam are available in http://repository.jboss.org/maven2 and nightly snapshots are available in http://snapshots.jboss.org/maven2.

Seam ########## Maven ######

```
<dependency>
  <groupId
>org.jboss.seam</groupId>
  <artifactId
>jboss-seam</artifactId>
</dependency
>
```

```
<dependency>
  <groupId
>org.jboss.seam</groupId>
  <artifactId
>jboss-seam-ui</artifactId>
</dependency
>
```

```
<dependency>
  <groupId
>org.jboss.seam</groupId>
  <artifactId
>jboss-seam-pdf</artifactId>
</dependency
>
```

```
<dependency>
  <groupId
>org.jboss.seam</groupId>
  <artifactId
```

```
>jboss-seam-remoting</artifactId>
</dependency
>
```

```
<dependency>
  <groupId
>org.jboss.seam</groupId>
  <artifactId
>jboss-seam-ioc</artifactId>
</dependency
>
```

```
<dependency>
  <groupId
>org.jboss.seam</groupId>
  <artifactId
>jboss-seam-ioc</artifactId>
</dependency
>
```

######## POM # Seam# JPA (Hibernate #########)# Hibernate Validator ##########

```
<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://maven.apache.org/POM/4.0.0  http://maven.apache.org/maven-
v4_0_0.xsd">
  <modelVersion
>4.0.0</modelVersion>
  <groupId
>org.jboss.seam.example/groupId>
  <artifactId
>my-project</artifactId>
  <version
>1.0</version>
  <name
>My Seam Project</name>
  <packaging
>jar</packaging>
  <repositories>
```

```
    <repository>
      <id
>repository.jboss.org</id>
      <name
>JBoss Repository</name>
      <url
>http://repository.jboss.org/maven2</url>
    </repository>
  </repositories>

  <dependencies>

    <dependency>
      <groupId
>org.hibernate</groupId>
      <artifactId
>hibernate-validator</artifactId>
      <version
>3.0.0.GA</version>
    </dependency>

    <dependency>
      <groupId
>org.hibernate</groupId>
      <artifactId
>hibernate-annotations</artifactId>
      <version
>3.3.0.ga</version>
    </dependency>

    <dependency>
      <groupId
>org.hibernate</groupId>
      <artifactId
>hibernate-entitymanager</artifactId>
      <version
>3.3.1.ga</version>
    </dependency>

    <dependency>
      <groupId
>org.jboss.seam</groupId>
      <artifactId
>jboss-seam</artifactId>
```

```
    <version
>2.0.0.GA</version>
  </dependency>

 </dependencies>

</project
>
```