

jBPM Tools Reference Guide



Version: 3.2.0.Beta

1. Introduction	1
1.1. Preface	1
1.2. Feature list	1
1.3. Other relevant resources on the topic	2
2. Tasks	3
2.1. JBoss jBPM Runtime Installation	3
2.2. A Guided Tour of JBoss jBPM GPD	4
2.2.1. Creating a jBPM Project	5
2.2.2. Creating an Empty Process Definition	8
2.3. Actions : The JBoss jBPM Integration Mechanism	12
2.3.1. Creating a Hello World Action	12
2.3.2. Integrating the Hello World Action	14
2.3.3. Integration Points	18
2.4. Quick Howto Guide	18
2.4.1. Change the Default Core jBPM Installation	18
2.4.2. Configuring Task Nodes	19
3. Reference	24
3.1. Wizards	24
3.1.1. Process Project Wizard	24
3.1.2. New JBPM Action Wizard	25
3.2. The views	27
3.2.1. The Outline View	28
3.2.2. The Overview	29
3.2.3. The Properties View	29
3.2.4. The jBPM Graphical Process Designer editor.	31

Introduction

All developers and process analysts who are beginning to use JBoss jBPM should read this Getting Started guide. It will give them a jumpstart showing how to create a process definition.

1.1. Preface

This document introduces the use of the JBoss jBPM Graphical Process Designer (GPD) to create workflow processes. It will help first time users with the following tasks :

- Install the JBoss jBPM GPD Eclipse plugin available from the JBoss jBPM download area
- Set up a Java project in Eclipse and prepare it to do test driven process development
- Using the creation wizard to create an empty process definition
- Use the designer palette to draw the first processdefinition
- Show how the xml processdefinition can be inspected as an xml file
- Set up a Java project in Eclipse and prepare it to do test driven process development
- Write an example process test case

If you have any questions, please feel free to contact [Koen Aers](mailto:koen.aers@jboss.com) [mailto:koen.aers@jboss.com] or [Tom Baeyens](mailto:tom.baeyens@jboss.com) [mailto:tom.baeyens@jboss.com] for more information.

1.2. Feature list

JBoss jBPM is a workflow that enables creating and automatization business processes. Look at the list of features below to understand its main functionality.

Table 1.1. Key Functionality for JBoss jBPM

Feature	Benefit
jPDL support	Enables managing workflow processes as well as human tasks and interactions between them. jPDL combines the best techniques both in Java and in declarative process.
Support of Graphical Process Designer (GPD)	Is used for simplifying declarative process development and visualizations of all actions.
Project Creation wizard	Allows to create a new jBPM template project that already includes all advanced artifacts and core jBPM libraries.

Feature	Benefit
<i>Rich palette of pre-build process nodes</i>	Provides process-building functionality and gives opportunity even non-programmers to develop processes.
<i>A large range of special views, including:</i>	
<i>Support of XML code view</i>	Shows the corresponding XML that's generated automatically in the Source view of the process definition editor when developing the process.
<i>Properties view</i>	Facilitates configuring and editing of all nodes properties.
<i>The jBPM Graphical Process Designer editor</i>	The plugin is used for designing the workflow.
Interaction with all of the J2EE based integration technologies including Web Services, Java Messaging, J2EE Connectors, JBDC, EJBs.	Enables implementation, provides better functionality and flexibility.
Integration with jBoss Seam	Allows to write applications with complex workflows and provides easier interactions between them.

1.3. Other relevant resources on the topic

All JBoss Developer Studio/JBoss Tools release documentation you can find at <http://docs.jboss.org/tools> [http://docs.jboss.org/tools/] in the corresponding release directory.

There is some extra information on [JBoss Wiki](http://www.jboss.org/community/wiki/JBPMWiki). [http://www.jboss.org/community/wiki/JBPMWiki]

The latest documentation builds are available at <http://download.jboss.org/jbosstools/nightly-docs> [http://download.jboss.org/jbosstools/nightly-docs/].

Tasks

2.1. JBoss jBPM Runtime Installation

The main purpose of this chapter is to let you know how to launch the [JBoss jBPM](#) (business process management).

The jBPM plugin (jBPM Designer) is already included into the [JBoss Tools](#). To make it work, you should only download the jBPM runtime ([jbpm-jpdl-3.2.3](http://sourceforge.net/project/showfiles.php?group_id=70542&package_id=145174&release_id=607377) [http://sourceforge.net/project/showfiles.php?group_id=70542&package_id=145174&release_id=607377] currently) and specify the directory where you extracted the runtime either when you create a jBPM project or by using the jBPM preference pages.



Note:

Try to avoid using spaces in the names of installation folders. It can provoke problems in some situations with Sun-based VMs.

Navigate to [Window > Preferences > JBoss jBPM > Runtime Locations](#). Here you can add, edit and remove JBoss jBPM installation locations. Click [Add](#) button. In the dialog that appeared enter a name for a newly added jBPM runtime and point to the correct location of this package on your harddrive. Click [OK](#) then click [OK](#) again.

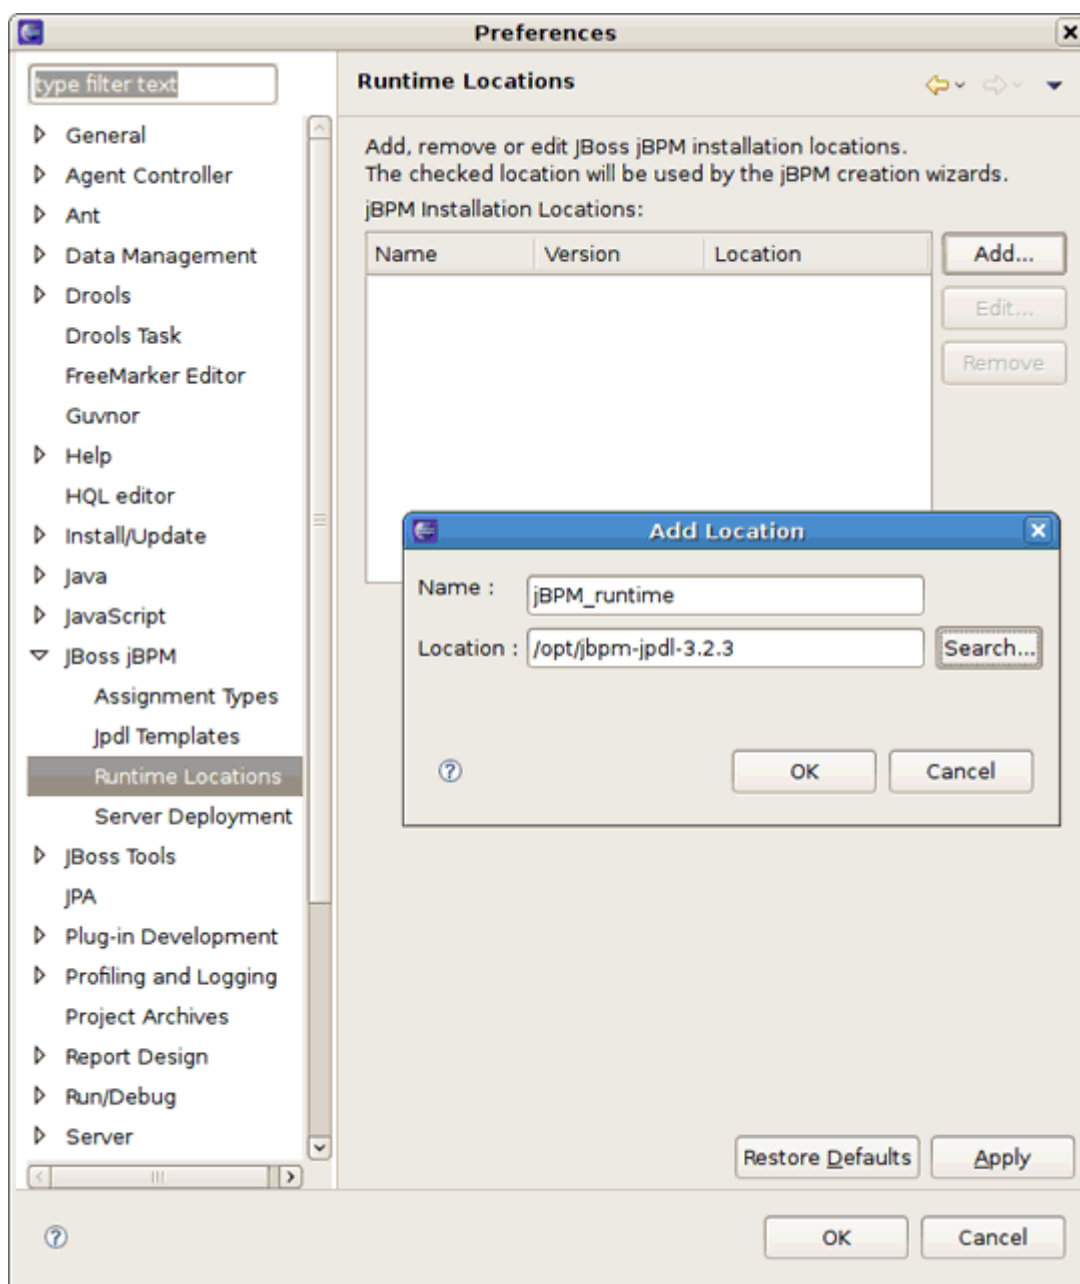


Figure 2.1. Adding jBPM Location

Now, when you have a runtime installed, we are going to demonstrate some powerful features of the jBPM.

2.2. A Guided Tour of JBoss jBPM GPD

In this chapter we suggest a step-by-step walk-through of creating and configuring your own simple process. Let's try to organize a new jBPM project.

A wizard for creating a jBPM project is included in the GPD plugin. We have opted to create a project based on a template already containing a number of advanced artifacts that we will ignore

for this section. In the future we will elaborate this wizard and offer the possibility to create an empty jBPM project as well as projects based on templates taken from the jBPM tutorial.

2.2.1. Creating a jBPM Project

This section will show you how to use the Creation wizard for creating a new jBPM project with already included source folders.

At first you should select [File > New Project...](#) and then [JBoss jBPM > Process Project](#) in the New Project dialog:

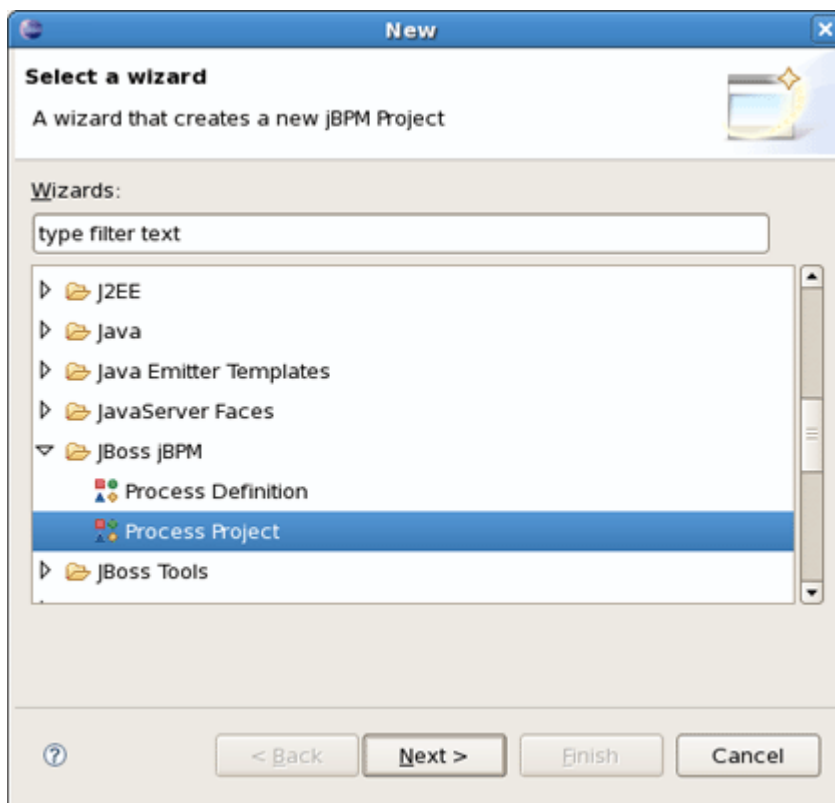


Figure 2.2. New Project Dialog

Clicking [Next](#) brings us to the wizard page where it's necessary to specify the name and location for the project. We choose, for example, [HellojBPM](#) as the name and accept the default location.

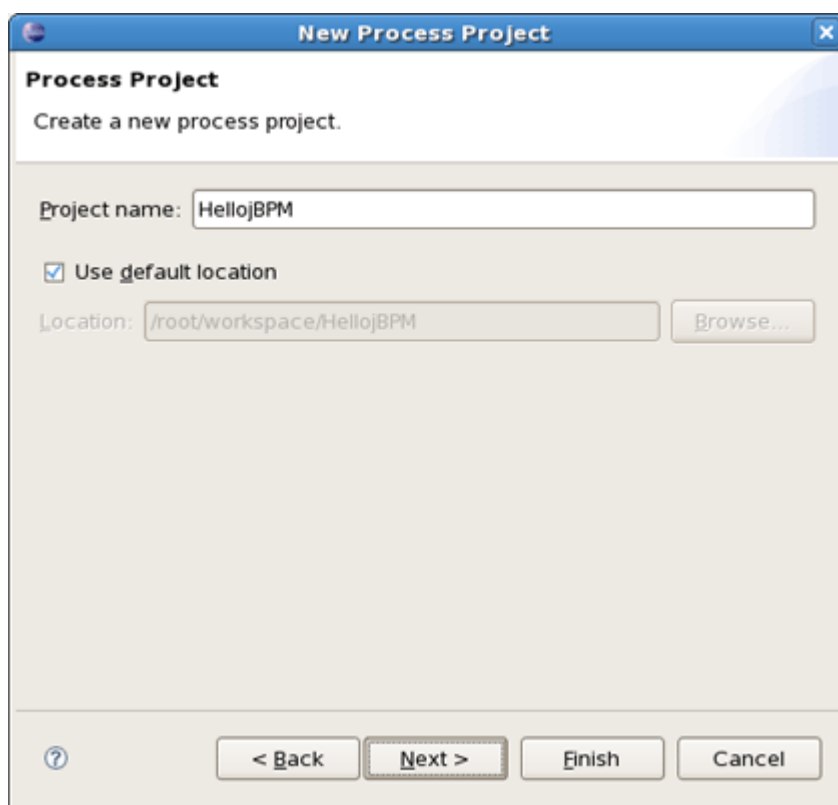


Figure 2.3. Process Name and Location

Thus, our project will be created in the workspace root directory by default. If you want to change the directory for your future project, deselect [Use default location](#) and click [Browse...](#) button to set needed location or simply type it.

On the next screen you'll be prompted to select the core jBPM location that we have defined in the previous chapter.

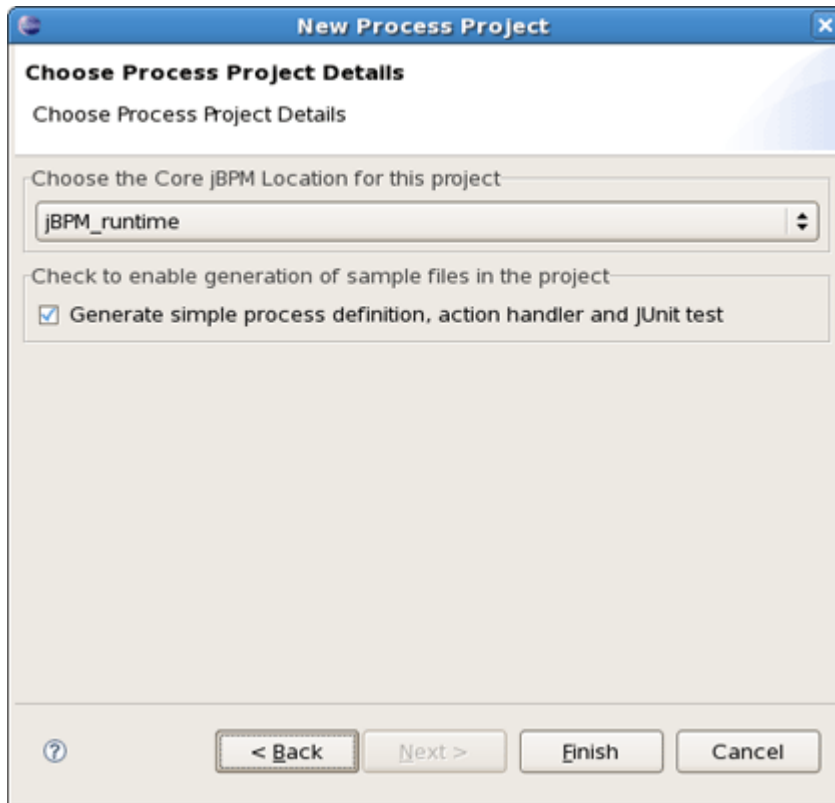


Figure 2.4. Core jBPM Location Specifying

Clicking on [Finish](#) results in the project being generated. The wizard creates four source folders: one for the processes ([src/main/jpdl](#)), one for the java sources ([src/main/java](#)), one for the unit tests ([src/test/java](#)) and one for the resources such as the `jbpm.properties` and the `hibernate.properties` files ([src/main/config](#)). In addition a classpath container with all the core jBPM libraries is added to the project

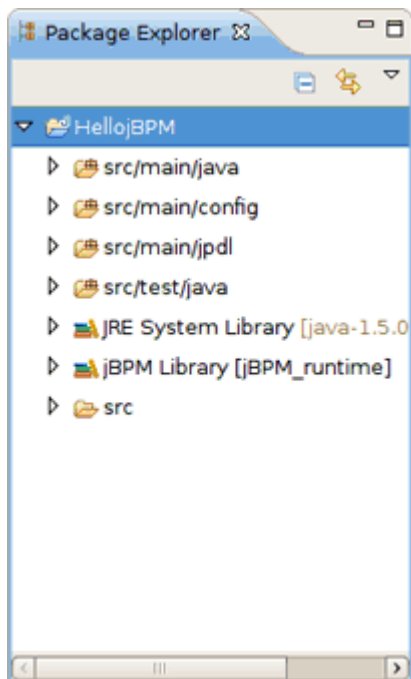


Figure 2.5. Layout of the Process Project

Looking inside the different source folders will reveal a number of other artifacts that were generated, but we will leave these untouched for the moment. Instead, we will look at another wizard that enables us to create an empty process definition.

2.2.2. Creating an Empty Process Definition

Now when the project is set up, we can use a Creation wizard to create an empty process definition. Bring up the [New](#) wizard by clicking the [File > New > Other...](#) menu item. The wizard opens on the [Select Wizard](#) page.

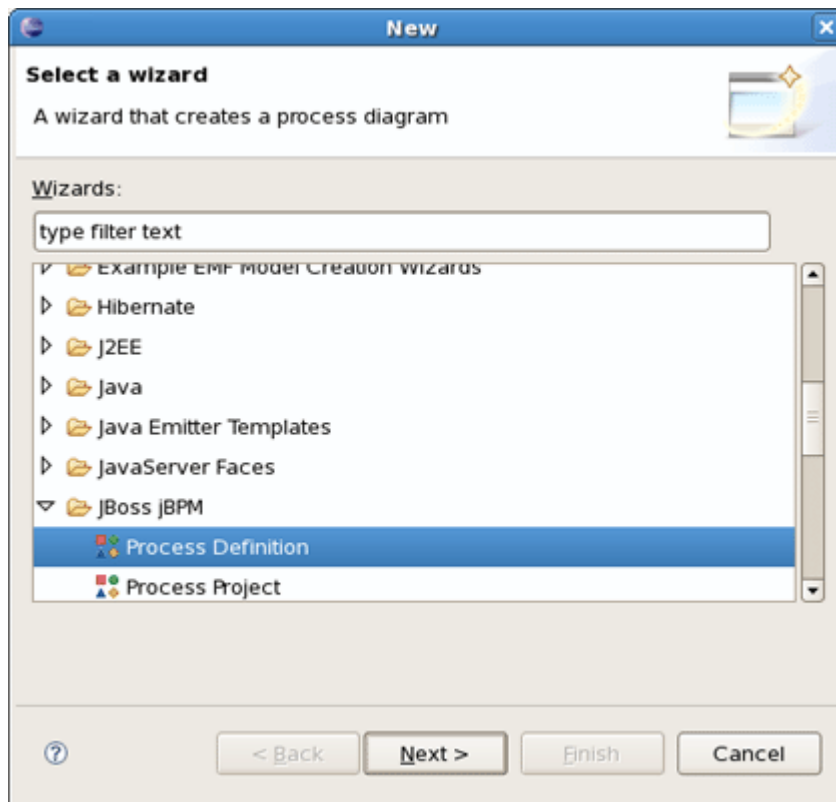


Figure 2.6. The Select Wizard Page

Selecting the *JBoss jBPM* category, then the *Process Definition* item and clicking on the *Next* button brings us to the *Create Process Definition* page.

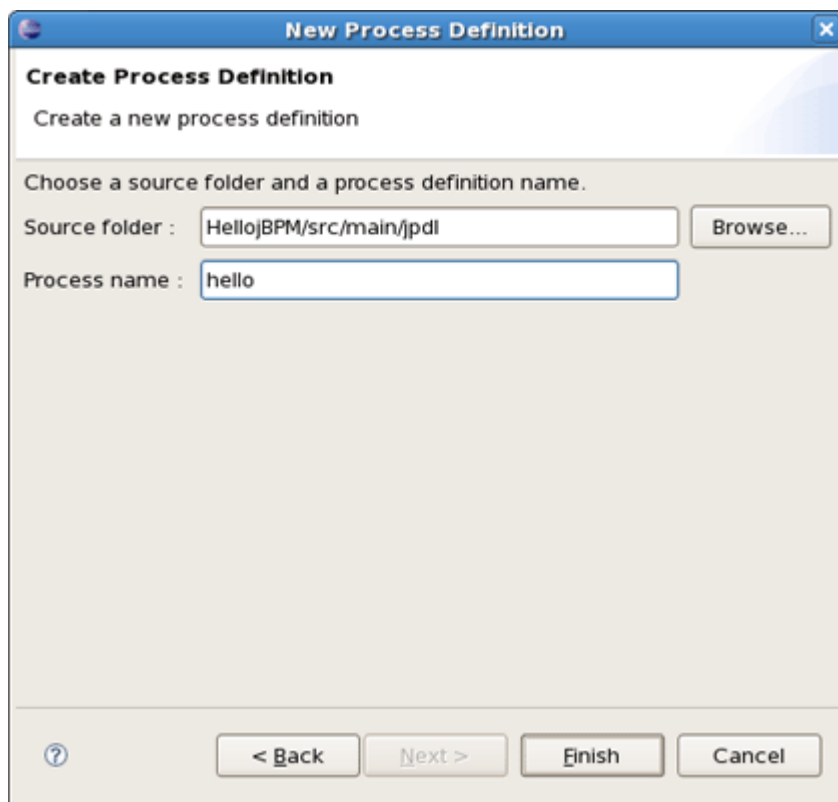


Figure 2.7. The Create New Process Defining Page

We choose *hello* as the name of the process archive file. Click on the *Finish* button to end the wizard and open the process definition editor.

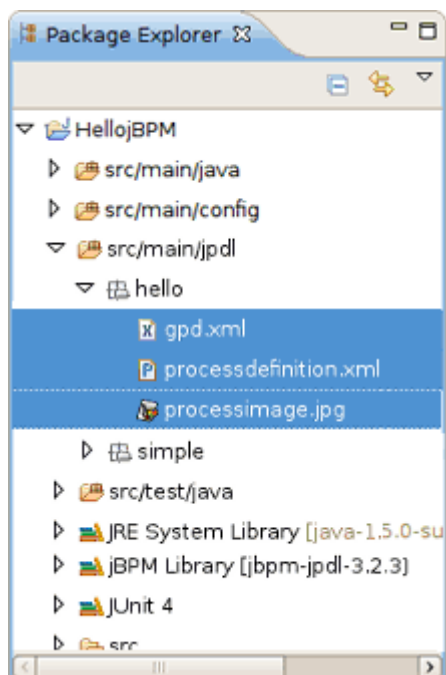


Figure 2.8. The Process Definition Editor

You can see in the Package Explorer that creating a process definition involves creating a folder with the name of the process definition and populating this folder with two .xml files : [gpd.xml](#) , [processdefinition.xml](#) and a .jpg file: [processimage.jpg](#).

The [gpd.xml](#) contains the graphical information used by the process definition editor. The [processdefinition.xml](#) file contains the actual process definition info. The graphical view of the process is automatically saved in [processimage.jpg](#) file. At present, the GPD assumes that these three files are siblings. More sophisticated configuration will be supported later.

2.2.2.1. A Minimal Process Definition

Now we are ready to create a very simple process definition consisting of a begin state, an intermediate state and an end state.

To make the configuration of actions much easier it's better to use the ["jBPM jPDL 3"](#) perspective. It provides the tabbed Properties Editor which allows to configure all the relevant properties of the current selected item.

2.2.2.1.1. Adding the Nodes

At first select respectively [Start](#), [State](#) and [End](#) on the tools palette and click on the canvas to add these nodes to the process definition. The result should look similar to this:

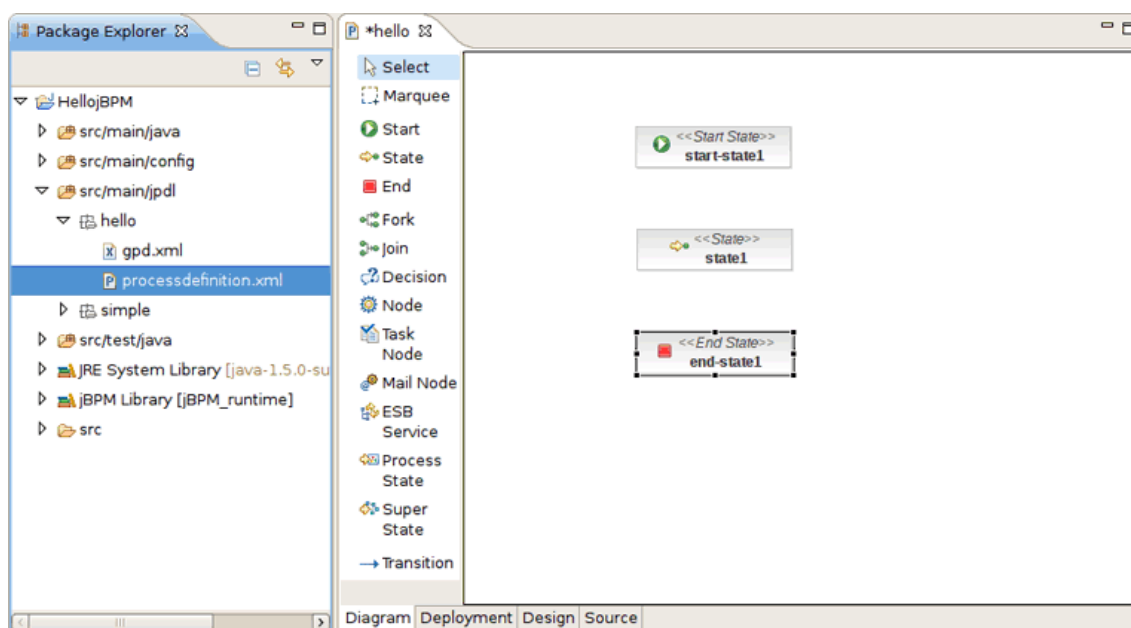


Figure 2.9. A Simple Process With Three Nodes

2.2.2.1.2. Adding Transitions

Then, we will connect the nodes with transitions. To do that select the [Transition](#) tool in the tools palette and click on the [Start](#) node, then move to the [State](#) node and click again to see the

transition being drawn. Perform the same steps to create a transition from the [State](#) node to the [End](#) node. The result will look like:

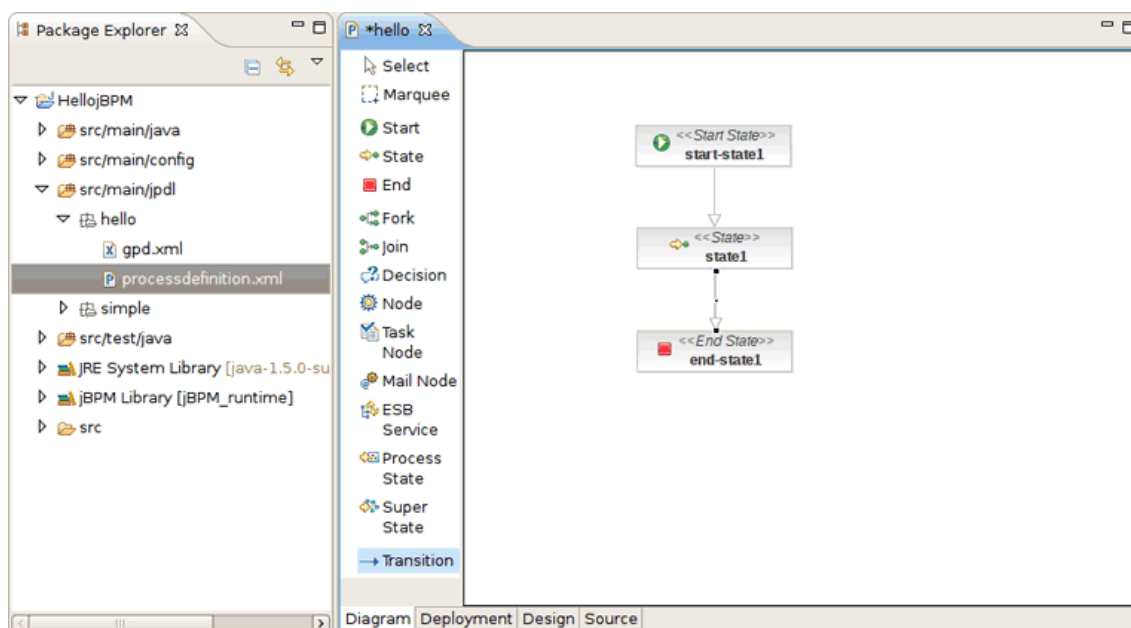


Figure 2.10. A Simple Process With Transitions

Now, when you've got background knowledge of simple project creation, let's move to more advanced tools.

2.3. Actions : The JBoss jBPM Integration Mechanism

In this chapter we will show how to do software integration with [JBoss jBPM](#). The standard mechanism to implement this is to wrap the functionality you want to integrate in a class that implements the [ActionHandler](#) interface. In order to demonstrate it let's specify Hello World action for our process.

2.3.1. Creating a Hello World Action

Each Hello World process should integrate one or more Hello World actions, so this is what we will be doing. We can integrate custom code at different points in the process definition. To do this we have to specify an action handler, represented by an implementation of the [ActionHandler](#) interface, and attach this piece of code to a particular event. These events are amongst others, going over a transition, leaving or entering nodes, after and before signalling.

To make things a little bit more concrete, let's create a new class called [HelloActionHandler](#). For that firstly we'll create a new package [com.jbay.action](#) in the [src/java/main](#) folder of our project. Then, we should call New Class Creation wizard as usual by right-clicking and navigating [New](#) > [Class](#).

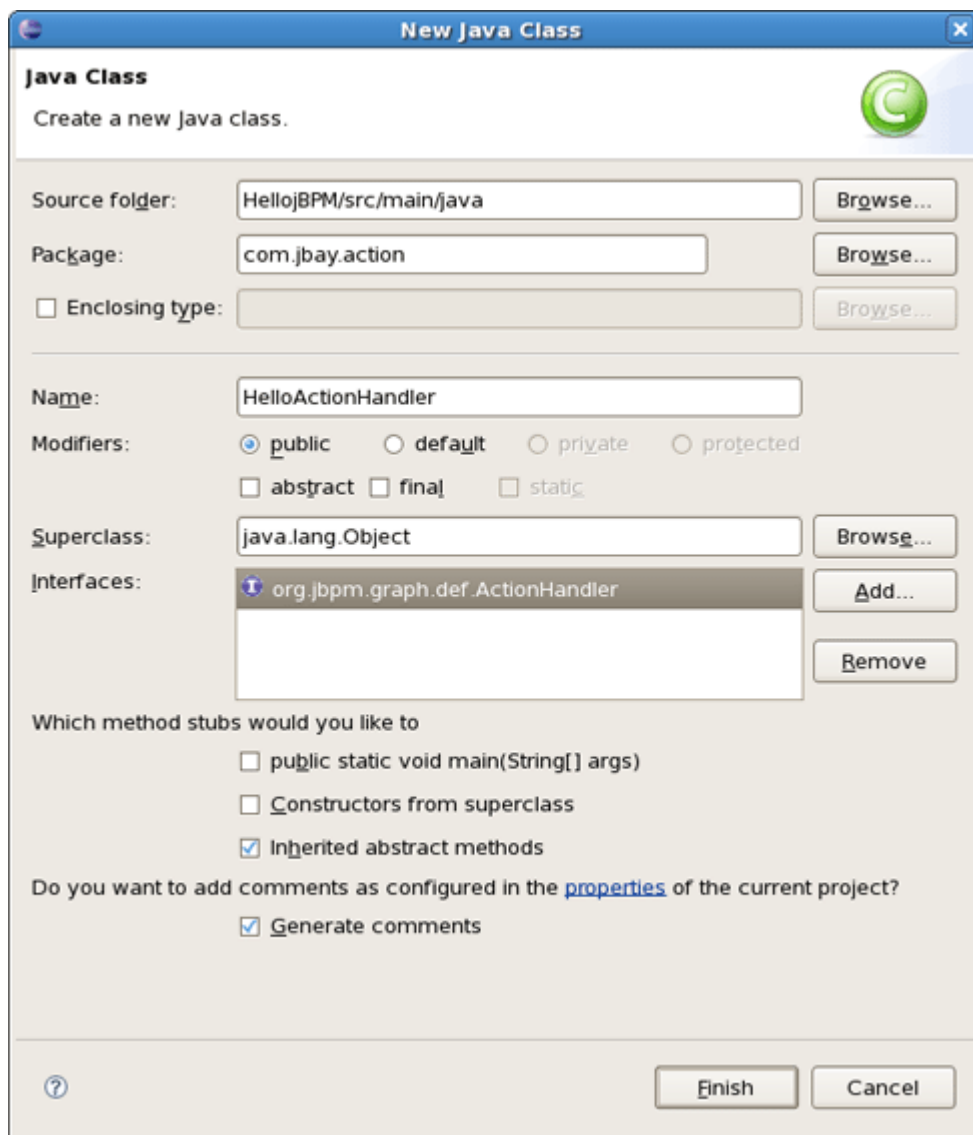


Figure 2.11. Creating HelloActionHendler Class

Notice that two first gaps have been filled automatically. Here, instead of *Package* option *Enclose type* option can be selected where a type in which to enclose a new class should be specified.

In our case, we leave everything as it is, just type *HelloActionHandler* as a name of new class and add *org.jbpm.graph.ActionHandler* interface as it's shown in the picture above.

Thus, our *HelloActionHandler* implements the *ActionHandler* interface including the *execute* method as shown in the next figure. Here, we add a variable named *greeting* to the collection of process variables and put a message in it : *"Hello from ActionHandler"*.

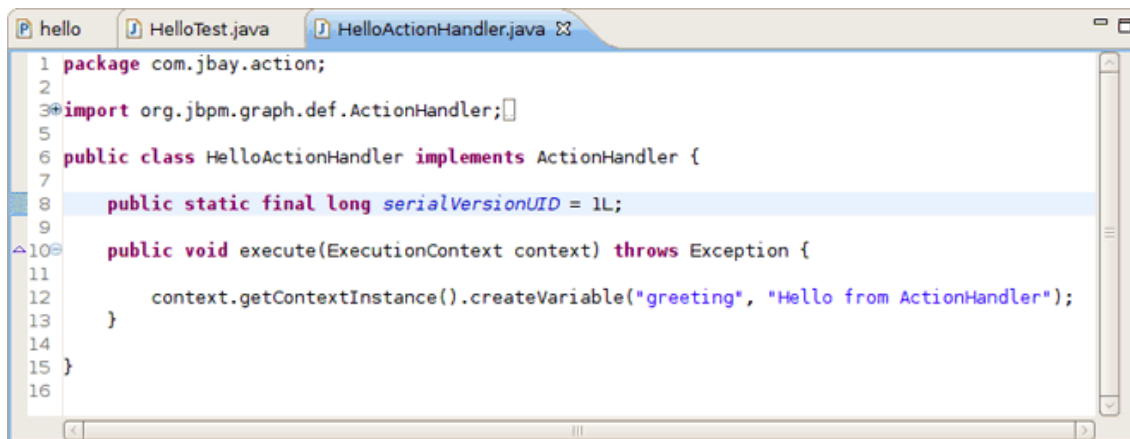


Figure 2.12. A Simple Hello Action

Now, as we have [HelloActionHandler](#) class defined, let's explore how we can handle it.

2.3.2. Integrating the Hello World Action

The main purpose of this chapter is to provide you with the steps associating our Hello World action with a particular event and test the correctness of our actions as well.

As good Testcity citizens we will first create a Unit Test that proves the behaviour we want to achieve by adding the [ActionHandler](#) to the process. So we implement another test.

At first, let's return to the code we already saw in the previous chapter and add new test method [testActionHendler](#) to it.

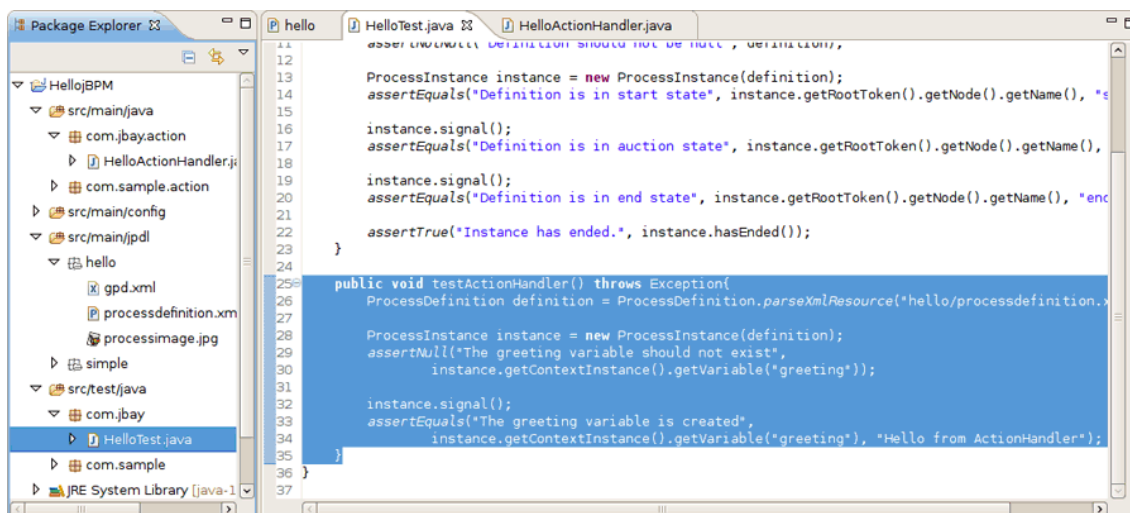


Figure 2.13. Create the Hello Action Test

We assert that no variable called [greeting](#) exist. Then we give the process a signal to move it to the auction state. We want to associate the execution of the action with the event of going over the transition from the start state to the auction state. So after the signal, the process should

be in the auction state as in the previous scenario. But moreover, the *greeting* variable should exist and contain the string "Hello from ActionHandler". That's what we assert in the last lines of the test method.

Running the tests now results in a failure. The point is that we did not associate the action with any particular event in the process definition, so the process variable did not get set.

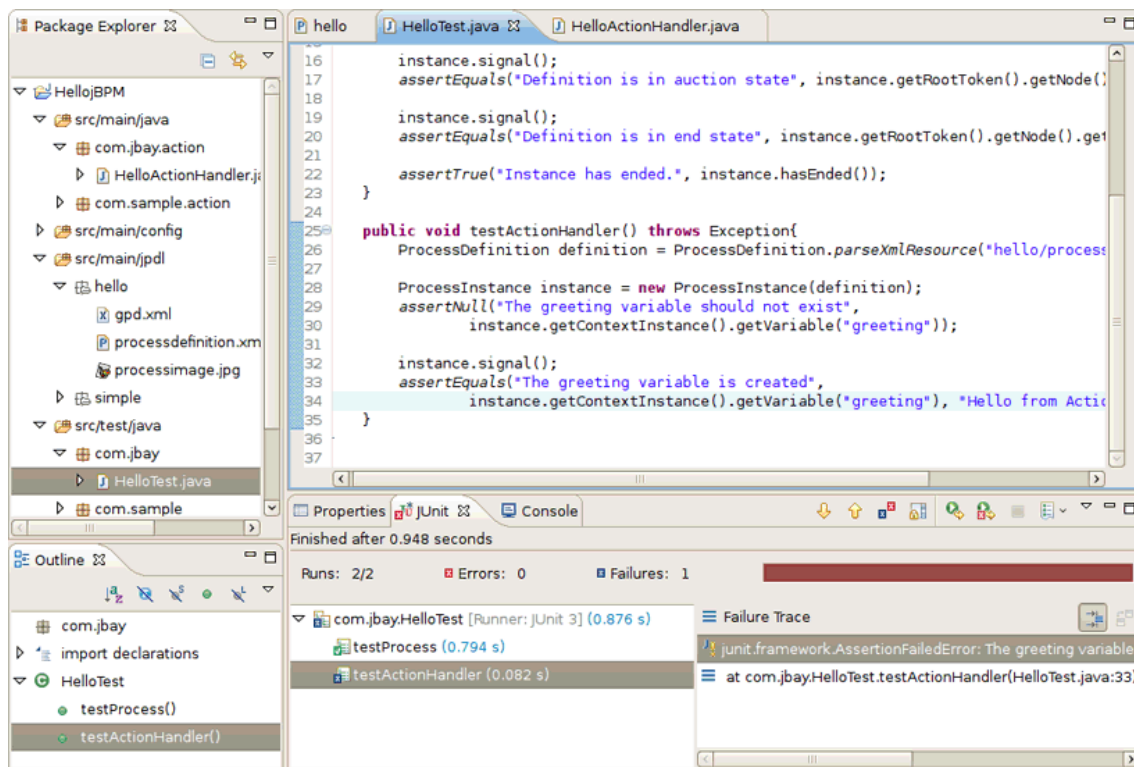


Figure 2.14. Test Results Before Integration

Let's do something about it and add an action to the first transition of our sample process. To do this you can use the Actions tab in the Properties Editor that is under the graphical canvas. Bring up the popup menu of the action element container and chose New Action as it's shown on the figure below. The other way to add an action to the transition is simply to use the dropdown menu that is available under the action icon in the right upper corner of the Properties View.

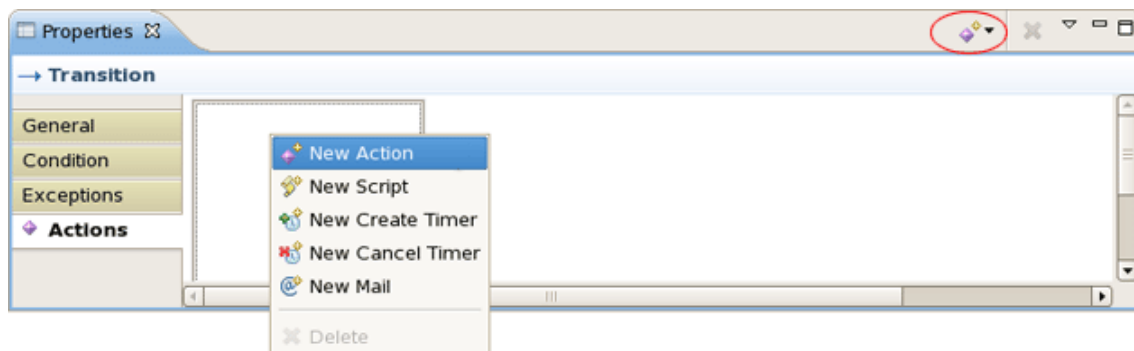


Figure 2.15. Adding an Action to a Transition

After adding the action a tabbed view with three pages will appear.

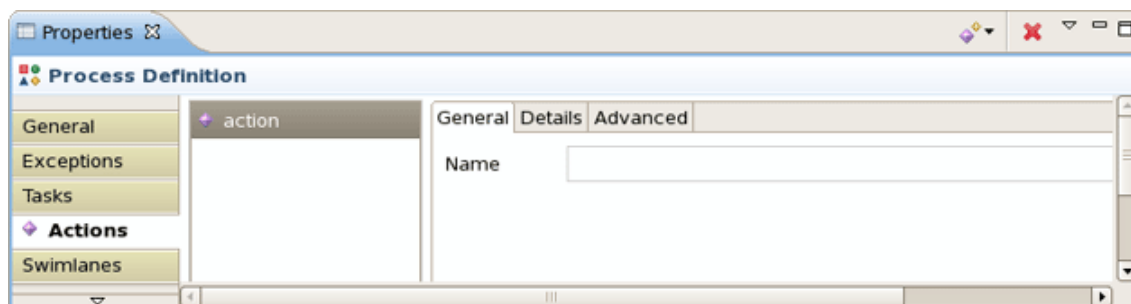


Figure 2.16. Configuration Dialog for an Action

The first of these three pages allows you to give the Action a name. The last page contains some advanced attributes such as whether the Action is asynchronous. The Details page is the most important. It allows to choose and configure the actual action handler implementation.

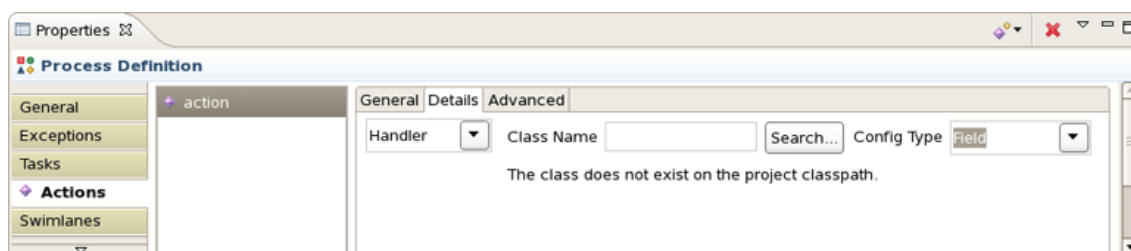


Figure 2.17. The Details page of an Action Configuration Dialog

Clicking on the [Search...](#) button brings us to a Choose Class dialog.

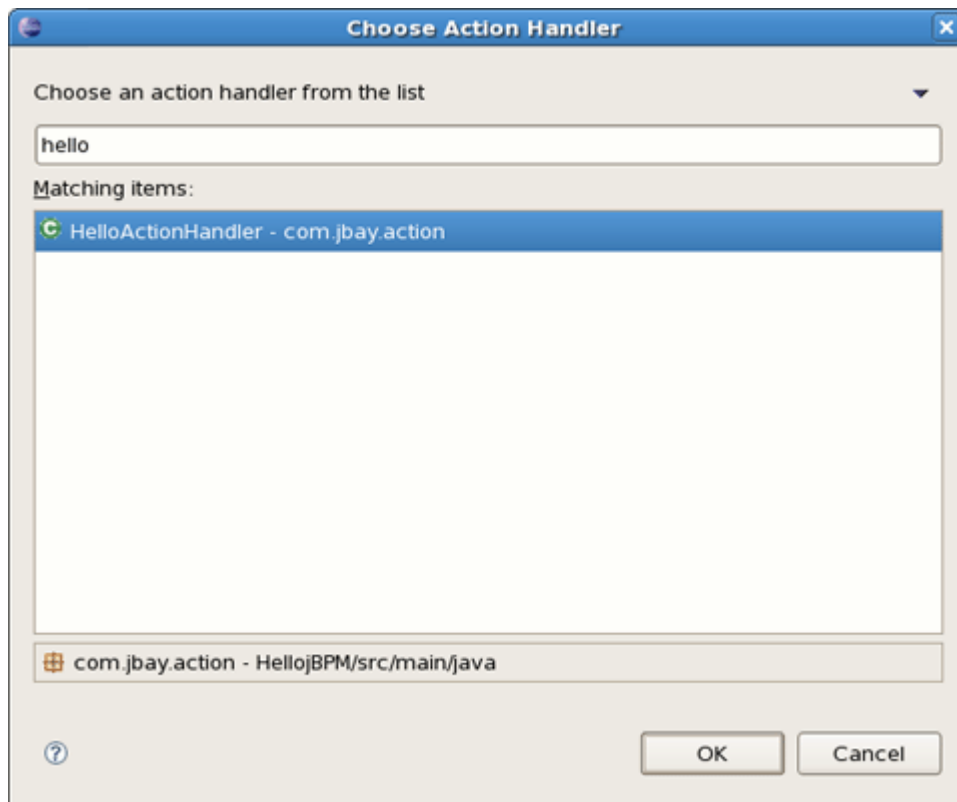


Figure 2.18. The Choose Action Handler Dialog

We choose our previously created 'HelloActionHandler' class and push the [OK](#) button. After the selection of the action handler for the action, we can run the test and observe it gives us a green light.

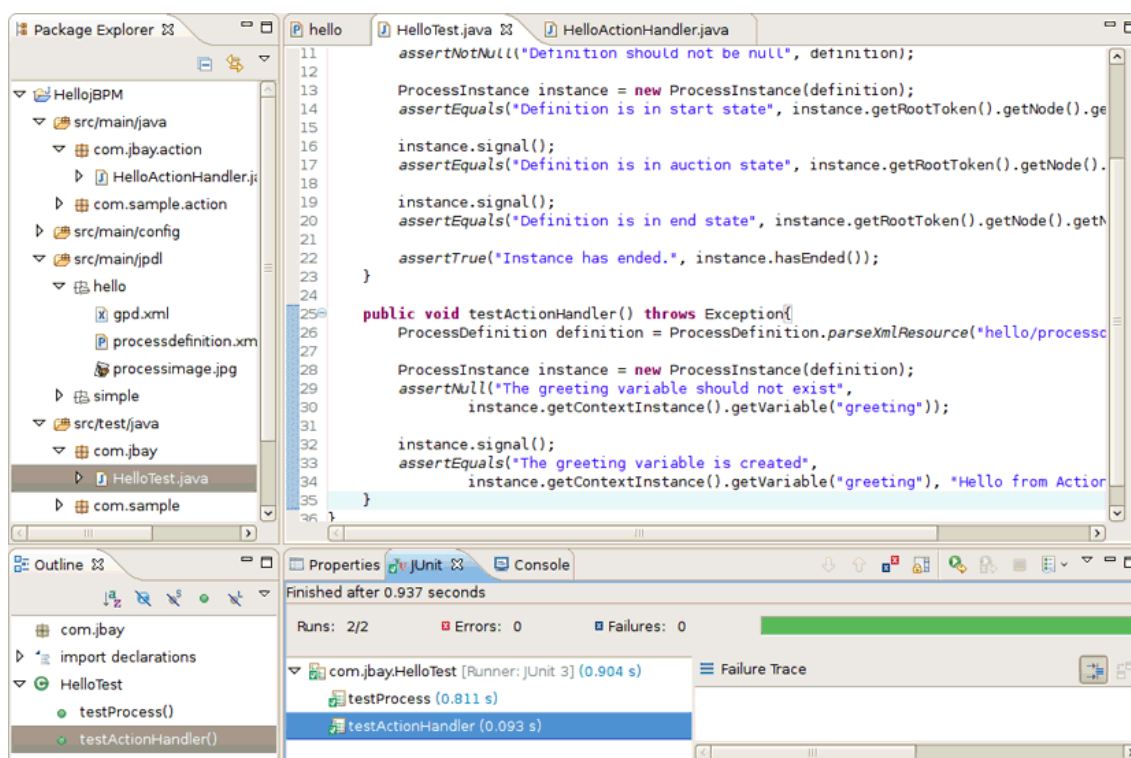


Figure 2.19. Test Results

There we are. The above objective has been achieved.

2.3.3. Integration Points

The different integration points in a process definition are thoroughly documented in the [JBoss jBPM User Guide](http://docs.jboss.com/jbpm/v3/userguide/) [http://docs.jboss.com/jbpm/v3/userguide/]. Instance nodes can contain many action elements. Each of these will appear in the Action element list of the Actions tab. But each Action also has a properties view of itself. You can navigate to this view by selecting the added Action in the outline view.

2.4. Quick Howto Guide

This chapter contains additional information related to the [JBoss jBPM](#).

2.4.1. Change the Default Core jBPM Installation

You can change the default [jBPM](#) installation by means of the Eclipse preference mechanism. Open the Preferences dialog by selecting [Window > Preferences](#) and select the [JBoss jBPM > Runtime Location](#) category. Using this page you can add multiple [jBPM](#) installation locations and change the default one. The default installation is used for the classpath settings when creating a new Process Project. Changing the preferences has no influence on already created projects. Getting rid of a [jBPM](#) installation that's being referenced by a project however will cause the classpath to contain errors.

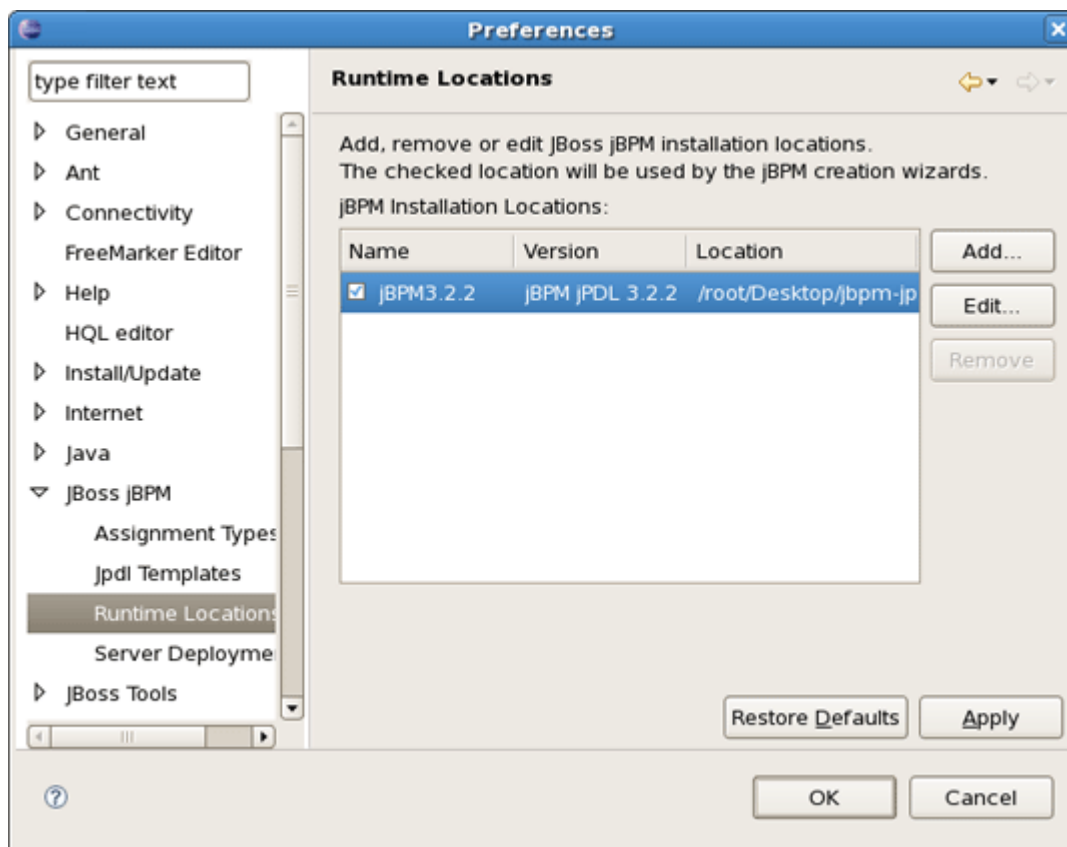


Figure 2.20. The jBPM Preferences Page

2.4.2. Configuring Task Nodes

Here, we'll examine how you can configure the Task nodes in jBPM jPDL GPD.

You can add Tasks to Task nodes and then configure them in a similar manner as the Action configuration mechanism. Let's consider the process definition similar to the previous one that contains three nodes: Start state, Task node and End state. The [Properties view](#) for selected Task node includes several tabs.

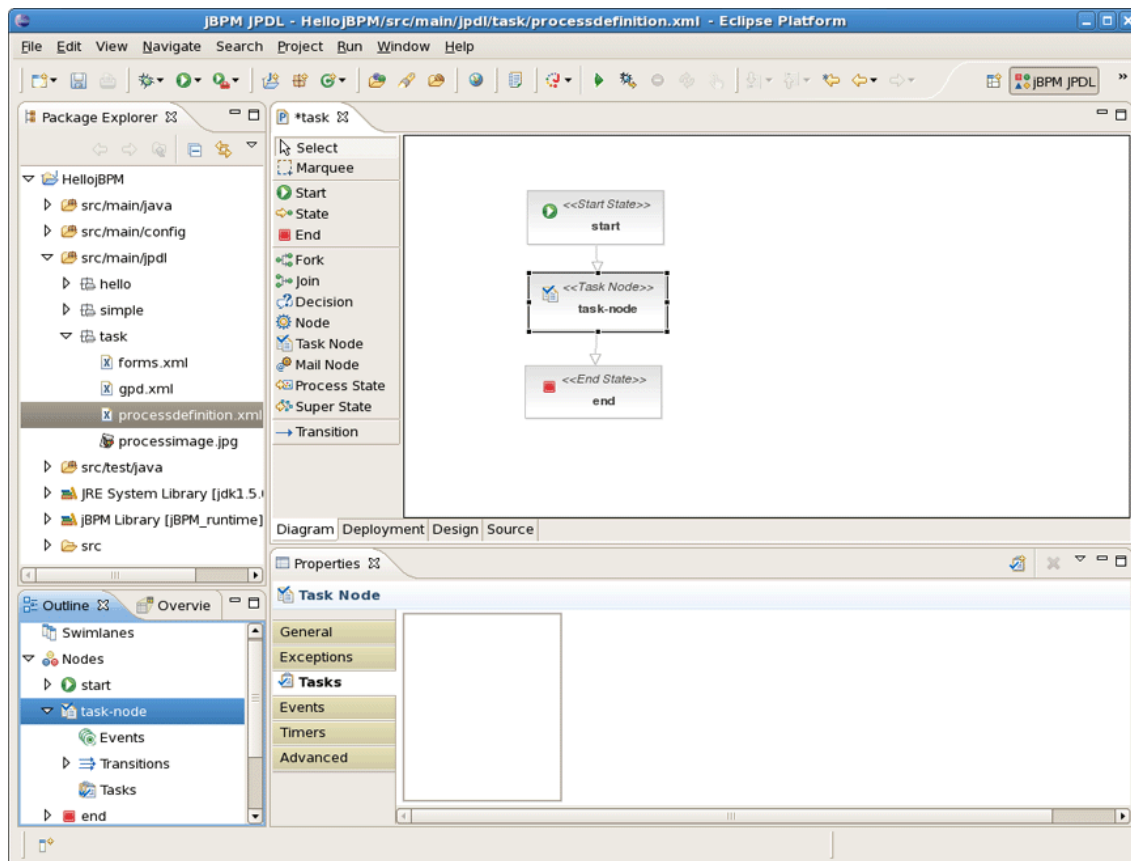


Figure 2.21. The Properties View of the selected Task Node

We should choose the Task tab and then bring up the context menu or click the button in the top right corner of the view to add a Task to our Task node.

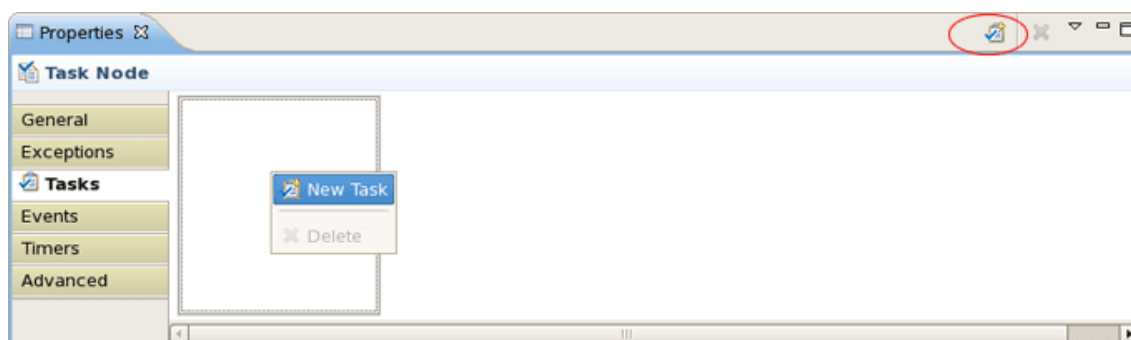


Figure 2.22. Adding a Task to the Task Node

Every added Task has its own configuration possibilities. You can access them through the [Properties view](#) as well.

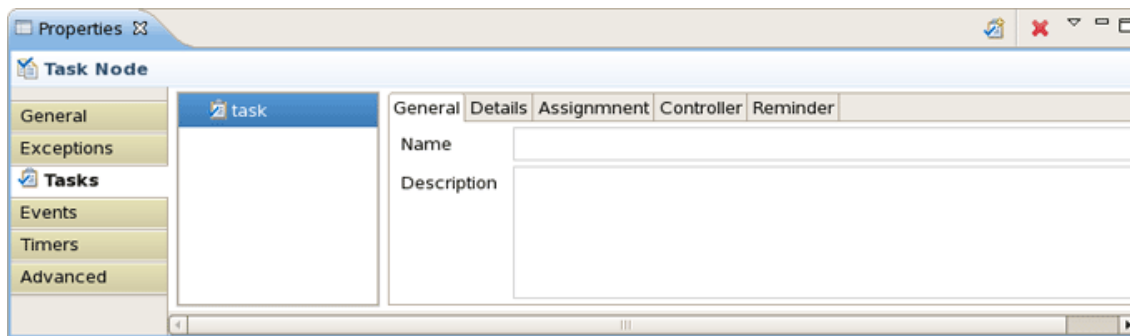


Figure 2.23. The Task properties

The [General](#) page is a place where you can specify the name of a Task and its description. For instance, let it be [approve order](#) with appropriate description that you can see in the figure below.

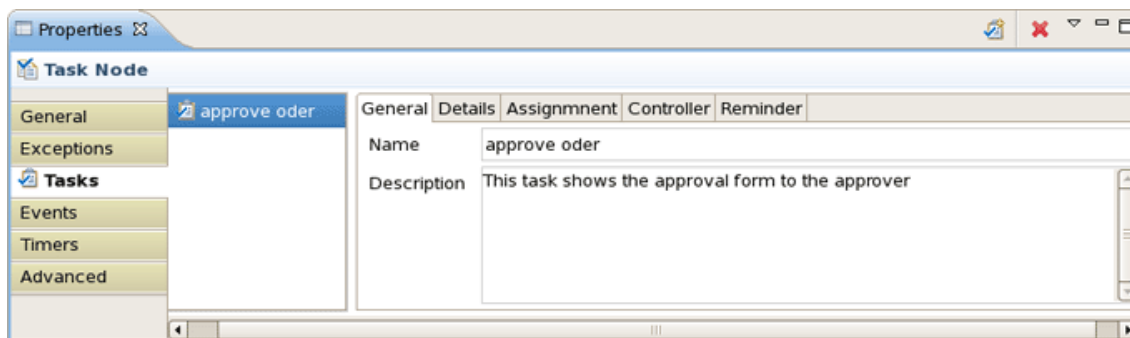


Figure 2.24. The Task General Page

Now, look at [Details](#) page. First, you should specify the due date that is a mandatory property for the Task. The due date is the date on which the task should be accomplished. Here you can also set a Task priority as well as signalling, notifying or blocking. The [Blocking](#) attribute indicates that the process will not be able to continue if this task is still unaccomplished. The [Generate Form...](#) button is for creating a simple task form that can be rendered by the jBPM console.

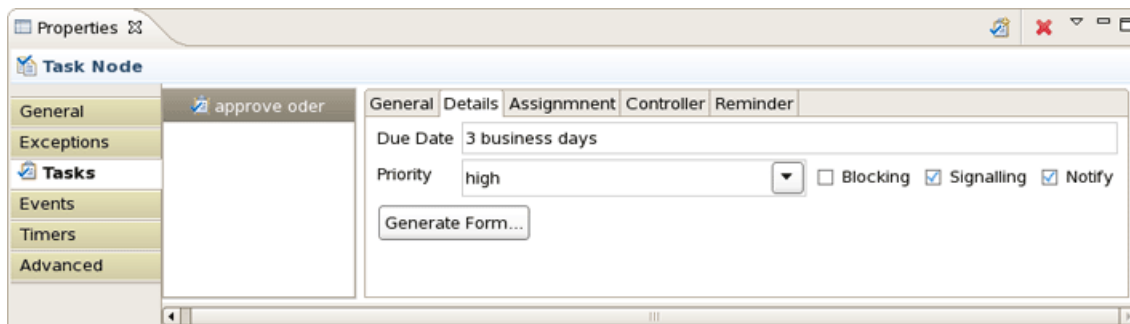


Figure 2.25. The Task Details Page

For our example, we specify the due date as 2 business days, choose the high priority and also check the [Signalling](#) and [Notify](#) attributes. It means that the Task should be accomplished in

2 business days and the assignee will be notified by email when the task is assigned. To specify how the Task should be assigned switch on to the [Assignment page](#).

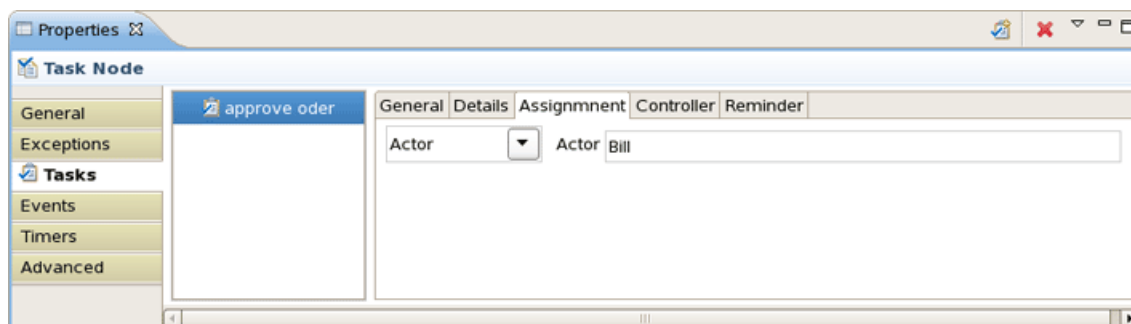


Figure 2.26. The Task Assignment Page

On the [Reminder page](#) you can specify whether the assignee will be reminded of the task that awaits him.

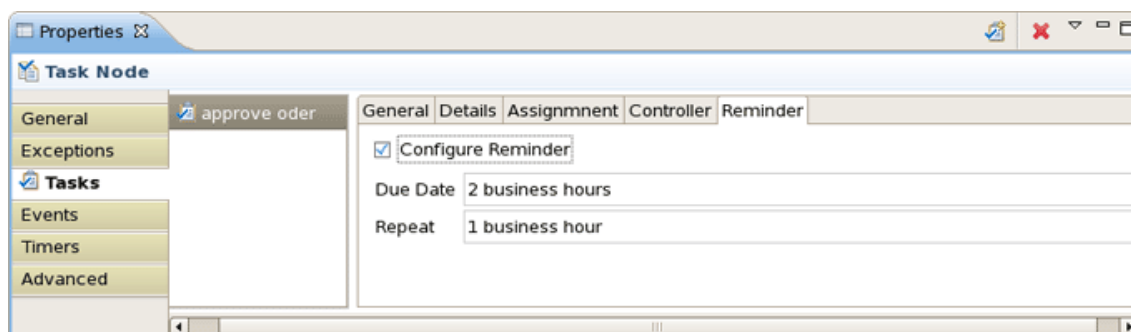


Figure 2.27. The Task Reminder Page

In our case, the assignee will be reminded by email after two business hours and continue to get reminding every business hour after that.

In the next figure you can see our configuring generated into XML.

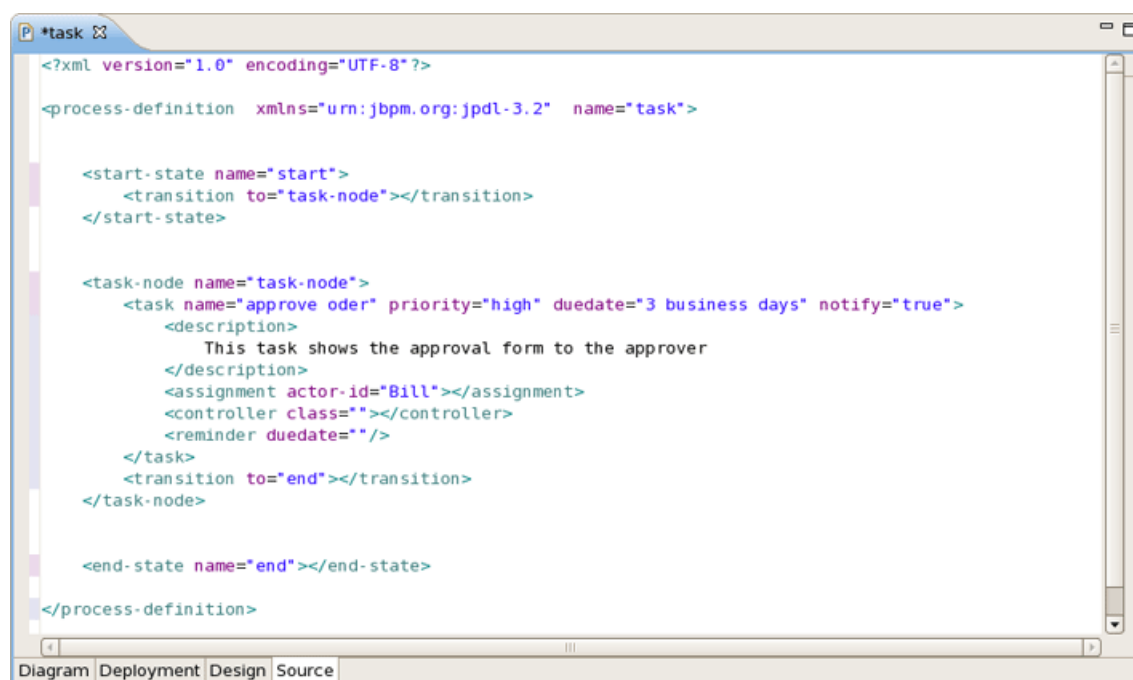


Figure 2.28. The Task Reminder Page

We hope, our guide will help you to get started with the jPDL process language and jBPM workflow on the whole. Besides, for additional information you are welcome on [JBoss forum](http://www.jboss.com/index.html?module=bb&op=viewforum&f=201) [http://www.jboss.com/index.html?module=bb&op=viewforum&f=201].

Reference

3.1. Wizards

3.1.1. Process Project Wizard

This wizard helps to create new jBPM project. It is available with clicking [File->New->Other->jBPM 3 Project](#) in the menu bar.

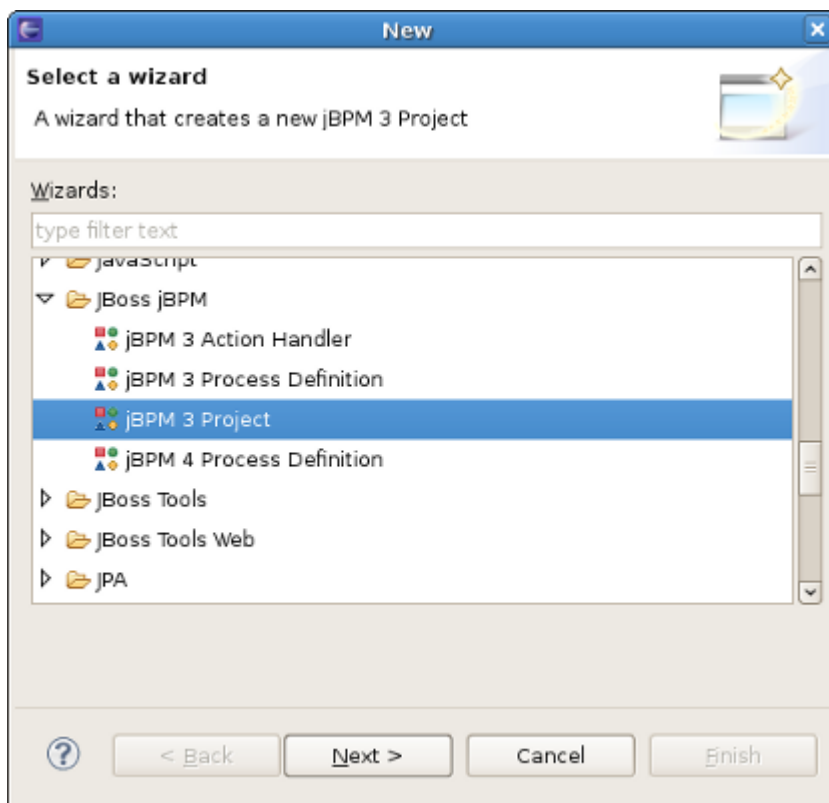


Figure 3.1. New Process Project Wizard

It consists of several pages:

- On the first page you can adjust the name of the project and the directory where it will be created.

If "[Use default](#)" option is checked the output directory will be the workspace, otherwise the user should specify it by himself using [Browse](#) button.

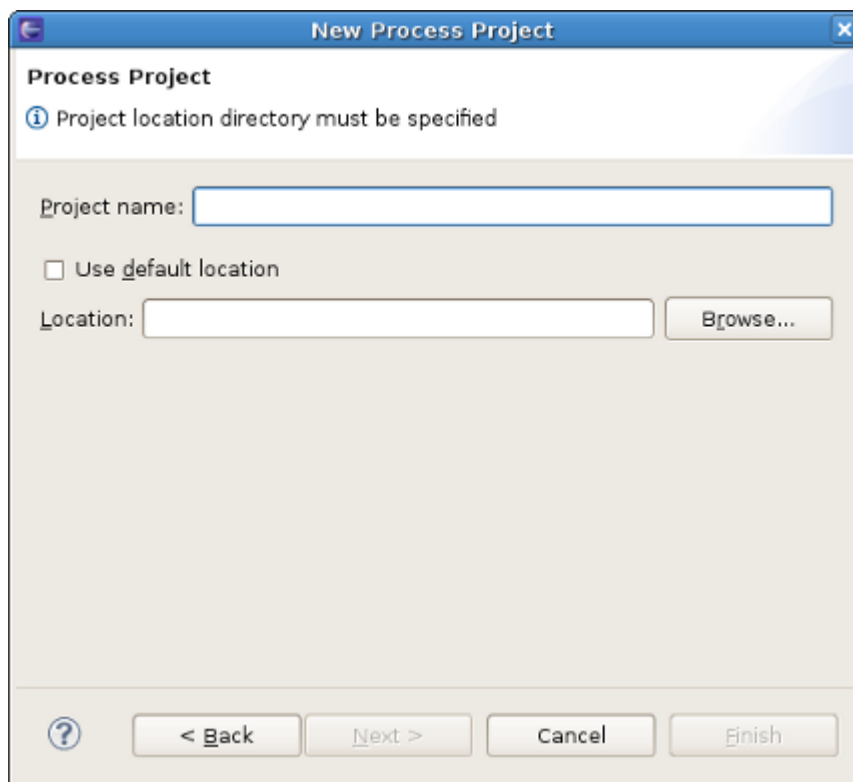


Figure 3.2. New Process Project Wizard

- On the second page you should point the location of your jbpn runtime.
- The last page is only available for unabling/disabling *Generate simple process definition,action handling and Unit test*.If you unable the option all the mentioned code will be generated automatically.

3.1.2. New JBPM Action Wizard

This wizard is available by clicking [File->New->Other->jBPM 3 Action Handler](#).

jBPM Action

⚠ Type name is discouraged. By convention, Java type names usually start with an uppercase letter

Source folder:

Package:

☐ Enclosing type:

Name:

Modifiers: ☒ public ☐ default ☐ private ☐ protected
☐ abstract ☐ final ☐ static

Superclass:

Interfaces:

Which method stubs would you like to create?

☐ public static void main(String[] args)

☒ Constructors from superclass

☒ Inherited abstract methods

Do you want to add comments? (Configure templates and default value [here](#))

☐ Generate comments

Figure 3.3. New JBPM Action Wizard

It includes the next options to adjust:

Table 3.1. New JBPM Action Wizard. Options.

Option	Description	Default
Source folder	The path to the source folder relative to the selected project	The source folder of the project selected in the Project field
Package	Enter a package to contain an Action Handler. Either type a valid package name or click Browse to select a package via the dialog box.	<blank>

Option	Description	Default
Enclosing type	Select the enclosing type of your jBPM action using Browse button.	<blank>
Modifiers	Select the modifiers that will be added to the generated class.	Public
Name	Type a name for a new Action Handler	<blank>
Superclass	Type or click Browse to select a superclass for an Action Handler	org.jbpm.graph.def.ActionHandler
Interface	Type or click Add to select an interface/interfaces for an Action Handler	org.jbpm.graph.def.ActionHandler
Which method stubs you would like to create?	Select the stubs that you would like to be created automatically.	<ul style="list-style-type: none"> • Constructors from superclass • Inherited abstract methods
Do you want to add comments?	Select Generate comments check box if you want comment mask to be generated before the class definition.	<blank>

3.2. The views

Here, it will be explained how to work with views and editors provided by JBDS.

The views are used for representation and navigation the resources you are working on at the moment. One of the advantages of all the views is that all modifications made in the current active file are immediately displayed in them. Let's get acquainted more closely with those that the [jPDL perspective](#) provides.

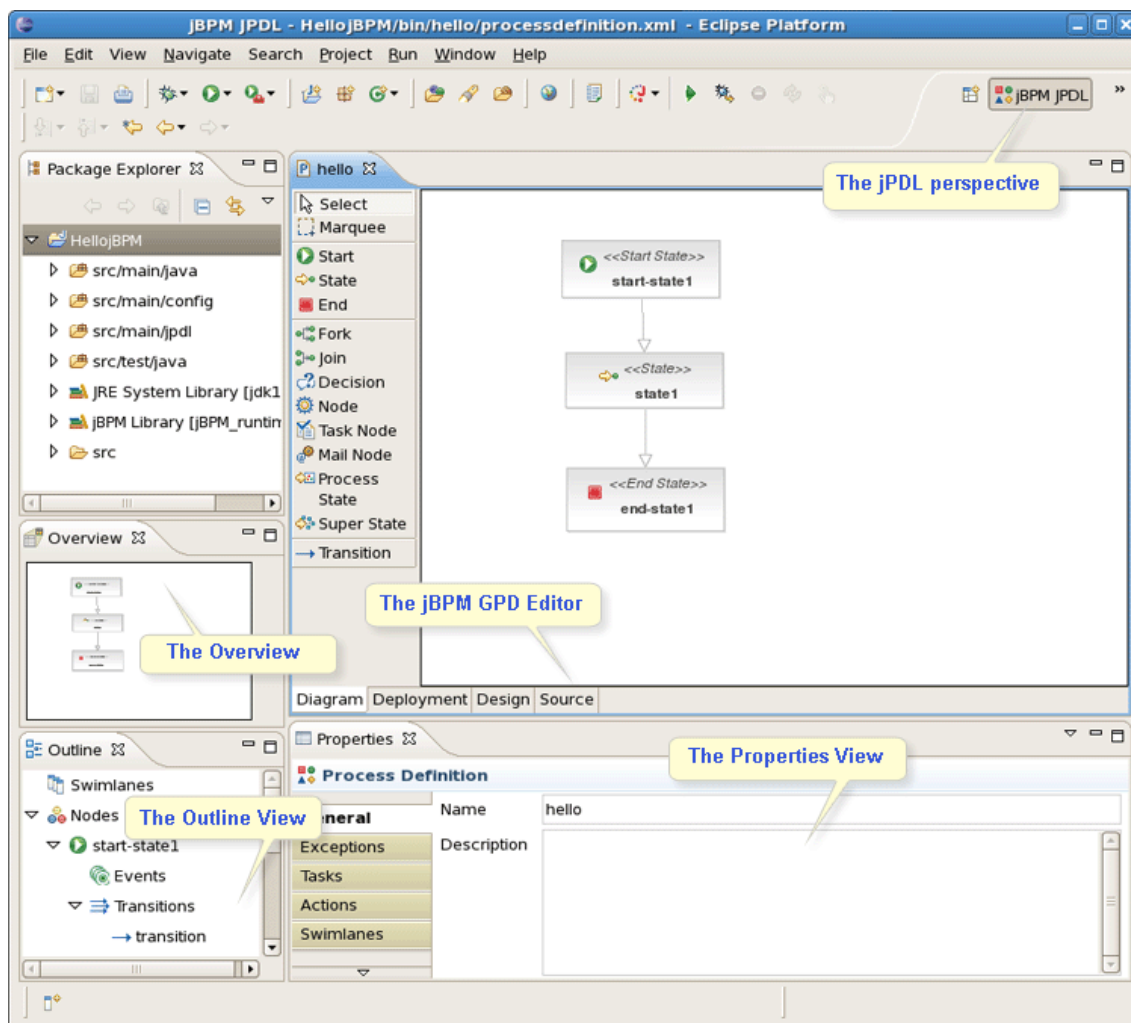


Figure 3.4. The jPDL Perspective Views and Editors

As you can see in the picture above, the [jPDL perspective](#) contains a complete set of functionality that's necessary for working on the jBPM project.

3.2.1. The Outline View

To have a way to quickly see an outline of the process use the [Outline view](#) that is presented as the classical tree. If it is not visible select [Window > Show view > Outline](#).



Figure 3.5. The Overview View

3.2.2. The Overview

The main advantage of this view is that it gives visual representation of the whole current developing process. Besides, the [Overview](#) comes as a scrollable thumbnail which enables a better navigation of the process structure if it's too large.

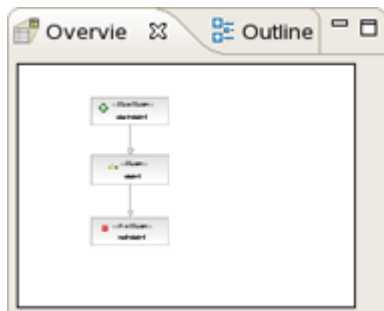


Figure 3.6. The Overview

3.2.3. The Properties View

Here, we dwell on the JBDS [Properties view](#).

Notice if it's not visible you can access it by navigating [Window > Show view > Properties](#).

The view shows the relevant properties of the selected item in the tabbed form. Every item has its own set of properties, which can be directly editable in the Properties view or by bringing up the context menu.

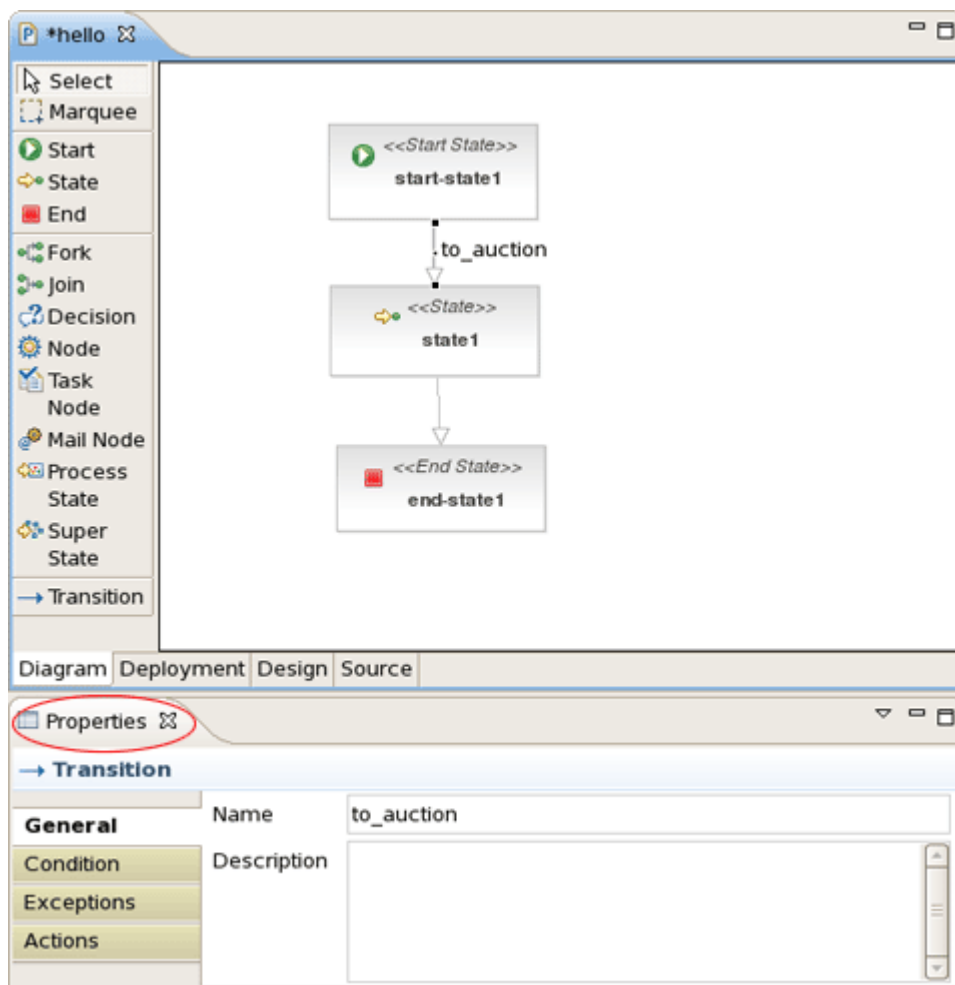


Figure 3.7. The Properties View of selected Transition

For example, on the picture above the Properties view displays all the properties for a selected transition. Its name has been changed to `to_auction`. We've done it directly in active General tab of the view. The same way let's change the name for the second transition to `to_end`.

If no one item is selected, the view represents the properties of the whole process definition.



Figure 3.8. The Properties View of Process Definition

In this case, it contains six tabs. The first one is the `General`. It allows to specify a process name and add necessary description. To illustrate let's change the process definition name to `jbay`.

3.2.4. The jBPM Graphical Process Designer editor.

The [jBPM GPD editor](#) includes four modes: Diagram, Deployment, Design and Source, which are available as switchable tabs at the bottom of the editor. Let's dwell on each of them.

3.2.4.1. The Diagram mode

In this mode we define the process in the form of a diagram by means of tools provided on the left-hand side of the jBPM GPD.

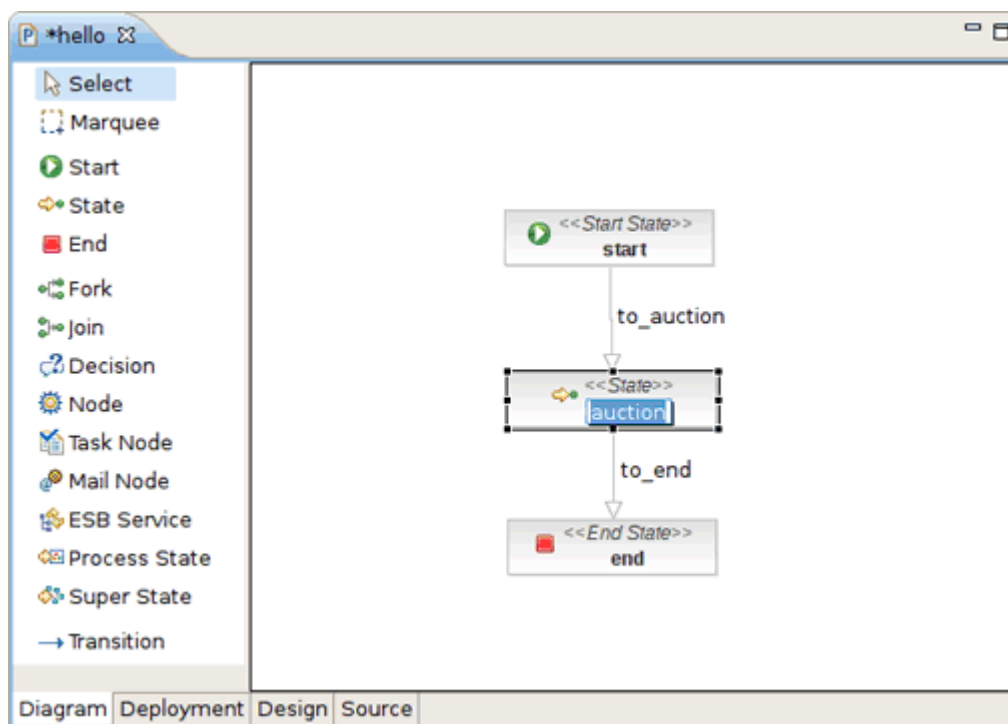


Figure 3.9. The Diagram mode

Besides, some properties can be directly edited in the [Diagram mode](#) of the graphical editor. One example of this is the [name](#) property of nodes. You can edit this directly by selecting the node of which you want to change the name and then click once inside this node. This enables an editor in the node. We change the name of the node to [auction](#).

3.2.4.2. The Source Mode

Now, that we have defined a simple process definition, we can have a look at the XML that is being generated under the covers. To see this XML click on the Source tab of the graphical process designer editor.

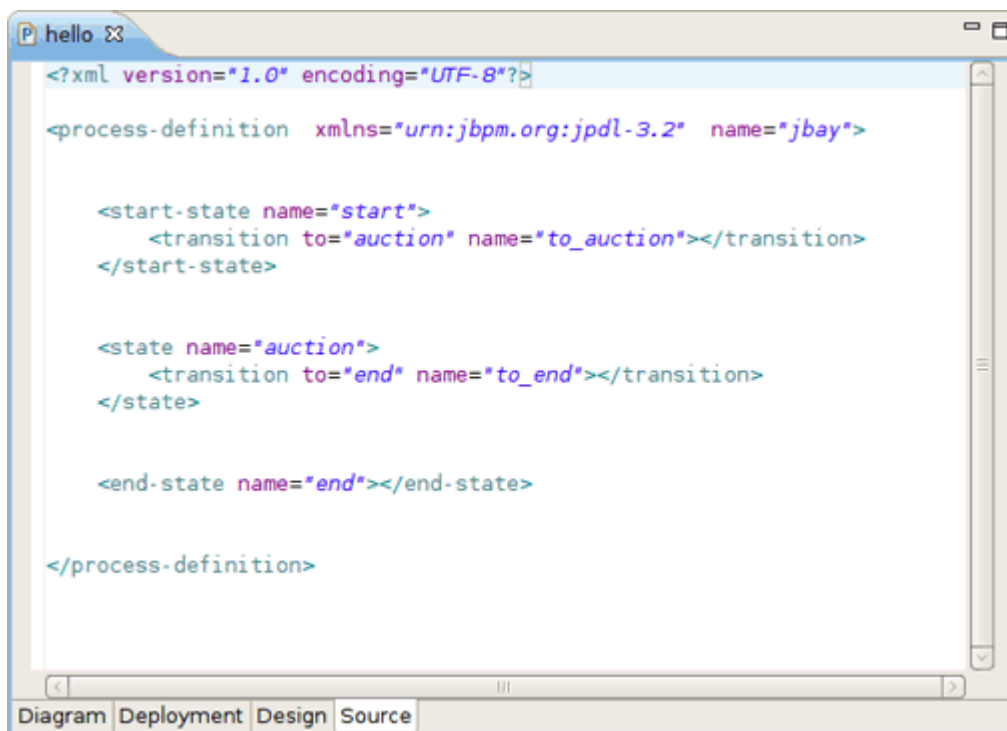


Figure 3.10. The Source Mode

The [Source mode](#) enables to easily manipulate our XML. That is manually inserting and editing necessary elements or attributes. In addition, here you can take advantage of content assist.

A template is added to better render the jBPM task forms in the Visual editor. Now the jBPM Graphical Process designer can create facelets that are associated with tasks and are rendered in the jBPM console.

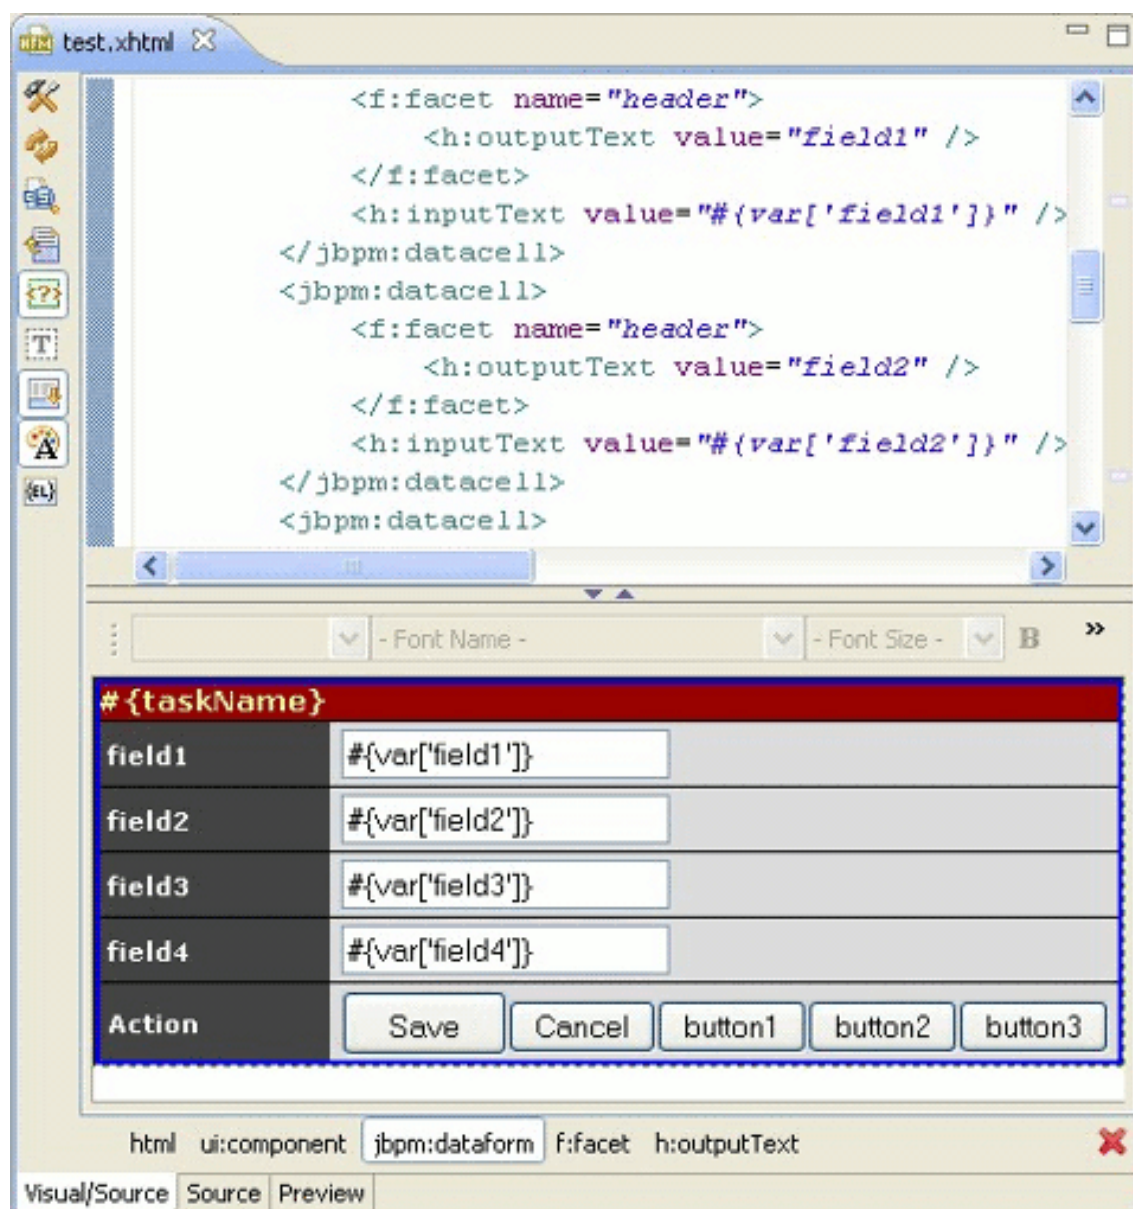


Figure 3.11. A task form in VPE

3.2.4.3. The Design Mode

One more way to edit your file is to use [Design mode](#). You can see it in the next picture:

The screenshot shows the BPMN Source Editor with the following XML content:

```

<?xml version="1.0" encoding="UTF-8">
<process-definition (description | swimlane | start-state | ((node | state | task-node | sup
  <xmlns urn:jbpm.org:jpd1-3.2
  <name jbay
  <start-state (description | task | transition | event | exception-handler)*
    <name start
    <transition (description | condition | ((action | script | create-timer | cancel-time
      <to auction
      <name to_auction
    <state (((description | event | exception-handler | timer | transition))))*
      <name auction
      <transition (description | condition | ((action | script | create-timer | cancel-time
    <end-state (description | event | exception-handler)*
      <name end
  
```

Figure 3.12. The Design Mode

As you can see above, this mode looks like a table in the first column of which the process structure is performed. Here, you can also insert, remove and edit elements or attributes, moreover add comments and instructions. Their values can be directly edited in the second column of the Design mode table.

For instance, let's add a comment on the second transition. For that, you should bring up the context menu for it and choose *Add Before > Comment*.

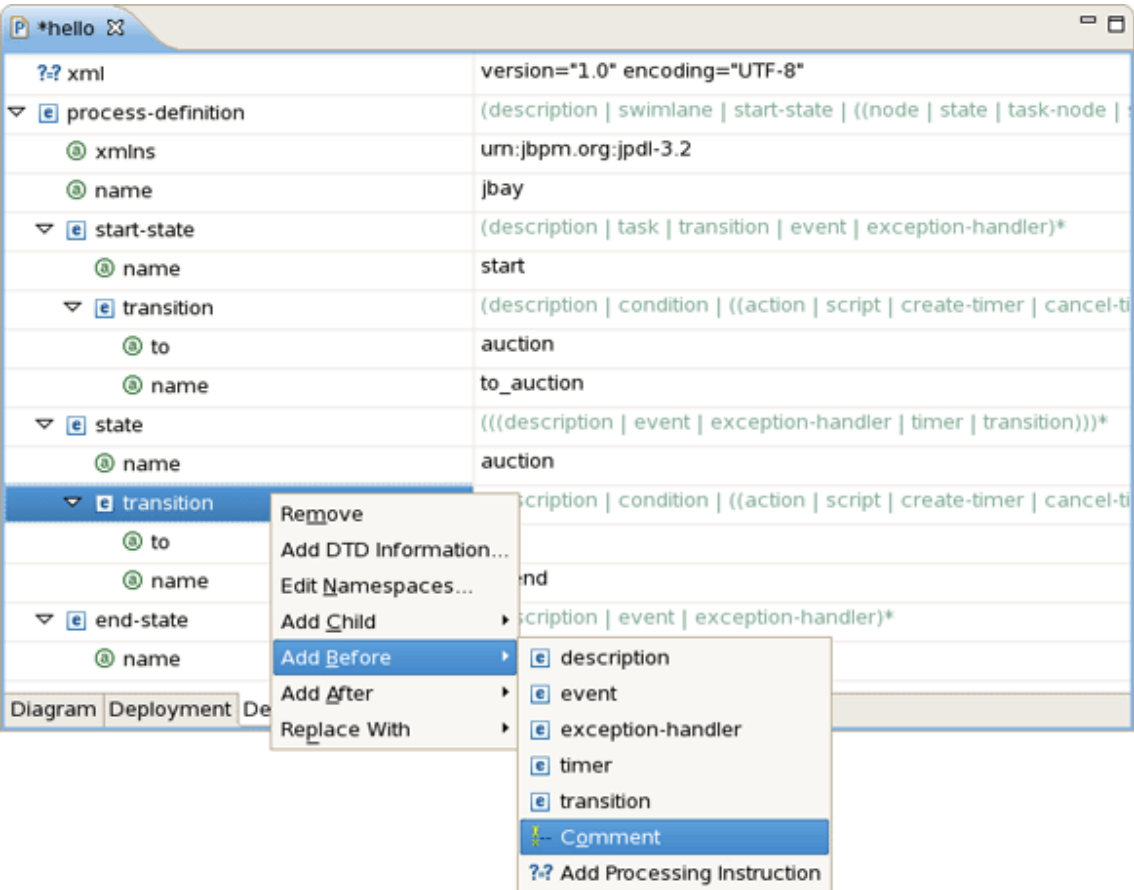


Figure 3.13. Adding a Comment

Then, we can put the text *This transition leads to the end state* in the right column as its value.

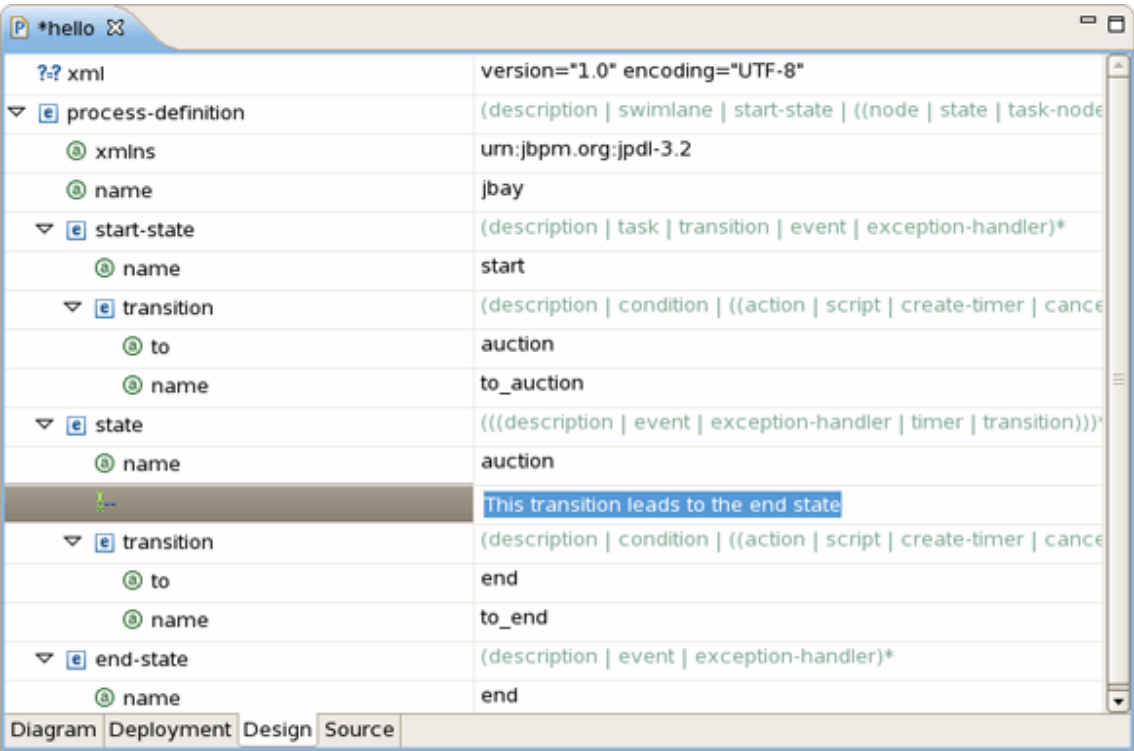


Figure 3.14. Comment is added

3.2.4.4. The Deployment Mode

Finally, to adjust the deployment settings of the project you should switch on to the tab that opens the [Deployment mode](#). On the picture below the [Deployment mode](#) is performed with default settings. Here, you can easily modify them or, if the settings won't match your needs, to reset defaults.

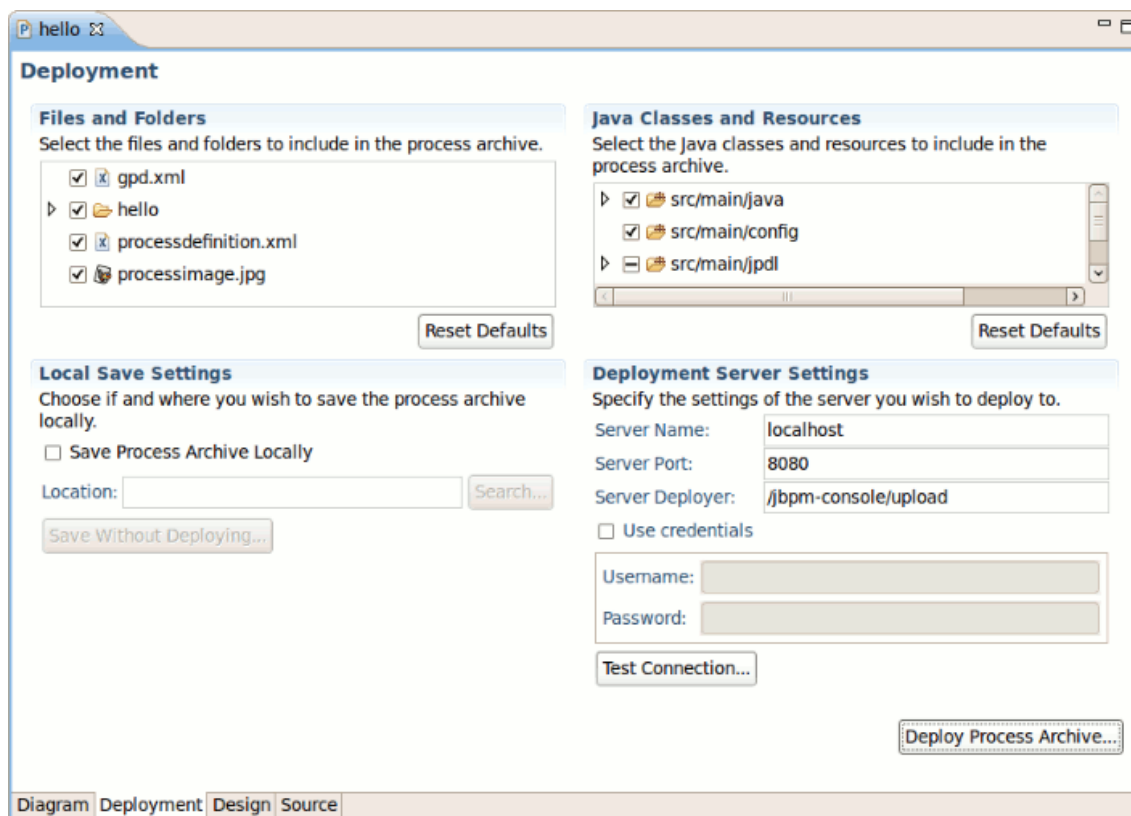


Figure 3.15. The Deployment Mode

The [Test Connections](#) button can be used to check whether all your settings are valid before deploying the process.

To deploy the process on the server you should click the [Deploy Process Archive](#) button.

However, prior to testing the connection and deploying the process on the server you need to make sure the server is configured to support jBPM functionality and is running.

Please, also note that if authentication for deployment is required you may use the process deployer that is available at [/gpd-deployer/upload](#).

Now that we've seen how to work with [jPDL perspective](#), let's pass on to the project testing.