

**Web Beans: Java Contexts
and Dependency Injection**

**The new standard
for dependency
injection and contextual
state management**

Gavin King

JSR-299 specification lead

Red Hat Middleware LLC

Pete Muir

Web Beans (JSR-299 Reference Implementation) lead

Red Hat Middleware LLC

David Allen

: Nicola Benaglia, Francesco Milesi

Spanish Translation: Gladys Guerrero

Red Hat Middleware LLC

Korean Translation: Eun-Ju Ki,

Red Hat Middleware LLC
Traditional Chinese Translation: Terry Chuang
Red Hat Middleware LLC
Simplified Chinese Translation: Sean Wu
Kava Community

Note	vii
I. à»í##î#âí#, ê°#î²` î#¬î#©	1
1. Web Beans# ####	3
1.1. # ## Web Bean	3
1.2. Web Bean# #####?	5
1.2.1. API ##, ### ## # ### ##	6
1.2.2. ## ##	7
1.2.3. ##	7
1.2.4. Web Bean ## # Unified EL	7
1.2.5. ##### ## ##	8
1.3. ## ### ## Web Beans# # # #####?	8
1.3.1. ## Web Beans	9
1.3.2. ##### Web Beans	9
1.3.3. ### ##	10
1.3.4. JMS #####	11
2. JSF # ##### #	13
3. Getting started with Web Beans, the Reference Implementation of JSR-299.....	17
3.1. Using JBoss AS 5	17
3.2. Using Apache Tomcat 6.0	19
3.3. Using GlassFish	20
3.4. numberguess ##	20
3.4.1. The numberguess example in Tomcat	27
3.4.2. The numberguess example for Apache Wicket	28
3.4.3. The numberguess example for Java SE with Swing	31
3.5. ## ##	37
4. ### ##	43
4.1. ### #####	44
4.1.1. ### ### #####	46
4.1.2. ### ##### ##	46
4.1.3. ### ##### # ### ##	46
4.1.4. ### ### ##	47
4.2. ## ##	47
4.2.1. ## ## ###	48
4.2.2. ## ## ## ##	48
4.2.3. ## ## ##	49
4.3. ##### ## ##	49
4.4. ##### ##	49
4.5. ##### lookup# ## Web Bean ##	50
4.6. ## ## ##, @Resource, @EJB # @PersistenceContext	51
4.7. InjectionPoint ##	51
5. ## # #####	55
5.1. ## ##	55
5.2. ### ##	55
5.3. ##### ##	56

5.3.1. ##### ## ##	56
5.3.2. ##### ##	57
5.3.3. ##### ## ##	58
5.4. dependent pseudo-scope	58
5.4.1. @New #####	58
6. ### ##	61
6.1. ### ## ##	62
6.2. ### ##### ##	62
6.3. ### ## ## @New ##	63
II. $\hat{e}^{\circ}\hat{i}\hat{\#}\hat{\imath}\hat{\#}\hat{e}^2\hat{\imath}\hat{\#}\hat{e}^2\hat{e}\hat{\#}$ (loosely-coupled) $\hat{e}^{\circ}\hat{i}\hat{\#}\hat{i}\hat{\#}\hat{\imath}\hat{\#}\hat{e}\hat{\#}\hat{e}^{\circ}\hat{\#}$	65
7. #####	67
7.1. ##### ##	67
7.2. ##### ##	68
7.3. ##### ##	68
7.4. ### ##### ##	69
7.5. ##### ##### ## #####	70
7.6. ##### ## ## ##	71
7.7. @Interceptors ##	71
8. #####	73
8.1. ## ##	74
8.2. ##### ##	74
9. ###	77
9.1. ### ##	77
9.2. ### ##	77
9.3. ##### ##### ##	79
9.4. ### ## ##	79
9.5. ## ## ##	80
9.6. ##### ##	81
III. $\hat{e}^{\circ}\hat{i}\hat{\#}\hat{\imath}\hat{\#}\hat{e}^{\circ}\hat{i}\hat{\#}\hat{\imath}\hat{\#}\hat{i}\hat{\#}\hat{\imath}\hat{\#}$ (strong typing) $\hat{i}\hat{\#}\hat{-}\hat{i}\hat{\#}\hat{\circ}$	83
10. ##### (Stereotypes)	85
10.1. ##### ## ## ## # ## ##	85
10.2. ##### ## # ## ##	86
10.3. ##### # ##### ##	86
10.4. ##### ## ## ##### ##	87
10.5. ## #####	87
11. ###	89
11.1. ### ## ##	90
11.2. ### ##### ##	90
12. XML# ##### Web Beans ##	91
12.1. Web Bean ### ##	91
12.2. Web Bean ##### ##	92
12.3. Web Bean ## ##	93
12.4. ### Web Beans ##	93
12.5. ### ##	94

IV. Web Beans	95
13. Java EE	97
13.1. Java EE	97
13.2. Servlet	97
13.3. Message-Driven Bean	98
13.4. JMS	99
13.5.	100
14. Web Beans	101
14.1. Manager	101
14.2. Bean	103
14.3. Context	104
15.	105
V. Web Beans Reference	107
16. Application Servers and environments supported by Web Beans	109
16.1. Using Web Beans with JBoss AS	109
16.2. Glassfish	109
16.3. Servlet Containers (such as Tomcat or Jetty)	109
16.3.1. Tomcat	110
16.4. Java SE	111
16.4.1. Web Beans SE Module	111
17. JSR-299 extensions available as part of Web Beans	115
17.1. Web Beans Logger	115
18. Alternative view layers	117
18.1. Using Web Beans with Wicket	117
18.1.1. The WebApplication class	117
18.1.2. Conversations with Wicket	117
A. Integrating Web Beans into other environments	119
A.1. The Web Beans SPI	119
A.1.1. Web Bean	119
A.1.2. EJB services	120
A.1.3. JPA services	122
A.1.4. Transaction Services	122
A.1.5. JMS services	123
A.1.6. Resource Services	123
A.1.7. Web Services	123
A.1.8. The bean store	124
A.1.9. The application context	124
A.1.10. Bootstrap and shutdown	124
A.1.11. JNDI	124
A.1.12.	125
A.1.13. Servlet injection	126
A.2.	126

Note

JSR-299 has recently changed its name from "Web Beans" to "Java Contexts and Dependency Injection". The reference guide still refers to JSR-299 as "Web Beans" and the JSR-299 Reference Implementation as the "Web Beans RI". Other documentation, blogs, forum posts etc. may use the new nomenclature, including the new name for the JSR-299 Reference Implementation - "Web Beans".

You'll also find that some of the more recent functionality to be specified is missing (such as producer fields, realization, asynchronous events, XML mapping of EE resources).

I. ì»`í##ì#αί#, ê°#ì²' ì#¬ì#©

Web Beans (JSR-299) #### ##### ## ## ##### ## Java EE #### ## #### #####. Web Beans#
JavaBeans # Enterprise Java Bean# ##### Java ## ## #### ## ## # ## ## #####.
Java EE ##### ## ## ####, Web Beans# #### ## #####:

- ##### ## ##### ## ## ## ## ## ##
- #### ## (dependency injection)#### ## #### (typesafe) ##
- #### ## #### ## #####
- ##### (decorator) ## #### #### ##### ## ##### ##### ## #### #####, ##### ## #### ##
##

API #####:

- #### #### ## #### #####?
- #### ## ##### ## #### ## # #####?
- ## #####?
- #### ## # #####?
- ## ##### ##### ##?
- ## ##### ## ## ## #### ##### ##?
- #### ## ## #### #####, #### #### ## #### ## # # #####?
- #### ## ## ## ##### ##### ##### # #####?

Web Bean# ##### ## Web Beans# ## # #### ## #####. ## ##### ## Web Bean ##### ## ####
##, ##### ## ##, #### ## #### #### #####. # #### ##### Web Bean# #### ##, ## ##, #### ## ####
#####.

####, ##### # ##### #### #### ##### ##### (loose-coupling) ####:

- #### #### ##### #### ##### ## #####
- ##### ##### ##### #### #### ## #####
- ##### ##### #### ##### ##.

Web Beans# #### ## #### ## #### (typesafe) #####. Web Beans# #### #### #### ##
#####. XML# ##### ##### ## #####. ## Web Beans#

(binding annotations)### ### ### ## Java ## ##### ## ## ### ### ### ##### Web Beans
Web Beans# ###, ####, ##### # ### ##### ## #####.

Web Beans ##### Java EE ### ## ### ## ## ### ## #####:

- ## JavaBeans
- ## EJB
- ## Servlets

Web Beans# ## ### ##### ## Java EE ##### ## ### ##### ## ### ## ### ## ### Web Beans#
Web Beans ##### ### ### ## ### Web Bean# ## #####.

Web Beans# Seam, Guice, Spring# ##### ## ## Java ##### ## ### ##### Web Beans# #####
#####: Seam ## # ## ###, ## # ## ###, Spring ## # XML-##, Guice ## #
#####-##### ##

Web Beans# Java EE # ## ### EJB Lite# #### # ## Java SE ### ### JCP #####.

Web Beans#

```
# ## Web Bean ### ## #####? ## ## ## Web Beans ### ## ##### # ## ## ## ##### ## # #
#####! # ## ## ## ##### ## ##### ## ##### Web Beans# ## ## # ##### ##### #####. ## ##### #####
##### Web Beans# ##### ## ## # # #####.
```

1.1. # ## Web Bean

```
### ## ##### ## #### ## ## ##### ##### ##### ## Java ##### Web Bean## #### ## JavaBean# #####.
## #### ## EJB 3-#### ## ## Web Bean####. ## ## ##### JavaBeans # EJB# Web Beans #### ##
#### #### ##### #### ## # ####, Web Beans#### ## #### ##### ## # ## ## ##### # ##### # ## ## Web
Beans## ##, Web Beans XML ## #### ## ##, ##### # ##### ## ##
```

```
#### ##### ##### # # ## Java ##### ## ### #####. # ## ##### ##### ## ##### ## #####:
```

```
public class SentenceParser {
    public List<String>
    > parse(String text) { ... }
}
```

```
# ## ##### ## ##### ## ##### # ## ## ##### ## ##### ## # #####:
```

```
@Stateless
public class SentenceTranslator implements Translator {
    public String translate(String sentence) { ... }
}
```

```
### Translator# ## #####:
```

```
@Local
public interface Translator {
    public String translate(String sentence);
}
```

```
##### ## ### #### ##### ## ##### ####, ### ### ##### Web Bean# #####:
```

```
public class TextTranslator {  
  
    private SentenceParser sentenceParser;
```


1.2. Web Bean# #####?

Web Bean# #####?

Web Bean# ##### ## ## ##### #####. Web Bean# Java ##### ## ##### ## Unified EL#
#####. Web Bean# ##### ##### ## # #####. Web Beans ##### ##### Web Bean #####
#####. ##### Web Beans# ## ## (stateful) # ##### #####. Web Bean ## ## ## Web
Bean ##### ## #####.

##. "#####"#### ## ## #####? Web Beans# ## ## ## ##, ##### ## #
#####. ## ## ## ## ## (#: ## ## #) ## singleton ##### ## (#: ervlets ## singleton #)##
Web Bean# ## ##### ## ## ## Web Bean# ## ##. #####-#### ## ##### ##### ## Web
Bean# ##### ##### #####.

####, ## ## ## ## ## ## ## ## ## ## ## ##, ##### ##### ## ## ##### ## ## ## ## ## ## ##.
##, Web Bean# ## ## ## ## #####:

- #### Web Bean ##### ## ##
- ## ##### ## Web Bean ##### ## ## ##

Web Beans ##### ## ## ## ## ##, Web Bean ## ## ## ## ## ## ## ## ##. ## ##### #####
(#: ## ## ##) ## ## ## ## ## ## ## ## (#: Web Bean# ## ## ##) ## ## ## ## ## ##
(Web Bean# ##### ## ##).

(#: ## ## Web Bean)# #### Web Bean# ##### ## ##. #### ## #####
##.

Web Beans# ##### ##### ## #####! ##### ##### Web Bean# ## ##
##. Web Beans# ##### ##### ##### Web Bean ## ## ##
##. Web Beans# ## ## ## ## ## ## ## ##:

- # ## ## API# ## ## #####
- ## ## ## ## ## ##

Web Bean# ## API# ##### ## Web Bean ## ## ## ## ## ## ## ## ## (# ##)## ## ## Web
Bean## ## # #####. ##, 4.2#. "## ## "## ##### # ## Web Beans# ## Web Bean ## ## ##
##.

Web Bean ##### Web Beans# # # ## #####. Servlets ## Message-Driven Beans# ## # ##
Web Beans# ## ## ## ## ##.

spec# ##:

Web Bean# ## ## ## ## ##:

1#. Web Beans#

- (## ## ##) API ## ##
- (## ## ##) #### ##### ## ##
- ##
- ## ##
- Web Bean ## (## ##)
- ##### ## ## ##
- Web Bean ##

Web Bean ##### ## ## ##.

1.2.1. API ##, #### ## # ####

Web Beans# #### ## ## Web Beans# #### #####. #### ## ## Web Bean# ##### "##"##
#####. ##### ## ## ##.

- API ##
- #### ## ##

API# #### ## #### ## #####. (Web Bean# EJB ## ## ##, API #### @Local ##### ## bean-
class ## #####.) #### #####-#### ##### #### API# ## #### ## #####.

@BindingType## ##### ## ## ##### ## #####. ## ##, #### ## ## ##
PaymentProcessor API ## # @CreditCard #### ## ##:

```
@CreditCard PaymentProcessor paymentProcessor
```

##, #### ## ##@Current# #####.

##, Web Bean ##### ## ## ## (API# ##### ## ## ## ##) Web Bean# ##### ## #####.

Web Bean# @CreditCard #### ## ## PaymentProcessor API #### #####. #### ## ## ##
#####:

```
@CreditCard  
public class CreditCardPaymentProcessor  
    implements PaymentProcessor { ... }
```

Web Bean# #### ## ## ## ##### ## ##, ## ## ## ## ## @Current## #### ## ## ##.

Web Beans# ##### #### # ##### ##### ## ## ##### ## ## Web Bean# ## ## ##### ##
#####. ## ## ## 4#. #### ## ## #####.

1.2.2. ##

```
## ### ## ##### ## Web Beans# ##### ###. ## ### ## ## ##### ##### #####, ## ## @Mock,
@Staging, @AustralianTaxLaw# #####. ##### ##### # Web Beans# ##### #####. ## ### ##
##### ##### ## Web Beans ### ## ## ##### ##.
```

```
### Web Beans# ##### ## ## @Production# #####, ### ## ## #### ##### ## ## #####. ### ##
Web Bean ### @Production ## #### #####.
```

```
### ####, SentenceTranslator Web Bean# "## ##"### ####:
```

```
@Mock
public class MockSentenceTranslator implements Translator {
    public String translate(String sentence) {
        return "Lorem ipsum dolor sit amet";
    }
}
```

```
MockSentenceTranslator # ## ## Web Bean ##### @Mock# ##### ## ##### ## ## ## ## @Mock
## ## ## ## # #####.
```

4.2#. “## ##”## #### ##### ### #### ## #### ## #####.

1.2.3.

Web Bean# ## ### ##### #####. Web Beans ##### ## ##, ## ##. ##, ## ## ## ##### ##, Web Bean #####. ## ##### ## ##.

```
## ##, # ##### ## ## Web Beans# ## # #####:
```

```
@SessionScoped
public class ShoppingCart { ... }
```

```
## ## Web Bean# ##### ### ##### ##### ## ##### ##### ## ## ## #####.
```

```
#####, Web Beans# dependent pseudo-scope## ## ### #####. ### ### ## Web Beans# #####
### ### ### ##### ##### ### ##### #####.
```

5#. ## # ##### ## ### ## ## ##### #####.

1.2.4. Web Bean ## # Unified EL

Web Bean# ### # # ###, Unified EL ##### # # ###. Web Bean# ### ##### # # #####:

1#. Web Beans#

```
@SessionScoped @Named("cart")
public class ShoppingCart { ... }
```

JSF ## JSP ##### ## Web Bean# ### # #####:

```
<h:dataTable value="#{cart.lineItems}" var="item">
    ....
</h:dataTable
>
```

Web Bean ##### ## ##### ## ## ## ## #####:

```
@SessionScoped @Named
public class ShoppingCart { ... }
```

##, ## ##### shoppingCart# ### # ### ## ##### # ##### ##### ## ##.

1.2.5. ##### ##

Web Beans# EJB beans # # ### ## Java ##### ## EJB 3# ## ### ##### #####. ## ##, Web Beans# ### ##, EJB beans # ## ## Web Beans# ### ## ## #####.

@Interceptors ##### ## ## ##### ## ## ## ## ##:

```
@SessionScoped
@Interceptors(TransactionInterceptor.class)
public class ShoppingCart { ... }
```

###, ##### ## ## ## ## ## ## ## ## ## ## ##:

```
@SessionScoped @Transactional
public class ShoppingCart { ... }
```

7#. ##### # 8#. ##### ## Web Beans ##### # ##### ## #####.

1.3. ## ## ## Web Beans# # # #####?

JavaBeans, EJB # ## ## Java ##### Web Beans# # # ### #####. ##, ## ## ## ## Web Beans###?

1.3.2. ##### Web Beans

1#. Web Beans#

- ## ## ## # # ##### ## #### # #### ## # # ##### ##
- ## # # #### ##
- #### # #### ##

Web Bean# ##### ####. #### ## ## ##### ## ##, ## Web Bean# # #### #####.

Web Beans (## ## ##### ## Web Bean ##)# ## ##### ## #####. ####, EJB 3.1# ## #####
#####. ##### ## # ##### ## Web Beans# EJB#### ##.

Web Beans# #### ##### ## EJB @Stateless/@Stateful/@Singleton #### ## #### ##
##.

#####, ####-## ##### ##, ####-## ##, ####, ## ## ## ## ## ## ## ## ##.

Web Bean## ####, @Stateless, @Stateful, @Singleton ##### ## EJB# #####.

1.3.3. ###

Web Bean# ##### ## Web Bean ##### ## ##### #####.
Web Bean ##### ## ## ##### ## ## ## ## ## ##. #:

```
@ApplicationScoped
public class Generator {

    private Random random = new Random( System.currentTimeMillis() );

    @Produces @Random int next() {
        return random.nextInt(100);
    }

}
```

Web Bean# ## #####.

```
@Random int randomNumber
```

##/##### ## ##### API #### ## #####. ## ## ## ## ## ## ## ## API
##.

##:

```
@Produces @RequestScoped Connection connect(User user) {
```

```
return createConnection( user.getId(), user.getPassword() );  
}
```

##:

```
void close(@Disposes Connection connection) {  
    connection.close();  
}
```

Web Bean ##### ## ## ## ## ##.

6#. ### ## ## ## ## ## ## ## ## ##.

1.3.4. JMS

#####, JMS # ## ## ## Web Bean# # # #####. Web Beans# # # ## ## ## ## ## ## ## ## ## JMS
##. 13.4#. "JMS ##### "## JMS ##### ## ##.

JSF # #####

#####. JSF# ##### ##### #####. ##, ##### ### ##
Web Bean# #####:

```
@Named @RequestScoped
public class Credentials {

    private String username;
    private String password;

    public String getUsername() { return username; }
    public void setUsername(String username) { this.username = username; }

    public String getPassword() { return password; }
    public void setPassword(String password) { this.password = password; }

}
```

Web Bean# #### ## JSF ##### #####:

```
<h:form>
    <h:panelGrid columns="2" rendered="#{!login.loggedIn}">
        <h:outputLabel for="username"
    >Username:</h:outputLabel>
        <h:inputText id="username" value="#{credentials.username}" />
        <h:outputLabel for="password"
    >Password:</h:outputLabel>
        <h:inputText id="password" value="#{credentials.password}" />
    </h:panelGrid>
    <h:commandButton value="Login" action="#{login.login}" rendered="#{!login.loggedIn}" />
    <h:commandButton value="Logout" action="#{login.logout}" rendered="#{login.loggedIn}" />
</h:form>
>
```

Web Bean ## #### ## #### ##### ## Web Beans# User #####:

```
@SessionScoped @Named
public class Login {
```

```
@Current Credentials credentials;
@PersistenceContext EntityManager userDatabase;

private User user;

public void login() {

    List<User
> results = userDatabase.createQuery(
    "select u from User u where u.username=:username and u.password=:password")
    .setParameter("username", credentials.getUsername())
    .setParameter("password", credentials.getPassword())
    .getResultList();

    if ( !results.isEmpty() ) {
        user = results.get(0);
    }

}

public void logout() {
    user = null;
}

public boolean isLoggedIn() {
    return user!=null;
}

@Produces @LoggedIn User getCurrentUser() {
    return user;
}

}
```

@LoggedIn# ### #####:

```
@Retention(RUNTIME)
@Target({TYPE, METHOD, FIELD})
@BindingType
public @interface LoggedIn {}
```

Web Bean# ## ##### ## ### # #####:

Getting started with Web Beans, the Reference Implementation of JSR-299

The Web Beans is being developed at [the Seam project](http://seamframework.org/WebBeans) [http://seamframework.org/WebBeans]. You can download the latest developer release of Web Beans from the [the downloads page](http://seamframework.org/Download) [http://seamframework.org/Download].

Web Beans comes with a two deployable example applications: webbeans-numberguess, a war example, containing only simple beans, and webbeans-translator an ear example, containing enterprise beans. There are also two variations on the numberguess example, the tomcat example (suitable for deployment to Tomcat) and the jsf2 example, which you can use if you are running JSF2. To run the examples you'll need the following:

- the latest release of Web Beans,
- JBoss AS 5.0.1.GA, or
- Apache Tomcat 6.0.x, and
- Ant 1.7.0.

3.1. Using JBoss AS 5

You'll need to download JBoss AS 5.0.1.GA from [jboss.org](http://www.jboss.org/jbossas/downloads/) [http://www.jboss.org/jbossas/downloads/], and unzip it. For example:

```
$ cd /Applications
$ unzip ~/jboss-5.0.1.GA.zip
```

Next, download Web Beans from [seamframework.org](http://seamframework.org/Download) [http://seamframework.org/Download], and unzip it. For example

```
$ cd ~/
$ unzip ~/webbeans-$VERSION.zip
```

```
####, JBoss# #### ## ## Web Beans## #### ###. jboss-as/build.properties# #####
jboss.home #### #####. #:
```

3#. Getting started with Web ...

```
jboss.home=/Applications/jboss-5.0.1.GA
```

To install Web Beans, you'll need Ant 1.7.0 installed, and the ANT_HOME environment variable set. For example:



##

JBoss 5.1.0 comes with Web Beans built in, so there is no need to update the server.

```
$ unzip apache-ant-1.7.0.zip
$ export ANT_HOME=~/.apache-ant-1.7.0
```

Then, you can install the update. The update script will use Maven to download Web Beans automatically.

```
$ cd webbeans-$VERSION/jboss-as
$ ant update
```

##, ### ### ### ### #####!



##

The build scripts for the examples offer a number of targets for JBoss AS, these are:

- ant restart - exploded #####
- ant explode - ## ### ## ##### exploded ### #####
- ant deploy - ### jar #####
- ant undeploy - #####
- ant clean - ### #####

numberguess ### #####:

```
$ cd examples/numberguess
```

```
ant deploy
```

Start JBoss AS:

```
$ /Application/jboss-5.0.0.GA/bin/run.sh
```



##

If you use Windows, use the `run.bat` script.

```
##### ##### http://localhost:8080/webbeans-numberguess## ##### #####!
```

Web Beans includes a second simple example that will translate your text into Latin. The numberguess example is a war example, and uses only simple beans; the translator example is an ear example, and includes enterprise beans, packaged in an EJB module. To try it out:

```
$ cd examples/translator
ant deploy
```

```
##### ##### http://localhost:8080/webbeans-translator# #####!
```

3.2. Using Apache Tomcat 6.0

You'll need to download Tomcat 6.0.18 or later from [tomcat.apache.org](http://tomcat.apache.org/download-60.cgi) [http://tomcat.apache.org/download-60.cgi], and unzip it. For example:

```
$ cd /Applications
$ unzip ~/apache-tomcat-6.0.18.zip
```

Next, download Web Beans from [seamframework.org](http://seamframework.org/Download) [http://seamframework.org/Download], and unzip it. For example

```
$ cd ~/
$ unzip ~/webbeans-$VERSION.zip
```

Next, we need to tell Web Beans where Tomcat is located. Edit `jboss-as/build.properties` and set the `tomcat.home` property. For example:

```
tomcat.home=/Applications/apache-tomcat-6.0.18
```



##

The build scripts for the examples offer a number of targets for Tomcat, these are:

- `ant tomcat.restart` - deploy the example in exploded format
- `ant tomcat.explode` - update an exploded example, without restarting the deployment
- `ant tomcat.deploy` - deploy the example in compressed jar format
- `ant tomcat.undeploy` - remove the example from the server
- `ant tomcat.clean` - clean the example

To deploy the numberguess example for tomcat:

```
$ cd examples/tomcat
ant tomcat.deploy
```

Start Tomcat:

```
$ /Applications/apache-tomcat-6.0.18/bin/startup.sh
```



##

If you use Windows, use the `startup.batscript`.

```
##### ##### http://localhost:8080/webbeans-numberguess## ##### #####!
```

3.3. Using GlassFish

TODO

3.4. numberguess

```
numberguess ##### 1## 100### ### ##### ## ### 10 ## ##### ###. ## ### # ### ## ###
## ## ##### ##### ##.
```

numberguess ### ## Web Beans, ## ##, Facelet JSF ##### ## ##, war# ##### ## ## ## ## ##.

WEB-INF/# ## ## ##, ## ## ## ## WebContent# ##### ## ##. ##, faces-config.xml# #####, Facelets# ## ## JSF# ##### ##:

```
<?xml version='1.0' encoding='UTF-8'?>
<faces-config version="1.2"
    xmlns="http://java.sun.com/xml/ns/javaee"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://java.sun.com/xml/ns/javaee http://java.sun.com/xml/ns/
javaee/web-facesconfig_1_2.xsd">

    <application>
        <view-handler
>com.sun.facelets.FaceletViewHandler</view-handler>
        </application>

</faces-config
>
```

web-beans.xml ### ##, ## Web Beans ##### ## ##.

#####, web.xml ### ##:

```
<?xml version="1.0" encoding="UTF-8"?>

<web-app version="2.5"
    xmlns="http://java.sun.com/xml/ns/javaee"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://java.sun.com/xml/ns/javaee http://java.sun.com/xml/ns/javaee/
web-app_2_5.xsd">

    <display-name>Web Beans Numbergues example</display-name>

    <!-- JSF -->

    <servlet>
        <servlet-name>Faces Servlet</servlet-name>
        <servlet-class>javax.faces.webapp.FacesServlet</servlet-class>
        <load-on-startup>1</load-on-startup>
    </servlet>
```

1

```
<servlet-mapping> 2
  <servlet-name>Faces Servlet</servlet-name>
  <url-pattern>*.jsf</url-pattern>
</servlet-mapping>

<context-param> 3
  <param-name>javax.faces.DEFAULT_SUFFIX</param-name>
  <param-value>.xhtml</param-value>
</context-param>

<session-config> 4
  <session-timeout>10</session-timeout>
</session-config>

</web-app>
```

- 1 Enable and load the JSF servlet
- 2 Configure requests to `.jsf` pages to be handled by JSF
- 3 Tell JSF that we will be giving our source files (facelets) an extension of `.xhtml`
- 4 Configure a session timeout of 10 minutes



##

Whilst this demo is a JSF demo, you can use Web Beans with any Servlet based web framework.

Let's take a look at the Facelet view:

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/
xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml"
  xmlns:ui="http://java.sun.com/jsf/facelets"
  xmlns:h="http://java.sun.com/jsf/html"
  xmlns:f="http://java.sun.com/jsf/core"
  xmlns:s="http://jboss.com/products/seam/taglib">

  <ui:composition template="template.xhtml"> 1
    <ui:define name="content">
      <h1>Guess a number...</h1>
```

```

<h:form id="NumberGuessMain">

    <div style="color: red">
        <h:messages id="messages" globalOnly="false"/>
        <h:outputText id="Higher" value="Higher!" rendered="#{game.number gt game.guess
and game.guess ne 0}"/>
        <h:outputText id="Lower" value="Lower!" rendered="#{game.number lt game.guess and
game.guess ne 0}"/>
    </div>

    <div>

        I'm thinking of a number between #{game.smallest} and #{game.biggest} st}.
        You have #{game.remainingGuesses} guesses.
    </div>

    <div>
        Your guess:

        <h:inputText id="inputGuess"
            value="#{game.guess}"
            required="true"
            size="3"
            disabled="#{game.number eq game.guess}">

        <f:validateLongRange maximum="#{game.biggest}"
            minimum="#{game.smallest}"/>
    </h:inputText>

    <h:commandButton id="GuessButton"
        value="Guess"
        action="#{game.check}"
        disabled="#{game.number eq game.guess}"/>
    </div>
    <div>
        <h:commandButton id="RestartButton" value="Reset" action="#{game.reset}"
immediate="true" />
    </div>
</h:form>
</ui:define>
</ui:composition>
</html>

```

- ① Facelets is a templating language for JSF, here we are wrapping our page in a template which defines the header.

3#. Getting started with Web ...

- ② There are a number of messages which can be sent to the user, "Higher!", "Lower!" and "Correct!"
- ③ As the user guesses, the range of numbers they can guess gets smaller - this sentence changes to make sure they know what range to guess in.
- ④ This input field is bound to a Web Bean, using the value expression.
- ⑤ A range validator is used to make sure the user doesn't accidentally input a number outside of the range in which they can guess - if the validator wasn't here, the user might use up a guess on an out of range number.
- ⑥ And, of course, there must be a way for the user to send their guess to the server. Here we bind to an action method on the Web Bean.

```
##### 4 ## ##### #####, # ## # ## #####. ##, ### ##### ## ##### @Random ### #####:
```

```
@Target( { TYPE, METHOD, PARAMETER, FIELD })
@Retention(RUNTIME)
@Documented
@BindingType
public @interface Random {}
```

```
### # ## ## ## ##### ## ##### @MaxNumber ### #####:
```

```
@Target( { TYPE, METHOD, PARAMETER, FIELD })
@Retention(RUNTIME)
@Documented
@BindingType
public @interface MaxNumber {}
```

```
Generator ##### ### ### ## ### ##### # ### #####. ## ## ### ### ### ### ## ### #####:
```

```
@ApplicationScoped
public class Generator {

    private java.util.Random random = new java.util.Random( System.currentTimeMillis() );

    private int maxNumber = 100;

    java.util.Random getRandom()
    {
        return random;
    }
}
```

```
##### ## ### Web Bean# Game ## #####.
```

```
@Named ##### JSF ##### EL# ## bean# ### # ### #####. ##### ## ## ## ##  
## ## #####. ##, ## ##### ## ##### ##### ##, FacesMessage# #####.
```

```
import javax.annotation.PostConstruct;
import javax.faces.application.FacesMessage;
import javax.faces.context.FacesContext;
import javax.webbeans.AnnotationLiteral;
import javax.webbeans.Current;
import javax.webbeans.Initializer;
import javax.webbeans.Named;
import javax.webbeans.SessionScoped;
import javax.webbeans.manager.Manager;
```

25

```
public Game()
{
}

@Initializer
Game(@MaxNumber int maxNumber)
{
    this.biggest = maxNumber;
}

public int getNumber()
{
    return number;
}

public int getGuess()
{
    return guess;
}

public void setGuess(int guess)
{
    this.guess = guess;
}

public int getSmallest()
{
    return smallest;
}

public int getBiggest()
{
    return biggest;
}

public int getRemainingGuesses()
{
    return remainingGuesses;
}

public String check()
{
    if (guess
>number)
```

```

    {
        biggest = guess - 1;
    }
    if (guess < number)
    {
        smallest = guess + 1;
    }
    if (guess == number)
    {
        FacesContext.getCurrentInstance().addMessage(null, new FacesMessage("Correct!"));
    }
    remainingGuesses--;
    return null;
}

@PostConstruct
public void reset()
{
    this.smallest = 0;
    this.guess = 0;
    this.remainingGuesses = 10;
    this.number = manager.getInstanceByType(Integer.class, new AnnotationLiteral<Random
>0{});
}
}

```

3.4.1. The numberguess example in Tomcat

The numberguess for Tomcat differs in a couple of ways. Firstly, Web Beans should be deployed as a Web Application library in WEB-INF/lib. For your convenience we provide a single jar suitable for running Web Beans in any servlet container webbeans-servlet.jar.



##

Of course, you must also include JSF and EL, as well common annotations (jsr250-api.jar) which a JEE server includes by default.

Secondly, we need to explicitly specify the servlet listener (used to boot Web Beans, and control it's interaction with requests) in web.xml:

```
<listener>
```

```
<listener-class>org.jboss.webbeans.environment.servlet.Listener</listener-class>
</listener>
```

3.4.2. The numberguess example for Apache Wicket

Whilst JSR-299 specifies integration with Java ServerFaces, Web Beans allows you to inject into Wicket components, and also allows you to use a conversation context with Wicket. In this section, we'll walk you through the Wicket version of the numberguess example.



##

You may want to review the Wicket documentation at <http://wicket.apache.org/>.

Like the previous example, the Wicket WebBeans examples make use of the `webbeans-servlet` module. The use of the [Jetty servlet container](http://jetty.mortbay.org/) [http://jetty.mortbay.org/] is common in the Wicket community, and is chosen here as the runtime container in order to facilitate comparison between the standard Wicket examples and these examples, and also to show how the `webbeans-servlet` integration is not dependent upon Tomcat as the servlet container.


These examples make use of the Eclipse IDE; instructions are also given to deploy the application from the command line.

3.4.2.1. Creating the Eclipse project

To generate an Eclipse project from the example:

```
cd examples/wicket/numberguess
mvn -Pjetty eclipse:eclipse
```

Then, from eclipse, choose *File -> Import -> General -> Existing Projects into Workspace*, select the root directory of the numberguess example, and click finish. Note that if you do not intend to run the example with jetty from within eclipse, omit the `"-Pjetty"`. This will create a project in your workspace called `webbeans-wicket-numberguess`

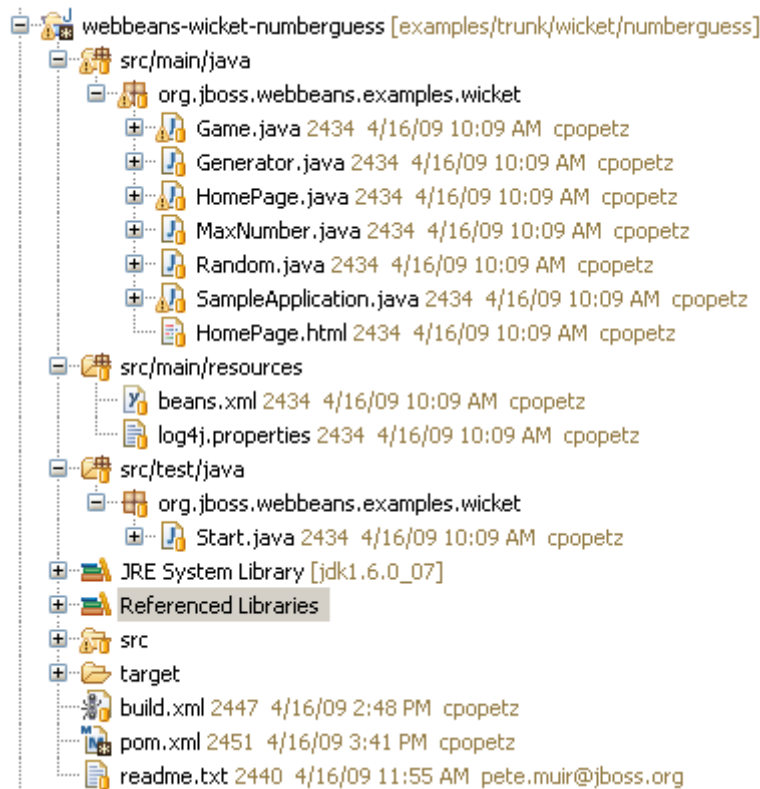

3.4.2.2. Running the example from Eclipse

This project follows the wicket-quickstart approach of creating an instance of Jetty in the Start class. So running the example is as simple as right-clicking on that Start class in `src/test/java` in the *Package Explorer* and choosing *Run as Java Application*. You should see console output related to Jetty starting up; then visit `http://localhost:8080` to view the app. To debug choose *Debug as Java Application*.

3.4.2.3. Running the example from the command line in JBoss AS or Tomcat

This example can also be deployed from the command line in a (similar to the other examples). Assuming you have set up the `build.properties` file in the `examples` directory to specify the location of JBoss AS or Tomcat, as previously described, you can run `ant deploy` from the `examples/wicket/numberguess` directory, and access the application at `http://localhost:8080/webbeans-numberguess-wicket`.

3.4.2.4. Understanding the code

JSF uses Unified EL expressions to bind view layer components in JSP or Facelet views to beans, Wicket defines its components in Java. The markup is plain html with a one-to-one mapping between html elements and the view components. All view logic, including binding of components to models and controlling the response of view actions, is handled in Java. The integration of Web Beans with Wicket takes advantage of the same binding annotations used in your business

3#. Getting started with Web ...

layer to provide injection into your WebPage subclass (or into other custom wicket component subclasses).

The code in the wicket numberguess example is very similar to the JSF-based numberguess example. The business layer is identical!

Differences are:

- Each wicket application must have a webApplication subclass, In our case, our application class is SampleApplication:

```
public class SampleApplication extends WebBeansApplication {
    @Override
    public Class getHomePage() {
        return HomePage.class;
    }
}
```

This class specifies which page wicket should treat as our home page, in our case, `HomePage.class`

- In `HomePage` we see typical wicket code to set up page elements. The bit that is interesting is the injection of the Game bean:

```
@Current Game game;
```

The Game bean is can then be used, for example, by the code for submitting a guess:

```
final Component guessButton = new AjaxButton("GuessButton") {
    protected void onSubmit(AjaxRequestTarget target, Form form) {
        if (game.check()) {
```



##

All injections may be serialized; actual storage of the bean is managed by JSR-299. Note that Wicket components, like the `HomePage` and its subcomponents, are *not* JSR-299 beans.

Wicket components allow injection, but they *cannot* use interceptors, decorators and lifecycle callbacks such as `@PostConstruct` or `@Initializer` methods.

- The example uses AJAX for processing of button events, and dynamically hides buttons that are no longer relevant, for example when the user has won the game.
- In order to activate wicket for this webapp, the Wicket filter is added to web.xml, and our application class is specified:

```
<filter>
  <filter-name>wicket.numberguess-example</filter-name>
  <filter-class>org.apache.wicket.protocol.http.WicketFilter</filter-class>
  <init-param>
    <param-name>applicationClassName</param-name>
    <param-value>org.jboss.webbeans.examples.wicket.SampleApplication</param-value>
  </init-param>
</filter>

<filter-mapping>
  <filter-name>wicket.numberguess-example</filter-name>
  <url-pattern>/*</url-pattern>
</filter-mapping>

<listener>
  <listener-class>org.jboss.webbeans.environment.servlet.Listener</listener-class>
</listener>
```

Note that the servlet listener is also added, as in the Tomcat example, in order to bootstrap Web Beans when Jetty starts, and to hook Web Beans into the Jetty servlet request and session lifecycles.

3.4.3. The numberguess example for Java SE with Swing

This example can be found in the `examples/se/numberguess` folder of the Web Beans distribution.

To run this example:

- Open a command line/terminal window in the `examples/se/numberguess` directory
- Ensure that Maven 2 is installed and in your PATH
- Ensure that the `JAVA_HOME` environment variable is pointing to your JDK installation
- execute the following command

```
mvn -Drun
```

3#. Getting started with Web ...

There is an empty `beans.xml` file in the root package (`src/main/resources/beans.xml`), which marks this application as a Web Beans application.

The game's main logic is located in `Game.java`. Here is the code for that class, highlighting the changes made from the web application version:

```
@ApplicationScoped
public class Game implements Serializable
{
    private int number;
    private int guess;
    private int smallest;

    @MaxNumber
    private int maxNumber;

    private int biggest;
    private int remainingGuesses;
    private boolean validNumberRange = true;

    @Current Generator rndGenerator;

    ...

    public boolean isValidNumberRange()
    {
        return validNumberRange;
    }

    public boolean isGameWon()
    {
        return guess == number;
    }

    public boolean isGameLost()
    {
        return guess != number && remainingGuesses <= 0;
    }

    public boolean check()
    {
        boolean result = false;
    }
}
```

1 2

3

```
    if ( checkNewNumberRangeIsValid() )  
    {  
        if ( guess > number )  
        {  
            biggest = guess - 1;  
        }  
  
        if ( guess < number )  
        {  
            smallest = guess + 1;  
        }  
  
        if ( guess == number )  
        {  
            result = true;  
        }  
  
        remainingGuesses--;  
    }  
  
    return result;  
}  
  
private boolean checkNewNumberRangeIsValid()  
{  
    return validNumberRange = ( ( guess >= smallest ) && ( guess <= biggest ) );  
}  
  
@PostConstruct  
public void reset()  
{  
    this.smallest = 0;  
    ...  
    this.number = rndGenerator.next();  
}  
}
```

- ❶ The bean is application scoped instead of session scoped, since an instance of the application represents a single 'session'.
- ❷ The bean is not named, since it doesn't need to be accessed via EL

3#. Getting started with Web ...

- ③ There is no JSF FacesContext to add messages to. Instead the Game class provides additional information about the state of the current game including:

- If the game has been won or lost
- If the most recent guess was invalid

This allows the Swing UI to query the state of the game, which it does indirectly via a class called MessageGenerator, in order to determine the appropriate messages to display to the user during the game.

- ④ Validation of user input is performed during the check() method, since there is no dedicated validation phase
- ⑤ The reset() method makes a call to the injected rndGenerator in order to get the random number at the start of each game. It cannot use manager.getInstanceByType(Integer.class, new AnnotationLiteral<Random>({})) as the JSF example does because there will not be any active contexts like there is during a JSF request.

The MessageGenerator class depends on the current instance of Game, and queries its state in order to determine the appropriate messages to provide as the prompt for the user's next guess and the response to the previous guess. The code for MessageGenerator is as follows:

```
public class MessageGenerator
{
    @Current Game game; ①

    public String getChallengeMessage() ②
    {
        StringBuilder challengeMsg = new StringBuilder( "I'm thinking of a number between " );
        challengeMsg.append( game.getSmallest() );
        challengeMsg.append( " and " );
        challengeMsg.append( game.getBiggest() );
        challengeMsg.append( ". Can you guess what it is?" );

        return challengeMsg.toString();
    }

    public String getResultMessage() ③
    {
        if ( game.isGameWon() )
        {
            return "You guess it! The number was " + game.getNumber();
        }
    }
}
```

```
} else if ( game.isGameLost() )
{
    return "You are fail! The number was " + game.getNumber();
} else if ( ! game.isValidNumberRange() )
{
    return "Invalid number range!";
} else if ( game.getRemainingGuesses() == Game.MAX_NUM_GUESSES )
{
    return "What is your first guess?";
} else
{
    String direction = null;

    if ( game.getGuess() < game.getNumber() )
    {
        direction = "Higher";
    } else
    {
        direction = "Lower";
    }

    return direction + "! You have " + game.getRemainingGuesses() + " guesses left.";
}
}
```

- ① The instance of Game for the application is injected here.
- ② The Game's state is interrogated to determine the appropriate challenge message.
- ③ And again to determine whether to congratulate, console or encourage the user to continue.

Finally we come to the NumberGuessFrame class which provides the Swing front end to our guessing game.

```
public class NumberGuessFrame extends javax.swing.JFrame
{
    private @Current Game game;
    private @Current MessageGenerator msgGenerator;

    public void start( @Observes @Deployed Manager manager )
    {
        java.awt.EventQueue.invokeLater( new Runnable()

```

①

②

③

```
{  
    public void run()  
    {  
        initComponents();  
        setVisible( true );  
    }  
});  
}
```

```
private void initComponents() {
```

4

```
    buttonPanel = new javax.swing.JPanel();  
    mainMsgPanel = new javax.swing.JPanel();  
    mainLabel = new javax.swing.JLabel();  
    messageLabel = new javax.swing.JLabel();  
    guessText = new javax.swing.JTextField();  
    ...  
    mainLabel.setText(msgGenerator.getChallengeMessage());  
    mainMsgPanel.add(mainLabel);  
  
    messageLabel.setText(msgGenerator.getResultMessage());  
    mainMsgPanel.add(messageLabel);  
    ...  
}
```

```
private void guessButtonActionPerformed( java.awt.event.ActionEvent evt )
```

5

```
{  
    int guess = Integer.parseInt(guessText.getText());  
  
    game.setGuess( guess );  
    game.check();  
    refreshUI();  
  
}
```

```
private void replayBtnActionPerformed( java.awt.event.ActionEvent evt )
```

6

```
{  
    game.reset();  
    refreshUI();  
}
```

```
private void refreshUI()
```

7

```
{
    mainLabel.setText( msgGenerator.getChallengeMessage() );
    messageLabel.setText( msgGenerator.getResultMessage() );
    guessText.setText( "" );
    guessesLeftBar.setValue( game.getRemainingGuesses() );
    guessText.requestFocus();
}

// swing components
private javax.swing.JPanel borderPanel;
...
private javax.swing.JButton replayBtn;
}
```

- 1 The injected instance of the game (logic and state).
- 2 The injected message generator for UI messages.
- 3 This application is started in the usual Web Beans SE way, by observing the `@Deployed` Manager event.
- 4 This method initialises all of the Swing components. Note the use of the `msgGenerator`.
- 5 `guessButtonActionPerformed` is called when the 'Guess' button is clicked, and it does the following:

- Gets the guess entered by the user and sets it as the current guess in the Game
 - Calls `game.check()` to validate and perform one 'turn' of the game
 - Calls `refreshUI`. If there were validation errors with the input, this will have been captured during `game.check()` and as such will be reflected in the messages returned by `MessageGenerator` and subsequently presented to the user. If there are no validation errors then the user will be told to guess again (higher or lower) or that the game has ended either in a win (correct guess) or a loss (ran out of guesses).
- 6 `replayBtnActionPerformed` simply calls `game.reset()` to start a new game and refreshes the messages in the UI.
- 7 `refreshUI` uses the `MessageGenerator` to update the messages to the user based on the current state of the Game.

3.5. ##

#####

```
## ## ear# ##, EJB# ##. ##, ## ## numberquess ## ## ##.
```

3#. Getting started with Web ...



##

EJB 3.1 # Jave EE 6# EJB# war# ##### ##, ### ## ## ## ## ###!

##, webbeans-translator-ear ### ## ear aggregator# #####. Maven# #### application.xml# #####:

```
<plugin>
  <groupId>
>org.apache.maven.plugins</groupId>
  <artifactId>
>maven-ear-plugin</artifactId>
  <configuration>
    <modules>
      <webModule>
        <groupId>
>org.jboss.webbeans.examples.translator</groupId>
        <artifactId>
>webbeans-translator-war</artifactId>
        <contextRoot>
>/webbeans-translator</contextRoot>
      </webModule>
    </modules>
  </configuration>
</plugin>
>
```

url (<http://localhost:8080/webbeans-translator>)# ##### ## ## ## ##.



##

Maven# ##### ## ## ## ##, META-INF/application.xml# #####:

```
<?xml version="1.0" encoding="UTF-8"?>
<application xmlns="http://java.sun.com/xml/ns/javaee"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://java.sun.com/xml/ns/javaee http://
java.sun.com/xml/ns/javaee/application_5.xsd"
  version="5">
  <display-name>
>webbeans-translator-ear</display-name>
```

```

<description
>Ear Example for the reference implementation of JSR 299: Web Beans</
description>

<module>
  <web>
    <web-uri
>webbeans-translator.war</web-uri>
    <context-root
>/webbeans-translator</context-root>
  </web>
</module>
<module>
  <ejb
>webbeans-translator.jar</ejb>
  </module>
</application
>

```

Next, let's look at the war. Just as in the numberguess example, we have a `faces-config.xml` (to enable Facelets) and a `web.xml` (to enable JSF) in `webContent/WEB-INF`.

facelet# #####. numberguess ##### ## ##### ##### ##### (##### ## ## ##### ##):

```

<h:form id="NumberGuessMain">

  <table>
    <tr align="center" style="font-weight: bold" >
      <td>
        Your text
      </td>
      <td>
        Translation
      </td>
    </tr>
    <tr>
      <td>
        <h:inputTextarea id="text" value="#{translator.text}" required="true" rows="5" cols="80" />
      </td>
      <td>
        <h:outputText value="#{translator.translatedText}" />
      </td>
    </tr>
  </table>

```

```
</table>
<div>
  <h:commandButton id="button" value="Translate" action="#{translator.translate}"/>
</div>

</h:form>
>
```

####, ##### #### #### ##### ## #### ##### ####.

```
#####, ejb ### webbeans-translator-ejb# #####. src/main/resources/META-INF## Web
Beans# ## ## ## ##### ##### ## ##### # web-beans.xml# #####.
```

```
## ##### ## ### ##### ## #####! ##### # ## ## beans# SentenceParser # TextTranslator#
## ### ##### beans# TranslatorControllerBean # SentenceTranslator# ####. ## Web Bean#
## ## ## ## ## #####, ## ### ## ## ## #####.
```

```
SentenceParser # TextTranslator# beans# ####, TextTranslator# ### ##### #####:
```

```
public class TextTranslator {
    private SentenceParser sentenceParser;
    private Translator sentenceTranslator;

    @Initializer
    TextTranslator(SentenceParser sentenceParser, Translator sentenceTranslator)
    {
        this.sentenceParser = sentenceParser;
        this.sentenceTranslator = sentenceTranslator;
    }
}
```

```
TextTranslator# #### ##### (## ##### ##### ##), ### ##### ## ## ##, # ##### #####!
```

#####, UI ## ##### ##, ## ##### ## ##### ##### ## #####. ## ## ##, ##, ## ## ##### #####
#####.

```
@Stateful
@RequestScoped
@Named("translator")
public class TranslatorControllerBean implements TranslatorController
{

    @Current TextTranslator translator;
```

```
bean# ##### ## ## #### ## getter # setter# #####.
```

#####, ## #### ## #### ##:

```
@Remove
public void remove()
{

}
```

Web Beans ##### bean# #### # ## #### ##### ##; #### ## ## ##### ##### ##.

That concludes our short tour of the Web Beans examples. For more on Web Beans , or to help out, please visit <http://www.seamframework.org/WebBeans/Development>.

##, #### ## ##, ## ##, ## #### #### ## ## ##### ## ##.

##

Web Beans# #### ## # ## ## ##### #####:

##:

```
public class Checkout {  
  
    private final ShoppingCart cart;  
  
    @Initializer  
    public Checkout(ShoppingCart cart) {  
        this.cart = cart;  
    }  
  
}
```

##:

```
public class Checkout {  
  
    private ShoppingCart cart;  
  
    @Initializer  
    void setShoppingCart(ShoppingCart cart) {  
        this.cart = cart;  
    }  
  
}
```

##:

```
public class Checkout {  
  
    private @Current ShoppingCart cart;  
  
}
```

Web Bean ##### ## ##### ## #### #####.

4#. ###

- ##, Web Bean ##### Web Bean ##### Web Bean ##### #####.
- #####, Web Bean ##### Web Bean# ### ## ### ## #####.
- # #, Web Bean ##### Web Bean# ## ### ### #####.
- ##### Web Bean# @PostConstruct ### #####.

EJB# Web Bean ##### ## EJB ##### ## ##### ## ### ##### ## EJB beans# ##### #####.

@Current# ##### ## ##### ## ## # ### ##### ##### ##### ## #####. ### ##
##, ## ### ## ## ## ## ## ##### ##. ### ## ## ## ## ## ##, ##
##.

#####:

```
@Produces Checkout createCheckout(ShoppingCart cart) {  
    return new Checkout(cart);  
}
```

(9#. ### ## #####), ## ## # ### ## ## ## ## ## #####.

Web Beans ### ## ## ## ##### ## ## ##, Web Bean ##### ## ## ## ## Web
Bean# ### # ## ## ##. ### ##### ## ## ## ##, ## ## ##, ## ## #####. ##
##, ##### ## ## ## ##### Web Bean# ##### ## ##,
UnsatisfiedDependencyException ## AmbiguousDependencyException ## ##.

Web Beans# ##### ## API ### ##### ## #####:

- ## ##### ## ##### ## ## ## ## ## ##,
- ##### ## ## ##### ## ## ## ## ## ## ## ## ## ## ## ## ##.
- ### API ### ##### ## ## ## ## ## ## ## ## ## API ### ##### ##.

Web Beans ##### ## Web Bean# ### ## ## ## ##.

4.1. ###

API ### ##### ## ## Web Bean# ## ##, ## ## ## ##### ## ## Web Bean# ##### # ##
#####. ## ##, PaymentProcessor# # ## ## ## # #####:

```
@PayByCheque  
public class ChequePaymentProcessor implements PaymentProcessor {  
    public void process(Payment payment) { ... }  
}
```

```
@PayByCreditCard
public class CreditCardPaymentProcessor implements PaymentProcessor {
    public void process(Payment payment) { ... }
}
```

```
### @PayByCheque # @PayByCreditCard# ### #####:
```

```
@Retention(RUNTIME)
@Target({TYPE, METHOD, FIELD, PARAMETER})
@BindingType
public @interface PayByCheque {}
```

```
@Retention(RUNTIME)
@Target({TYPE, METHOD, FIELD, PARAMETER})
@BindingType
public @interface PayByCreditCard {}
```

```
##### Web Bean ##### ### ##### ##### ### Web Bean# ##### ## ## #####.
```

```
## ## ##:
```

```
@PayByCheque PaymentProcessor chequePaymentProcessor;
@PayByCreditCard PaymentProcessor creditCardPaymentProcessor;
```

```
### ## ## ##:
```

```
@Initializer
public void setPaymentProcessors(@PayByCheque PaymentProcessor
    chequePaymentProcessor,
    @PayByCreditCard PaymentProcessor creditCardPaymentProcessor) {
    this.chequePaymentProcessor = chequePaymentProcessor;
    this.creditCardPaymentProcessor = creditCardPaymentProcessor;
}
```

```
### ## ##:
```

```
@Initializer
```

```
public Checkout(@PayByCheque PaymentProcessor chequePaymentProcessor,
    @PayByCreditCard PaymentProcessor creditCardPaymentProcessor) {
    this.chequePaymentProcessor = chequePaymentProcessor;
    this.creditCardPaymentProcessor = creditCardPaymentProcessor;
}
```

4.1.1. ### ####

##:

```
@Retention(RUNTIME)
@Target({TYPE, METHOD, FIELD, PARAMETER})
@BindingType
public @interface PayBy {
    PaymentType value();
}
```

##, ## ## #####:

```
@PayBy(CHEQUE) PaymentProcessor chequePaymentProcessor;
@PayBy(CREDIT_CARD) PaymentProcessor creditCardPaymentProcessor;
```

Web Bean ##### @NonBinding #### ##### ## ## ## ## ## ##.

4.1.2. ### #####

##:

```
@Asynchronous @PayByCheque PaymentProcessor paymentProcessor
```

##, ## #### ##### ## Web Bean# #### # ##.

4.1.3. ### ##### # ###

##:

```
@Produces
@Asynchronous @PayByCheque
PaymentProcessor createAsyncPaymentProcessor(@PayByCheque PaymentProcessor
processor) {
```

```
return new AsynchronousPaymentProcessor(processor);
}
```

4.1.4. ###

```
Web Beans# ##### ### ### ##### ## Web Bean## ## ## ##### ## ##### ##### @Current ### ###
#####.
```

```
@Current# ##### ## ### ##### ### # ## #####:
```

- ### ### ### ## ## ##### ## ##### ## #####
- ### ### ### ### ## ### ### ## Web Bean##

4.2. ##

```
## Web Beans# ## ### #####. ### ## ### ##### ## ### ##### ##### ## Web Beans ### #####.
```

```
## ##, @Mock## ## #### ## ## ##, ## ##### ##### ## ## ## ## ## ## ## ## Web Beans# #####:
```

```
@Retention(RUNTIME)
@Target({TYPE, METHOD})
@DeploymentType
public @interface Mock {}
```

```
## ### ##### ## ### ##### ## ##### ## Web Bean# ### #####:
```

```
public class ExternalPaymentProcessor {  
  
    public void process(Payment p) {  
        ...  
    }  
}
```

Web Bean# ## ### ##### ##### ## #####, ## ### ## ## @Production# ## ##.

#####. ### ## ### ## # #####:

```
@Mock
public class MockPaymentProcessor implements PaymentProcessor {
```

```
@Override
public void process(Payment p) {
    p.setSuccessful(true);
}
}
```

Web Bean ##### ## #### ## #### #### ## #### #####?

4.2.1. ## ##

```
Web Beans# # ## ### ## ### #####: @Production # @Standard. ##### ##### ##### ### ## ###
## Web Beans ## #####. web-beans.xml## ### ##### ## ##### ##### ## ## ### ### # #####.
```

```
### ## #####, ### ##### ### #, ## @Mock ### ##### ##:
```

```
<WebBeans>
  <Deploy>
    <Standard/>
    <Production/>
    <test:Mock/>
  </Deploy>
</WebBeans>
>
```

```
## Web Bean ##### @Production, @Standard, @Mock ##### ## Web Beans# ## # ##### ##.
```

```
@Standard ## ### Web Beans ### ## ### ## Web Beans#### #####. ### Web Beans## ## ###
# ### ## ##### # #####.
```

```
@Production ## ### ## ### ##### ## Web Beans# ## ### ## ##### ##### # #####.
```

4.2.2. ## ## ##

```
### #####, Web Bean #### ## ## ExternalPaymentProcessor ## MockPaymentProcessor
# # ### ## ##### ## ### ## ##. ##### ## ## ## ## # ## ## ## ## ##;
```

@Current PaymentProcessor paymentProcessor

```
PaymentProcessor ### ##### # ## Web Beans# #####. ## ##### ### ##### ### ##-##### ####,
##### ## ## ### ##### ### # ###. ##### ### ## ## ### #####!
```

```
### ### ##### ## # ## # # ####.# # ## # web-beans.xml# ##### ##  
#####.## @Mock@Production## #### ## ## ##.
```


4#. ###

Web Bean### ## ## ## ## Web Bean# ## ##. ## ##
##. ##, ##### ## Web Bean ##### ## ##
Web Bean# ## ##### ###!

###, Web Bean# ## ## @Dependent# ## ## #, Web Bean ##### ## ## ## ## Web
Bean## ## ## ##. ## ##### ## ## ## Web Bean ##### ## ##### ## ##
##. ## ##### Web Beans# ## ## Web Beans# ##### ## ## ## ## ##
##.

Java ### ## ##, ## Java ### Web Bean ##### ## ## # ##. ##, ## ## ## ## # ##
Web Bean ##### UnproxyableDependencyException# ## ##.

Java ### Web Bean ##### ## ## # ##:

- final### ##### ## final ### ## ##,
- ## ## ## ## ## ## ##,
- ## # ## ##

UnproxyableDependencyException# ##### ##. ##### ## ## ## ## ##, #####
#####, ## Web Bean# ## @Dependent# #####.

4.5. ##### lookup# ## Web Bean

Manager ##### ## ## # ##:

```
@Current Manager manager;
```

Manager ### ##### Web Bean ##### ## ## ## ##.

```
PaymentProcessor p = manager.getInstanceByType(PaymentProcessor.class);
```

AnnotationLiteral ### ##### ## # ##, ## ## Java## ##### ##
##.

```
PaymentProcessor p = manager.getInstanceByType(PaymentProcessor.class,  
new AnnotationLiteral<CreditCard  
>());
```

##, AnnotationLiteral# ## ##### ## # ## # ## named ## ##
##:

```
## ## ##, @Resource, @EJB #  
@PersistenceContext
```

```
abstract class CreditCardBinding  
    extends AnnotationLiteral<CreditCard  
>  
    implements CreditCard {}
```

```
PaymentProcessor p = manager.getInstanceByType(PaymentProcessor.class,  
    new CreditCardBinding() {  
        public void value() { return paymentType; }  
    });
```

4.6. ## ## ##, @Resource, @EJB # @PersistenceContext

Enterprise Web Beans# EJB #### ## #### ## ## ## #### #: @PostConstruct, @PreDestroy,
@PrePassivate # @PostActivate.

Web Beans# @PostConstruct # @PreDestroy ## #### #.

Web Beans# Java EE #### ##, EJB # JPA #### ##### ##
@Resource, @EJB # @PersistenceContext# #### ## #####. ## Web Beans#
@PersistenceContext(type=EXTENDED)# #### ##### #.

@PostConstruct #### ## ##### ## ## #.

4.7. InjectionPoint

@Dependent #### ## Web Beans # ## ## ## ## #### ## ## #### ## ##
##. #:

- Logger # ## ##### ## ## ## #.
- ## #### HTTP ## ## ## ## ## ## ## ## ## ## #.
- EL #### ## (expression evaluation) #### ## ## ## ## #.

@Dependent #### ## Web Bean# InjectionPoint ##### ## ## ## ## #.

#####. #### ## ## ## ##### #:

```
Logger log = Logger.getLogger(MyClass.class.getName());
```

JDK Logger# ##### #:

```
class LogFactory {
```

```
@Produces Logger createLogger(InjectionPoint injectionPoint) {
    return Logger.getLogger(injectionPoint.getMember().getDeclaringClass().getName());
}

}
```

##:

```
@Current Logger log;
```

? ##### ## # ## ## ##. HTTP ## ## ##, ## ## ## ##:

```
@BindingType
@Retention(RUNTIME)
@Target({TYPE, METHOD, FIELD, PARAMETER})
public @interface HttpParam {
    @NonBinding public String value();
}
```

##:

```
@HttpParam("username") String username;
@HttpParam("password") String password;
```

##:

```
class HttpParams
```

```
@Produces @HttpParam("")
String getParamValue(ServletRequest request, InjectionPoint ip) {
    return request.getParameter(ip.getAnnotation(HttpParam.class).value());
}

}
```

HttpParam ##### value() #####@NonBinding.# ##### Web Bean ##### ## ## ## ##.

Web Bean ##### InjectionPoint ##### ## ## Web Bean# #####:

```
public interface InjectionPoint {  
    public Object getInstance();  
    public Bean<?> getBean();  
    public Member getMember():  
    public <T extends Annotation  
> T getAnnotation(Class<T  
> annotation);  
    public Set<T extends Annotation  
> getAnnotations();  
}
```

#####

#####. Web Bean# ### Web Bean #####. ## ##
Web Bean ##### ## # ##. Web Beans ### ## ## ## ##:

- ### ## Web Bean# ### ##### ## ##
- ### ## Web Bean# ## ##### ## ##
- ### ## ## ## ## Web Bean ##### ## ##

##, Web Bean ## ## ## ##, currentUser, ### HttpSession ##### ## Web Beans#
currentUser #####. ### ##### currentUser# ##### ## # ##### ## ##
#####.

5.1. ##

Web Beans# *extensible context model*#####. ### ## ## ##### ## ## ## ## # ##:

```
@Retention(RUNTIME)
@Target({TYPE, METHOD})
@ScopeType
public @interface ClusterScoped {}
```

##. ### ## ## ## ##, ### ##### Context ### ##### ##! Context ###
##.

Web Bean ### ##### ## Web Bean ## ##### ## ## ##### ## # ##:

```
@ClusterScoped
public class SecondLevelCache { ... }
```

##, Web Beans# ### ## # ## ## ##.

5.2. ###

Web Beans# # ## ## ##:

- @RequestScoped
- @SessionScoped
- @ApplicationScoped

- @ConversationScoped

Web Beans# ##### # ##### ##:

- servlet #### ## ##, ## # ##### ## #####

- JSF #### ## ##### ## #####.

##:

- EJB ## ## ##

- EJB ## ##

- ### ## ## ## ##

- # ## ##

Web Bean# ##### ##, ##### ContextNotActiveException# Web Bean ##### ## ## ##.

Java EE ##### ##, ## ## ##. ## # # ## ## ## ##.

5.3. #####

Web Beans ##### ## ## ## ## ## ## ## ## ## ##, ## ## ## ## ##. ##, ## ## ## ## ## ## ## ##:

- ##### ## ##### ## ##

- JSF ##### ## ## # ## ## ## ## ##.

##, ## ## ##. ##### ##### ## ## ## ## ## ## ##. ##### ## ## ## ## ## ## ##, ## ## ## ## ##.

JSF ## # ##### ##. ## ## ## ## ## ## ##. ##### ## ## ## ## ## ## ## # ##, ## ## ## ## ## ##.

5.3.1. ##### ##

Web Beans# JSF ##### ## ##### ## ## ## ## ## Web Bean# #####. ## Web Bean# ## ## ## # ##:

@Current Conversation conversation;

##, ##### ## ## begin() ## ##. ## ## ## ## ## ## ## ## ## ## ## ## ## ## ## end()# ##.

##, ##### ## Web Bean# ## # ##### ##:

```
@ConversationScoped @Stateful
public class OrderBuilder {

    private Order order;
    private @Current Conversation conversation;
    private @PersistenceContext(type=EXTENDED) EntityManager em;

    @Produces public Order getOrder() {
        return order;
    }

    public Order createOrder() {
        order = new Order();
        conversation.begin();
        return order;
    }

    public void addLineItem(Product product, int quantity) {
        order.add( new LineItem(product, quantity) );
    }

    public void saveOrder(Order order) {
        em.persist(order);
        conversation.end();
    }

    @Remove
    public void destroy() {}

}
```

Web Bean# Conversation API# ##### ## ## # #####. ### ## ## Web Beans# ## ## ##
##.

5.3.2. #####

JSF faces ## (JSF ## ##)# ## #####. ## ##, ### ## ##### ## ## non-faces
##.

non-faces ### ## ##### ## # #####. Web Beans
cid ## ## ## ##. ##### ## ##### Conversation ##### ## # ##,
conversation### Web Beans ### ##.

5#. ## #

###, ### ## #### ##### ##

```
<a href="/addProduct.jsp?cid=#{conversation.id}"
>Add Product</a
>
```

Web Bean ##### ## ##### ## ##, ##### ## ##### ## ##. ## "####" ## ##
POST-then-redirect ## ## ##### ##. ## ## Web Bean ##### ##
URL# ## ## ## ## ##.

5.3.3. ##### ##

Web Bean ##### ## ## ## ## ## ## ## ## ## ##. Web Bean ##
Web Beans ## ## ##### ##. ## ## ##### ## ##
##.

Conversation ## ## ## ## ## ##. ## Web Bean ##### ## ##, ## ## ##### ##
##.

```
conversation.setTimeout(timeoutInMillis);
```

5.4. dependent pseudo-scope

##, Web Beans# *dependent pseudo-scope*## ## ## ##. ## ## ## ## ##
Web Bean# ## ## ##.

##, Web Bean## @Dependent ## ## ##:

```
public class Calculator { ... }
```

Web Bean# ## ## ## Web Bean# ## #, ## Web Bean# ## ##### ## Web Bean# ##
##. ## Web Beans# ##### ## Web Bean ##### ## ## ## ## ##. ## ##
Web Bean ##### ## ## ##.

Web Bean ##### ##.

EJB bean# ## ## ## ## Web Bean## ##### ##, Web Beans# Java ### ## EJB bean#
##.

5.4.1. @New

@New ### ##### ## ##### Web Bean# ## ## #####. ### ## ## ## ##### ##:

```
@New Calculator calculator;
```

```
@Dependent ##, @New ### ##, Calculator API ##, Calculator ## ###, @Standard ## ### ##  
Web Bean# ##### #####.
```

```
Calculator# ## ## ### ## ## ##### ## ## #####, #:
```

```
@ConversationScoped  
public class Calculator { ... }
```

```
### ## ### ## Calculator ##### ##::
```

```
public class PaymentCalc {  
  
    @Current Calculator calculator;  
    @New Calculator newCalculator;  
  
}
```

```
calculator ##### Calculator# ##### ## ##### #####. newCalculator ##### PaymentCalc  
##### ## ### ## Calculator# ### ##### ##### ##::.
```

```
## ### ### ## ### ### # ### ##### #####.
```

##

Web Bean ##### ##### ## ##### ## ## # ## # ## ## ## ## # ## ##. Web Beans#
Web Beans ##### ##### ## ## ## ## #####. (12#. XML# ##### Web Beans ## ## ## ##
#####.)

spec# ##:

A Web Beans producer method acts as a source of objects to be injected, where:

- the objects to be injected are not required to be instances of Web Beans,
- the concrete type of the objects to be injected may vary at runtime or
- the objects require some custom initialization that is not performed by the Web Bean constructor

For example, producer methods let us:

- expose a JPA entity as a Web Bean,
- expose any JDK class as a Web Bean,
- define multiple Web Beans, with different scopes or initialization, for the same implementation class, or
- vary the implementation of an API type at runtime.

In particular, producer methods let us use runtime polymorphism with Web Beans. As we've seen, deployment types are a powerful solution to the problem of deployment-time polymorphism. But once the system is deployed, the Web Bean implementation is fixed. A producer method has no such limitation:

```
@SessionScoped
public class Preferences {

    private PaymentStrategyType paymentStrategy;

    ...

    @Produces @Preferred
    public PaymentStrategy getPaymentStrategy() {
        switch (paymentStrategy) {
            case CREDIT_CARD: return new CreditCardPaymentStrategy();
            case CHEQUE: return new ChequePaymentStrategy();
        }
    }
}
```

```
        case PAYPAL: return new PayPalPaymentStrategy();
        default: return null;
    }
}
```

Consider an injection point:

```
@Preferred PaymentStrategy paymentStrat;
```

This injection point has the same type and binding annotations as the producer method, so it resolves to the producer method using the usual Web Beans injection rules. The producer method will be called by the Web Bean manager to obtain an instance to service this injection point.

6.1. ###

```
### ### ### @Dependent# ## ####, # # Web Bean #### ## ## ## ## ## ## ## ## ##
### ## # ## ####. ###, ### ## ## ## PaymentStrategy ### #### ## # ##.
```

```
### ## ####, @SessionScoped #### ## ## # ##.
```

```
@Produces @Preferred @SessionScoped
public PaymentStrategy getPaymentStrategy() {
    ...
}
```

```
## ## ## ####, ### PaymentStrategy# ## ####. ### ## ## ## ## ## ##.
```

6.2. ### ####

```
## ## # ## ## # ##. CreditCardPaymentStrategy ### Java new #### ####.
##### ## ## ##### ## ## ## ## ## ## ## ##.
```

```
### ## ## ##, ### ## ## ## ## Web Bean #### ## # ##:
```

```
@Produces @Preferred @SessionScoped
public PaymentStrategy getPaymentStrategy(CreditCardPaymentStrategy ccps,
                                           ChequePaymentStrategy cps,
                                           PayPalPaymentStrategy ppps) {
    switch (paymentStrategy) {
        case CREDIT_CARD: return ccps;
```

```
case CHEQUE: return cps;
case PAYPAL: return ppps;
default: return null;
}
```

```
CreditCardPaymentStrategy# ## ## Web Bean## ### ##? ## ## ## ## ## ## ## ##
## ## "#####" ##. ## #####! ## ## ## ## ## # Web Bean ##### ## #####, ## ## ##
## ## "## #" ##. ## ## Web Bean ##### ## ##### ##### ## ## Web Bean ##### ## ##
## ## ##### #####!
```

```
#### ## ## # ## # ## ## ##. CreditCardPaymentStrategy ## ## ## # ##, Web Bean#
##### ## # ## ##. ## ## ## ## ## ## @Dependent ## @RequestScoped# ##### ##.
```

@New ### ##### ##### #####.

6.3. ### ## @New

#####:

```
@Produces @Preferred @SessionScoped
public PaymentStrategy getPaymentStrategy(@New CreditCardPaymentStrategy ccps,
                                           @New ChequePaymentStrategy cps,
                                           @New PayPalPaymentStrategy ppps) {
    switch (paymentStrategy) {
        case CREDIT_CARD: return ccps;
        case CHEQUE: return cps;
        case PAYPAL: return ppps;
        default: return null;
    }
}
```

```
CreditCardPaymentStrategy# ### ### ##### #####, ### ##### #####, ### ### # ### #, #####  
## ##### #####. ### ### # ### Preferences ### ### # ## ##### #####.
```

II. ë###ì#`í###ê²# ì#°ê²°ë## (loosely-coupled) ë°©ì###ì## ì½#ë## ê°#ë°#

Web Beans# ### ## ### ## (loose coupling)###. ### ### ## ### ##### ## ### ### ## ### ###:

- ## ### ## ## #####
- ### ### ### #####
- ##### ##### ## Web Bean ## ### ## #####.

#####. ##### ### API ##### # ###, ## ### ##### ### # #####. ### ##### ## ## ### ##### # ## ## ##### ##.

#####. ##### # ### ##### ## ### ### # #####. ## ### ### ##### ### ## ### ##### ## ##### ##### ## #####. Web Beans# ## ### ##### ## ### ##### ## ### #####.

Web Beans# ### ## ### ##### ## # ## ### ### ### #####:

- ##### ##### ##### ## ## ## ## #####
- ##### ## ##### ## ## ##### ## ## # #####.
- ### ### ### ##### ## ### ##### ## #####.

#####.

####

Web Beans# EJB 3.0# ## ##### ## #####, # ## ##### ## #####:

- Web Bean## ## beans ## ## ##### ## # #####.
- Web Beans# Web Beans# ##### ##### ## ## ## ##### ## ## ##### ##.

EJB ### # ### ##### ## #####:

- ##### ## #####
- ##### ## #####

Web Bean ##### ## Web Bean ## ## #####:

```
public class TransactionInterceptor {  
    @AroundInvoke public Object manageTransaction(InvocationContext ctx) { ... }  
}
```

#####:

```
public class DependencyInjectionInterceptor {  
    @PostConstruct public void injectDependencies(InvocationContext ctx) { ... }  
}
```

#####.

7.1.

Web Beans# ### ##### # ### ##### ## #####. ##### ## ## ## Web Beans# ### ## ## #####
##:

```
@InterceptorBindingType  
@Target({METHOD, TYPE})  
@Retention(RUNTIME)  
public @interface Transactional {}
```

ShoppingCart# ##### ##### ## ## # #####:

```
@Transactional
public class ShoppingCart { ... }
```

```
### ##, ### ## ## ##### ##### ## # #####:
```

```
public class ShoppingCart {
    @Transactional public void checkout() { ... }
}
```

7.2. ####

```
## ## ##### ## ##### ## ## ##### ## ##### ##### ##. ## # ## ## EJB ##### ## ##
@Interceptor # @Transactional# ##### ##.
```

```
@Transactional @Interceptor
public class TransactionInterceptor {
    @AroundInvoke public Object manageTransaction(InvocationContext ctx) { ... }
}
```

```
## Web Beans ##### ## Web Beans##, ### ## ##### ## ## ## ## ## # #####.
```

```
@ApplicationScoped @Transactional @Interceptor
public class TransactionInterceptor {

    @Resource Transaction transaction;

    @AroundInvoke public Object manageTransaction(InvocationContext ctx) { ... }

}
```

```
## ##### ## ##### ## ## ## ## # #####.
```

7.3. ####

```
##### web-beans.xml## ##### ##### ##.
```

```
<Interceptors>
  <tx:TransactionInterceptor/>
```

```
<Interceptors>
  <sx:SecurityInterceptor/>
  <tx:TransactionInterceptor/>
</Interceptors>
>
```

```
@InterceptorBindingType
@Target({METHOD, TYPE})
@Retention(RUNTIME)
public @interface Transactional {
    boolean requiresNew() default false;
}
```

```
@Transactional(requiresNew=true) @Interceptor
public class RequiresNewTransactionInterceptor {
    @AroundInvoke public Object manageTransaction(InvocationContext ctx) { ... }
}
```

69

```
@Transactional(requiresNew=true)
public class ShoppingCart { ... }
```

```
# ## ##### ## ##### ##### # requiresNew ## ##### ## ##### ## ##### @NonBinding #####
### # #####:
```

```
@InterceptorBindingType
@Target({METHOD, TYPE})
@Retention(RUNTIME)
public @interface Secure {
    @NonBinding String[] rolesAllowed() default {};
}
```

7.5.

```
##### ##### ##### Web Bean# ##### ## ##### ## ##### ## #####. ## ##, ### ## ## ## ##### ##
Web Bean# TransactionInterceptor # SecurityInterceptor# ##### # #####:
```

```
@Secure(rolesAllowed="admin") @Transactional
public class ShoppingCart { ... }
```

```
### ## ## ## ##### ## ##### ## ## ## ## ## ## ## ## ##:
```

```
@Transactional @Secure @Interceptor
public class TransactionalSecureInterceptor { ... }
```

```
# # ## ##### ## ## ## # ## ## ## checkout() ## ##### # #####:
```

```
public class ShoppingCart {
    @Transactional @Secure public void checkout() { ... }
}
```

```
@Secure
public class ShoppingCart {
    @Transactional public void checkout() { ... }
}
```


7#.

- ##### ### ##### ##### #####
- ##### ### ## ##### # #####,
- ##### ### ##### # ## ### ### ### ##### ## #####.

Web Beans ## ##### ### ## #####.

```
##### ## ##### ## ## ## ### ##### ##### ##### #####. ##### ## Java ## ### ### # #####. ## #####
## # ### ## ### ### ##### #####. ###, ## ##### ### ##### ### ##### #####. ###, #####
##### ## ### ##### ## ##### ##### #####.
```

```
### #### ## #####. ##### ## Java ##### #### ## ####, ##### ## ## #### #####.
## ## ##### ## ##### ## ##### ## ## ####. ## ##### ##### ## ## ##. #####
## ## ## ##### ## ## ## # #####.
```

```
public interface Account {  
    public BigDecimal getBalance();  
    public User getOwner();  
    public void withdraw(BigDecimal amount);  
    public void deposit(BigDecimal amount);  
}
```

```
##### ## Web Bean## ### ##### @Decorator# #####.
```

73

```
>0){
    em.persist( new LoggedDeposit(amount) );
}
}
```

Web Beans# ##, ##### ## ## ##. ##### ## ## ## ## ## ## ## ## ## ##, # ## ## ## ## ##.

8.1. ##

##. ## ## ## # ## ## ## Web Beans# ##### ## ## ##. ## ## ## ## ## ## ## ## ## ## ## ## ## ##.

Account# ##### ## Web Beans# ##### ## ##.

```
@Decorates Account account;
```

##. # # ## ## ## ## ## Web Beans# ##### ##.

```
@Decorates @Foreign Account account;
```

Web Bean## #####:

- API ## ## ## ## ##
- ## ## ## ## ## ## ##

##, ##### InvocationContext.proceed()# ##### ## ## ## ##.

8.2. #####

web-beans.xml## ##### ## ##.

```
<Decorators>
  <myapp:LargeTransactionDecorator/>
</Decorators>
>
```

<Interceptors> ### ##### ## ## ## ## ## ## ## ##.

- ## ##### ## ##### ## ##### ## ## # ## #####, ##### ## #####
- ### ##### ##### ## ## ##### ##.

#####.

###

Web Beans ### ## ### Web Beans# ## ## ## ##### ## ##### ###. ### ##### ##### ## # Web Bean ##### ## ### ##### #####. ### ##### ##### #####/##### ##### ##### ##, # ## ## ## #####:

- ### ##### ##### ## ##### ## ###; ##### ##### ##### ## #####.
- ##### "####" ### ##### ## ## ## ## #####.
- ##### ## ##### ## ## ##### ## ## ## ## ##### ## # #####.

9.1. ###

@Observes# ##### Web Bean #####.

```
public void onAnyDocumentEvent(@Observes Document document) { ... }
```

#####. ### ## ## ## ##### ## #####. ### ## Web Beans ###
"####" # ## ##. ### ## ## ##### ## ##, ## ## ## ##### #####.

```
@BindingType  
@Target({PARAMETER, FIELD})  
@Retention(RUNTIME)  
public @interface Updated { ... }
```

#####:

```
public void afterDocumentUpdate(@Observes @Updated Document document) { ... }
```

##. ### ##### ##### ##
##, ### ## ## ## ##### ## ## ##.

##, ## ##### Web Beans ## ## ## ## ##### ## #####:

```
public void afterDocumentUpdate(@Observes @Updated Document document, User user) { ... }
```

9.2. ###

#####:

```
@Observable Event<Document>  
> documentEvent
```

```
@observable ##### @Dependent ## # @Standard ## ##, Web Bean ##### ## ##### Web  
Bean# #####.
```

```
##### Event ##### fire() ### ##### ##, ### ## #####:
```

```
documentEvent.fire(document);
```

```
### ## ##### ## ##### ## ## ## ## Java ##### ## # ##. ##### ## ## ## ##  
### ## #####:
```

- ### ## ## # ## ## ## ## ##,
- ### ## ## #####.

```
Web Bean ##### ## ## ## ##, ### ## ## ## ## ##. ### ## ## ## ## # ##, Web  
Bean ##### ## ## ## ## ## fire() ### ## ## ## ##.
```

```
"###"### ##, ### ## ## ## ## fire() ### ## ##:
```

```
documentEvent.fire( document, new AnnotationLiteral<Updated  
>{} );
```

```
Java## ##### ## ## ## AnnotationLiteral# ## ## ##### # ## ##.
```

```
##### ## ## ## #####:
```

- ### ## ## # ## ## ## ## ##,
- ## fire()### ## ## ## ## ## ## ## ##.

```
## ##### ## ## ## ## ## ## ## ## ## # # ##:
```

```
@Observable @Updated Event<Document>  
> documentUpdatedEvent
```

```
### Event ##### ## ## ## ## ##### ## ## ##. ##### ## ## ## ##:
```

- #### ## # ## ## ## ## ##,
- ## ## ## ## ## ## ## ## fire()# ## ## ## ## ## ## ## ## ## ##.

9.3. ####

##. ##### Observer ##### observe() ## ## ## ## ## ## ## ## # ##.

```
documentEvent.observe( new Observer<Document
>() { public void notify(Document doc) { ... } });
```

observe() ## ## ## ## ## ## ## ## # ##:

```
documentEvent.observe( new Observer<Document
>() { public void notify(Document doc) { ... } },
                        new AnnotationLiteral<Updated
>{} );
```

9.4. ### ###

##:

```
@BindingType
@Target({PARAMETER, FIELD})
@Retention(RUNTIME)
public @interface Role {
    RoleType value();
}
```

##:

```
public void adminLoggedIn(@Observes @Role(ADMIN) LoggedIn event) { ... }
```

##:

```
@Observable @Role(ADMIN) Event<LoggedIn
```

```
> LoggedInEvent;}}
```

```
## #####, ### ### ## ## ## ## ## ## ## ## ## ##. AnnotationLiteral# ### #####  
##### ## ## ##:
```

```
abstract class RoleBinding  
    extends AnnotationLiteral<Role  
>  
    implements Role {}
```

```
### ##### ## ## ## ## ## ## ## ## ## fire()# #####:
```

```
documentEvent.fire( document, new RoleBinding() { public void value() { return user.getRole();  
} });
```

9.5. ## ###

```
### ### ### ### # #####, #:
```

```
@Observable @Blog Event<Document  
> blogEvent;  
...  
if (document.isBlog()) blogEvent.fire(document, new AnnotationLiteral<Updated  
>({});
```

```
### ##### ## ## ## ## ## ## ## ## ## ##, ### ## ## ## ## ## ## ## ##:
```

```
public void afterBlogUpdate(@Observes @Updated @Blog Document document) { ... }
```

```
public void afterDocumentUpdate(@Observes @Updated Document document) { ... }
```

```
public void onAnyBlogEvent(@Observes @Blog Document document) { ... }
```

```
public void onAnyDocumentEvent(@Observes Document document) { ... }}
```


Product# ## # ##### Web Bean# ##### ### # #####, #:

```
@Stateless
public class ProductManager {

    @PersistenceContext EntityManager em;
    @Observable Event<Product
> productEvent;

    public void delete(Product product) {
        em.delete(product);
        productEvent.fire(product, new AnnotationLiteral<Deleted
>());
    }

    public void persist(Product product) {
        em.persist(product);
        productEvent.fire(product, new AnnotationLiteral<Created
>());
    }

    ...

}
```

Catalog# ##### ##### ### ## ##### ##### # #####:

```
@ApplicationScoped @Singleton
public class Catalog {

    ...

    void addProduct(@AfterTransactionSuccess @Observes @Created Product product) {
        products.add(product);
    }

    void addProduct(@AfterTransactionSuccess @Observes @Deleted Product product) {
        products.remove(product);
    }

}
```

III. ê°#ì#¥ ê°#í## í##ì#´í## (strong typing) ì#¬ì#©

Web Beans# #### ## #### ## #### (strong typing)####. Web Bean# ####, ####, ####### ## ## # ####
Java ## #### ## #####.

Web Beans ##### ## ## #### ## # ####. # #### ##### # "### ## ##"#### ## # #### ## ####
#####!

IDE# ## ## ## ## ##, ##, ##### ## # ####. #### ## #### ## ####. ## ##
##, ##, ##### ##### # ## #### ## #### ## #### ## # ####.

Web Beans# #### ## ## ##### ##### ##. #:

- @Asynchronous,
- @Mock,
- @Secure ##
- @Updated,

##

- asyncPaymentProcessor,
- mockPaymentProcessor,
- SecurityInterceptor ##
- DocumentUpdatedEvent.

####. ## ##### ## ## ## #### ## #### ##### ##, #### ##### ##### ## # ####.
##, #### ## # ##### ## # # ## ##.

Web Beans# ##### ## ## #### ## # ## # #####. ##### ## ##### ##### ##### ## ## #### ##. ##
##, ##### ##, ## ## ## ## #### ## #### ## ## ## ## #### #####.

Web Beans XML ##### ## ## #####! XML # ##### ##### Web Beans# XML ##### ## ##
XML# ##### Java ## # #### ##### ##. ##### Java #### ## # # ## ## # ## #### ## XML# ## #
##.

Web Beans# ## ## #### ## #### ## ####. #### ## ## ## ## #### ## ##### ## ## #### ##
#####. #### ## ## ## ## #### ## ## ##### ## ##, #### ## #### # #####.

(Stereotypes)

Web Beans ### ##:

```
## #####, ##### ## Web Bean ### #####. #####  
### ## ## ## Web Beans# ##### ##.
```

```
##### ## ##:
```

- ### ##
- ### ##
- Web Bean ##### ##,
- ## ## Web Bean# ##### ## ##
- ##### ##

```
##### ## ## Web Beans# Web Bean ### ##### ## # ##.
```

```
Web Bean# 0 ## ## ##### ##.
```

```
##### Java #####. ## ## MVC ##### ## ##:
```

```
@Retention(RUNTIME)  
@Target(TYPE)  
@Stereotype  
public @interface Action {}
```

```
Web Bean# ##### ##.
```

```
@Action  
public class LoginAction { ... }
```

10.1. ##### ## ##

```
##### ## ## Web Beans# ## ## ## ## ##. ## ##, @WebTier ## ##  
##### ## ## Web Beans# ##### ##, ## ## ## ## ## ##:
```

```
@Retention(RUNTIME)
```

10#. ##### (Stereotypes)

```
@Target(TYPE)
@RequestScoped
@WebTier
@Stereotype
public @interface Action {}
```

```
## ## ### ### ## ### ##### ##### # #####.
```

```
@Dependent @Mock @Action
public class MockLoginAction { ... }
```

```
## ### ## ### ##### # ##, ##### # #####.
```

10.2. ##### ## # ##

```
## ### ## ### ##### ## ## ##### #####. Web Beans# ## ##### ## Web Beans# ## ## ##
##### ## # ## ##. #:
```

```
@Retention(RUNTIME)
@Target(TYPE)
@RequestScoped
@WebTier
@Stereotype(supportedScopes=RequestScoped.class)
public @interface Action {}
```

```
## ## ##### Web Beans ## ## ## ##### # ##, ##### ## ## Web Bean ##### ## ##### ##.
```

```
## ##### ## ## Web Bean# ##### ##### ##### ## # ##:
```

```
@Retention(RUNTIME)
@Target(TYPE)
@RequestScoped
@WebTier
@Stereotype(requiredTypes=AbstractAction.class)
public @interface Action {}
```

```
## ## ##### AbstractAction ##### ##### ## ##, ##### ## ## Web Bean ##### ## ##### ##.
```

10.3. ##### # #####

```
##### ##### ## ## Web Beans# ## ##### ## ##### ## ## ## # #####.
```

```

@Retention(RUNTIME)
@Target(TYPE)
@RequestScoped
@Transactional(requiresNew=true)
@Secure
@WebTier
@Stereotype
public @interface Action {}

```

```
## ##### ##### ### # ## ### ### ##### ## ###!
```

10.4. ##### ## ### #####

```
##### ## ##### ## ## Web Beans# Web Bean ##### ## ##### Web Bean ### ## ## # #####.
### JSP ##### ## # ##, ### ### ##### ## # ## ## # # #####. ### ## # @Named ##### #####
####:
```

```

@Retention(RUNTIME)
@Target(TYPE)
@RequestScoped
@Transactional(requiresNew=true)
@Secure
@Named
@WebTier
@Stereotype
public @interface Action {}

```

```
## LoginAction# loginAction### ## ## ##.
```

10.5. ##

```
Web Beans ### ## ### ## ## ##### @Interceptor # @Decorator# #####.
```

```
Web Beans# ## ## ## ##### ##:
```

```

@Named
@RequestScoped
@Stereotype
@Target({TYPE, METHOD})
@Retention(RUNTIME)
public @interface Model {}

```

10#. ##### (Stereotypes)

JSF# ## ##### ## #####. JSF ## beans# ##### ## Web Bean @Model# ##### ##
JSF ##### #####.

###

Web Beans ### ## ### API ### ##### ## ##. ## ##, ### ## ##### Web Bean# #####
API PaymentProcessor ### #####:

```
@CreditCard @Stateless
public class CreditCardPaymentProcessor
    implements PaymentProcessor {
    ...
}
```

staging #####, ## Web Bean# ##### PaymentProcessor ### ##### ##:

```
@CreditCard @Stateless @Staging
public class StagingCreditCardPaymentProcessor
    implements PaymentProcessor {
    ...
}
```

StagingCreditCardPaymentProcessor# ##### ##### ## ## ## ##
AsyncPaymentProcessor# ## #####. ### ## ## @Staging# ### ## ## @Production ## ##
##:

```
@CreditCard PaymentProcessor ccpp
```

StagingCreditCardPaymentProcessor ##### ## ##.

##:

- ## ## ## Web Bean# ##### Web Bean# ## API ### ## # ##.
- ## ## ## Web Bean# ##### Web Bean# ## ## ## ## # ##.
- ## ## ## Web Bean# ## ##### Web Bean# ### ## ## # ##.
- ##### Web Bean# ### ##, ## ## ## ## ## ## # ##.

##, ## ##### Web Bean# ##### ## ##### ## ##, ##### ## ## ## ## ## ##.

Web Beans# ##### ## ## ##, ##### ## ## ## ## ##. ### ## ## ## ## ## ##,
##.

11.1. ### ##

Web Beans # ##### Web Beans## ## #####. ### ### ##### ## ## ## Web Bean#
##:

- ##### Web Bean# ##### ## ##### ## ##.
- ##### Web Bean# ## Web Bean# ## ## Web Bean# #### ## ## ##### # Web Bean# #####
Web Bean# ## ##### Web Bean# #### ##
- @Specializes# ##### ##.

```
@Stateless @Staging @Specializes
public class StagingCreditCardPaymentProcessor
    extends CreditCardPaymentProcessor {
    ...
}
```

Web Bean# ## ##### ##### ##.

11.2. ### ###

##:

- ##### ## ## @Specializes# ##### Web Bean# ## #####
- ##### Web Bean ### @Specializes# ##### Web Bean# ## #####
- ##### ## ## ## ##, ## ## # ## ## @Specializes# ##### Web Bean #####.

CreditCardPaymentProcessor# @CreditCard ## ##
StagingCreditCardPaymentProcessor# ## #####.

Web Bean ##### ## ## ##:

- ##### ## API ### @Specializes# ##### Web Bean# API ##### (##### ## ## ##
##)
- @Specializes# ##### Web Bean# ## ## ##### ## ##### ## ## ##
- ##### ##### ## Web Bean# #####.

##, Web Bean ##### ## ## ## ##.

###, @Specializes## ##### Web Bean# ##### ##### ## ##### ##### ## ## ##
#####.

XML# ##### Web Beans

Web Beans# ## #####. ## Web Bean# ##### ## ##### ##
#####:

- ## ##### ## ## ##### ##### ##,
- ### ## ##### ## ## Web Beans# ## ##

##, Web Beans# # ## ## #####:

- ### ## ## ##
- XML# ##### Web Bean ##

XML# ##### Java ### ## ##### #####. ##, Web Beans# ### ## ## ## Java
##, ##, ### ##### ## ##### #####. XML ## # ### ## ## ## # ## ## ## ## ##, Web
Beans# XML ## ##### ## ## ## ## ## ## ##.

XML ##### ## ## ## ## ## XML ##### ## # ## ##. ##### Java ##### XML
##. ## ## ## ## ## ## ## ## ## ## ## ## ## ## ## ##.

12.1. Web Bean ###

Java ##### ##, Web Beans# ## XML namespace# #####. namespace# Java
urn:java:# ##### #####. com.mydomain.myapp ##### ##, XML namespace#
urn:java:com.mydomain.myapp###.

Java ### ##### namespace# ## XML ### #####. ## ## Java ### ## ##.
namespace# ## ## ## ## ##. ### ##### ## ##, ### ## ## ## ##.

##, ### XML ### ## <util:Date/> ### java.util.Date ##### #####:

```
<WebBeans xmlns="urn:java:javax.webbeans"
  xmlns:util="urn:java:java.util">

  <util:Date/>

</WebBeans
>
```

Date# ## Web Bean## ##### # ## #####! Date# ##### ## ## Web Bean# ## ## # #####:

@Current Date date

12.2. Web Bean #####

Web Bean ### ##### ## ### ##### ##, ## ##, ##### ### ### ## # #####:

```
<myapp:ShoppingCart>
  <SessionScoped/>
  <myfwk:Transactional requiresNew="true"/>
  <myfwk:Secure/>
</myapp:ShoppingCart>
>
```

#####:

```
<util:Date>
  <Named
>currentTime</Named>
</util:Date>

<util:Date>
  <SessionScoped/>
  <myapp:Login/>
  <Named
>loginTime</Named>
</util:Date>

<util:Date>
  <ApplicationScoped/>
  <myapp:SystemStart/>
  <Named
>systemStartTime</Named>
</util:Date>
>
```

@Login # @SystemStart# ### ##### #####.

```
@Current Date currentTime;
@Login Date loginTime;
@SystemStart Date systemStartTime;
```

Web Bean# ## ### ##### # #####:

```
<myapp:AsynchronousChequePaymentProcessor>
  <myapp:PayByCheque/>
  <myapp:Asynchronous/>
</myapp:AsynchronousChequePaymentProcessor>
>
```

Web Beans####, ## ## ## Web Bean## #### # #####:

```
<myfwk:TransactionInterceptor>
  <Interceptor/>
  <myfwk:Transactional/>
</myfwk:TransactionInterceptor>
>
```

12.3. Web Bean ##

##!

12.4. ### Web Beans

Web Beans# ## ##### Web Bean# #### # ## #### . #:

```
<myapp:System>
  <ApplicationScoped/>
  <myapp:admin>
    <myapp:Name>
      <myapp:firstname>
>Gavin</myapp:firstname>
      <myapp:lastname>
>King</myapp:lastname>
      <myapp:email>
>gavin@hibernate.org</myapp:email>
    </myapp:Name>
  </myapp:admin>
</myapp:System>
>
```

<Name> #### ## ## ## ## @Dependent #### ## Web Bean # Name ##### #####. Web Bean# ###
#####.

Web Beans XML ### Java ### ## ##### ##### ##### ###. ## ### #####
##, ### #####!

12.5. ###

Java ### ### ## ### ##### # ## ##### ## ### XML ## ### ### ##, ##### ##### ###. ##### ## ##
Web Beans# ### ### #####.

```
<WebBeans xmlns="urn:java:javax.webbeans"
  xmlns:myapp="urn:java:com.mydomain.myapp"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="urn:java:javax.webbeans http://java.sun.com/jee/web-beans-1.0.xsd
    urn:java:com.mydomain.myapp http://mydomain.com/xsd/myapp-1.2.xsd">

  <myapp:System>
    ...
  </myapp:System>

</WebBeans>
>
```

XML ### ### ## #####. ### Web Beans RI ##### ##### ## ##### XML ##### ##### ##### ### #####
###.

IV. Web Beans ë°#

Java EE ì###ì½#ì##ì#ᄁí##

Web Beans# # ## ### ## #####. Web Beans# ## ### ### ##### ## ##, ##### ## ## ##
##. ## Java EE ##### ##### ##### ## ## ##### ## ## # ## ##
##.

```
EJB# JSF ##### ## ##### ## Web Beans# ### EJB # JSF# ##### #####. ## ## ### #####.
Web Beans# ##### ##### ## ##, ## ## # #####, ### ## ## ### ## ## ### ##### ## ### ### ###
#####. Java EE ##### Java ##### ### ##### ## ### ##### # ###, Web Beans# Java EE ## ##
## ##### ##### ## ## ## ## ## ## ## ## ## ##.
```

```
Web Beans# ##### Java EE #### ## ### #. ## Web Beans#  
#### SPI #### #. #### SPI #### # # #, ##  
## ## ## ## ##. ## ## ## ## ## ## ## ##
```

Java EE

Web Beans# Java EE #####. Web Beans# Java EE ### # JPA ### #####. ## JSF # JSP ##### Unified EL ##### ### # #####. ## Web Beans# ## Servlets # Message-Driven Beans# ## ## ## ## ## # # #####.

13.1. Java EE ##### Web Bean##

Web Beans# @Resource, @EJB, @PersistenceContext# ##### Java EE ### ## ## ## # #####. ## ## ## ## ## #####:

```
@Transactional @Interceptor
public class TransactionInterceptor {

    @Resource Transaction transaction;

    @AroundInvoke public Object manageTransaction(InvocationContext ctx) { ... }

}
```

```
@SessionScoped
public class Login {

    @Current Credentials credentials;
    @PersistenceContext EntityManager userDatabase;

    ...

}
```

Java EE @PostConstruct # @PreDestroy ### ## ##### Web Beans# ## #####. ## ## ## ## # @PostConstruct ### #####.

#####: @PersistenceContext(type=EXTENDED)# #### Web Beans# ## ##### #####.

13.2. Servlet## Web Bean

Java EE 6# ## Servlet## Web Bean# ##### #####. Web Beans ## ## ## ## ## ## ## ## Web Bean# #####.

```
public class Login extends HttpServlet {

    @Current Credentials credentials;

    @Current Login login;

    @Override
    public void service(HttpServletRequest request, HttpServletResponse response)
        throws ServletException, IOException {
        credentials.setUsername( request.getAttribute("username") );
        credentials.setPassword( request.getAttribute("password") );
        login.login();
        if ( login.isLoggedIn() ) {
            response.sendRedirect("/home.jsp");
        }
        else {
            response.sendRedirect("/loginError.jsp");
        }
    }

}
```

```
Web Beans ##### Servlet## ## ## # ### HTTP ### ### Credentials # Login ##### ##  
#####.
```

13.3. Message-Driven Bean## Web Bean

```
Web Beans ### ## EJB# ####, Web Bean ### ## ## ## ## ##### (## ##, JNDI lookup# ## #####  
@EJB# ##### ##### ##) #####. ##, Message-Driven Beans## Web Beans ### ## # ##, ## ##  
# ## ## ## Web Beans# ##### #####.
```

Message-Driven Beans# ## Web Beans ##### ##### #### # #####.

```
@Transactional @MessageDriven
public class ProcessOrder implements MessageListener {

    @Current Inventory inventory;
    @PersistenceContext EntityManager em;

    public void onMessage(Message message) {
        ...
    }
}
```

```
}
```

```
###, Web Beans ##### ## ## #####. ### ##### Message-Driven Bean## ### # ### # ##
## ## ## ##### ## ##### #####. @RequestScoped # @ApplicationScoped Web Beans ## ##
# #####.
```

```
## Web Beans# ##### ##### ##### #####.
```

13.4. JMS

```
JMS# ##### ##### ##### ## ## ## # #####. ## ## ## ## ##### ## #####. ## ## Queue,
QueueConnectionFactory, QueueConnection, QueueSession QueueSender# #####. ## ##
Topic, TopicConnectionFactory, TopicConnection, TopicSession, TopicPublisher# #####.
### ## ## ##### ## ## # ## ## ## ## #####.
```

```
Web Beans# ## ## ## #####. ### ##### # ### web-beans.xml# ## # ## ## ##### ## ## ##
# ## ##### ##### #####.
```

```
<Queue>
  <destination
>java:comp/env/jms/OrderQueue</destination>
  <connectionFactory
>java:comp/env/jms/QueueConnectionFactory</connectionFactory>
  <myapp:OrderProcessor/>
</Queue
>
```

```
<Topic>
  <destination
>java:comp/env/jms/StockPrices</destination>
  <connectionFactory
>java:comp/env/jms/TopicConnectionFactory</connectionFactory>
  <myapp:StockPrices/>
</Topic
>
```

```
## ## ## Queue, QueueConnection, QueueSession, QueueSender# ##### # ##, ## ## Topic,
TopicConnection, TopicSession TopicPublisher# ##### # #####.
```

```
@OrderProcessor QueueSender orderSender;
@OrderProcessor QueueSession orderSession;
```

```
public void sendMessage() {  
    MapMessage msg = orderSession.createMapMessage();  
    ...  
    orderSender.send(msg);  
}
```

```
@StockPrices TopicPublisher pricePublisher;  
@StockPrices TopicSession priceSession;  
  
public void sendMessage(String price) {  
    pricePublisher.send( priceSession.createTextMessage(price) );  
}
```

JMS ### ##### Web Bean ##### ## ##### #####.

13.5. ### #

Web Beans# ## ## ##### #####. JAR, EJB-JAR ## WAR# ## Web Beans # #####
classpath# ## ## ## ##### # #####. ### Web Beans# ## ## ##### META-INF ## WEB-INF
web-beans.xml## ## ## ##. ### ## ## # # #####. web-beans.xml ### ## #####
Web Beans# ##### ## # #####.

Java SE ### ##, ### ## EJB Lite ##### ## ## EJB# ### # ## ## Web Beans# ### # #####.
web-beans.xml ### ## ## ##.

Web Beans

Web Beans# ## ##### ##, ##, ##### ## ##### ## ## #####. ####, Web Beans# Web Beans## ####
SPI #### #####. ## ##, #### ## ##### Web Beans ##### ## #####.

- ##### ##### ## ##### ##
- Spring, Seam, GWT, Wicket# ## #### ##### ##
- Web Beans ##### #### ##### ## #### ##

Web Beans #### #### Manager #####.

14.1. Manager

Manager ##### Web Beans, ####, #####, #### # ##### ##### ##### #### # ## ##.

```
public interface Manager
{

    public <T>
    > Set<Bean<T>
    >
    > resolveByType(Class<T>
    > type, Annotation... bindings);

    public <T>
    > Set<Bean<T>
    >
    > resolveByType(TypeLiteral<T>
    > apiType,
        Annotation... bindings);

    public <T>
    > T getInstanceByType(Class<T>
    > type, Annotation... bindings);

    public <T>
    > T getInstanceByType(TypeLiteral<T>
    > type,
        Annotation... bindings);

    public Set<Bean<?>
    > resolveByName(String name);
```

```
public Object getInstanceByName(String name);

public <T
> T getInstance(Bean<T
> bean);

public void fireEvent(Object event, Annotation... bindings);

public Context getContext(Class<? extends Annotation
> scopeType);

public Manager addContext(Context context);

public Manager addBean(Bean<?> bean);

public Manager addInterceptor(Interceptor interceptor);

public Manager addDecorator(Decorator decorator);

public <T
> Manager addObserver(Observer<T
> observer, Class<T
> eventType,
    Annotation... bindings);

public <T
> Manager addObserver(Observer<T
> observer, TypeLiteral<T
> eventType,
    Annotation... bindings);

public <T
> Manager removeObserver(Observer<T
> observer, Class<T
> eventType,
    Annotation... bindings);

public <T
> Manager removeObserver(Observer<T
> observer,
    TypeLiteral<T
> eventType, Annotation... bindings);

public <T
```

```

> Set<Observer<T
>
> resolveObservers(T event, Annotation... bindings);

    public List<Interceptor
> resolveInterceptors(InterceptionType type,
    Annotation... interceptorBindings);

    public List<Decorator
> resolveDecorators(Set<Class<?>
> types,
    Annotation... bindings);

}

```

```

### ## Manager ##### ## # ####:

```

```

@Current Manager manager

```

14.2. Bean

```

Bean ## ##### ##### Web Beans# #####. ##### ## ## Web Bean# ##### Manager ### ###
Bean ##### #####.

```

```

public abstract class Bean<T> {

    private final Manager manager;

    protected Bean(Manager manager) {
        this.manager=manager;
    }

    protected Manager getManager() {
        return manager;
    }

    public abstract Set<Class> getTypes();
    public abstract Set<Annotation> getBindingTypes();
    public abstract Class<? extends Annotation> getScopeType();
    public abstract Class<? extends Annotation> getDeploymentType();
    public abstract String getName();
}

```

14#. Web Beans

```
public abstract boolean isSerializable();
public abstract boolean isNullable();

public abstract T create();
public abstract void destroy(T instance);

}
```

Web Beans ## (## Web Beans # ##### Web Beans, ### ## # JMS #####)# ## ### # ##### ###
Web Beans# ##### ## Bean ##### ##### Manager . addBean()# ##### ##### ### # #####. ## ##,
Bean ##### ##### Web Beans# ### ## ##### ## ##### ## ##### # # #####.

Web Beans ### ## ##### # ## Bean ## ##### #####: Interceptor # Decorator.

14.3. Context

Context ##### Web Beans# ### ### ### ##### ### ### ### ### ## #####.

```
public interface Context {

    public Class<? extends Annotation> getScopeType();

    public <T> T get(Beans# bean, boolean create);

    boolean isActive();

}
```

##, Web Beans# ##### ##### ### ##### ## Wicket# ##### ##### ##### ## ## ## ## ##
Context# ### # #####.



Web Beans# #### ##### ### ## ##### ## ### ### ## #####.

Web Beans ### Web Beans ## ### #####. ## # 100 ##### # # ### # # ### ### ## #
#####. ## ### ### ### ##### ### ###, <http://jcp.org/en/jsr/detail?id=299>## ## # #####.

Web Beans Reference ### <http://seamframework.org/WebBeans>## #####. RI ### # Web Beans ### <http://in.relation.to>## ## #####. ### ### ##### ##### ### ### ##### #####. ###.

V. Web Beans Reference

Web Beans is the reference implementation of JSR-299, and is used by JBoss AS and Glassfish to provide JSR-299 services for Java Enterprise Edition applications. Web Beans also goes beyond the environments and APIs defined by the JSR-299 specification and provides support for a number of other environments (such as a servlet container such as Tomcat, or Java SE) and additional APIs and modules (such as logging, XSD generation for the JSR-299 XML deployment descriptors).

If you want to get started quickly using Web Beans with JBoss AS or Tomcat and experiment with one of the examples, take a look at [3#. *Getting started with Web Beans, the Reference Implementation of JSR-299*](#). Otherwise read on for a exhaustive discussion of using Web Beans in all the environments and application servers it supports, as well the Web Beans extensions.

Application Servers and environments supported by Web Beans

16.1. Using Web Beans with JBoss AS

No special configuration of your application, beyond adding either `META-INF/beans.xml` or `WEB-INF/beans.xml` is needed.

If you are using JBoss AS 5.0.1.GA then you'll need to install Web Beans as an extra. First we need to tell Web Beans where JBoss is located. Edit `jboss-as/build.properties` and set the `jboss.home` property. For example:

```
jboss.home=/Applications/jboss-5.0.1.GA
```

Now we can install Web Beans:

```
$ cd webbeans-$VERSION/jboss-as
$ ant update
```



##

A new deployer, `webbeans.deployer` is added to JBoss AS. This adds supports for JSR-299 deployments to JBoss AS, and allows Web Beans to query the EJB3 container and discover which EJBs are installed in your application.

Web Beans is built into all releases of JBoss AS from 5.1 onwards.

16.2. Glassfish

TODO

16.3. Servlet Containers (such as Tomcat or Jetty)

Web Beans can be used in any Servlet container such as Tomcat 6.0 or Jetty 6.1.



##

Web Beans doesn't support deploying session beans, injection using `@EJB`, or `@PersistenceContext` or using transactional events in Servlet containers.

Web Beans should be used as a web application library in a servlet container. You should place `webbeans-servlet.jar` in `WEB-INF/lib`. `webbeans-servlet.jar` is an "uber-jar" provided for your convenience. Instead, you could use its component jars:

- `jsr299-api.jar`
- `webbeans-api.jar`
- `webbeans-spi.jar`
- `webbeans-core.jar`
- `webbeans-logging.jar`
- `webbeans-servlet-int.jar`
- `javassist.jar`
- `dom4j.jar`

You also need to explicitly specify the servlet listener (used to boot Web Beans, and control its interaction with requests) in `web.xml`:

```
<listener>
  <listener-class>org.jboss.webbeans.environment.servlet.Listener</listener-class>
</listener>
```

16.3.1. Tomcat

Tomcat has a read-only JNDI, so Web Beans can't automatically bind the Manager. To bind the Manager into JNDI, you should add the following to your `META-INF/context.xml`:

```
<Resource name="app/Manager"
  auth="Container"
  type="javax.inject.manager.Manager"
  factory="org.jboss.webbeans.resources.ManagerObjectFactory"/>
```

and make it available to your deployment by adding this to `web.xml`:

```
<resource-env-ref>
  <resource-env-ref-name>
    app/Manager
  </resource-env-ref-name>
  <resource-env-ref-type>
    javax.inject.manager.Manager
  </resource-env-ref-type>
</resource-env-ref>
```

Tomcat only allows you to bind entries to `java:comp/env`, so the Manager will be available at `java:comp/env/app/Manager`

Web Beans also supports Servlet injection in Tomcat. To enable this, place the `webbeans-tomcat-support.jar` in `$TOMCAT_HOME/lib`, and add the following to your `META-INF/context.xml`:

```
<Listener className="org.jboss.webbeans.environment.tomcat.WebBeansLifecycleListener" />
```

16.4. Java SE

Apart from improved integration of the Enterprise Java stack, Web Beans also provides a state of the art typesafe, stateful dependency injection framework. This is useful in a wide range of application types, enterprise or otherwise. To facilitate this, Web Beans provides a simple means for executing in the Java Standard Edition environment independently of any Enterprise Edition features.

When executing in the SE environment the following features of Web Beans are available:

- Simple Web Beans (POJOs)
- Typesafe Dependency Injection
- Application and Dependent Contexts
- Binding Types
- Stereotypes
- Typesafe Event Model

16.4.1. Web Beans SE Module

To make life easy for developers Web Beans provides a special module with a main method which will boot the Web Beans manager, automatically registering all simple Web Beans found on the classpath. This eliminates the need for application developers to write any bootstrapping

code. The entry point for a Web Beans SE applications is a simple Web Bean which observes the standard `@Deployed` Manager event. The command line parameters can be injected using either of the following:

```
@Parameters List<String> params;  
@Parameters String[] paramsArray; // useful for compatability with existing classes
```

Here's an example of a simple Web Beans SE application:

```
@ApplicationScoped  
public class HelloWorld  
{  
    @Parameters List<String> parameters;  
  
    public void printHello( @Observes @Deployed Manager manager )  
    {  
        System.out.println( "Hello " + parameters.get(0) );  
    }  
}
```

Web Beans SE applications are started by running the following main method.

```
java org.jboss.webbeans.environments.se.StartMain <args>
```

If you need to do any custom initialization of the Web Beans manager, for example registering custom contexts or initializing resources for your beans you can do so in response to the `@Initialized` Manager event. The following example registers a custom context:

```
public class PerformSetup  
{  
  
    public void setup( @Observes @Initialized Manager manager )  
    {  
        manager.addContext( ThreadContext.INSTANCE );  
    }  
}
```

**##**

The command line parameters do not become available for injection until the `@Deployed` Manager event is fired. If you need access to the parameters during initialization you can do so via the public static `String getParameters()` method in `StartMain`.

JSR-299 extensions available as part of Web Beans



##

These modules are usable on any JSR-299 implementation, not just Web Beans!

17.1. Web Beans Logger

Adding logging to your application is now even easier with simple injection of a logger object into any JSR-299 bean. Simply annotate a `org.jboss.webbeans.log.Log` type member with `@Logger` and an appropriate logger object will be injected into any instance of the bean.

```
public class Checkout {
    import org.jboss.webbeans.annotation.Logger;
    import org.jboss.webbeans.log.Log;

    @Logger
    private Log log;

    void invoiceItems() {
        ShoppingCart cart;
        ...
        log.debug("Items invoiced for {0}", cart);
    }
}
```

The example shows how objects can be interpolated into a message. This interpolation is done using `java.text.MessageFormat`, so see the JavaDoc for that class for more details. In this case, the `ShoppingCart` should have implemented the `toString()` method to produce a human readable value that is meaningful in messages. Normally, this call would have involved evaluating `cart.toString()` with String concatenation to produce a single String argument. Thus it was necessary to surround the call with an if-statement using the condition `log.isDebugEnabled()` to avoid the expensive String concatenation if the message was not actually going to be used. However, when using `@Logger` injected logging, the conditional test can be left out since the object arguments are not evaluated unless the message is going to be logged.



##

You can add the Web Beans Logger to your project by including `webbeans-logger.jar` and `webbeans-logging.jar` to your project. Alternatively, express a dependency on the `org.jboss.webbeans:webbeans-logger` Maven artifact.

If you are using Web Beans as your JSR-299 implementation, there is no need to include `webbeans-logging.jar` as it's already included.

Alternative view layers

18.1. Using Web Beans with Wicket

18.1.1. The `WebApplication` class

Each wicket application must have a `WebApplication` subclass; Web Beans provides, for your utility, a subclass of this which sets up the Wicket/JSR-299 integration. You should subclass `org.jboss.webbeans.wicket.WebBeansApplication`.



##

If you would prefer not to subclass `WebBeansApplication`, you can manually add a (small!) number of overrides and listeners to your own `WebApplication` subclass. The javadocs of `WebBeansApplication` detail this.

For example:

```
public class SampleApplication extends WebBeansApplication {
    @Override
    public Class getHomePage() {
        return HomePage.class;
    }
}
```

18.1.2. Conversations with Wicket

The conversation scope can be used in Web Beans with the Apache Wicket web framework, through the `webbeans-wicket` module. This module takes care of:

- Setting up the conversation context at the beginning of a Wicket request, and tearing it down afterwards
- Storing the id of any long-running conversation in Wicket's metadata when the page response is complete
- Activating the correct long-running conversation based upon which page is being accessed
- Propagating the conversation context for any long-running conversation to new pages

18.1.2.1. Starting and stopping conversations in Wicket

As JSF applications, a conversation *always* exists for any request, but its lifetime is only that of the current request unless it is marked as *long-running*. For Wicket applications this is

accomplished as in JSF applications, by injecting the `@Current Conversation` and then invoking `conversation.begin()`. Likewise, conversations are ended with `conversation.end()`

18.1.2.2. Long running conversation propagation in Wicket

When a conversation is marked as long-running, the id of that conversation will be stored in Wicket's metadata for the current page. If a new page is created and set as the response target through `setResponsePage`, this new page will also participate in this conversation. This occurs for both directly instantiated pages (`setResponsePage(new OtherPage())`), as well as for bookmarkable pages created with `setResponsePage(OtherPage.class)` where `OtherPage.class` is mounted as bookmarkable from your `WebApplication` subclass (or through annotations). In the latter case, because the new page instance is not created until after a redirect, the conversation id will be propagated through a request parameter, and then stored in page metadata after the redirect.

A. Integrating Web Beans into other environments

Currently Web Beans only runs in JBoss AS 5; integrating the RI into other EE environments (for example another application server like Glassfish), into a servlet container (like Tomcat), or with an Embedded EJB3.1 implementation is fairly easy. In this Appendix we will briefly discuss the steps needed.

A.1. The Web Beans SPI

The Web Beans SPI is located in the `webbeans-spi` module, and packaged as `webbeans-spi.jar`. Some SPIs are optional, if you need to override the default behavior, others are required.

All interfaces in the SPI support the decorator pattern and provide a `Forwarding` class located in the `helpers` sub package. Additional, commonly used, utility classes, and standard implementations are also located in the `helpers` sub package.

A.1.1. Web Bean

```
/**
 * Gets list of all classes in classpath archives with META-INF/beans.xml (or
 * for WARs WEB-INF/beans.xml) files
 *
 * @return An iterable over the classes
 */
public Iterable<Class<?>> discoverWebBeanClasses();

/**
 * Gets a list of all deployment descriptors in the app classpath
 *
 * @return An iterable over the beans.xml files
 */
public Iterable<URL> discoverWebBeansXml();
```

The discovery of Web Bean classes and `beans.xml` files is self-explanatory (the algorithm is described in Section 11.1 of the JSR-299 specification, and isn't repeated here).

A.1.2. EJB services



##

Web Beans will run without an EJB container; in this case you don't need to implement the EJB SPI.

Web Beans also delegates EJB3 bean discovery to the container so that it doesn't have to scan for EJB3 annotations or parse `ejb-jar.xml`. For each EJB in the application an `EjbDescriptor` should be discovered:

```
public interface EjbDescriptor<T>
{

    /**
     * Gets the EJB type
     *
     * @return The EJB Bean class
     */
    public Class<T> getType();

    /**
     * Gets the local business interfaces of the EJB
     *
     * @return An iterator over the local business interfaces
     */
    public Iterable<BusinessInterfaceDescriptor<?>> getLocalBusinessInterfaces();

    /**
     * Gets the remote business interfaces of the EJB
     *
     * @return An iterator over the remote business interfaces
     */
    public Iterable<BusinessInterfaceDescriptor<?>> getRemoteBusinessInterfaces();

    /**
     * Get the remove methods of the EJB
     *
     * @return An iterator over the remove methods
     */
    public Iterable<Method> getRemoveMethods();

    /**
```

```

* Indicates if the bean is stateless
*
* @return True if stateless, false otherwise
*/
public boolean isStateless();

/**
* Indicates if the bean is a EJB 3.1 Singleton
*
* @return True if the bean is a singleton, false otherwise
*/
public boolean isSingleton();

/**
* Indicates if the EJB is stateful
*
* @return True if the bean is stateful, false otherwise
*/
public boolean isStateful();

/**
* Indicates if the EJB is and MDB
*
* @return True if the bean is an MDB, false otherwise
*/
public boolean isMessageDriven();

/**
* Gets the EJB name
*
* @return The name
*/
public String getEjbName();

```

```

EjbDescriptor# ## # ## EJB #### ##### ##### ##### #####. ### # ## ##### ##,
## ##### ##### BusinessInterfaceDescriptor# #####. (EJB ##### ##### #####
### # jndi ### ##)

```

The resolution of @EJB (for injection into simple beans), the resolution of local EJBs (for backing session beans) and remote EJBs (for injection as a Java EE resource) is delegated to the container. You must provide an implementation of `org.jboss.webbeans.ejb.spi.EjbServices` which provides these operations. For resolving the @EJB injection point, Web Beans will provide the `InjectionPoint`; for resolving local EJBs, the `EjbDescriptor` will be provided, and for remote EJBs the `jndiName`, `mappedName`, or `ejbLink` will be provided.

When resolving local EJBs (used to back session beans) a wrapper (`SessionObjectReference`) around the EJB reference is returned. This wrapper allows Web Beans to request a reference that implements the given business interface, and, in the case of SFSBs, request the removal of the EJB from the container.

A.1.3. JPA services

Just as EJB resolution is delegated to the container, resolution of `@PersistenceContext` for injection into simple beans (with the `InjectionPoint` provided), and resolution of persistence contexts and persistence units (with the `unitName` provided) for injection as a Java EE resource is delegated to the container.

To allow JPA integration, the `JpaServices` interface should be implemented.

Web Beans also needs to know what entities are in a deployment (so that they aren't managed by Web Beans). An implementation that detects entities through `@Entity` and `orm.xml` is provided by default. If you want to provide support for a entities defined by a JPA provider (such as Hibernate's `.hbm.xml` you can wrap or replace the default implementation.

```
EntityDiscovery delegate = bootstrap.getServices().get(EntityDiscovery.class);
```

A.1.4. Transaction Services

Web Beans must delegate JTA activities to the container. The SPI provides a couple hooks to easily achieve this with the `TransactionServices` interface.

```
public interface TransactionServices
{
    /**
     * Possible status conditions for a transaction. This can be used by SPI
     * providers to keep track for which status an observer is used.
     */
    public static enum Status
    {
        ALL, SUCCESS, FAILURE
    }

    /**
     * Registers a synchronization object with the currently executing
     * transaction.
     *
     * @see javax.transaction.Synchronization
     * @param synchronizedObserver
     */
}
```

```
public void registerSynchronization(Synchronization synchronizedObserver);

/**
 * Queries the status of the current execution to see if a transaction is
 * currently active.
 *
 * @return true if a transaction is active
 */
public boolean isTransactionActive();
}
```

The enumeration `Status` is a convenience for implementors to be able to keep track of whether a synchronization is supposed to notify an observer only when the transaction is successful, or after a failure, or regardless of the status of the transaction.

Any `javax.transaction.Synchronization` implementation may be passed to the `registerSynchronization()` method and the SPI implementation should immediately register the synchronization with the JTA transaction manager used for the EJBs.

To make it easier to determine whether or not a transaction is currently active for the requesting thread, the `isTransactionActive()` method can be used. The SPI implementation should query the same JTA transaction manager used for the EJBs.

A.1.5. JMS services

A number of JMS operations are not container specific, and so should be provided via the SPI `JmsServices`. JMS does not specify how to obtain a `ConnectionFactory` so the SPI provides a method which should be used to look up a factory. Web Beans also delegates `Destination` lookup to the container via the SPI.

A.1.6. Resource Services

The resolution of `@Resource` (for injection into simple beans) and the resolution of resources (for injection as a Java EE resource) is delegated to the container. You must provide an implementation of `ResourceServices` which provides these operations. For resolving the `@Resource` injection, Web Beans will provide the `InjectionPoint`; and for Java EE resources, the `jndiName` or `mappedName` will be provided.

A.1.7. Web Services

The resolution of web service references (for injection as a Java EE resource) is delegated to the container. You must provide an implementation of `WebServices` which provides this operation. For resolving the Java EE resource, the `jndiName` or `mappedName` will be provided.

A.1.8. The bean store

Web Beans uses a map like structure to store bean instances - `org.jboss.webbeans.context.api.BeanStore`. You may find `org.jboss.webbeans.context.api.helpers.ConcurrentHashMapBeanStore` useful.

A.1.9. The application context

Web Beans expects the Application Server or other container to provide the storage for each application's context. The `org.jboss.webbeans.context.api.BeanStore` should be implemented to provide an application scoped storage.

A.1.10. Bootstrap and shutdown

The `org.jboss.webbeans.bootstrap.api.Bootstrap` interface defines the bootstrap for Web Beans. To boot Web Beans, you must obtain an instance of `org.jboss.webbeans.bootstrap.WebBeansBootstrap` (which implements `Bootstrap`), tell it about the SPIs in use, and then request the container start.

The bootstrap is split into phases, bootstrap initialization and boot and shutdown. Initialization will create a manager, and add the standard (specification defined) contexts. Bootstrap will discover EJBs, classes and XML; add beans defined using annotations; add beans defined using XML; and validate all beans.

The bootstrap supports multiple environments. An environment is defined by an implementation of the `Environment` interface. A number of standard environments are built in as the enumeration `Environments`. Different environments require different services to be present (for example servlet doesn't require transaction, EJB or JPA services). By default an EE environment is assumed, but you can adjust the environment by calling `bootstrap.setEnvironment()`.

Web Beans uses a generic-typed service registry to allow services to be registered. All services implement the `Service` interface. The service registry allows services to be added and retrieved.

To initialize the bootstrap you call `Bootstrap.initialize()`. Before calling `initialize()`, you must register any services required by your environment. You can do this by calling `bootstrap.getServices().add(JpaServices.class, new MyJpaServices())`. You must also provide the application context bean store.

Having called `initialize()`, the `Manager` can be obtained by calling `Bootstrap.getManager()`.

To boot the container you call `Bootstrap.boot()`.

To shutdown the container you call `Bootstrap.shutdown()` or `webBeansManager.shutdown()`. This allows the container to perform any cleanup operations needed.

A.1.11. JNDI

Web Beans delegates all JNDI operations to the container through the SPI.



##

A number of the SPI interface require JNDI lookup, and the class `AbstractResourceServices` provides JNDI/Java EE spec compliant lookup methods.

A.1.12. ###

Web Beans needs to load classes and resources from the classpath at various times. By default, they are loaded from the Thread Context ClassLoader if available, if not the same classloader that was used to load Web Beans, however this may not be correct for some environments. If this is case, you can implement `org.jboss.webbeans.spi.ResourceLoader`:

```

public interface ResourceLoader {

    /**
     * Creates a class from a given FQCN
     *
     * @param name The name of the clas
     * @return The class
     */
    public Class<?> classForName(String name);

    /**
     * Gets a resource as a URL by name
     *
     * @param name The name of the resource
     * @return An URL to the resource
     */
    public URL getResource(String name);

    /**
     * Gets resources as URLs by name
     *
     * @param name The name of the resource
     * @return An iterable reference to the URLs
     */
    public Iterable<URL
> getResources(String name);

}

```

A.1.13. Servlet injection

Java EE / Servlet does not provide any hooks which can be used to provide injection into Servlets, so Web Beans provides an API to allow the container to request JSR-299 injection for a Servlet.

To be compliant with JSR-299, the container should request servlet injection for each newly instantiated servlet after the constructor returns and before the servlet is placed into service.

To perform injection on a servlet call `webBeansManager.injectServlet()`. The manager can be obtained from `Bootstrap.getManager()`.

A.2. #####

API# ## ##### ## ## ##### ## ## Web Beans RI# ##### ##### ## # ## ## ## ##

ClassLoader ##

Web Beans RI# ### ##### ## ## ## ## ## ##, ### Web Beans ##### ## #####
##.

Servlet

Web Beans# Servlet ##### ##, Servlet# ##### ## Web Beans ##### ## ##### ## ##
org.jboss.webbeans.servlet.WebBeansListener# Servlet ##### ##### ##.

JSF

If you are integrating the Web Beans into a JSF environment you must register `org.jboss.webbeans.jsf.WebBeansPhaseListener` as a phase listener, and `org.jboss.webbeans.el.WebBeansELResolver` as an EL resolver, either automatically, or through user configuration, for each Web Beans application which uses JSF.

If you are integrating the Web Beans into a JSF environment you must register `org.jboss.webbeans.servlet.ConversationPropagationFilter` as a Servlet listener, either automatically, or through user configuration, for each Web Beans application which uses JSF. This filter can be registered for all Servlet deployment safely.



##

Web Beans only supports JSF 1.2 and above.

Session Bean #####

Web Beans# EJB ##### # ## ##### beans# ##### ## Web Beans ##### ## ##
EJB ##### ## EJB ##### org.jboss.webbeans.ejb.SessionBeanInterceptor# #####
##.



##

You must register the `SessionBeanInterceptor` as the inner most interceptor in the stack for all EJBs.

The `webbeans-core.jar`

If you are integrating the Web Beans into an environment that supports deployment of applications, you must insert the `webbeans-core.jar` into the applications isolated classloader. It cannot be loaded from a shared classloader.

Binding the manager in JNDI

You should bind a Reference to the Manager ObjectFactory into JNDI at `java:app/Manager`. The type should be `javax.inject.manager.Manager` and the factory class is `org.jboss.webbeans.resources.ManagerObjectFactory`

